


Base from U.S. Geological Survey Craig B-3, 1949; B-4, 1949; Quadrangles, Alaska



TOTAL FIELD MAGNETICS AND DETAILED ELECTROMAGNETIC ANOMALIES OF SELECTED AREAS NEAR KETCHIKAN, SOUTHEAST ALASKA PARTS of CRAIG B-3 and B-4 QUADRANGLES 1999

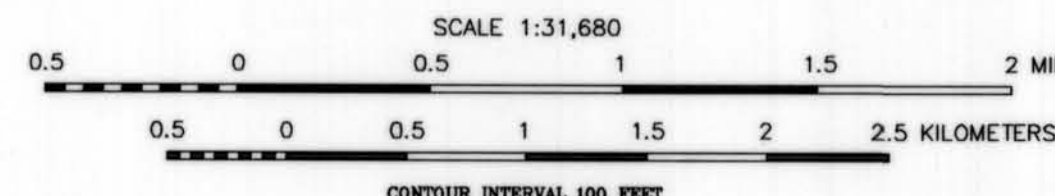


DESCRIPTIVE NOTES
KETCHIKAN SURVEY "Area 4" - March 1999
 The geophysical data were acquired with a DIGEM[®] Electromagnetic (EM) system and a Scintrex cesium magnetometer. Both were flown at a height of 100 feet. In addition the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors and video camera. Flights were performed with an AS350B-2 Squirrel helicopter at a mean terrain clearance of 200 feet along north-south flight lines one-quarter mile apart. The lines were flown perpendicular to the flight lines at intervals of approximately 3 miles.

An Ashtech/Racal Real-Time Differential Global Positioning System (RT-DGPS) was used for both navigation and flight path recovery. The helicopter position was derived every 0.5 seconds using real-time differential positioning to a relative accuracy of better than 10 m. Flight path positions were projected onto the Clarke 1866 (UTM zone 8) spheroid, 1927 North American datum using a central meridian (CM) of 135°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.



HETIA SURVEY "Area 3" - May 1992
 The geophysical data were acquired with a DIGEM[®] Electromagnetic (EM) system and a Scintrex cesium magnetometer. Mean terrain clearance for the magnetometer and EM system were approximately 213 and 164 feet, respectively. In addition the survey recorded data from a radar altimeter, UHF navigation system, 50/60 Hz monitors, VLF receiver and video camera. The east-west flight lines were flown one-eighth mile apart with the lines flown perpendicular to the flight lines. The survey was flown with an AS350B-1 helicopter.

A Del Norte UHF electronic positioning system was used for navigation. Flight path recovery was done with a combination of UHF data and visual recovery. Positional accuracy of the 1992 data should be considered of low reliability.

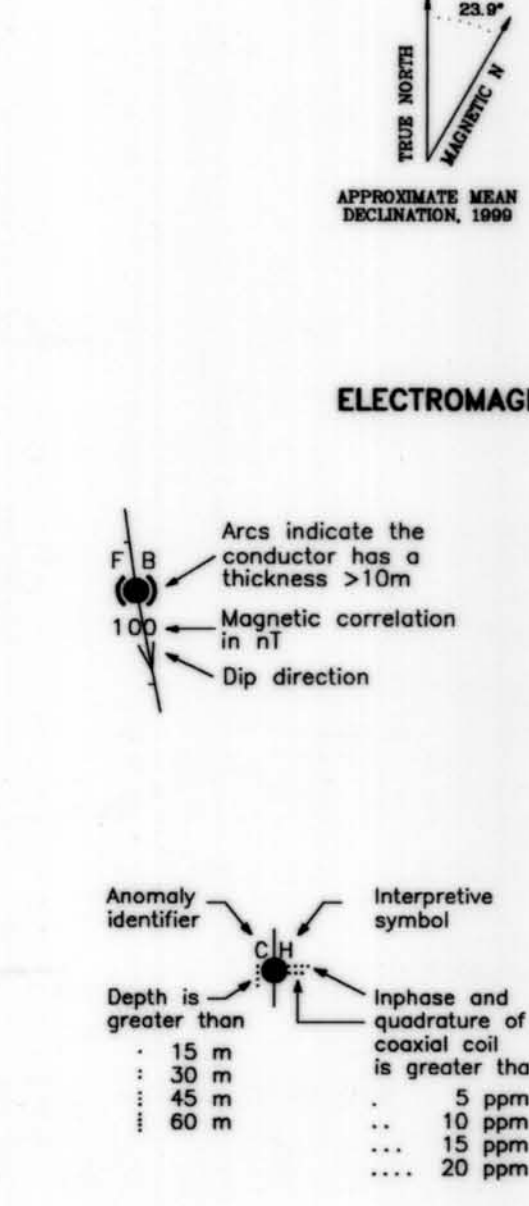


ELECTROMAGNETIC ANOMALIES	
●	>100 siemens
●	50-100 siemens
●	20-50 siemens
●	10-20 siemens
●	5-10 siemens
●	1-5 siemens
●	<1 siemens
⊛	Questionable anomaly
⊛	EM magnetite response
Interpretive symbol	
B	Conductor ("model")
D	Bedrock conductor
D	Narrow bedrock conductor ("thin disk")
S	Conductive cover ("horizontal thin sheet")
H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("half space")
E	Edge of broad conductor ("edge of half space")
L	Culture, e.g., power line, metal building or fence

ELECTROMAGNETICS
 To determine the location of EM anomalies or their boundaries, the DIGEM[®] EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial-coil pairs operated at 900 and 5500 Hz while three horizontal coplanar-coil pairs operated at 900, 7200, and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The type of conductor is indicated on the aeromagnetic map by the interpretive symbol attached to each EM anomaly. Determination of the type of conductor is based on EM anomaly shapes of the coaxial- and coplanar-coil responses, together with conductor and magnetic patterns and topography. The power line monitor and the flight track video were examined to locate cultural sources.

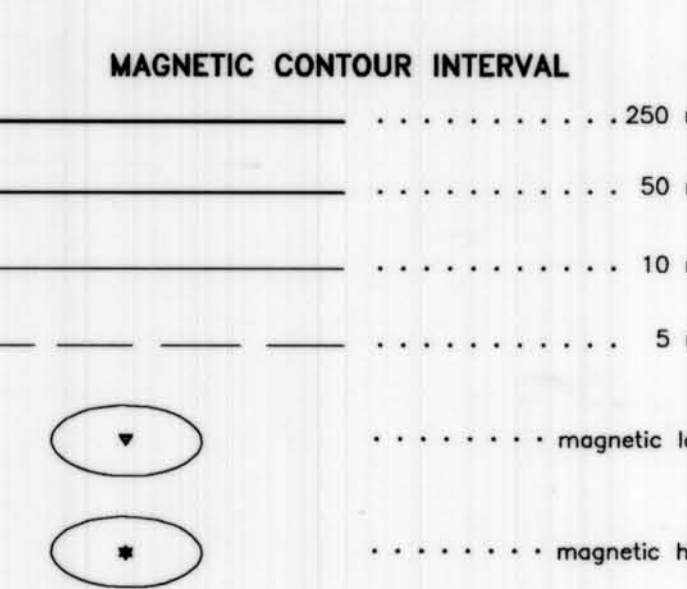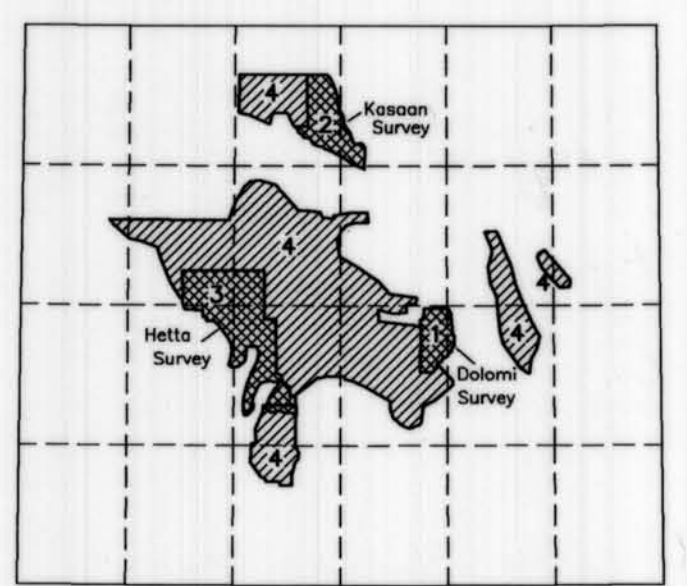

LOCATION INDEX FOR SCALE 1:31,680

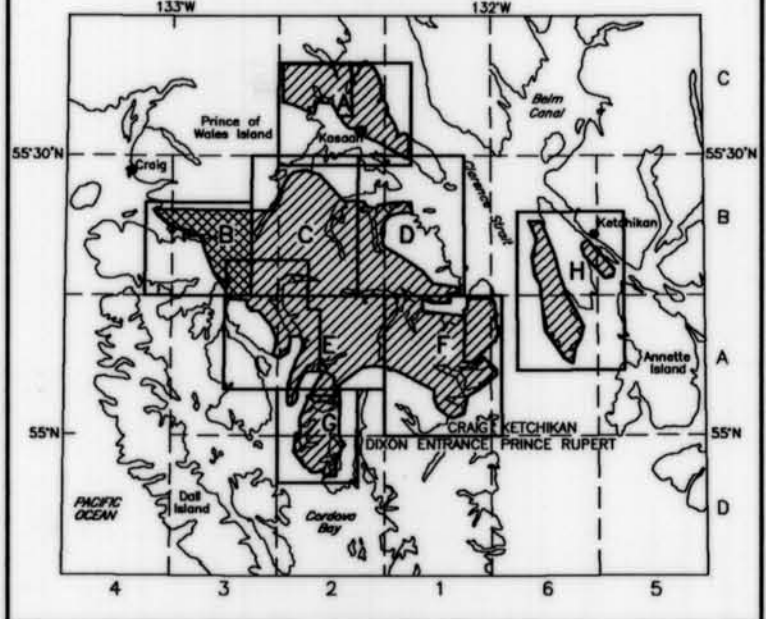

SURVEY HISTORY
 This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources (DNR), Division of Geological & Geophysical Surveys (DGS), and WGM, Mining & Geological Consultants, Inc. Airborne geophysical data for area 4 were acquired in 1999 by Geoterrax-Digheim, a division of CGG Canada Ltd. Funding for the project was provided by the U.S. Department of the Interior, Bureau of Land Management (BLM), Ketchikan Gateway Borough, Sealaska Corporation, Alaska State Mental Health Trust Land Office, and the cities of Thorne Bay and Coffman Cove. The data for areas 1, 2 and 3 were flown by Digheim in 1991 and 1992. These data were provided for publication by Sealaska Corporation.

This map and other products from this survey are available by mail order, or in person, from DGS, 734 University Ave., Suite 200, Fairbanks, Alaska, 99709. Some products are also available, in person only, at the BLM's Juneau Minerals Information Center, Mayflower Island, Douglas, AK.

TOTAL FIELD MAGNETICS
 The total field magnetic data were acquired with a sampling interval of 0.1 seconds, and were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) leveled to the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF gradient, 1995, updated to March 1999) was removed from the leveled magnetic data.

Akima, H. 1970. A new method of interpolation and smooth curve fitting based on local procedures. Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.