




Revised from U.S. Geological Survey Big Delta B-2 1966; B-3 1968; Quadrangles, Alaska

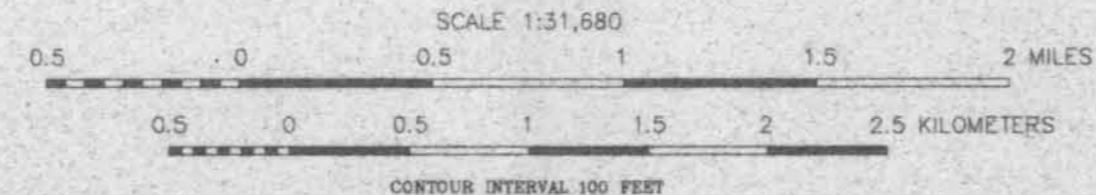

LOCATION INDEX FOR SCALE 1:31,680

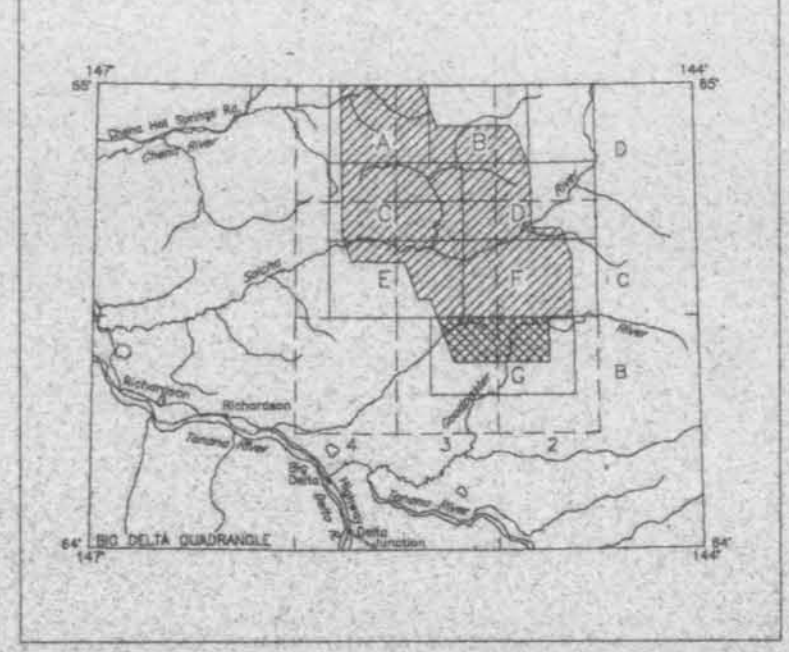

TOTAL MAGNETIC FIELD AND DETAILED ELECTROMAGNETIC ANOMALIES OF THE SALCHA RIVER - POGO MINING AREA, CENTRAL ALASKA

PARTS of BIG DELTA B-2
and B-3 QUADRANGLES
2000



DESCRIPTIVE NOTES

The geophysical data were acquired with a DIGHEM[®] electromagnetic (EM) system, Explorerium 600 gamma-ray spectrometer and a Scintrex cesium magnetometer. The EM coil magnetic sensors were flown at a height of 100 feet. The gamma-ray spectrometer was flown at a height of 200 feet. In addition the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors and video camera. Flights were performed with an AS350B-2 Squirrel helicopter at a minimum terrain clearance of 200 feet along N-S-E (347°) survey flight lines with a spacing of a quarter of a mile. The lines were flown perpendicular to the flight lines at intervals of approximately 3 miles.


An Airmtech GG24 NAVSTAR / GLONAVIS Global Positioning System was used for navigation. The helicopter position was derived every 0.5 seconds using post-flight differential positioning to a relative accuracy of better than 5 m. Flight path positions were projected onto the Clarke 1866 (UTM zone 6) spheroid, 1927 North American datum using a central meridian (CM) of 147° 0' north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m, with respect to the UTM grid.

ELECTROMAGNETICS

To determine the location of EM anomalies or their boundaries, the DIGHEM EM system measured in-phase and quadrature components at five frequencies. Two vertical coplanar coils operated at 500 and 2500 Hz while three horizontal coplanar coils operated at 500, 7500, and 15,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The type of conductor is indicated on the aeromagnetic map by the direction of the type of conductor is based on EM anomaly shapes of the in-phase and quadrature responses, together with conductor size, magnetic patterns and topography. The lower line transfer and the flight track video were examined to locate cultural sources.

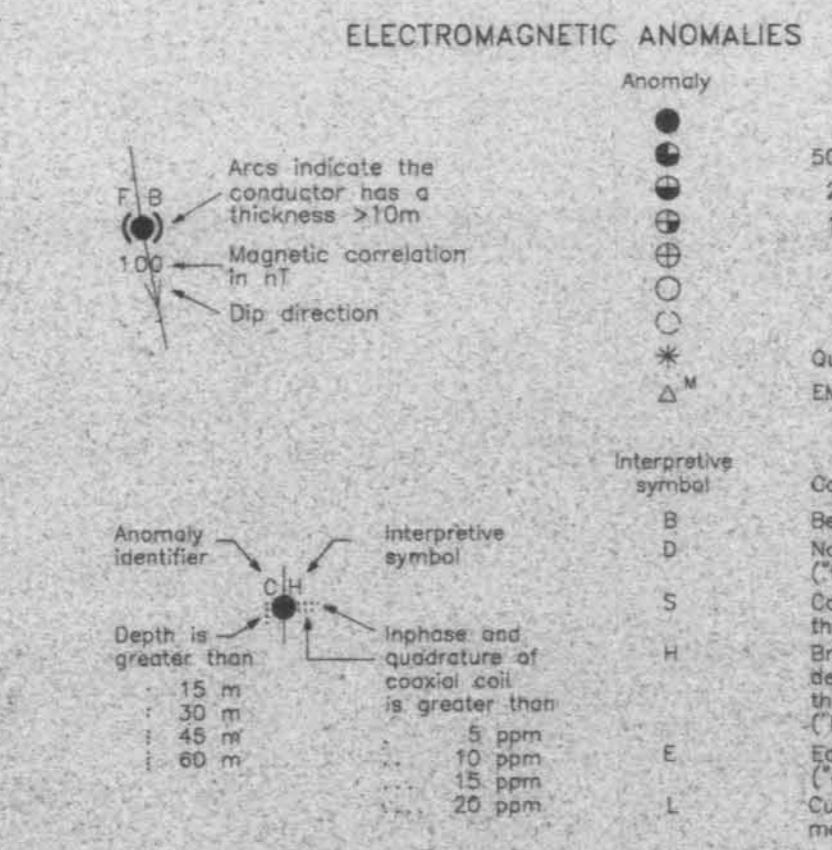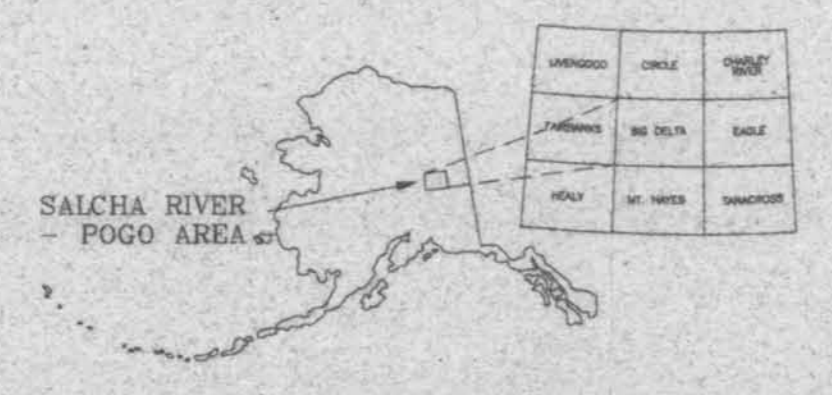

TOTAL MAGNETIC FIELD
The total magnetic field data were acquired with a sampling interval of 0.1 seconds, and were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) reduced to the tie line datum, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGR gradient, 1985, updated to September 1995) was removed from the leveled magnetic data.
Akima, H. 1970. A new method of interpolation and smooth curve fitting based on local procedures. *Journal of the Association of Computing Machinery*, v. 17, no. 6, p. 589-602.

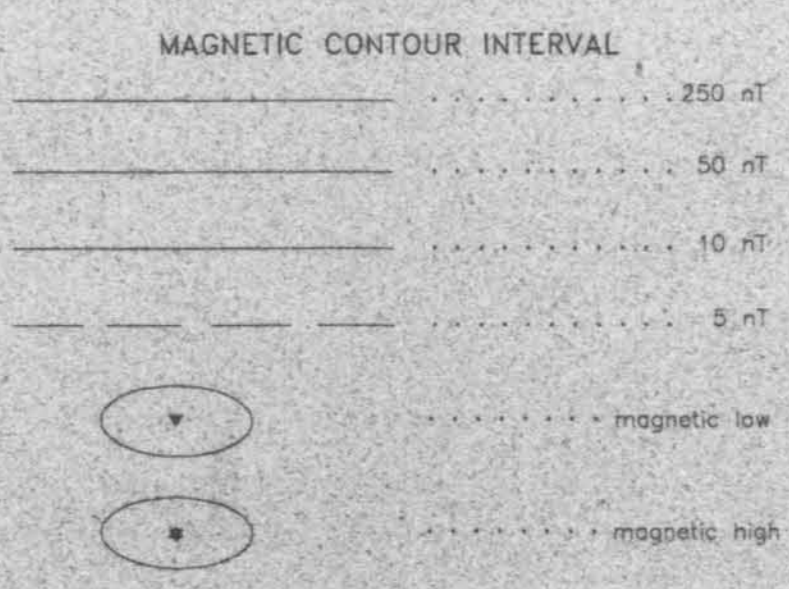

SURVEY HISTORY
This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys (DGGS), and Stevens Exploration Management Corp. Airborne geophysical data for this area were acquired by Geoterra-Digheim, a division of CGG Canada Ltd., in 1995. Laurel Burns was the contract manager for DGGS. This map and other products from this survey are available by mail order or in person from DGGS, 794 University Ave., Suite 206, Fairbanks, Alaska, 99709.