
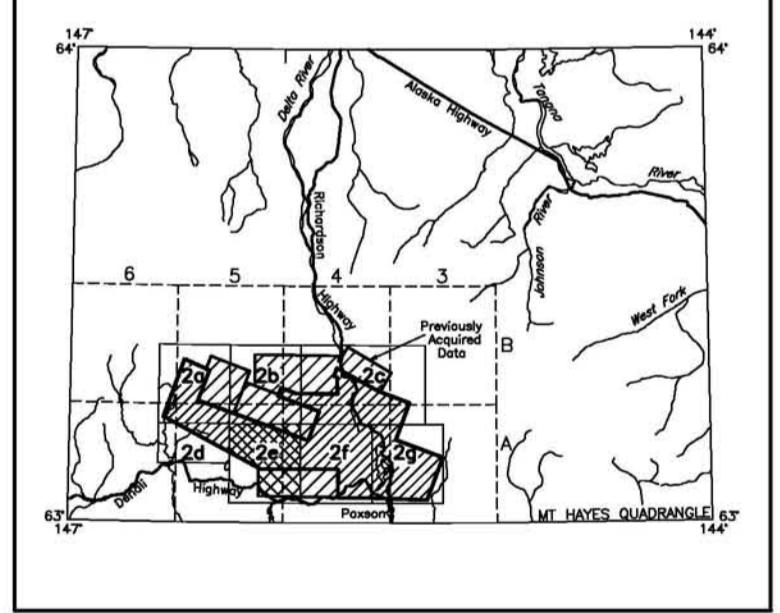


Base from U.S. Geological Survey Mt. Hayes A-4, 1976; A-5, 1978; Quadrangles, Alaska

SCALE 1:31,680
CONTOUR INTERVAL 100 FEET
DATUM MEAN SEA LEVEL

LOCATION INDEX FOR SCALE 1:31,680

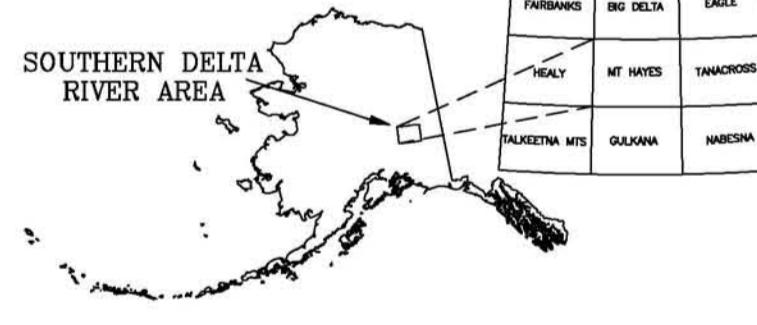

DESCRIPTIVE NOTES

The geophysical data were acquired with a DIGEM[®] Electromagnetic (EM) system and a Scintrex cesium magnetometer. Both were flown at a height of 100 feet. In addition the survey recorded data from a radar altimeter, GPS navigation system, 60 Hz video camera, 40-400 Hz monitors and video camera. Flights were performed with an AS350B-2 Squirrel helicopter at a mean terrain clearance of 200 feet along N20°E survey flight lines with a spacing of a quarter of a mile. Tie lines were flown perpendicular to the flight lines at intervals of approximately 3 miles.

An Ashtech GG24 NAVSTAR / GLONASS Global Positioning System was used for navigation. The helicopter position was derived every 0.5 seconds using post-flight differential positioning to a relative accuracy of better than 0.5 m. Flight path positions were projected onto the Clark 1866 (UTM zone 6) spheroid, 1927 North American datum using a central meridian (CM) of 147°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

PREVIOUSLY SURVEYED AREAS

The previously acquired geophysical data were acquired with an Aerodat Condor Electromagnetic (EM) system and a Scintrex cesium magnetometer. The electromagnetic system utilized two vertical coils and one pair of 936 Hz and 4,476 Hz outer three horizontal coil pairs at 144, 4,189 Hz and 32,490 Hz. Mean terrain clearance for the magnetometer and EM system were slightly higher than 150 and 100 feet, respectively. In addition the survey recorded data from a radar altimeter, GPS navigation system, 60 Hz monitor and video camera. The GEM[®] Electromagnetic positioning system was in differential mode. The flight line direction varies from block to block as follows: Canwell N30°E, Eureka and Fish Lake N20°E, and Rainy and Tangle Lake N-S. The flight lines were one-eighth mile apart. Extended tie lines were flown with the current survey which cover both the 1995 and 2002 survey areas. The older survey was flown with an AS350B helicopter.

ELECTROMAGNETICS

To determine the location of EM anomalies or their boundaries, a DIGEM[®] EM system measured vertical and quadrature components at six frequencies. Two vertical coaxial-coil pairs operated at 1000 and 5500 Hz while three horizontal coplanar-coil pairs operated at 800, 7200, and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The type of conductor indicated on the geophysical map by the interpretive symbol is based on each EM response. Determination of the type of conductor is based on EM anomaly shapes of the coaxial- and coplanar-coil responses, together with conductor and magnetic patterns and topography. The power line monitor and the flight track video were examined to locate cultural sources.

TOTAL MAGNETIC FIELD AND DETAILED ELECTROMAGNETIC ANOMALIES OF THE SOUTHERN DELTA RIVER AREA, EAST-CENTRAL ALASKA

PARTS OF MT. HAYES A-4 AND A-5 QUADRANGLES

2003

ELECTROMAGNETIC ANOMALIES

- Arcs indicate the conductor has a thickness >10m
- Magnetic correlation in
- Dip direction

- Conductance
>100 siemens
- 50-100 siemens
- 20-50 siemens
- 10-20 siemens
- 5-10 siemens
- 1-5 siemens
- <1 siemens
- Questionable anomaly
- △ EM magnetic response

TRUE NORTH
MAGNETIC N
APPROXIMATE MEAN DECLINATION, 2002

MAGNETIC CONTOUR INTERVAL	250 nT
.....	50 nT
.....	10 nT
.....	5 nT
.....	magnetic low
.....	magnetic high

SURVEY HISTORY

This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys (DGGS) and Stevens Exploration Management Corp. Airborne geophysical data for the current area were acquired and processed by Fugro Airborne Surveys in 2002. Airborne geophysical data for the Canwell, Eureka, Fish Lake, Rainy and Tangle Lake areas were acquired in 1995 by Aerodat and were provided for publication by the BLM. The current survey was funded by the U.S. Department of Interior, Bureau of Land Management (BLM) and conducted in support of its mineral assessment program in the Delta River mining district. Laurel Burns was the contract manager for DGGS.

This map and other products from this survey are available by mail order or in person from DGGS, 794 University Ave., Suite 200, Fairbanks, Alaska, 99709. Some products are also available in person only at the BLM's Juneau Mineral Information Center, 100 Savikko Road, Douglas, Alaska, 99824.

TOTAL MAGNETIC FIELD

The total magnetic field data were acquired with a sampling interval of 0.1 seconds, and were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) evaluated the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF gradient, 2000, updated to August, 2002) was removed from the leveled magnetic data.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures, Journal of the Association of Computing Machinery, v. 17, no. 4, p. 589-602.