


# 900 Hz COPLANAR RESISTIVITY OF THE SLEETMUTE AREA, SOUTHWESTERN ALASKA

PARTS OF IDITAROD AND SLEETMUTE QUADRANGLES  
2003

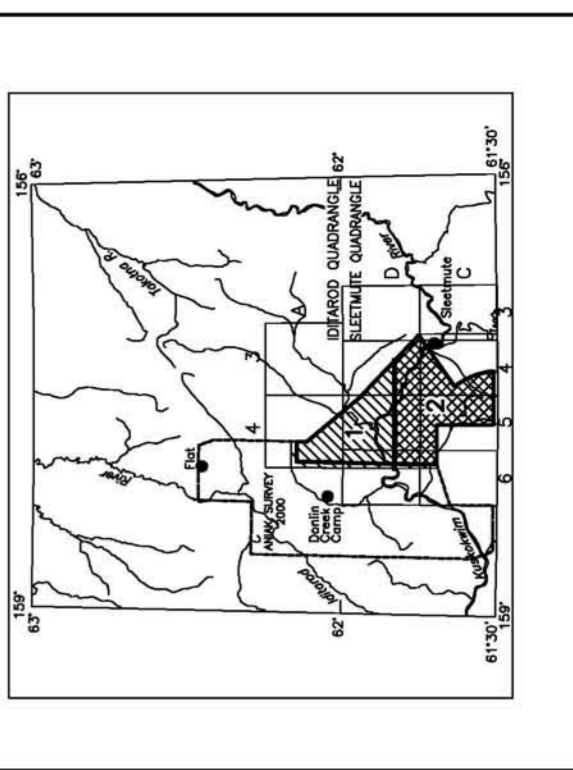

LOCATION INDEX

### DESCRIPTIVE NOTES

The geophysical data were acquired with a DIGHEM V Electromagnetic (EM) system and a Sinterex cesium magnetometer. Both were flown at a height of 100 meters. The Sinterex magnetometer was a 56/50 Hz radar altimeter, GPS navigation system, 56/50 Hz magnetometer and video camera. Flights were performed with a clearance of 200 feet along NW-SE (340°) flight lines with a spacing of a quarter of a mile. The instrumentation and flight line direction, (2000) were similar to the current survey.

An Ashtech GC24 NAVSTAR / GLONASS Global Positioning System was used for navigation. The helicopter position was derived every 0.5 seconds. The flight path was surveyed along a north-south line. The relative accuracy of better than 5 m. Flight path positions were projected onto the Clarke 1866 datum using a central meridian (CM) of 159°, a north constant of 0 and an east constant of 500,000. The projection was done with a program on a computer that is better than 10 m with respect to the UTM grid.

### RESISTIVITY

The DIGHEM EM system measured inphase and quadrature horizontal coplanar-coil pairs operated at 800, 7200, and 5500 Hz while three vertical coplanar-coil pairs responded to bedrock conductors, conductive overburden, and cultural sources. Apparent resistivity is the ratio of the in-phase to the quadrature voltage response. The coplanar 900 Hz using the pseudo-layer half space model (Fraser 1978). The data were interpolated onto a regular 100 m grid using a modified Memo (1970) technique.

Arnold, H., 1970. A new method of interpolation and smooth curve fitting. *Proceedings of the 1969 International Symposium on Computer Machinery*, v. 17, no. 4, p. 589-602.

Fraser, H., 1978. A method of resistivity data reduction for a coplanar electromagnetic system. *Geophysics*, v. 43, no. 4, p. 741-742.

### SURVEY HISTORY

This map has been compiled from data collected by the State of Alaska Department of Natural Resources, Division of Geological & Geophysical Surveys (DGGGS), and Stevens Exploration Management Corp. (SEMG) during the 1980s. The data were processed by Fugro Airborne Surveys in 2002. The project was funded by the Bureau of Land Management (BLM). The Alick survey data shown along the western edge of the current survey were processed by the BLM and published by DGGGS. The map and other products from this survey are available to the public. Some products are available for purchase. Some products are also available in person only at the BLM's Bureau of Land Management, 100 Seward Road, Douglas, Alaska, 99624.

Base Area: U.S. Geological Survey Sheet(s) C-3, 1996; C-4, 1994; C-5, 1994; C-6, 1984; D-1, 1976; D-2, 1976; D-3, 1976; D-4, 1976; D-5, 1976; D-6, 1976; D-7, 1976.