



Base from U.S. Geological Survey Standard Plate S-1, 1984.  
Base from U.S. Geological Survey Standard Plate S-1, 1984.

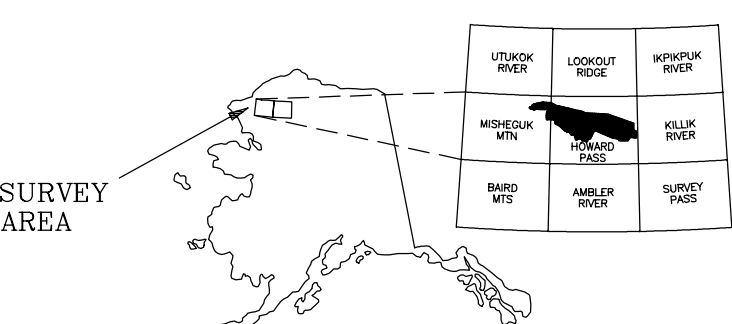

**DESCRIPTIVE NOTES**

The geophysical data were acquired with a DIGHEM<sup>®</sup> Electromagnetic (EM) system and a Scripps cesium magnetometer. The EM and magnetic sensors were flown at a height of 100 feet. In addition the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors and video camera. Flights were performed with an AS350B-2 Squirrel helicopter at a mean terrain clearance of 200 feet along NW-SE (345°) survey flight lines west of the red line shown on the location index and NE-SW (225°) survey flight lines east of the red line. Flight lines were spaced one eighth of a mile with the exception of the Branchwater Creek area (red area in the location index), where flight lines were spaced one quarter of a mile. Flight lines were flown perpendicular to the flight line intervals of approximately 3 miles except for the Branchwater Creek area, where the flight interval was 1.5 miles.

An Autech G224 NAVSTAR / GLOMNAS Global Positioning System was used for navigation. The helicopter position was derived every 0.5 seconds using post-flight differential positioning to a relative accuracy of better than 5 m. Flight path positions were projected onto the Clarke 1886 (UTM zone 4) spheroid, 1927 North American datum using a central meridian (CM) of 159°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m. with respect to the UTM grid.

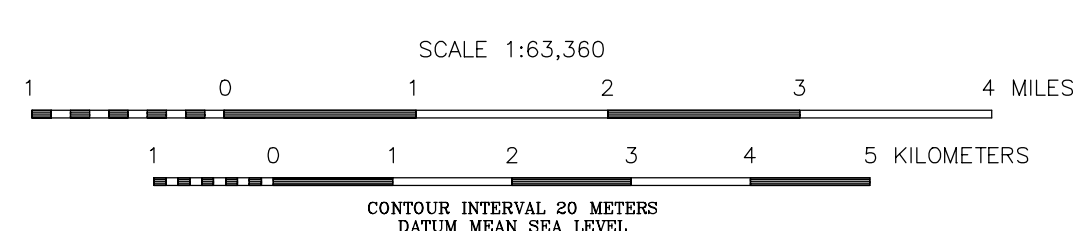

**7200 Hz COPLANAR APPARENT RESISTIVITY  
OF PARTS OF  
SOUTHERN NATIONAL PETROLEUM RESERVE - ALASKA,  
NORTHWEST ALASKA**


by  
**Laurel E. Burns, U.S. Bureau of Land Management, Fugro Airborne Surveys Corp., and Stevens Exploration Management Corp.**  
2006

**RESISTIVITY**

The DIGHEM<sup>®</sup> EM system measured inphase and quadrature components at five frequencies. Two vertical coplanar coil-pairs operated at 1000 and 5000 Hz while three horizontal coplanar coil-pairs operated at 900, 7200 and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. Apparent resistivity is generated from the inphase and quadrature component of the coplanar 7200 Hz using the pseudo-layer half space mode. The data were interpolated onto a regular 80 m grid using a modified Akima (1970) technique.

Akima, H., 1970. A new method of interpolation and smooth curve fitting based on local splines. *Journal of the Association of Computing Machinery*, v. 17, no. 4, p.589-602.

**LOCATION INDEX**

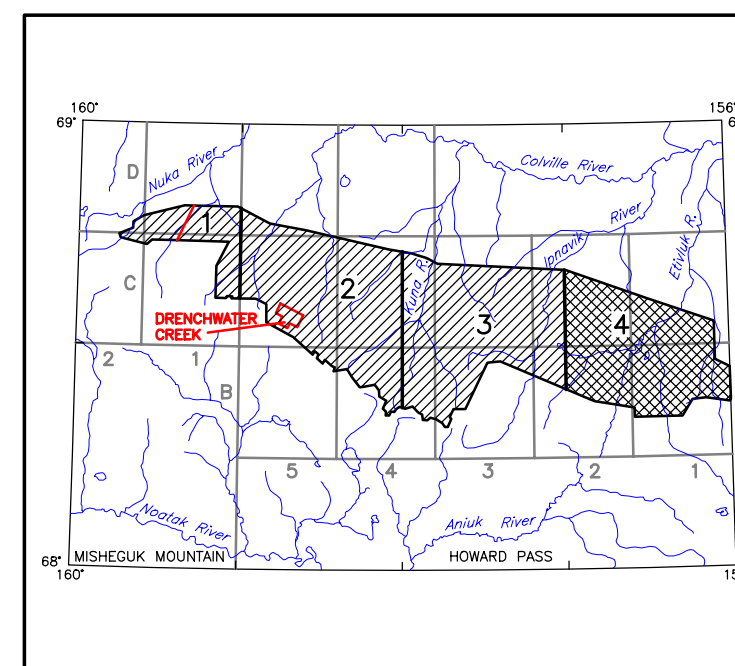

**SURVEY HISTORY**

This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys (DGGS), and Stevens Exploration Management Corp. Airborne geophysical data for the area were acquired and processed by Fugro Airborne Surveys Corp. in 2005. Funding for the project was provided by the U.S. Department of the Interior, Bureau of Land Management (BLM).

This map and other products from this survey are available by mail order in person from DGGS, 3334 College Road, Fairbanks, Alaska, 99709-3707. Published maps are also available for viewing or downloading as Adobe Acrobat Files (.pdf) on our Web site (<http://www.dggs.dnr.state.ak.us/pubs/>). Some products are also available for viewing at the BLM Alaska State Office, 222 W. 7th Avenue, Anchorage, AK 99513.