


900 HZ COPLANAR APPARENT RESISTIVITY OF THE EAST RICHARDSON AREA, FAIRBANKS MINING DISTRICT, INTERIOR ALASKA

PARTS OF BIG DELTA QUADRANGLE
by
Laurel E. Burns, Fugro Airborne Surveys Corp., and Stevens Exploration Management Corp.
2006

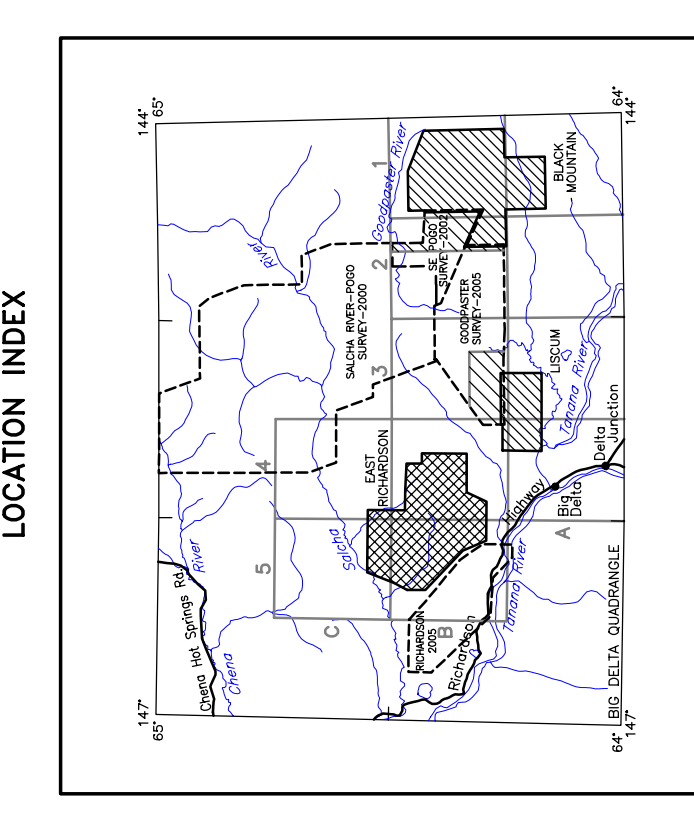

The geophysical data were acquired with a DUCHEM[®] coplanar system. The DUCHEM coplanar system consists of a transmitter and receiver coil pair, each 100 m in diameter, mounted on a Cessna 441 aircraft. The transmitter coil is energized with a 900 Hz current, and the receiver coil is connected to a 100 mV preamplifier. The system is operated at 1000 Hz and 2000 Hz, with three 50,000 Hz EM data sets sampled at 0.1 second intervals. The system is operated at 900 Hz using the pseudo-layer half space method. The system is operated at 900 Hz using the pseudo-layer half space method. The system is operated at 900 Hz using the pseudo-layer half space method.

RESISTIVITY

The DUCHEM[®] system measured apparent resistivity and apparent inductance. The apparent resistivity is calculated from the ratio of the voltage induced in the receiver coil to the current in the transmitter coil. The apparent resistivity is calculated from the ratio of the voltage induced in the receiver coil to the current in the transmitter coil. The apparent resistivity is calculated from the ratio of the voltage induced in the receiver coil to the current in the transmitter coil.

RESISTIVITY CONTOURS

1000
800
600
500
400
300
200
150
125
100

Contours in ohm-m at 10 intervals per decade

DESCRIPTIVE NOTES

The geophysical data were acquired with a DUCHEM[®] coplanar system. The DUCHEM coplanar system consists of a transmitter and receiver coil pair, each 100 m in diameter, mounted on a Cessna 441 aircraft. The transmitter coil is energized with a 900 Hz current, and the receiver coil is connected to a 100 mV preamplifier. The system is operated at 1000 Hz and 2000 Hz, with three 50,000 Hz EM data sets sampled at 0.1 second intervals. The system is operated at 900 Hz using the pseudo-layer half space method. The system is operated at 900 Hz using the pseudo-layer half space method. The system is operated at 900 Hz using the pseudo-layer half space method.

SURVEY HISTORY

This map has been compiled and drawn under contract to the Alaska Division of Geological & Geophysical Surveys, Department of Geological & Geophysical Surveys, University of Alaska Fairbanks, Fairbanks, Alaska. The survey was conducted by Fugro Airborne Surveys, Inc., Fairbanks, Alaska, in 2006. The survey was conducted by Fugro Airborne Surveys, Inc., Fairbanks, Alaska, in 2006. The survey was conducted by Fugro Airborne Surveys, Inc., Fairbanks, Alaska, in 2006.

LOCATION INDEX

This map shows the location of the survey area within the state of Alaska. The survey area is highlighted in a shaded region in the central part of the state, near Fairbanks. The map includes major cities and geographical features.

SCALE 1:50,000

0 1 2 3 4 5 KILOMETERS

0 1 2 3 4 5 MILES

UNITS

RESISTIVITY: OHM-METERS

LENGTH: METERS

ANGLE: DEGREES

ACKNOWLEDGMENTS

The author wishes to thank the following individuals and organizations for their assistance in the preparation of this report: Fugro Airborne Surveys, Inc.; Stevens Exploration Management Corp.; and the Alaska Division of Geological & Geophysical Surveys.

REFERENCES

Alaska Division of Geological & Geophysical Surveys. 2006. Geophysical Report 2006-5-4b. Fairbanks, Alaska.