

**Division of Geological & Geophysical Surveys**

**Geophysical Report 2002\_14**

**PROJECT REPORT OF THE AIRBORNE GEOPHYSICAL SURVEY OF THE  
BROAD PASS AREA, SOUTHWESTERN BONNIFIELD MINING DISTRICT,  
CENTRAL ALASKA,**

by

Ruth Pritchard  
Fugro Airborne Surveys

\$33.00

April 2002

THIS REPORT HAS NOT BEEN REVIEWED FOR  
TECHNICAL CONTENT (EXCEPT AS NOTED IN TEXT) OR FOR  
CONFORMITY TO THE EDITORIAL STANDARDS OF DGGS.

Released by

STATE OF ALASKA  
DEPARTMENT OF NATURAL RESOURCES  
Division of Geological & Geophysical Surveys  
3354 College Rd.  
Fairbanks, Alaska 99709-3707



PROJECT REPORT OF THE  
AIRBORNE GEOPHYSICAL SURVEY  
OF THE BROAD PASS AREA  
SOUTHWESTERN BONNIFIELD MINING DISTRICT  
CENTRAL ALASKA

STEVENS EXPLORATION MANAGEMENT CORP.  
DIGHEM<sup>V</sup> SURVEY  
FOR THE  
STATE OF ALASKA  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF GEOLOGICAL AND GEOPHYSICAL SURVEYS

Quadrangle: HEALY B-3, B-4, B-5, C-3, C-4, C-5

Fugro Airborne Surveys Corp.  
Mississauga, Ontario

Ruth A. Pritchard  
Geophysicist

April 15, 2002

## SUMMARY

This report describes the logistics and results of a DIGHEM<sup>V</sup> airborne geophysical survey carried out under contract to Stevens Exploration Management Corp., Mining and Geological Consultants, for the State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys. The survey was flown from July 26<sup>th</sup> to August 22<sup>nd</sup>, 2001, over one block, and was flown as a northeastern extension to a 1996 Geotrex-Dighem survey flown in the Chulitna Mining area, central Alaska. Total coverage of the survey block amounts to 1224.5 line-miles (1970.2 line-km).

This airborne geophysical survey is part of a program to acquire data on Alaska's most promising mineral belts and districts. The information acquired is aimed at catalyzing new private sector exploration, discovery, and ultimate development and production. The purpose of the survey was to map the magnetic and conductive properties of the survey area, and to detect conductive mineralization. This was accomplished by using a DIGHEM<sup>V</sup> multi-coil, multi-frequency electromagnetic system, supplemented by a high sensitivity cesium magnetometer. A GPS electronic navigation system ensured accurate positioning of the geophysical data with respect to the base maps. Visual flight path recovery techniques were used to confirm the location of the helicopter with respect to the ground.

Various maps depicting the survey results are provided at scales of 31,680 (1" = 1/2 mile) and 1:63,360 (1" = 1 mile). Some of the maps are presented on a topographic base. The data sets are processed and presented using Zone 6 of the Universal Transverse Mercator projection coordinates using the NAD27 datum. The following geophysical parameters are presented on the maps and/or on the digital archive:

- ? Total Field Magnetics
- ? Shadow Total Field Magnetics
- ? Apparent Resistivity – 900 Hz
- ? Apparent Resistivity – 7,200 Hz
- ? Interpreted Discrete Electromagnetic Anomalies

The total field magnetic and apparent resistivity data sets have successfully mapped the magnetic and conductive characteristics of the lithologies in the survey area. Numerous faults and contacts have been inferred from the survey results.

The discrete EM anomalies are interpreted to fall within one of four general categories. The first type consists of discrete, well-defined anomalies which are usually attributed to conductive sulphides or graphite. The second class of anomalies comprises moderately broad responses which exhibit the characteristics of a half space. Some of these anomalies may reflect conductive rock units or zones of deep weathering. The third class of anomalies consists of negative inphase responses which are indicative of magnetite. The fourth class consists of responses reflecting cultural sources.

It is recommended that the survey results be reviewed in detail, in conjunction with all available geophysical, geological and geochemical information. Particular reference should be made to the multi-parameter stacked profiles, which clearly define the characteristics of the individual anomalies in the identification of target areas. Image processing of existing geophysical data should be considered, in order to extract the maximum amount of information from the survey results.

# CONTENTS

1.	INTRODUCTION.....	1.1
2.	SURVEY EQUIPMENT AND FIELD PROCEDURES .....	2.1
	Electromagnetic System.....	2.1
	Magnetometer .....	2.2
	Base Station Magnetometer .....	2.3
	Radar Altimeter .....	2.3
	Barometric Pressure and Temperature Sensors .....	2.3
	Analog Recorder .....	2.3
	Digital Data Acquisition System.....	2.4
	Video Flight Path Recording System .....	2.4
	Navigation (Global Positioning System).....	2.4
	Field Workstation .....	2.6
3.	PRODUCTS AND PROCESSING TECHNIQUES .....	3.1
	PRODUCTS .....	3.1
	Maps .....	3.1
	Other Products .....	3.2
	PROCESSING TECHNIQUES .....	3.3
	Topographic Base Maps.....	3.3
	Electromagnetic Anomalies .....	3.3
	Apparent Resistivity.....	3.6
	EM Magnetite (optional) .....	3.7
	Total Magnetic Field .....	3.7
	Calculated Vertical Magnetic Gradient (optional).....	3.7
	Magnetic Derivatives (optional) .....	3.8
	Multi-channel Stacked Profiles .....	3.8
	Contour, Colour and Shadow Map Displays .....	3.8
	Resistivity-depth Sections (optional).....	3.10
	Digital Terrain.....	3.11
4.	SURVEY RESULTS AND DISCUSSION.....	4.1
	Geology.....	4.1
	Survey Results .....	4.1
5.	CONCLUSIONS AND RECOMMENDATIONS .....	5.1

## APPENDICES

- A. Background Information
- B. List of Personnel
- C. Archive Description
- D. EM Anomaly List

## LIST OF TABLES

Table 2-1	The Analog Profiles .....	2-5
Table 3-1	Survey Products .....	3-2
Table 3-2	Multi-channel Stacked Profiles .....	3-9
Table 4-1	EM Anomaly Statistics .....	4-2
Table A-1	EM Anomaly Grades .....	A-2

## LIST OF FIGURES

Figure 1-1	Location of the Broad Pass Area, Central Alaska.....	1-2
Figure 3-1a	Processing Flow Chart – Electromagnetic data.....	3-4
Figure 3-1b	Processing Flow Chart – Magnetic data.....	3-4
Figure 4-1	Interpretation Sketch Map of the Broad Pass Area .....	4-3
Figure A-1	Typical DIGHEM Anomaly Shapes.....	A-4

## LIST OF MAPS

2002_14	Interpretation Map of Broad Pass Area .....	map pocket
---------	---	------------

## 1. INTRODUCTION

A DIGHEM<sup>V</sup> electromagnetic/resistivity/magnetic survey was flown under contract to Stevens Exploration Management Corp., Mining and Geological Consultants for the State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys (DGGs). The survey was flown from July 26<sup>th</sup> to August 22<sup>nd</sup>, 2001, over a survey block located in the Broad Pass Mining area. The survey area is a northeastern extension of a survey block in the Chulitna Mining area which was flown for DGGs in 1996 by Geoterrrex-Dighem. The survey area is located in the Healy quadrangle, map sheets B-3, B-4, B-5, C-3, C-4, C-5 (Figure 1-1).


Survey coverage consisted of approximately 1224.5 line-miles (1970.2 line-km), including 138.7 miles (223.2 km) of tie lines. Flight lines were flown in an azimuthal direction of 0°/180° with a line separation of ¼-mile (approximately 400 metres).

Tie lines are flown perpendicular to the flight lines with a separation of 3 miles (5 kilometres). Several boundary lines were also flown around the edge of the survey area.

The survey employed the DIGHEM<sup>V</sup> electromagnetic system. Ancillary equipment consisted of a magnetometer, radar altimeter, video camera, analog and digital recorders, and an electronic navigation system. The instrumentation was installed in an AS350B2 turbine helicopter (Registration N165EH) which was provided by ERA Helicopters Ltd. The helicopter flew at an average airspeed of 40 mph (64 km/h) with an EM sensor height of approximately 30 metres.

Section 2 provides details on the survey equipment, the data channels, their respective sensitivities, and the navigation/flight path recovery procedure. Section 3 describes the processing techniques, and lists the products which are delivered with this report. Section 4 gives a brief overview of the known geology in the survey area and the geophysical survey results, and Section 5 describes the conclusions and recommendations relating to the airborne survey.

### LOCATION INDEX

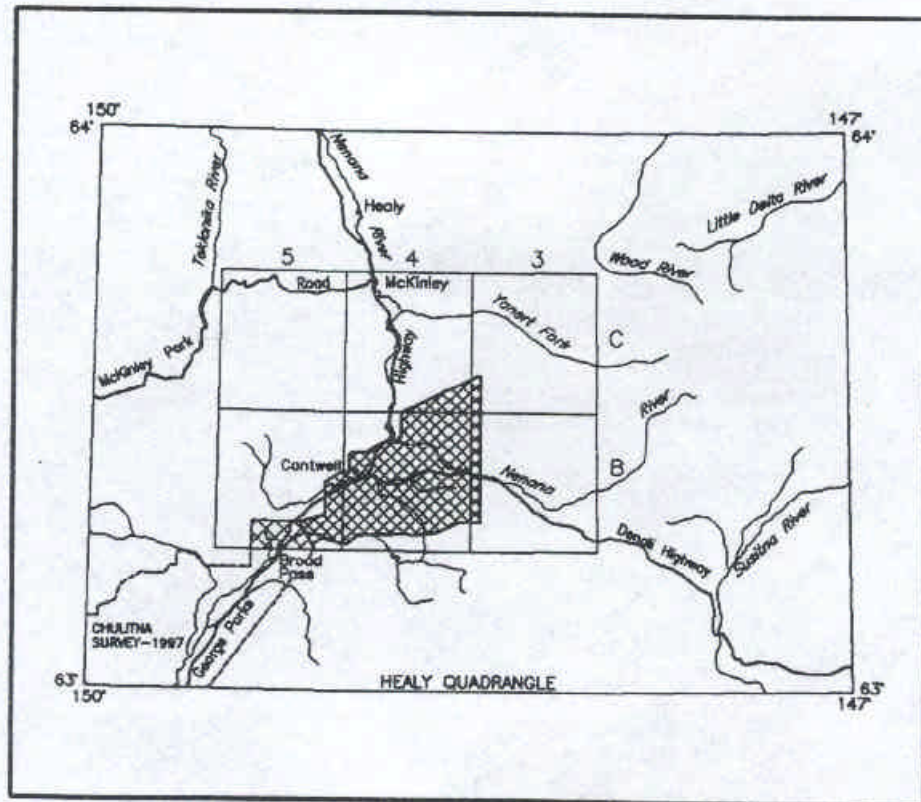

**FIGURE 1-1**  
**LOCATION MAP OF THE SURVEY AREA**  
**BROAD PASS AREA**  
**SOUTHWESTERN BONNIFIELD MINING DISTRICT**  
**CENTRAL ALASKA**



## 2. SURVEY EQUIPMENT AND FIELD PROCEDURES

This section provides a brief description of the geophysical instruments used to acquire the survey data and the calibration procedures employed. The survey equipment was installed in an Aerospatiale AS350B2 turbine helicopter which was provided by ERA Helicopters Ltd. A bird, which houses much of the electromagnetic and magnetic equipment is suspended approximately 30 m below the helicopter.

### Electromagnetic System

Model: DIGHEM<sup>V</sup>

Type: Towed bird, symmetric dipole configuration operated at a nominal survey altitude of 30 metres. Coil separation is 8 metres for 900 Hz, 1000 Hz, 5500 Hz and 7200 Hz, and 6.3 metres for the 56,000 Hz coil-pair.

Coil orientations/frequencies:	<u>orientation</u>	<u>nominal</u>	<u>actual</u>
	coaxial /	1000 Hz	1072 Hz
	coplanar /	900 Hz	883 Hz
	coaxial /	5500 Hz	5954 Hz
	coplanar /	7200 Hz	7236 Hz
	coplanar /	56,000 Hz	56,360 Hz

Channels recorded: 5 in-phase channels  
5 quadrature channels  
2 monitor channels

Sensitivity: 0.06 ppm at 1000 Hz Cx  
0.12 ppm at 900 Hz Cp  
0.12 ppm at 5,500 Hz Cx  
0.24 ppm at 7,200 Hz Cp  
0.60 ppm at 56,000 Hz Cp

Sample rate: 10 per second, equivalent to 1 sample every 3 m, at a survey speed of 110 km/h.

The electromagnetic system utilizes a multi-coil coaxial/coplanar technique to energize conductors in different directions. The coaxial coils are vertical with their axes in the flight direction. The coplanar coils are horizontal. The secondary fields are sensed simultaneously by means of receiver coils which are maximally coupled to their respective transmitter coils. The system yields an in-phase and a quadrature channel from each transmitter-receiver coil-pair.

The Dighem calibration procedure involves four stages; primary field bucking, phase calibration, gain calibration, and zero adjust. At the beginning of the survey, the primary

field at each receiver coil is cancelled, or “bucked out”, by precise positioning of five bucking coils.

The phase calibration adjusts the phase angle of the receiver to match that of the transmitter. A ferrite bar, which produces a purely in-phase anomaly, is positioned near each receiver coil. The bar is rotated from minimum to maximum field coupling and the responses for the in-phase and quadrature components for each coil pair/frequency are measured. The phase of the response is adjusted at the console to return an in-phase only response for each coil-pair. Phase checks are performed daily.

The gain calibration uses external coils designed to produce an equal response on in-phase and quadrature components for each frequency/coil-pair. The coil parameters and distances are designed to produce pre-determined responses at the receiver, due to the current induced in the calibration coil by the transmitter when a switch closes the loop at the coil. The gain at the console is adjusted to yield secondary responses of exactly 100 ppm. Gain calibrations are carried out at the beginning and end of the survey.

The phase and gain calibrations each measure a relative change in the secondary field, rather than an absolute value. This removes any dependency of the calibration procedure on the secondary field due to the ground, except under circumstances of extreme ground conductivity.

During each survey flight, internal (Q-coil) calibration signals are generated to recheck system gain and to establish zero reference levels. These calibrations are carried out at intervals of approximately 20 minutes with the system out of ground effect. At a sensor height of more than 250 m, there is no measurable secondary field from the earth. The remaining residual is therefore established as the zero level of the system. Linear system drift is automatically removed by re-establishing zero levels between the Q-coil calibrations.

## **Magnetometer**

Model:	Picodas MEP-710 processor with Geometrics G822 sensor
Type:	Optically pumped cesium vapour
Sensitivity:	0.01 nT
Sample rate:	10 per second

The magnetometer sensor is housed in the EM bird, 30 m below the helicopter.

## **Base Station Magnetometer**

Model: GEM Systems GSM-19T  
Type: Digital recording proton precession  
Sensitivity: 0.10 nT  
Sample rate: 0.2 per second

A digital recorder is operated in conjunction with the base station magnetometer to record the diurnal variations of the earth's magnetic field. The clock of the base station is synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

## **Radar Altimeter**

Manufacturer: Honeywell/Sperry  
Model: AA 220  
Type: Short pulse modulation, 4.3 GHz  
Sensitivity: 0.3 m

The radar altimeter measures the vertical distance between the helicopter and the ground. This information is used in the processing algorithm which determines conductor depth.

## **Barometric Pressure and Temperature Sensors**

Model: DIGHEM D 1300  
Type: Motorola MPX4115AP analog pressure sensor  
AD592AN high-impedance remote temperature sensors  
Sensitivity: Pressure: 150 mV/kPa  
Temperature: 100 mV/°C or 10 mV/°C (selectable)  
Sample rate: 10 per second

The D1300 circuit is used in conjunction with one barometric sensor and up to three temperature sensors. Two sensors (baro and temp) are installed in the EM console in the aircraft, to monitor pressure and internal operating temperatures.

## **Analog Recorder**

Manufacturer: RMS Instruments  
Type: DGR33 dot-matrix graphics recorder  
Resolution: 4x4 dots/mm  
Speed: 1.5 mm/sec

The analog profiles are recorded on chart paper in the aircraft during the survey. Table 2-1 lists the geophysical data channels and the vertical scale of each profile.

## **Digital Data Acquisition System**

Manufacturer: RMS Instruments  
Model: DGR 33  
Recorder: 48 Mb flash disk

The data are stored on a 48 Mb flash disk and are downloaded to the field workstation PC at the survey base for verification, backup and preparation of in-field products.

## **Video Flight Path Recording System**

Type: Panasonic VHS Colour Video Camera (NTSC)  
Model: AG 2400/WVCD132

Fiducial numbers are recorded continuously and are displayed on the margin of each image. This procedure ensures accurate correlation of analog and digital data with respect to visible features on the ground.

## **Navigation (Global Positioning System)**

### Airborne Receiver

Model: Ashtech Glonass GG24  
Type: SPS (L1 band), 24-channel, C/A code at 1575.42 MHz, S code at 0.5625 MHz, Real-time differential.  
Sensitivity: -132 dBm, 0.5 second update  
Accuracy: Manufacturer's stated accuracy is better than 10 metres real-time

### Base Station

Model: Marconi Allstar OEM, CMT-1200  
Type: Code and carrier tracking of L1 band, 12-channel, C/A code at 1575.42 MHz  
Sensitivity: -90 dBm, 1.0 second update  
Accuracy: Manufacturer's stated accuracy for differential corrected GPS is 2 metres

**Table 2-1 The Analog Profiles**

<b>Channel Name</b>	<b>Parameter</b>	<b>Scale units/mm</b>	<b>Designation on Digital Profile</b>
1X9I	coaxial in-phase ( 1000 Hz)	2.5 ppm	CXI1000
1X9Q	coaxial quad ( 1000 Hz)	2.5 ppm	CXQ1000
3P9I	coplanar in-phase ( 900 Hz)	2.5 ppm	CPI900
3P9Q	coplanar quad ( 900 Hz)	2.5 ppm	CPQ900
2P7I	coplanar in-phase ( 7200 Hz)	5 ppm	CPI7200
2P7Q	coplanar quad ( 7200 Hz)	5 ppm	CPQ7200
4X7I	coaxial in-phase ( 5500 Hz)	5 ppm	CXI5500
4X7Q	coaxial quad ( 5500 Hz)	5 ppm	CXQ5500
5P5I	coplanar in-phase ( 56000 Hz)	10 ppm	CPI56K
5P5Q	coplanar quad ( 56000 Hz)	10 ppm	CPQ56K
ALTR	altimeter (radar)	3 m	ALTBIRD
MAGC	magnetics, coarse	20 nT	MAG
MAGF	magnetics, fine	2.0 nT	MAG
CXSP	coaxial spherics monitor		CXSP
CPSP	coplanar spherics monitor		CPSP
4XSP	coaxial spherics monitor		
CXPL	coaxial powerline monitor		CXPL
CPPL	coplanar powerline monitor		CPPL
1KPA	altimeter (barometric)	30 m	
2TDC	internal (console) temperature	1° C	
3TDC	external temperature	1° C	

The Ashtech GG24 is a line of sight, satellite navigation system which utilizes time-coded signals from at least four of forty-eight available satellites. Both Russian GLONASS and American NAVSTAR satellite constellations are used to calculate the position and to provide real time guidance to the helicopter. The Ashtech system can be combined with a RACAL or similar GPS receiver which further improves the accuracy of the flying and subsequent flight path recovery to better than 5 metres. The differential corrections, which are obtained from a network of virtual reference stations, are transmitted to the helicopter via a spot-beam satellite. This eliminates the need for a local GPS base station. However, the Marconi Allstar OEM (CMT-1200) was used as a backup to provide post-survey differential corrections.

The Marconi Allstar OEM (CMT-1200) is operated as a base station and utilizes time-coded signals from at least four of the twenty-four NAVSTAR satellites. The base station raw XYZ data are recorded, thereby permitting post-survey processing for theoretical accuracies of better than 5 metres.

The Ashtech receiver is coupled with a PNAV navigation system for real-time guidance.

Although the base station receiver is able to calculate its own latitude and longitude, a higher degree of accuracy can be obtained if the reference unit is established on a known benchmark or triangulation point. For this survey, the GPS station was located at latitude 63°23.99797'N and longitude 148°53.68994'W at an elevation of 666.1 m a.m.s.l. The GPS records data relative to the WGS84 ellipsoid, which is the basis of the revised North American Datum (NAD83). Conversion software is used to transform the WGS84 coordinates to the NAD27 system displayed on the base maps.

## **Field Workstation**

A PC is used at the survey base to verify data quality and completeness. Flight data are transferred to the PC hard drive to permit the creation of a database using a proprietary software package (typhoon-version 17.01.04). This process allows the field operators to display both the positional (flight path) and geophysical data on a screen or printer.

### 3. PRODUCTS AND PROCESSING TECHNIQUES

This section describes the final delivered products and the techniques employed during the data processing, interpretation and presentation.

Table 3-1 lists the maps and products which have been provided under the terms of the survey agreement. Other products can be prepared from the existing dataset, if requested. These include magnetic enhancements or derivatives, percent magnetite, digital terrain or resistivity-depth sections. Most parameters can be displayed as contours, profiles, or in colour.

#### PRODUCTS

##### Maps

Maps depicting the survey results have been provided at scales of 1:63,360 and 1:31,680 as listed in Table 3-1. The data sets were processed and presented using the NAD27 datum. Details of this projection and the conversion from WGS84 are given below:

##### Projection Description:

Datum:	NAD27
Ellipsoid:	Clarke 1866
Projection:	UTM (Zone 6N)
Central Meridian:	-147
False Northing:	0
False Easting:	500000
Scale Factor:	0.9996
WGS to local conversion method:	Molodensky
Datum Shift (x,y,z):	+5, -135, -172

**Table 3-1 Survey Products**

<b>Product Description</b>	<b>Product Number</b>	<b>Map Scale</b>
Colour Total Magnetic Field with topography	2002_11_1a	1:63,360
Colour Total Magnetic Field with contours and sections lines	2002_11_1b	1:63,360
Colour Shadow Total Magnetic Field with section lines	2002_11_1c	1:63,360
Black & White Total Magnetic field Contours with section lines and simplified EM anomalies	2002_11_1d	1:63,360
Black & White Total Magnetic Field Contours with detailed EM anomalies and topography	2002_11_2a 2002_11_2b 2002_11_2c	1:31,680
Colour Resistivity (7200 Hz coplanar) with topography	2002_11_3a	1:63,360
Colour Resistivity (7200 Hz coplanar) with contours and section lines	2002_11_3b	1:63,360
Black & White Resistivity (7200 Hz coplanar) contours with section lines	2002_11_3c	1:63,360
Colour Resistivity (900 Hz coplanar) with topography	2002_11_4a	1:63,360
Colour Resistivity (900 Hz coplanar) with contours and section lines	2002_11_4b	1:63,360
Black & White Resistivity (900 Hz coplanar) contours with section lines	2002_11_4c	1:63,360
Flight lines with topography	2002_11_5a	1:63,360
CD-ROM containing profile and gridded data and DXF plot files	2002_12	-

## **Other Products**

Multi-parameter stacked profiles are provided for all survey lines at a scale of 1:63,360. They are provided as plots on mylar, and digitally as HP2500 compatible plot files. A detailed description of the plotted parameters is given in Table 3-2.

The final digital archives are provided on CD-ROM. Both line data and grid archives are provided in Geosoft format. Appendix C gives a detailed description of the contents of the CD-ROMs and of the archive format.

All original materials, including flight path videos, flight analog records, and the calibration analogs are also provided.



## **PROCESSING TECHNIQUES**

Figure 3-1 depicts the data processing flow for the electromagnetic and magnetic datasets.

### **Topographic Base Maps**

Base maps of the survey area have been produced from published 1:63,360 scale topographic maps. The original topographic maps are scanned to a bitmap format and combined with the geophysical data for final map plotting.

### **Electromagnetic Anomalies**


The EM data are processed at the recorded sample rate of 10 samples/second. The EM data are first filtered with a spike rejection filter. Appropriate median and/or Hanning filters are applied to reduce high frequency noise to acceptable levels. EM test profiles are then created to allow the interpreter to select the most appropriate EM anomaly picking controls for the given survey area. The EM picking parameters depend on several factors but are primarily based on the dynamic range of the resistivity within the survey area, and the types and expected geophysical responses of the geologic target models.

Anomalous electromagnetic responses are selected and analysed by computer to provide a preliminary set of electromagnetic anomalies. These preliminary anomalies are reviewed and interpreted by the geophysicist to produce the final interpreted EM anomaly maps. Excellent resolution and discrimination of conductors is accomplished by employing a common frequency on two orthogonal coil-pairs (coaxial and coplanar). The computed "difference channel" parameters often permit differentiation of bedrock and surficial conductors where the computed conductance alone can not.


The anomalies shown on the electromagnetic anomaly maps are based on a near-vertical, half-plane model. This model best reflects "discrete" bedrock conductors. Wide bedrock conductors or flat-lying conductive units, whether from surficial or bedrock sources, may give rise to very broad anomalous responses on the EM profiles. These may not appear on the electromagnetic anomaly map if they have a regional character rather than a locally anomalous character. These broad conductors, which more closely approximate a half space model, will be maximum coupled to the horizontal (coplanar) coil-pair and should be more evident on the resistivity parameter. Resistivity maps, therefore, may be more valuable than the electromagnetic anomaly maps in areas where broad or flat-lying conductors are considered to be of importance.

Anomalous EM responses have been interpreted from the electromagnetic data in the survey area. Table 4-1 summarizes these responses with respect to conductance grade and interpretation.

**Figure 3-1a)**  
**Processing Flow Chart - Electromagnetic Data**

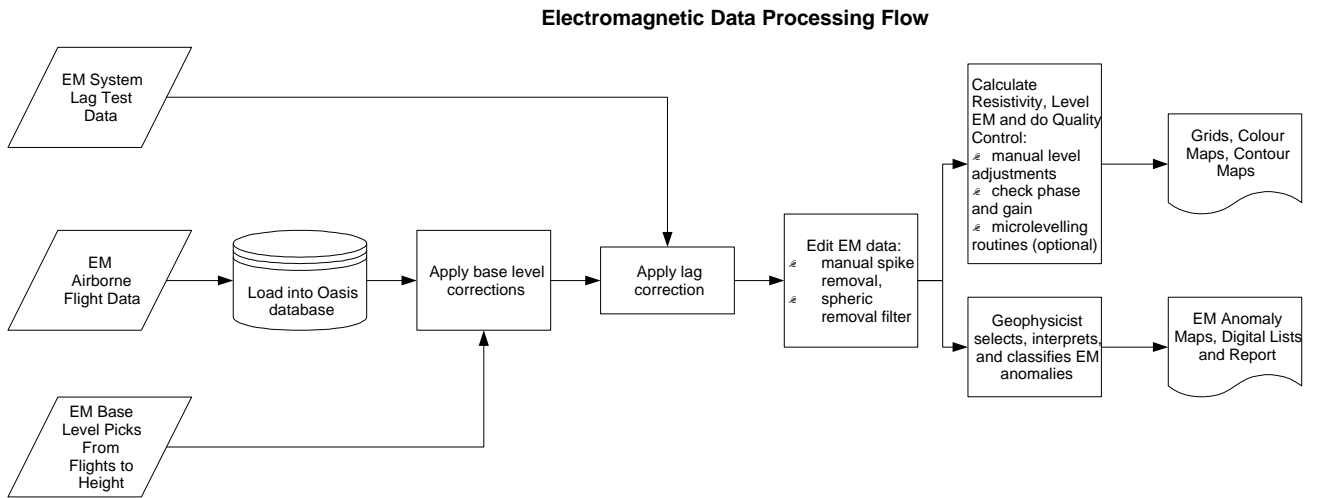

**Figure 3-1b)**  
**Processing Flow Chart – Magnetic Data**

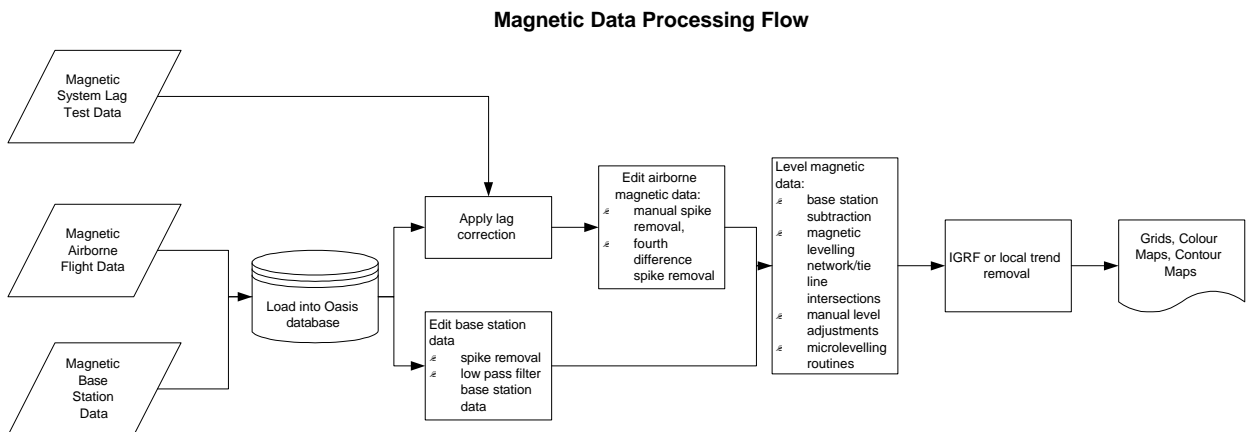

The EM anomalies resulting from this survey appear to fall within one of four general categories. The first type consists of discrete, well-defined anomalies which yield marked inflections on the difference channels. These anomalies are usually attributed to conductive sulphides or graphite and are generally given a "B", "T" or "D" interpretive symbol, denoting a bedrock source.

The second class of anomalies comprises moderately broad responses which exhibit the characteristics of a half space and do not yield well-defined inflections on the difference channels. Anomalies in this category are usually given an "S" or "H" interpretive symbol. The lack of a difference channel response usually implies a broad or flat-lying conductive source such as overburden. Some of these anomalies may reflect conductive rock units, zones of deep weathering, or the weathered tops of kimberlite pipe which can often yield "non-discrete" signatures.

The effects of conductive overburden are evident over portions of the survey area. Although the difference channels (DIFI and DIFQ) are extremely valuable in detecting bedrock conductors which are partially masked by conductive overburden, sharp undulations in the bedrock/overburden interface can yield anomalies in the difference channels which may be interpreted as possible bedrock conductors. Such anomalies usually fall into the "S?" or "B?" classification but may also be given an "E" interpretive symbol, denoting a resistivity contrast at the edge of a conductive unit.

The "?" symbol does not question the validity of an anomaly, but instead indicates some degree of uncertainty as to which is the most appropriate EM source model. This ambiguity results from the combination of effects from two or more conductive sources, such as overburden and bedrock, gradational changes, or moderately shallow dips. The presence of a conductive upper layer has a tendency to mask or alter the characteristics of bedrock conductors, making interpretation difficult. This problem is further exacerbated in the presence of magnetite.

In areas where EM responses are evident primarily on the quadrature components, zones of poor conductivity are indicated. Where these responses are coincident with magnetic anomalies, it is possible that the inphase component amplitudes have been suppressed by the effects of magnetite. Most of these poorly-conductive magnetic features give rise to resistivity anomalies which are only slightly below background. If it is expected that poorly-conductive economic mineralization may be associated with magnetite-rich units, most of these weakly anomalous features will be of interest. In areas where magnetite causes the inphase components to become negative, the apparent conductance and depth of EM anomalies may be unreliable. Magnetite effects usually give rise to overstated (higher) resistivities and understated (shallow) depth calculations. Direct magnetic correlation is shown where it exists.

The third class of anomalies consists of magnetite anomalies, which are given an "M" interpretive symbol. These anomalies denote zones of negative inphase due to magnetite, without the presence of an associated conductive source. Where a conductive anomaly is evident coincident with negative inphase, the conductive anomaly takes precedence.

It is difficult to assess the relative merits of EM anomalies on the basis of conductance. It is recommended that an attempt be made to compile a suite of geophysical "signatures" over areas of interest. Anomaly characteristics are clearly defined on the computer-processed geophysical data profiles which are supplied as one of the survey products.

The fourth class comprises cultural anomalies. These anomalies are indicated by an "L" or "L?" interpretation.

In some portions of the survey area, the steep topography forced the pilot to exceed normal terrain clearance for reasons of safety. It is possible that some weak conductors may have escaped detection in areas where the bird height exceeded 120 m. In difficult areas where near-vertical climbs were necessary, the forward speed of the helicopter was reduced to a level which permitted excessive bird swinging. This problem, combined with the severe stresses to which the bird was subjected, gave rise to aerodynamic noise levels which are slightly higher than normal. Where warranted, reflights were carried out to minimize these adverse effects.

Anomalies which occur near the ends of the survey lines (i.e., outside the survey area), should be viewed with caution. Some of the weaker anomalies could be due to aerodynamic noise, i.e., bird bending, which is created by abnormal stresses to which the bird is subjected during the climb and turn of the aircraft between lines. Such aerodynamic noise is usually manifested by an anomaly on the coaxial inphase channel only, although severe stresses can affect the coplanar inphase channels as well.

## **Apparent Resistivity**

Apparent resistivity is computed from the inphase and quadrature EM components for the 900, 7200 and 56000 Hz coplanar data sets using a pseudo-layer halfspace model. The inputs to this resistivity algorithm are the amplitude and phase of the EM response. The algorithm calculates the apparent resistivity in ohm-m and the apparent height of the EM bird above the half-space. Any differences between the apparent height and the radar altimeter are ascribed to a highly resistive upper layer, or pseudo-layer. Errors in the radar altimeter will not affect the resistivity calculation as altitude is not an input parameter for the pseudo-layer half-space model. Apparent resistivity calculated in this manner may behave quite differently from those calculated using other models. The resultant apparent resistivity maps portray the variation in apparent resistivity for the given frequency over the entire survey area. This full coverage contrasts with the electromagnetic anomaly map which provides information only over the interpreted discrete conductors. The large dynamic range afforded by the multiple frequencies in the DIGHEM<sup>V</sup> system makes the apparent resistivity parameter an excellent mapping tool.

Preliminary apparent resistivity maps and images are carefully inspected to identify lines or line segments which may require base level adjustment. Subtle changes between in-flight calibrations of the system can result in line to line differences which are more readily recognizable in resistive (low signal amplitude) areas. If required, manual level adjustments are carried out to eliminate or minimize resistivity differences which can be

attributed in part to changes in operating temperature. These leveling adjustments are usually subtle, and do not result in the degradation of discrete anomalies.

After the leveling process is complete, revised apparent resistivity grids are created. The resulting grid may be subjected to a microlevelling filter in order to smooth the data for contouring. These grids can be filtered using a 3 cell by 3 cell smoothing filter prior to the preparation of the final maps. This final filter will not degrade the apparent resistivity given the broad 'footprint' of the parameter and the assumption of a homogeneous half space inherent in the apparent resistivity computation.

The calculated apparent resistivity values are clipped at a maximum value for each of the 900 and 7200 Hz data sets. These maxima eliminate the meaningless high apparent resistivity values which would result from very small EM amplitudes.

Contoured resistivity maps, based on the 900 Hz and 7200 Hz coplanar data are included with this report. Values are in ohm-metres on all final products.

### **EM Magnetite (optional)**

The apparent percent magnetite by weight is computed wherever magnetite produces a negative in-phase EM response. This calculation is more meaningful in resistive areas.

### **Total Magnetic Field**

A Picodas MEP-710 cesium vapour magnetometer was operated at the survey base to record diurnal variations of the earth's magnetic field. The clock of the base station was synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

Manual adjustments are applied to any lines that require levelling, as indicated by shadowed images of the gridded magnetic data or tie line/traverse line intercepts. The IGRF gradient has been removed from the data. The residual magnetic data have been presented on the base maps using a contour interval of 5 nT.

If a specific magnetic intensity can be assigned to the rock type which is believed to host the target mineralization, it may be possible to select areas of higher priority on the basis of the total field magnetic data. This is based on the assumption that the magnetite content of the host rocks will give rise to a limited range of contour values which will permit differentiation of various lithological units.

The magnetic results, in conjunction with the other geophysical parameters, have provided valuable information which can be used to effectively map the geology and structure in the survey areas.

### **Calculated Vertical Magnetic Gradient (optional)**

The diurnally-corrected total magnetic field data can be subjected to a processing algorithm which enhances the response of magnetic bodies in the upper 500 m and attenuates the response of deeper bodies. The resulting vertical gradient map provides better definition and resolution of near-surface magnetic units. It also identifies weak magnetic features which may not be evident on the total field map. However, regional magnetic variations and changes in lithology may be better defined on the total magnetic field map.

### **Magnetic Derivatives (optional)**

The total magnetic field data can be subjected to a variety of filtering techniques to yield maps of the following:

- enhanced magnetics
- second vertical derivative
- reduction to the pole/equator
- magnetic susceptibility with reduction to the pole
- upward/downward continuations
- analytic signal

All of these filtering techniques improve the recognition of near-surface magnetic bodies, with the exception of upward continuation. Any of these parameters can be produced on request.

### **Multi-channel Stacked Profiles**

Distance-based profiles of the digitally recorded geophysical data are generated and plotted by computer. These profiles also contain the calculated parameters which are used in the interpretation process. These are produced as worksheets prior to interpretation, and are also presented in the final corrected form after interpretation. The profiles display electromagnetic anomalies with their respective interpretive symbols. Table 3-2 shows the parameters and scales for the multi-channel stacked profiles.

### **Contour, Colour and Shadow Map Displays**

The geophysical data are interpolated onto a regular grid using a modified Akima spline technique. The resulting grid is suitable for generating contour maps of excellent quality. The grid cell size is usually 25% of the line interval.

**Table 3-2 Multi-channel Stacked Profiles**

<b>Channel Name (Freq)</b>	<b>Observed Parameters</b>	<b>Scale Units/mm</b>
MAG	total magnetic field (fine)	10 nT
MAG	total magnetic field (coarse)	100 nT
ALTBIRD	EM sensor height above ground	6 m
CXI1000	vertical coaxial coil-pair in-phase (1000 Hz)	2 ppm
CXQ1000	vertical coaxial coil-pair quadrature (1000 Hz)	2 ppm
CPI900	horizontal coplanar coil-pair in-phase (900 Hz)	4 ppm
CPQ900	horizontal coplanar coil-pair quadrature (900 Hz)	4 ppm
CXI5500	vertical coaxial coil-pair in-phase (5500 Hz)	4 ppm
CXQ5500	vertical coaxial coil-pair quadrature (5500 Hz)	4 ppm
CPI7200	horizontal coplanar coil-pair in-phase (7200 Hz)	8 ppm
CPQ7200	horizontal coplanar coil-pair quadrature (7200 Hz)	8 ppm
CPI56K	horizontal coplanar coil-pair in-phase (56,000 Hz)	20 ppm
CPQ56K	horizontal coplanar coil-pair quadrature (56,000 Hz)	20 ppm
CXSP	coaxial spherics monitor	
CXPL	coaxial powerline monitor	
CPPL	coplanar powerline monitor	
CPSP	coplanar spherics monitor	
	<b>Computed Parameters</b>	
DIFI (5500/7200 Hz)	difference function in-phase from CXI and CPI	4 ppm
DIFQ (5500/7200 Hz)	difference function quadrature from CXQ and CPQ	4 ppm
RES900	log resistivity	.06 decade
RES7200	log resistivity	.06 decade
RES56K	log resistivity	.06 decade
DP900	apparent depth	6 m
DP7200	apparent depth	6 m
DP56K	apparent depth	6 m
CDT	conductance	1 grade

Colour maps are produced by interpolating the grid down to the pixel size. The parameter is then incremented with respect to specific amplitude ranges to provide colour "contour" maps. Colour maps of the total magnetic field are particularly useful in defining the lithology of the survey area.

Monochromatic shadow maps or images are generated by employing an artificial sun to cast shadows on a surface defined by the geophysical grid. There are many variations in the shadowing technique. These techniques can be applied to total field or enhanced magnetic data, magnetic derivatives, VLF, resistivity, etc. The shadow of the enhanced magnetic parameter is particularly suited for defining geological structures with crisper images and improved resolution.

### **Resistivity-depth Sections (optional)**

The apparent resistivities for all frequencies can be displayed simultaneously as coloured resistivity-depth sections. Usually, only the coplanar data are displayed as the close frequency separation between the coplanar and adjacent coaxial data tends to distort the section. The sections can be plotted using the topographic elevation profile as the surface. The digital terrain values, in metres a.m.s.l., can be calculated from the GPS-Z value or barometric altimeter, minus the aircraft radar altimeter.

Resistivity-depth sections can be generated in three formats:

- (1) Sengpiel resistivity sections, where the apparent resistivity for each frequency is plotted at the depth of the centroid of the in-phase current flow<sup>1</sup>; and,
- (2) Differential resistivity sections, where the differential resistivity is plotted at the differential depth<sup>2</sup>.
- (3) Occam<sup>3</sup> or Multi-layer<sup>4</sup> inversion.

Both the Sengpiel and differential methods are derived from the pseudo-layer half-space model. Both yield a coloured resistivity-depth section which attempts to portray a smoothed approximation of the true resistivity distribution with depth. Resistivity-depth sections are most useful in conductive layered situations, but may be unreliable in areas of moderate to high resistivity where signal amplitudes are weak. In areas where in-phase responses have been suppressed by the effects of magnetite, the computed resistivities shown on the sections may be unreliable.

---

<sup>1</sup> Sengpiel, K.P., 1988, Approximate Inversion of Airborne EM Data from Multilayered Ground: Geophysical Prospecting 36, 446-459.

<sup>2</sup> Huang, H. and Fraser, D.C., 1993, Differential Resistivity Method for Multi-frequency Airborne EM Sounding: presented at Intern. Airb. EM Workshop, Tucson, Ariz.

<sup>3</sup> Constable et al, 1987, Occam's inversion: a practical algorithm for generating smooth models from electromagnetic sounding data: Geophysics, 52, 289-300.

<sup>4</sup> Huang H., and Palacky, G.J., 1991, Damped least-squares inversion of time domain airborne EM data based on singular value decomposition: Geophysical Prospecting, 39, 827-844.



Both the Occam and Multi-layer Inversions compute the layered earth resistivity model which would best match the measured EM data. The Occam inversion uses a series of thin, fixed layers (usually 20 x 5m and 10 x 10m layers) and computes resistivities to fit the EM data. The multi-layer inversion computes the resistivity and thickness for each of a defined number of layers (typically 3-5 layers) to best fit the data.

## **Digital Terrain**

The radar altimeter values (ALTR - aircraft to ground clearance) were subtracted from the differentially corrected GPS-Z values, which were transformed to the local datum, to produce profiles of the height above mean sea level along the survey lines. These values were gridded to produce contour maps showing approximate elevations within the survey blocks. The resulting digital terrain contours were compared against published topographic maps. The data were manually adjusted to remove differences between the two. The data were then subjected to a microlevelling algorithm to remove any remaining small line-to-line discrepancies.

The accuracy of the elevation calculation is directly dependent on the accuracy of the two input parameters, ALTR and GPS-Z. The ALTR value may be erroneous in areas of heavy tree cover, where the altimeter reflects the distance to the tree canopy rather than the ground. The GPS-Z value is primarily dependent on the number of available satellites. Although post-processing of GPS data will yield X and Y accuracies in the order of 5 metres, the accuracy of the Z value is usually much less, sometimes in the  $\pm 20$  metre range. Further inaccuracies may be introduced during the interpolation and gridding process.

Because of the inherent inaccuracies of this method, no guarantee is made or implied that the information displayed is a true representation of the height above sea level. Although this product may be of some use as a general reference, THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.

## 4. SURVEY RESULTS AND DISCUSSION

### Geology<sup>5</sup>

Large sedimentary units underlie much of the Broad Pass area. The most extensive is a Cretaceous aged unit, which underlies much of the southern portion of the survey block. This flysch sequence is described as a sequence of intensely deformed and locally highly metamorphosed turbidites. Less extensive sedimentary units are evident throughout the block. These have been described as: 1) Triassic aged unit of calcareous shale, argillite, sandstone, siltstone, and sandy to silty argillaceous limestone; 2) Cretaceous aged units described as melange of the Alaska Range; and 3) Cretaceous aged unit of the Cantwell Formation, which consists of a fluvial, intercalated sequence of polymictic conglomerate, sandstone, siltstone, argillite, shale, and a few thin coal beds.

Igneous rocks are also evident as Tertiary aged granites and granodiorites, hypabyssal felsic and intermediate intrusive rocks, which consist of small stocks, dykes and sills of rhyolite and dacite. A large zone of Tertiary aged undivided volcanic rocks, consisting of volcanic flows ranging from basalt to rhyolite in composition, is situated near the southeastern edge of the block. A small zone of Triassic age known as the Nikolai Greenstone is situated near the northern edge of the block. It consists of subaerial and submarine basalt flows which are commonly metamorphosed to lower greenschist facies.

Undifferentiated Quaternary surficial deposits cover much of the central region of the area. They consist of silt, sand and gravel of fluvial, glacial, colluvial and other origins.

### Survey Results

#### DISCRETE EM ANOMALY INTERPRETATION

A total of 5502 discrete anomalous EM responses have been interpreted from the electromagnetic data set in the current survey area. Table 4-1 summarizes these responses with respect to conductance grade and interpretation for the survey area.

An interpretation sketch for the survey area is shown in Figure 4-1. Conductive zones have been identified with an "R", whereas zones which are highly resistive, but appear to reflect a distinct unit, are given an "RH" label. Magnetic zones are designated with an "M", whereas magnetic lows are shown as "ML". Linear features that have been interpreted from the magnetic data and may reflect possible structural breaks within the survey area are shown with a dashed line, some, which have been discussed in the text of the report are given an "F#" designation. Conductor trends defined by line to line correlation of the EM anomalies are shown as thick solid lines, and are shown as "A1", "A2", etc.

---

<sup>5</sup> Wilson, F.H., Dover, J.H., Bradley, D.C., Weber, F.R., Bundtzen, T.K., and Haeussler, P.J., 1998, Geologic Map of Central (Interior) Alaska, Open File Report 98-133-A.

**TABLE 4-1 EM ANOMALY STATISTICS  
BROAD PASS AREA**

CONDUCTOR GRADE	CONDUCTANCE RANGE SIEMENS (MHOS)	NUMBER OF RESPONSES
7	>100	33
6	50 - 100	7
5	20 - 50	19
4	10 - 20	16
3	5 - 10	46
2	1 - 5	169
1	<1	251
*	INDETERMINATE	4961
TOTAL		5502

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	896
B	DISCRETE BEDROCK CONDUCTOR	3193
S	CONDUCTIVE COVER	946
H	ROCK UNIT OR THICK COVER	69
E	EDGE OF WIDE CONDUCTOR	6
M	MAGNETITE	90
L	CULTURE	302
TOTAL		5502

(SEE EM MAP LEGEND FOR EXPLANATIONS)

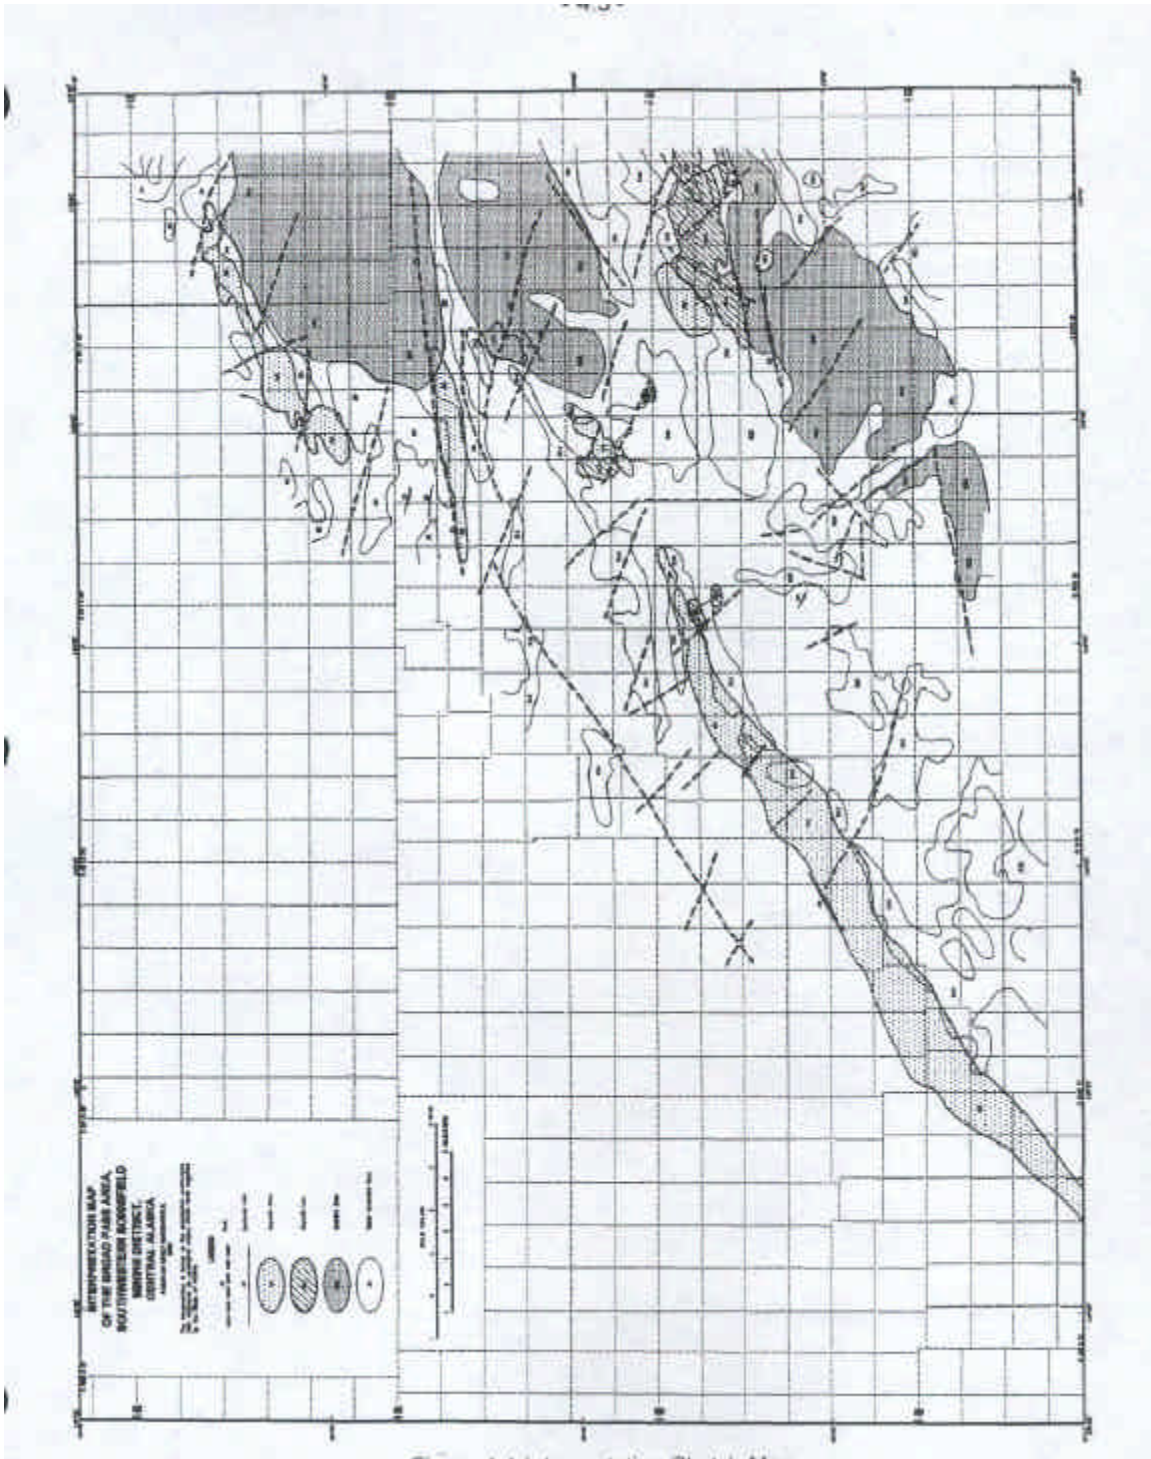


Figure 4-1 Interpretation Sketch Map

## **BROAD PASS AREA, SOUTHWESTERN BONNIFIELD MINING DISTRICT**

The following discussion describes zones and structural features, which have been inferred from the resistivity and magnetic data, with reference to available geology.

A strongly magnetic trend, M1, is the most prominent feature on the magnetic map. It is an extension of a previously mapped unit on the Chulitna survey. Further study in the Chulitna area after the 1996 airborne work resulted in this trend being mapped as a unit of serpentinite of unknown age.<sup>6</sup> Quaternary sands and gravel cover this rock unit within the Chulitna area, and from the regional geology and the magnetic signature, it appears that this is the case for the extension of the trend into the Broad Pass area. The magnetic signature is quite broad, suggesting a deeper source near the western edge of the block, near the merge with the Chulitna block. The trend appears to be narrower and more defined near its northeastern limit, suggesting a shallower depth. Conductive zones R16, R17, R18 and R19 show some association with this magnetic feature. R16 is an extensive conductive zone, the western edge of which is situated on the southern flank of M1. R17 and R18 are small conductive zones situated on the southern flank of the magnetic feature. Both reflect bedrock sources, and several anomalies within these zones appear to reflect thin, dyke-like sources. R20 is a more extensive zone situated near the northeastern end of M1. It also reflects a bedrock source. Poorly defined anomaly shapes are evident near the southwestern end of the zone, but several well-defined anomalies indicative of thin dyke-like sources are situated within this zone near the northeastern end of M1. Several anomalies are associated with a strong magnetic low, ML1, which is situated immediately south of M1. Another magnetic low, ML2, is situated to the south of R19. It also displays some association with bedrock anomalies at the edge of R19. A strong conductor, A6, is situated on the northern flank of M1. It appears to reflect a strong, thin bedrock source, but as it is situated in close proximity to the powerline responses, more work would have to be done in this area to determine its causative source.

Two large, highly resistive zones, RH1 and RH2, are located in the northeastern portion of the survey block. Both zones correlate well with mapped units of Eocene aged granite and granodiorite. The true outline of these units appears to be obscured on the geology map due to Quaternary sedimentary deposits which overlie the granite. Although these zones have been mapped as the same rock type, RH2 displays slightly more conductivity overall than RH1 and the magnetic signatures within the two zones are quite different. RH1 is generally situated within a non-magnetic area, whereas RH2 is situated in a more magnetic zone, with background magnetic values of about 40 to 50 nT higher than those associated with RH1. Although RH1 is generally resistive, there are areas within this zone which appear to reflect possible bedrock conductance, such as anomalies Q through U on line 30731 and anomalies AT through AX on line 30770. The western limit of RH2

---

<sup>6</sup> K. H. Clautice, R. J. Newberry, R. B. Blodgett, T. K. Bundtzen, B. G. Gage, E. E. Harris, S. A. Liss, M. L. Miller, R. R. Reifensstuhl, J. G. Clough, and D. S. Pinney, 2001, Bedrock Geologic Map of the Chulitna Region, Southcentral Alaska, Report of Investigations 2001-1a.

extends past the mapped edge of the granitic unit, and the westernmost portion of RH2 is associated with a unit identified as Melanges of the Alaska Range on the geology map. This unit underlies a large portion of the central region of the block and is described as a Cretaceous melange formation which consists of four rock suites which have been intensely deformed and intricately intermixed by tectonic and perhaps also sedimentary processes. The four suites are: 1) cherty tuff, chert, argillite, and volcanoclastic sandstone, 2) flysch-like assemblage of argillite, slate, graywacke, and subordinate chert, and chert-pebble conglomerate, 3) limestone, and 4) ultramafic rocks. Although conductivities are similar to the rest of RH2, several possible bedrock anomalies have been interpreted within this zone to the south of the highly magnetic unit M4, between possible structural features F2 and F3. Conductor A1 is situated in this area, and reflects a thin bedrock source which displays some evidence of a dip to the north.

Several prominent conductive units are situated around resistive zone RH1. Zones R1 through R6 are situated near the northern edge of the block. All appear to be zones which reflect multiple, closely spaced, thin bedrock sources. Zones R1, R2, R3, R5 and R6 all seem to be situated within a unit identified as a Late Cretaceous and Late Jurassic flysch sequence. Zone R4 differs from the others as it shows direct correlation with the highly magnetic zone, M2. A thin unit of Triassic aged Nikolai Greenstone and related rocks is situated in the vicinity of the western end of M2. Although M2 does not correlate directly with this unit, the magnetic signature suggests that it is related to it. M2 appears to be intersected by several possible structural features inferred from the magnetic data.

Zone R7 is a large, highly conductive zone situated to the west of RH1. It shows a general correlation with a unit of the Cantwell Formation. Resistivities of less than 2 ohm-metres are evident within the zone, and are generally less than 50 ohm-metres on the 900 Hz map. It consists of multiple, closely spaced anomalies which are indicative of thin bedrock sources. Some display well-defined anomaly shapes. Zone R8 is a small zone situated to the west of R7. It also reflects multiple anomalies indicative of thin bedrock sources. Conductors A2 and A3 are situated between zones R7 and R8. They reflect isolated bedrock conductors within the relatively more resistive area between the two zones. Both display moderately well defined anomaly shapes.

The structural break, F1, is situated immediately to the south of R7. A thin magnetic feature, M3, seems to cut across the general magnetic strike of the area and is coincident with this break. Conductive zone R9 displays some correlation with the eastern end of M3.

R9 consists of multiple anomalies which are indicative of thin, closely spaced bedrock sources. Zones R9, R11, R12 and R14, show a general association with a broad, moderately magnetic zone in the central region of the survey block, which in turn shows a loose correlation with a large zone defined on the geology map as complex units of the Melanges of the Alaska Range. All reflect elongate zones consisting of closely spaced thin bedrock sources. Zone R14 appears to be intersected by several possible structural breaks in the vicinity of lines 20480 through 30530. Zone R11 displays much lower conductivities than the other zones.

Conductive zones R10 and R13 are situated to the west of the previous group of zones, within a relatively non-magnetic area mapped as a part of the Kahiltna flysch sequence, a

late Cretaceous to late Jurassic sequence of intensely deformed and locally highly metamorphosed turbidites. Both zones reflect possible bedrock sources. R10 is the less conductive of the two; it contains moderately well defined anomalies indicative of thin bedrock sources. R13 is more conductive, but the anomalies are less well defined. The western end of this zone appears to reflect a broad conductive source at depth. Both zones appear to be truncated at the eastern end by a northeast/southwest trending structural feature. Both zones are located in close proximity to cultural sources.

Many zones, indicative of conductive sources at depth are situated in the southern region of the survey block. One of the more interesting zones is zone R23, as it shows good correlation with the strongly non-magnetic zones ML5 and ML6. ML5 and ML6 display good correlation with a mapped unit of Triassic aged calcareous sedimentary rocks which include calcareous shale, argillite, sandstone, siltstone, and sandy to silty argillaceous limestone. The portion of R23 that is associated with the magnetic low consists of multiple, anomalies indicative of strong, closely spaced, thin bedrock sources. R23 appears to extend beyond the limit of the mapped geologic unit and the corresponding magnetic low, but anomaly characteristics change to the west of this limit. Anomaly shapes become broader, and display less conductivity which may suggest a different source of the conductivity for this portion of the zone.

Two extensive resistive zones, RH3 and RH4, are situated in the southeastern corner of the survey block. Although they show no definitive correlation with the geology, RH3 shows some association with a grouping of several smaller zones mapped as Tertiary hypabyssal felsic and intermediate intrusive rocks which consist of small stocks, dykes and sills of rhyolite and dacite. Both RH3 and RH4 are generally associated with non-magnetic areas of the survey block. Several possible conductors are situated within RH3.

R27 and A4 reflect thin conductive bedrock sources within RH3 which are situated along a possible structural break. R27 is associated with a circular magnetic low.

Conductive zones R28 through R32 are situated immediately south of RH3. Zone R28 is the strongest conductive zone, containing conductive sources that give rise to resistivities of less than 30 ohm-metres. It displays no magnetic correlation, as it is associated with a magnetic low. Zone R29 is a small conductive zone which displays some correlation with a moderately magnetic trend which extends northeast/southwest near the southeastern corner of the survey block. This magnetic trend is intersected by several possible structural features, giving it a segmented, discontinuous appearance. The northern portion of zone R30 and the northern limb of R32 are also associated with portions of this magnetic trend.

Zones R25 and R26 are situated to the northwest of RH4. They are associated with an area of complex magnetics, as many possible structural features have been inferred from the magnetic data in the vicinity of these trends. The southeastern limb of zone R26 displays direct coincidence with a thin magnetic trend.

## **5. CONCLUSIONS AND RECOMMENDATIONS**

This report provides a very brief description of the survey results and describes the equipment, procedures and logistics of the survey.

The survey has been successful in mapping the magnetic and conductive properties of the survey area. The survey was also successful in locating several conductors which may warrant additional work. The various maps included with this report display the magnetic and conductive properties of the survey area. It is recommended that the survey results be reviewed in detail, in conjunction with all available geophysical, geological and geochemical information. Particular reference should be made to the computer generated data profiles which clearly define the characteristics of the individual anomalies.

The interpreted bedrock conductors defined by the survey should be subjected to further investigation, using appropriate surface exploration techniques. Anomalies which are currently considered to be of moderately low priority may require upgrading if follow-up results are favourable.

It is also recommended that image processing of existing geophysical data be considered, in order to extract the maximum amount of information from the survey results. Current software and imaging techniques often provide valuable information on structure and lithology, which may not be clearly evident on the contour and colour maps. These techniques can yield images which define subtle, but significant, structural details.

Respectfully submitted,

**FUGRO AIRBORNE SURVEYS CORP.**

Ruth A. Pritchard  
Geophysicist

RAP/sdp

R6023FEB.02R



## APPENDIX A

### BACKGROUND INFORMATION

#### Electromagnetics

DIGHEM electromagnetic responses fall into two general classes, discrete and broad. The discrete class consists of sharp, well-defined anomalies from discrete conductors such as sulphide lenses and steeply dipping sheets of graphite and sulphides. The broad class consists of wide anomalies from conductors having a large horizontal surface such as flatly dipping graphite or sulphide sheets, saline water-saturated sedimentary formations, conductive overburden and rock, and geothermal zones. A vertical conductive slab with a width of 200 m would straddle these two classes.

The vertical sheet (half plane) is the most common model used for the analysis of discrete conductors. All anomalies plotted on the geophysical maps are analyzed according to this model. The following section entitled **Discrete Conductor Analysis** describes this model in detail, including the effect of using it on anomalies caused by broad conductors such as conductive overburden.

The conductive earth (half-space) model is suitable for broad conductors. Resistivity contour maps result from the use of this model. A later section entitled **Resistivity Mapping** describes the method further, including the effect of using it on anomalies caused by discrete conductors such as sulphide bodies.

#### Geometric Interpretation

The geophysical interpreter attempts to determine the geometric shape and dip of the conductor. Figure C-1 shows typical DIGHEM anomaly shapes which are used to guide the geometric interpretation.

#### Discrete Conductor Analysis

The EM anomalies appearing on the electromagnetic map are analyzed by computer to give the conductance (i.e., conductivity-thickness product) in siemens (mhos) of a vertical sheet model. This is done regardless of the interpreted geometric shape of the conductor.

This is not an unreasonable procedure, because the computed conductance increases as the electrical quality of the conductor increases, regardless of its true shape. DIGHEM anomalies are divided into seven grades of conductance, as shown in Table C-1. The conductance in siemens (mhos) is the reciprocal of resistance in ohms.

The conductance value is a geological parameter because it is a characteristic of the conductor alone. It generally is independent of frequency, flying height or depth of burial, apart from the averaging over a greater portion of the conductor as height increases. Small anomalies from deeply buried strong conductors are not confused with small

- Appendix A.2 -

anomalies from shallow weak conductors because the former will have larger conductance values.

**Table A-1. EM Anomaly Grades**

Anomaly Grade	Siemens
7	> 100
6	50 - 100
5	20 - 50
4	10 - 20
3	5 - 10
2	1 - 5
1	< 1

Conductive overburden generally produces broad EM responses which may not be shown as anomalies on the geophysical maps. However, patchy conductive overburden in otherwise resistive areas can yield discrete anomalies with a conductance grade (cf. Table A-1) of 1, 2 or even 3 for conducting clays which have resistivities as low as 50 ohm-m. In areas where ground resistivities are below 10 ohm-m, anomalies caused by weathering variations and similar causes can have any conductance grade. The anomaly shapes from the multiple coils often allow such conductors to be recognized, and these are indicated by the letters S, H, and sometimes E on the geophysical maps (see EM legend on maps).

For bedrock conductors, the higher anomaly grades indicate increasingly higher conductances. Examples: DIGHEM's New InscO copper discovery (Noranda, Canada) yielded a grade 5 anomaly, as did the neighbouring copper-zinc Magusi River ore body; Mattabi (copper-zinc, Sturgeon Lake, Canada) and Whistle (nickel, Sudbury, Canada) gave grade 6; and DIGHEM's Montcalm nickel-copper discovery (Timmins, Canada) yielded a grade 7 anomaly. Graphite and sulphides can span all grades but, in any particular survey area, field work may show that the different grades indicate different types of conductors.

Strong conductors (i.e., grades 6 and 7) are characteristic of massive sulphides or graphite. Moderate conductors (grades 4 and 5) typically reflect graphite or sulphides of a less massive character, while weak bedrock conductors (grades 1 to 3) can signify poorly connected graphite or heavily disseminated sulphides. Grades 1 and 2 conductors may not respond to ground EM equipment using frequencies less than 2000 Hz.

The presence of sphalerite or gangue can result in ore deposits having weak to moderate conductances. As an example, the three million ton lead-zinc deposit of Restigouche Mining Corporation near Bathurst, Canada, yielded a well-defined grade 2 conductor. The 10 percent by volume of sphalerite occurs as a coating around the fine grained massive pyrite, thereby inhibiting electrical conduction. Faults, fractures and shear zones may produce anomalies which typically have low conductances (e.g., grades 1 to 3). Conductive rock formations can yield anomalies of any conductance grade. The

### - Appendix A.3 -

conductive materials in such rock formations can be salt water, weathered products such as clays, original depositional clays, and carbonaceous material.

For each interpreted electromagnetic anomaly on the geophysical maps, a letter identifier and an interpretive symbol are plotted beside the EM grade symbol. The horizontal rows of dots, under the interpretive symbol, indicate the anomaly amplitude on the flight record. The vertical column of dots, under the anomaly letter, gives the estimated depth. In areas where anomalies are crowded, the letter identifiers, interpretive symbols and dots may be obliterated. The EM grade symbols, however, will always be discernible, and the obliterated information can be obtained from the anomaly listing appended to this report.


The purpose of indicating the anomaly amplitude by dots is to provide an estimate of the reliability of the conductance calculation. Thus, a conductance value obtained from a large ppm anomaly (3 or 4 dots) will tend to be accurate whereas one obtained from a small ppm anomaly (no dots) could be quite inaccurate. The absence of amplitude dots indicates that the anomaly from the coaxial coil-pair is 5 ppm or less on both the in-phase and quadrature channels. Such small anomalies could reflect a weak conductor at the surface or a stronger conductor at depth. The conductance grade and depth estimate illustrates which of these possibilities fits the recorded data best.

The conductance measurement is considered more reliable than the depth estimate. There are a number of factors which can produce an error in the depth estimate, including the averaging of topographic variations by the altimeter, overlying conductive overburden, and the location and attitude of the conductor relative to the flight line. Conductor location and attitude can provide an erroneous depth estimate because the stronger part of the conductor may be deeper or to one side of the flight line, or because it has a shallow dip. A heavy tree cover can also produce errors in depth estimates. This is because the depth estimate is computed as the distance of bird from conductor, minus the altimeter reading. The altimeter can lock onto the top of a dense forest canopy. This situation yields an erroneously large depth estimate but does not affect the conductance estimate.

Dip symbols are used to indicate the direction of dip of conductors. These symbols are used only when the anomaly shapes are unambiguous, which usually requires a fairly resistive environment.

A further interpretation is presented on the EM map by means of the line-to-line correlation of bedrock anomalies, which is based on a comparison of anomaly shapes on adjacent lines. This provides conductor axes which may define the geological structure over portions of the survey area. The absence of conductor axes in an area implies that anomalies could not be correlated from line to line with reasonable confidence.

- Appendix A.4 -

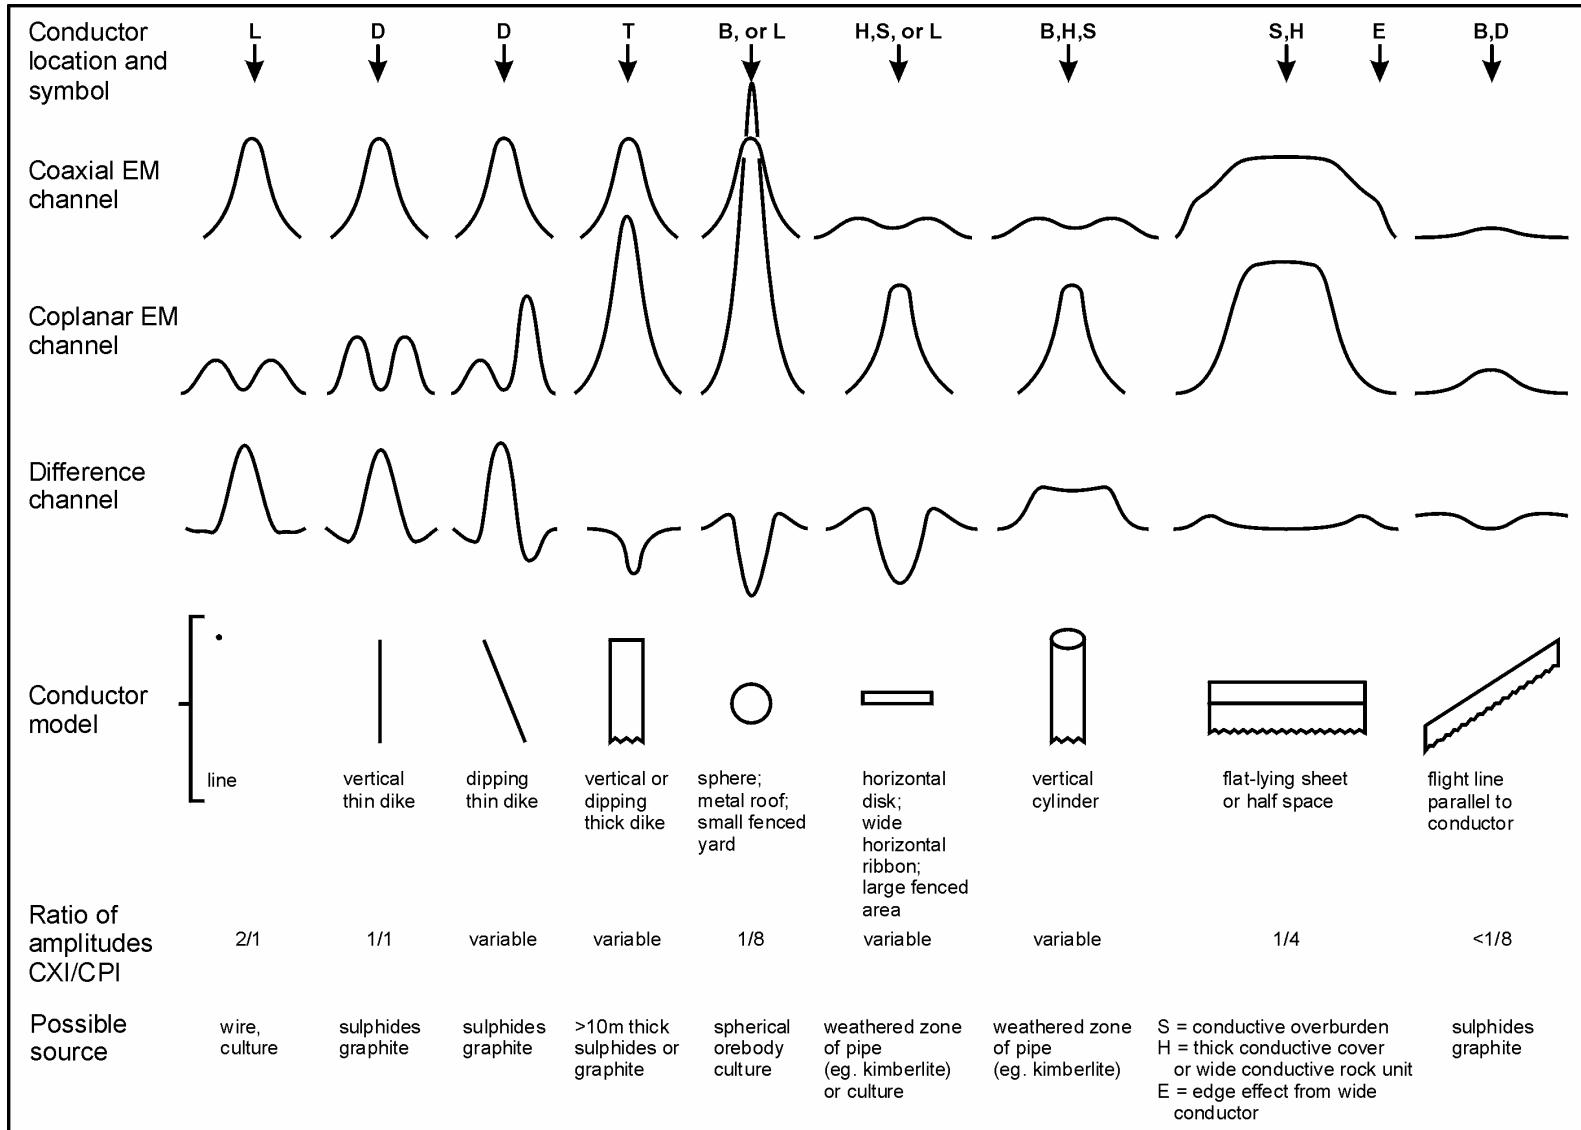

**Typical DIGHEM anomaly shapes**  
**Figure A-1**

## - Appendix A.5 -

DIGHEM electromagnetic anomalies are designed to provide a correct impression of conductor quality by means of the conductance grade symbols. The symbols can stand alone with geology when planning a follow-up program. The actual conductance values are printed in the attached anomaly list for those who wish quantitative data. The anomaly ppm and depth are indicated by inconspicuous dots which should not distract from the conductor patterns, while being helpful to those who wish this information. The map provides an interpretation of conductors in terms of length, strike and dip, geometric shape, conductance, depth, and thickness. The accuracy is comparable to an interpretation from a high quality ground EM survey having the same line spacing.

The attached EM anomaly list provides a tabulation of anomalies in ppm, conductance, and depth for the vertical sheet model. The EM anomaly list also shows the conductance and depth for a thin horizontal sheet (whole plane) model, but only the vertical sheet parameters appear on the EM map. The horizontal sheet model is suitable for a flatly dipping thin bedrock conductor such as a sulphide sheet having a thickness less than 10 m. The list also shows the resistivity and depth for a conductive earth (half-space) model, which is suitable for thicker slabs such as thick conductive overburden. In the EM anomaly list, a depth value of zero for the conductive earth model, in an area of thick cover, warns that the anomaly may be caused by conductive overburden.

Since discrete bodies normally are the targets of EM surveys, local base (or zero) levels are used to compute local anomaly amplitudes. This contrasts with the use of true zero levels which are used to compute true EM amplitudes. Local anomaly amplitudes are shown in the EM anomaly list and these are used to compute the vertical sheet parameters of conductance and depth. Not shown in the EM anomaly list are the true amplitudes which are used to compute the horizontal sheet and conductive earth parameters.

### **Questionable Anomalies**

DIGHEM maps may contain EM responses which are displayed as asterisks (\*). These responses denote weak anomalies of indeterminate conductance, which may reflect one of the following: a weak conductor near the surface, a strong conductor at depth (e.g., 100 to 120 m below surface) or to one side of the flight line, or aerodynamic noise. Those responses which have the appearance of valid bedrock anomalies on the flight profiles are indicated by appropriate interpretive symbols (see EM legend on maps). The others probably do not warrant further investigation unless their locations are of considerable geological interest.

### **The Thickness Parameter**

DIGHEM can provide an indication of the thickness of a steeply dipping conductor. The amplitude of the coplanar anomaly (e.g., CPI channel on the digital profile) increases relative to the coaxial anomaly (e.g., CXI) as the apparent thickness increases, i.e., the thickness in the horizontal plane. (The thickness is equal to the conductor width if the conductor dips at 90 degrees and strikes at right angles to the flight line.) This report

## - Appendix A.6 -

refers to a conductor as thin when the thickness is likely to be less than 3 m, and thick when in excess of 10 m. Thick conductors are indicated on the EM map by parentheses "( )". For base metal exploration in steeply dipping geology, thick conductors can be high priority targets because many massive sulphide ore bodies are thick, whereas non-economic bedrock conductors are often thin. The system cannot sense the thickness when the strike of the conductor is subparallel to the flight line, when the conductor has a shallow dip, when the anomaly amplitudes are small, or when the resistivity of the environment is below 100 ohm-m.

### **Resistivity Mapping**

Resistivity mapping is useful in areas where broad or flat lying conductive units are of interest. One example of this is the clay alteration which is associated with Carlin-type deposits in the south west United States. The Dighem system was able to identify the clay alteration zone over the Cove deposit. The alteration zone appeared as a strong resistivity low on the 900 Hz resistivity parameter. The 7,200 Hz and 56,000 Hz resistivities show more of the detail in the covering sediments, and delineate a range front fault. This is typical in many areas of the south west United States, where conductive near surface sediments, which may sometimes be alkalic, attenuate the higher frequencies.

Resistivity mapping has proven successful for locating diatremes in diamond exploration. Weathering products from relatively soft kimberlite pipes produce a resistivity contrast with the unaltered host rock. In many cases weathered kimberlite pipes were associated with thick conductive layers which contrasted with overlying or adjacent relatively thin layers of lake bottom sediments or overburden.

Areas of widespread conductivity are commonly encountered during surveys. These conductive zones may reflect alteration zones, shallow-dipping sulphide or graphite-rich units or conductive overburden. In such areas, anomalies can be generated by decreases of only 5 m in survey altitude as well as by increases in conductivity. The typical flight record in conductive areas is characterized by in-phase and quadrature channels which are continuously active. Local EM peaks reflect either increases in conductivity of the earth or decreases in survey altitude. For such conductive areas, apparent resistivity profiles and contour maps are necessary for the correct interpretation of the airborne data. The advantage of the resistivity parameter is that anomalies caused by altitude changes are virtually eliminated, so the resistivity data reflect only those anomalies caused by conductivity changes. The resistivity analysis also helps the interpreter to differentiate between conductive bedrock and conductive overburden. For example, discrete conductors will generally appear as narrow lows on the contour map and broad conductors (e.g., overburden) will appear as wide lows.

The apparent resistivity is calculated using the pseudo-layer (or buried) half-space model defined by Fraser (1978)<sup>7</sup>. This model consists of a resistive layer overlying a conductive

---

<sup>7</sup> Resistivity mapping with an airborne multicoil electromagnetic system: Geophysics, v. 43, p.144-172

## - Appendix A.7 -

half-space. The depth channels give the apparent depth below surface of the conductive material. The apparent depth is simply the apparent thickness of the overlying resistive layer. The apparent depth (or thickness) parameter will be positive when the upper layer is more resistive than the underlying material, in which case the apparent depth may be quite close to the true depth.

The apparent depth will be negative when the upper layer is more conductive than the underlying material, and will be zero when a homogeneous half-space exists. The apparent depth parameter must be interpreted cautiously because it will contain any errors which may exist in the measured altitude of the EM bird (e.g., as caused by a dense tree cover). The inputs to the resistivity algorithm are the in-phase and quadrature components of the coplanar coil-pair. The outputs are the apparent resistivity of the conductive half-space (the source) and the sensor-source distance. The flying height is not an input variable, and the output resistivity and sensor-source distance are independent of the flying height when the conductivity of the measured material is sufficient to yield significant in-phase as well as quadrature responses. The apparent depth, discussed above, is simply the sensor-source distance minus the measured altitude or flying height. Consequently, errors in the measured altitude will affect the apparent depth parameter but not the apparent resistivity parameter.

The apparent depth parameter is a useful indicator of simple layering in areas lacking a heavy tree cover. The DIGHEM system has been flown for purposes of permafrost mapping, where positive apparent depths were used as a measure of permafrost thickness. However, little quantitative use has been made of negative apparent depths because the absolute value of the negative depth is not a measure of the thickness of the conductive upper layer and, therefore, is not meaningful physically. Qualitatively, a negative apparent depth estimate usually shows that the EM anomaly is caused by conductive overburden. Consequently, the apparent depth channel can be of significant help in distinguishing between overburden and bedrock conductors.

### **Interpretation in Conductive Environments**

Environments having low background resistivities (e.g., below 30 ohm-m for a 900 Hz system) yield very large responses from the conductive ground. This usually prohibits the recognition of discrete bedrock conductors. However, DIGHEM data processing techniques produce three parameters which contribute significantly to the recognition of bedrock conductors in conductive environments. These are the in-phase and quadrature difference channels (DIFI and DIFQ, which are available only on systems with common frequencies on orthogonal coil pairs), and the resistivity and depth channels (RES and DP) for each coplanar frequency.

The EM difference channels (DIFI and DIFQ) eliminate most of the responses from conductive ground, leaving responses from bedrock conductors, cultural features (e.g.,

---

telephone lines, fences, etc.) and edge effects. Edge effects often occur near the perimeter of broad conductive zones. This can be a source of geologic noise. While edge effects yield anomalies on the EM difference channels, they do not produce resistivity anomalies. Consequently, the resistivity channel aids in eliminating anomalies due to edge effects. On the other hand, resistivity anomalies will coincide with the most highly conductive sections of conductive ground, and this is another source of geologic noise. The recognition of a bedrock conductor in a conductive environment therefore is based on the anomalous responses of the two difference channels (DIFI and DIFQ) and the resistivity channels (RES). The most favourable situation is where anomalies coincide on all channels.

The DP channels, which give the apparent depth to the conductive material, also help to determine whether a conductive response arises from surficial material or from a conductive zone in the bedrock. When these channels ride above the zero level on the digital profiles (i.e., depth is negative), it implies that the EM and resistivity profiles are responding primarily to a conductive upper layer, i.e., conductive overburden. If the DP channels are below the zero level, it indicates that a resistive upper layer exists, and this usually implies the existence of a bedrock conductor. If the low frequency DP channel is below the zero level and the high frequency DP is above, this suggests that a bedrock conductor occurs beneath conductive cover.

## **Reduction of Geologic Noise**

Geologic noise refers to unwanted geophysical responses. For purposes of airborne EM surveying, geologic noise refers to EM responses caused by conductive overburden and magnetic permeability. It was mentioned previously that the EM difference channels (i.e., channel DIFI for in-phase and DIFQ for quadrature) tend to eliminate the response of conductive overburden.

Magnetite produces a form of geological noise on the in-phase channels of all EM systems. Rocks containing less than 1% magnetite can yield negative in-phase anomalies caused by magnetic permeability. When magnetite is widely distributed throughout a survey area, the in-phase EM channels may continuously rise and fall, reflecting variations in the magnetite percentage, flying height, and overburden thickness. This can lead to difficulties in recognizing deeply buried bedrock conductors, particularly if conductive overburden also exists. However, the response of broadly distributed magnetite generally vanishes on the in-phase difference channel DIFI. This feature can be a significant aid in the recognition of conductors which occur in rocks containing accessory magnetite.

## **EM Magnetite Mapping**

The information content of DIGHEM data consists of a combination of conductive eddy current responses and magnetic permeability responses. The secondary field resulting from conductive eddy current flow is frequency-dependent and consists of both in-phase and quadrature components, which are positive in sign. On the other hand, the secondary field resulting from magnetic permeability is independent of frequency and consists of only an in-phase component which is negative in sign. When magnetic permeability manifests



## - Appendix A.9 -

itself by decreasing the measured amount of positive in-phase, its presence may be difficult to recognize. However, when it manifests itself by yielding a negative in-phase anomaly (e.g., in the absence of eddy current flow), its presence is assured. In this latter case, the negative component can be used to estimate the percent magnetite content.

A magnetite mapping technique was developed for the coplanar coil-pair of DIGHEM. The method can be complementary to magnetometer mapping in certain cases. Compared to magnetometry, it is far less sensitive but is more able to resolve closely spaced magnetite zones, as well as providing an estimate of the amount of magnetite in the rock. The method is sensitive to 1/4% magnetite by weight when the EM sensor is at a height of 30 m above a magnetic half-space. It can individually resolve steep dipping narrow magnetite-rich bands which are separated by 60 m. Unlike magnetometry, the EM magnetite method is unaffected by remanent magnetism or magnetic latitude.

The EM magnetite mapping technique provides estimates of magnetite content which are usually correct within a factor of 2 when the magnetite is fairly uniformly distributed. EM magnetite maps can be generated when magnetic permeability is evident as negative in-phase responses on the data profiles.

Like magnetometry, the EM magnetite method maps only bedrock features, provided that the overburden is characterized by a general lack of magnetite. This contrasts with resistivity mapping which portrays the combined effect of bedrock and overburden.

### **Recognition of Culture**

Cultural responses include all EM anomalies caused by man-made metallic objects. Such anomalies may be caused by inductive coupling or current gathering. The concern of the interpreter is to recognize when an EM response is due to culture. Points of consideration used by the interpreter, when coaxial and coplanar coil-pairs are operated at a common frequency, are as follows:

1. Channels CXP and CPP monitor 60 Hz radiation. An anomaly on these channels shows that the conductor is radiating power. Such an indication is normally a guarantee that the conductor is cultural. However, care must be taken to ensure that the conductor is not a geologic body which strikes across a power line, carrying leakage currents.
2. A flight which crosses a "line" (e.g., fence, telephone line, etc.) yields a centre-peaked coaxial anomaly and an m-shaped coplanar anomaly.<sup>8</sup> When the flight crosses the cultural line at a high angle of intersection, the amplitude ratio of coaxial/coplanar response is 8. Such an EM anomaly can only be caused by a line. The geologic body which yields anomalies most closely resembling a line is the vertically dipping thin dike. Such a body, however, yields an amplitude ratio of 4 rather than 8. Consequently, an m-shaped coplanar anomaly with a CXI/CPI amplitude ratio of 8 is virtually a guarantee that the source is a cultural line.

---

<sup>8</sup> See Figure A-1 presented earlier.

- Appendix A.10 -

3. A flight which crosses a sphere or horizontal disk yields centre-peaked coaxial and coplanar anomalies with a CXI/CPI amplitude ratio (i.e., coaxial/coplanar) of 1/8. In the absence of geologic bodies of this geometry, the most likely conductor is a metal roof or small fenced yard.<sup>9</sup> Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
4. A flight which crosses a horizontal rectangular body or wide ribbon yields an m-shaped coaxial anomaly and a centre-peaked coplanar anomaly. In the absence of geologic bodies of this geometry, the most likely conductor is a large fenced area.<sup>5</sup> Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
5. EM anomalies which coincide with culture, as seen on the camera film or video display, are usually caused by culture. However, care is taken with such coincidences because a geologic conductor could occur beneath a fence, for example. In this example, the fence would be expected to yield an m-shaped coplanar anomaly as in case #2 above. If, instead, a centre-peaked coplanar anomaly occurred, there would be concern that a thick geologic conductor coincided with the cultural line.
5. The above description of anomaly shapes is valid when the culture is not conductively coupled to the environment. In this case, the anomalies arise from inductive coupling to the EM transmitter. However, when the environment is quite conductive (e.g., less than 100 ohm-m at 900 Hz), the cultural conductor may be conductively coupled to the environment. In this latter case, the anomaly shapes tend to be governed by current gathering. Current gathering can completely distort the anomaly shapes, thereby complicating the identification of cultural anomalies. In such circumstances, the interpreter can only rely on the radiation channels and on the camera film or video records.

---

<sup>9</sup> It is a characteristic of EM that geometrically similar anomalies are obtained from: (1) a planar conductor, and (2) a wire which forms a loop having dimensions identical to the perimeter of the equivalent planar conductor.

## Magnetics

Total field magnetics provides information on the magnetic properties of the earth materials in the survey area. The information can be used to locate magnetic bodies of direct interest for exploration, and for structural and lithological mapping.

The total field magnetic response reflects the abundance of magnetic material, in the source. Magnetite is the most common magnetic mineral. Other minerals such as ilmenite, pyrrhotite, franklinite, chromite, hematite, arsenopyrite, limonite and pyrite are also magnetic, but to a lesser extent than magnetite on average.

In some geological environments, an EM anomaly with magnetic correlation has a greater likelihood of being produced by sulphides than one which is non-magnetic. However, sulphide ore bodies may be non-magnetic (e.g., the Kidd Creek deposit near Timmins, Canada) as well as magnetic (e.g., the Mattabi deposit near Sturgeon Lake, Canada).

Iron ore deposits will be anomalously magnetic in comparison to surrounding rock due to the concentration of iron minerals such as magnetite, ilmenite and hematite.

Changes in magnetic susceptibility often allow rock units to be differentiated based on the total field magnetic response. Geophysical classifications may differ from geological classifications if various magnetite levels exist within one general geological classification. Geometric considerations of the source such as shape, dip and depth, inclination of the earth's field and remanent magnetization will complicate such an analysis.

In general, mafic lithologies contain more magnetite and are therefore more magnetic than many sediments which tend to be weakly magnetic. Metamorphism and alteration can also increase or decrease the magnetization of a rock unit.

Textural differences on a total field magnetic contour, colour or shadow map due to the frequency of activity of the magnetic parameter resulting from inhomogeneities in the distribution of magnetite within the rock, may define certain lithologies. For example, near surface volcanics may display highly complex contour patterns with little line-to-line correlation.

Rock units may be differentiated based on the plan shapes of their total field magnetic responses. Mafic intrusive plugs can appear as isolated "bulls-eye" anomalies. Granitic intrusives appear as sub-circular zones, and may have contrasting rings due to contact metamorphism. Generally, granitic terrain will lack a pronounced strike direction, although granite gneiss may display strike.

Linear north-south units are theoretically not well-defined on total field magnetic maps in equatorial regions due to the low inclination of the earth's magnetic field. However, most stratigraphic units will have variations in composition along strike which will cause the units to appear as a series of alternating magnetic highs and lows.

- Appendix A.12 -

Faults and shear zones may be characterized by alteration which causes destruction of magnetite (e.g., weathering) which produces a contrast with surrounding rock. Structural breaks may be filled by magnetite-rich, fracture filling material as is the case with diabase dikes, or by non-magnetic felsic material.

Faulting can also be identified by patterns in the magnetic total field contours or colours. Faults and dikes tend to appear as lineaments and often have strike lengths of several kilometres. Offsets in narrow, magnetic, stratigraphic trends also delineate structure. Sharp contrasts in magnetic lithologies may arise due to large displacements along strike-slip or dip-slip faults.

## APPENDIX B

### LIST OF PERSONNEL

The following personnel were involved in the acquisition, processing, interpretation and presentation of data, relating to a DIGHEM<sup>V</sup> airborne geophysical survey carried out for The State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys in the Broad Pass survey area.

David Miles	Manager, Helicopter Operations
Emily Farquhar	Manager, Data Processing and Interpretation
Frank Corbin	Senior Geophysical Operator
Brett Robinson	Field Geophysicist
Tim Perry	Pilot (ERA Helicopters Ltd.)
Gordon Smith	Data Processing Supervisor
Stephen Harrison	Computer Processor
Ruth Pritchard	Interpretation Geophysicist
Lyn Vanderstarren	Drafting Supervisor
Susan Pothiah	Word Processing Operator
Albina Tonello	Secretary/Expeditor

The survey consisted of 1224.5 line-miles (1970.2 km) of coverage, flown from July 26 to August 22, 2001.

All personnel are employees of Fugro Airborne Surveys, except for the pilot who is an employee of ERA Helicopters Ltd.

## **APPENDIX C**

### **ARCHIVE DESCRIPTION**

## APPENDIX C

### ARCHIVE DESCRIPTION

Volume Label: CCD01670  
Archive Date: 2002-February 12  
This archive consists of 2 CD's

#### FINAL PROCESSED DATA ARCHIVES

---

This CD contains final processed data archives of an airborne geophysical survey in the Broad Pass survey area, southwestern Bonnifield mining district, central Alaska. The survey area is located in the Healy quadrangle. This survey was conducted for the State of Alaska, Department of Natural Resources (DNR), Division of Geological & Geophysical Surveys (DGGGS). The data acquisition was performed by Stevens Exploration Management Corp and Fugro Airborne Surveys during July and August, 2001.

Where possible, the gridded and .DXF data are presented merged with data from a 1996 survey flown for DGGGS by CGG Geoterrex-Dighem, in the Chulitna area. The line data archive contains data only from the 2001 survey in the Broad Pass area.

This digital archive and other products from this survey are available by mail order, or in person, from DGGGS, 794 University Ave., Suite 200, Fairbanks, Alaska, 99709.

---

#### DESCRIPTIVE NOTES

The geophysical data were acquired with a DIGHEM V Electromagnetic (EM) system, and a Scintrex cesium magnetometer. The EM and magnetometer sensors were flown at a height of 100 feet. In addition, the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors and video camera. Flights were performed with an AS350B-2 helicopter at a mean terrain clearance of 200 feet along North/South (0°/180°) flight lines with a one-quarter mile line spacing. Tie lines were flown perpendicular to the flight lines at intervals of approximately 3 miles. The blank regions indicate an area where the survey aircraft had to detour around populated areas.

An Ashtech GG24 NAVSTAR/GLONASS Global Positioning System was used for navigation. The helicopter position was derived every 0.5 seconds using post-flight differential positioning to a relative accuracy of better than 5 m. Flight path positions were projected onto the Clarke 1866 (UTM zone 6) spheroid, 1927 North American datum using a central meridian of 147°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

To determine the location of EM anomalies or their boundaries, the DIGHEM V EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial-coil pairs operated at 1072 and 5954 Hz while three horizontal

coplanar-coil pairs operated at 883, 7236, and 56,360 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The power line monitors and the flight track video were examined to locate cultural sources. The EM anomalies that are indicated are classified by conductance.

The total magnetic field data were acquired with a sampling interval of 0.1 seconds, and were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) leveled to the tie line data, and (3) interpolated onto a regular 100m grid using a modified Akima (1970) technique. The regional variation (or IGRF gradient, 2000, updated to August 2001) was removed from the leveled magnetic data.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: Journal of the Association of Computing Machinery, v. 17, no. 4, p 589-602.

-----  
ARCHIVE ORGANIZATION

There are 2 CD ROMs in this set containing grids, vector files, EM anomalies and line data.

CD #1 comprises 12 data files contained in 3 subdirectories

\*\*\*\*\*

LINEDATA\

GPR2002\_12.XYZ                    ASCII line data archive in Geosoft XYZ format  
GPR2002\_12 linedata.TXT        text description file for the XYZ data archive

DXF\ (vector files in .DXF format)

(All at a scale of 1:63360 except for anomaly)

full\_em                    - Electromagnetic Anomaly Legend  
gpr2002\_12\_anomaly        - Detailed Electromagnetic Anomalies at a scale of 1:31680  
gpr2002\_12\_stategrid     - Alaska State Grid (UTM - Nad 27)  
gpr2002\_12\_fp             - Flight Path  
gpr2002\_12\_res900        - 900 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_res7200      - 7200 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_res56k        - 56000 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_magigrf       - Total Magnetic Field - IGRF removed (nT)

TEXT FILES\

GPR\_2002\_12 readme        - archive description  
GPR2002\_12 ANOMALY.XYZ   - EM anomaly table (Broad Pass data only)  
GPR2002\_12 metadata.txt   - metadata for this publication



CD #2 comprises 14 data files contained in 2 subdirectories

\*\*\*\*\*

GRIDS\ (in Geosoft .grd format and ASCII Grid Exchange Format .gxf)

gpr2002\_12\_res900 - 900 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_res7200 - 7200 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_res56k - 56000 Hz Apparent Resistivity (Ohm-m)  
gpr2002\_12\_magigrf - Total Magnetic Field - IGRF removed (nT)  
gpr2002\_12\_tfmag - Total Magnetic Field (nT)  
gpr2002\_12\_dtm - Digital Terrain Model (m) (Broad Pass data only)

TEXT FILES\

GPR\_2002\_12\_readme - archive description  
GPR2002\_12\_ANOMALY.XYZ - EM anomaly table (Broad Pass data only)  
GPR2002\_12metadata.txt - metadata for this publication

-----  
The coordinate system for all grids and XYZ files is described as follows:

Datum	NAD27
Spheroid	Clarke 1866
Projection	UTM Zone 6N
Central meridian	-147
False easting	500000
False northing	0
Scale factor	0.9996
Northern parallel	N/A
Base parallel	N/A
WGS84 to local conversion method	Molodensky
Delta X shift	+5
Delta Y shift	-135
Delta Z shift	-172

-----

Geosoft XYZ ARCHIVE SUMMARY

-----  
 JOB TITLE:  
 -----

TYPE OF SURVEY :DIGHEM EM, MAGNETICS, RESISTIVITY  
 AREA :Broad Pass Area, southwestern Bonnifield mining district,  
 central Alaska  
 CLIENT :State of Alaska, Department of Natural Resources (DNR),  
 Division of Geological & Geophysical Surveys (DGGS)

\*\*\*\*\*

NUMBER OF DATA FIELDS : 28

#	CHANNAME	TIME	UNITS /	DESCRIPTION	<<< #	BYTES	decimals
1	X	0.1	m	UTME-NAD27(ZONE-6 )	:	12	1
2	Y	0.1	m	UTMN-NAD27	:	12	1
3	FID	0.1			:	10	1
4	LAT	0.1		LATITUDE	:	12	6
5	LON	0.1		LONGITUDE	:	12	6
6	FLIGHT	0.1		Flight Number	:	10	0
7	IGRFMAG	0.1	nT	Magnetic Field - IGRF Corrected	l0		2
8	MAG	0.1	nT	Total Magnetic Field	:	10	2
9	ALTBIRDM	0.1	m	Bird Height	:	10	2
10	DTM	0.1	m	Digital Elevation Model	:	10	2
11	CXI1000	0.1	ppm	INPHASE-COAXIAL 1072 HZ	:	9	1
12	CXQ1000	0.1	ppm	QUADRATURE- COAXIAL 1072 HZ		9	1
13	CPI900	0.1	ppm	INPHASE-COPLANAR 883 HZ		9	1
14	CPQ900	0.1	ppm	QUAD- COPLANAR 883 HZ		9	1
15	CXI5500	0.1	ppm	INPHASE -COAXIAL 5954 HZ		9	1
16	CXQ5500	0.1	ppm	QUAD -COAXIAL 5954 HZ		9	1
17	CPI7200	0.1	ppm	INPHASE -COPLANAR 7236 HZ		9	1
18	CPQ7200	0.1	ppm	QUAD -COPLANAR 7236 HZ		9	1
19	CPI56K	0.1	ppm	INPHASE-COPLANAR 56360 HZ		9	1
20	CPQ56K	0.1	ppm	QUAD-COPLANAR 56360 HZ		9	1
21	RES56K	0.1	ohm*m	RESISTIVITY - 56 000 Hz		9	1
22	DP56K	0.1	m	DEPTH - 56 000 Hz		9	1
23	RES7200	0.1	ohm*m	RESISTIVITY - 7200 Hz		9	1
24	DP7200	0.1	m	DEPTH - 7200 Hz		9	1
25	RES900	0.1	ohm*m	RESISTIVITY - 900 Hz		9	1
26	DP900	0.1	m	DEPTH - 900 Hz		9	1
27	DIFI	0.1		DIFF. BASED ON 5500/7200 INPHASE		9	1
28	DIFQ	0.1		DIFF. BASED ON 5500/7200 QUAD		9	1

\*\*\*\*\*

ISSUE DATE :February 12, 2002  
 FOR WHOM :State of Alaska  
 BY WHOM :FUGRO AIRBORNE SURVEYS  
 2270 ARGENTIA ROAD, UNIT 2  
 MISSISSAUGA, ONTARIO,  
 CANADA L5N 6A6  
 TEL. (905) 812-0212  
 FAX (905) 812-1504

**APPENDIX D**

**EM ANOMALY LIST**

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30011			FLIGHT	11									
A	4010.2	S?	391399	7020678	8.6	14.4	117.1	116.0	12.0	28.2	---	---	110
B	4016.1	B?	391400	7020929	1.7	8.2	9.8	29.8	5.1	3.6	---	---	0
LINE 30021			FLIGHT	11									
A	3899.4	B	391788	7020059	10.5	12.8	104.7	72.8	9.9	36.8	---	---	0
B	3889.3	B?	391805	7020445	62.7	44.6	468.1	266.1	43.2	128.2	---	---	0
C	3883.0	D	391813	7020674	46.6	23.0	175.7	226.9	29.8	62.9	---	---	0
D	3880.0	B?	391815	7020776	20.8	26.4	158.1	213.1	29.8	50.9	---	---	0
LINE 30031			FLIGHT	11									
A	3750.2	L	392145	7018989	1.2	3.0	1.2	42.6	64.8	20.1	---	---	0
B	3753.6	L	392150	7019081	2.7	4.2	27.4	34.1	64.8	30.1	---	---	0
C	3757.9	L	392165	7019195	15.1	14.3	130.9	94.2	39.9	42.6	---	---	0
D	3761.9	L	392174	7019309	13.0	29.5	171.7	275.8	60.3	106.1	---	---	0
E	3774.5	B	392164	7019722	10.7	10.4	210.8	54.4	34.9	47.8	---	---	0
F	3786.6	S?	392181	7020171	7.8	9.2	78.3	76.2	11.8	21.1	---	---	0
G	3793.1	S?	392193	7020411	8.2	13.3	5.0	68.0	0.4	6.1	---	---	0
H	3799.2	B?	392199	7020636	15.6	11.6	131.8	157.9	10.3	31.8	---	---	0
I	3804.6	D	392200	7020832	69.9	31.2	283.9	142.0	105.8	106.5	---	---	0
J	3808.5	B	392205	7020978	17.6	29.9	165.7	223.0	105.8	46.5	---	---	0
K	3812.8	M	392210	7021140	6.3	9.9	0.0	8.2	16.8	0.0	---	---	648
LINE 30041			FLIGHT	11									
A	3650.3	B	392543	7018514	10.2	11.6	304.2	59.8	64.9	104.4	---	---	0
B	3625.6	L	392566	7019283	1.1	0.7	51.1	107.3	52.4	47.2	-0.9	41	0
C	3618.9	L	392568	7019465	11.2	20.0	59.7	122.6	119.5	47.2	---	---	0
D	3614.4	B?	392572	7019604	17.0	39.9	69.1	312.7	118.6	74.9	0.6	0	1170
E	3612.2	M	392576	7019674	0.0	17.6	18.6	389.7	0.0	74.0	---	---	0
F	3610.4	B?	392580	7019731	27.5	45.4	182.5	389.7	114.2	74.0	1.0	8	0
G	3608.0	B?	392586	7019807	19.5	38.4	182.5	389.7	114.2	74.0	---	---	0
H	3596.0	D	392596	7020193	35.3	41.6	168.5	206.2	3.6	53.2	---	---	0
I	3593.0	B	392592	7020294	14.5	10.8	168.5	152.7	0.0	53.2	---	---	12
J	3581.0	B?	392607	7020723	20.0	4.5	120.2	34.4	43.9	13.4	11.2	29	0
K	3576.4	M	392619	7020889	0.0	6.6	0.0	0.0	0.0	0.0	---	---	1527
L	3572.0	B?	392629	7021047	20.9	19.3	235.5	159.6	57.2	77.8	---	---	0
M	3570.2	D	392632	7021111	72.4	31.6	235.5	159.6	57.2	77.8	---	---	0
N	3566.6	B	392636	7021238	11.8	8.6	134.5	47.6	79.9	30.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30041			FLIGHT	11									
O	3564.0	M	392640	7021329	10.4	9.7	0.2	52.7	1.1	0.0	---	---	0
LINE 30051			FLIGHT	11									
A	3406.1	H	392919	7017617	6.0	13.7	80.9	127.9	6.2	25.6	---	---	0
B	3419.3	H	392935	7018155	2.1	14.1	14.3	170.4	2.5	18.9	---	---	0
C	3432.0	S	392960	7018662	31.8	52.6	426.9	465.4	42.7	119.0	---	---	0
D	3446.1	S	392977	7019185	27.8	41.7	272.3	431.1	13.4	94.9	---	---	0
E	3457.9	L	392981	7019568	0.0	0.2	62.0	8.3	90.5	33.1	-0.1	69	0
F	3461.1	L	392983	7019662	2.6	4.9	65.1	91.1	72.2	31.4	---	---	0
G	3468.0	L	392980	7019868	46.5	21.7	167.7	166.0	48.2	76.8	---	---	0
H	3472.4	B?	392980	7020015	24.6	18.6	116.6	129.1	8.4	28.6	---	---	0
I	3474.9	B?	392981	7020105	15.7	22.1	116.6	129.1	2.5	32.1	---	---	0
J	3482.8	D	392991	7020399	63.9	36.0	216.3	147.4	13.8	55.5	---	---	0
K	3485.7	B?	392995	7020507	20.5	11.4	216.3	147.4	13.8	55.5	---	---	0
L	3489.2	B?	393000	7020636	3.6	9.5	0.0	88.0	4.5	11.6	---	---	0
M	3507.5	M	393025	7021317	0.0	0.0	69.3	186.6	0.0	43.4	---	---	900
N	3508.8	B?	393027	7021368	29.9	23.0	178.5	91.4	130.4	38.1	---	---	0
O	3512.3	B?	393032	7021502	54.0	21.8	178.5	101.4	130.4	38.1	---	---	0
LINE 30060			FLIGHT	1									
A	1358.7	S	393302	7017490	4.8	5.2	15.8	44.6	0.3	4.7	---	---	0
B	1380.0	S	393341	7018284	47.5	67.5	314.4	352.4	19.5	89.3	---	---	0
C	1393.4	H	393384	7018777	8.1	9.2	111.6	63.3	29.6	44.0	---	---	0
D	1399.4	H	393376	7018993	7.0	11.5	81.9	106.4	0.9	18.4	---	---	0
E	1409.4	B?	393363	7019345	19.6	19.0	185.2	168.0	6.4	49.0	---	---	0
F	1422.3	L	393380	7019773	10.9	13.6	96.7	99.8	7.8	17.6	1.0	0	0
G	1428.9	L	393396	7019970	24.5	10.3	187.0	171.4	41.8	76.6	---	---	623
H	1437.5	B?	393396	7020216	14.3	14.8	32.4	186.1	9.4	10.5	---	---	0
I	1443.2	B?	393391	7020391	8.4	9.1	0.0	45.1	6.5	8.7	---	---	0
J	1456.2	D	393405	7020830	9.8	7.9	42.5	26.5	3.4	11.2	---	---	10
K	1460.5	D	393417	7020974	14.7	17.2	54.0	31.7	2.5	8.0	---	---	0
L	1476.4	M	393431	7021500	18.5	19.9	101.8	213.8	21.3	57.5	---	---	0
M	1477.3	D	393431	7021530	18.5	19.9	101.8	213.8	21.3	57.5	1.4	14	0
LINE 30070			FLIGHT	1									
A	1734.8	D	393664	7016092	16.0	6.4	130.0	46.3	68.1	64.1	---	---	0
B	1727.7	D	393679	7016250	21.8	2.8	120.4	3.9	70.3	56.5	---	---	12
C	1714.3	H	393699	7016594	6.0	14.7	80.6	168.7	3.6	27.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30070 FLIGHT 1													
D	1696.9	S	393707	7017115	8.4	8.8	53.0	75.6	2.8	15.9	---	---	0
E	1680.0	S	393734	7017691	5.9	6.0	60.2	51.0	2.7	14.0	1.0	34	0
F	1651.8	H	393756	7018597	9.4	8.2	164.5	44.3	27.1	57.3	---	---	0
G	1638.4	H	393758	7018998	4.7	7.7	121.4	86.9	8.7	30.5	---	---	0
H	1622.7	H	393751	7019461	4.0	7.9	34.0	67.8	10.2	10.4	---	---	0
I	1607.4	L	393760	7019874	10.1	12.0	101.1	85.9	31.0	42.7	---	---	0
J	1597.8	L	393783	7020102	0.0	8.7	55.6	55.6	15.8	8.0	---	---	379
K	1595.4	L	393787	7020160	12.6	0.0	14.6	13.4	13.3	8.0	---	---	378
L	1592.6	L	393789	7020229	12.6	11.3	17.7	3.9	22.2	51.2	---	---	0
M	1568.8	B?	393815	7020885	30.4	21.2	115.7	77.7	17.9	23.8	2.7	15	0
N	1561.1	B?	393824	7021105	23.5	31.4	105.5	153.9	3.9	29.2	---	---	0
O	1548.1	B?	393844	7021486	0.0	9.1	96.8	87.4	20.6	38.0	-0.1	18	550
P	1542.8	B?	393845	7021644	11.2	3.3	33.9	11.3	15.9	38.0	6.2	31	0
LINE 30080 FLIGHT 1													
A	1798.0	D	394036	7016292	15.7	6.2	39.5	16.4	3.1	17.9	4.6	10	0
B	1812.6	H	394053	7016854	9.0	11.2	146.4	113.3	15.7	46.3	---	---	0
C	1829.4	H	394158	7017601	7.6	7.4	104.6	26.5	17.5	38.4	---	---	0
D	1840.6	B?	394189	7018050	5.8	9.7	50.1	43.8	2.5	13.2	---	---	0
E	1858.2	H	394170	7018687	11.9	12.4	55.5	98.4	2.7	17.4	---	---	7
F	1869.1	B?	394155	7019067	5.3	8.1	46.9	16.2	10.6	16.4	---	---	2
G	1877.3	H	394157	7019364	4.7	5.9	28.4	79.1	6.7	14.8	---	---	0
H	1896.9	L	394225	7020130	8.4	12.5	114.2	60.5	25.0	53.7	---	---	0
I	1899.2	L	394232	7020210	10.0	6.7	82.6	0.0	7.3	20.3	---	---	0
J	1901.6	L	394236	7020291	3.0	7.7	62.5	65.9	12.2	20.3	---	---	0
K	1905.5	L	394242	7020419	2.4	7.1	21.0	65.9	14.0	14.3	---	---	397
L	1910.6	L	394246	7020580	2.5	10.0	53.9	79.8	16.5	26.9	---	---	0
M	1921.8	M	394219	7020948	5.5	15.6	0.0	196.9	0.0	22.3	---	---	26
N	1930.4	S?	394190	7021241	18.5	12.8	87.4	116.5	34.7	15.2	2.4	23	7
O	1937.9	B?	394191	7021503	15.7	17.8	89.8	67.4	81.6	17.5	1.2	20	0
P	1941.6	M	394198	7021630	0.0	10.7	105.5	109.1	8.0	58.7	---	---	751
Q	1942.9	B?	394201	7021676	19.8	22.9	105.5	109.1	41.7	58.7	1.3	16	751
R	1946.6	B?	394212	7021811	18.2	26.4	54.6	92.8	89.9	12.1	1.0	13	0
LINE 30090 FLIGHT 1													
A	2164.4	B	394521	7017030	9.7	9.7	70.7	68.7	9.0	25.8	---	---	1
B	2156.5	B?	394531	7017259	10.3	15.5	76.0	76.7	16.2	27.7	---	---	0
C	2142.3	B?	394546	7017682	5.1	12.8	29.6	40.5	4.3	8.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30090		FLIGHT 1										
D	2128.2	S	394538	7018107	5.1	10.0	72.4	120.8	7.7	20.5	---	---	4
E	2112.0	B	394557	7018658	5.5	3.4	40.9	10.0	16.2	18.6	1.8	46	8
F	2087.8	B	394582	7019545	1.1	6.7	37.8	92.0	9.5	30.1	---	---	0
G	2084.3	B	394585	7019659	9.6	16.2	81.2	92.0	10.0	30.1	---	---	0
H	2080.7	B	394587	7019776	11.9	23.5	81.2	105.5	0.6	14.3	---	---	0
I	2065.8	B?	394599	7020216	9.7	14.6	91.8	164.0	16.5	36.8	---	---	0
J	2059.4	L	394602	7020385	9.0	12.0	88.8	91.3	22.8	41.0	---	---	0
K	2052.4	L	394612	7020552	8.9	5.0	72.1	170.5	7.0	13.7	---	---	0
L	2048.8	L	394614	7020635	14.0	2.4	67.3	170.5	15.8	10.1	---	---	548
M	2044.3	L	394613	7020747	0.1	6.1	79.6	65.1	98.8	1.4	---	---	0
N	2037.8	M	394615	7020928	7.7	30.7	1.7	361.0	0.0	22.5	---	---	26
O	2030.3	B?	394619	7021154	10.8	17.6	38.2	246.0	57.4	35.3	0.8	24	0
P	2027.7	D	394622	7021233	24.5	68.8	77.9	246.0	0.0	35.3	0.6	3	48
Q	2020.8	B	394636	7021437	21.4	23.5	74.0	228.7	70.2	23.8	---	---	0
R	2018.0	B	394639	7021519	8.7	35.9	74.0	228.7	22.4	23.8	---	---	0
S	2012.2	D	394645	7021691	43.1	18.6	141.0	58.9	22.4	53.2	---	---	0
LINE	30100		FLIGHT 1										
A	2245.4	D	394904	7016984	18.4	7.9	56.5	85.1	0.0	14.5	---	---	2
B	2250.3	B?	394907	7017180	12.7	11.7	63.9	47.4	10.9	17.1	---	---	0
C	2258.9	B?	394926	7017528	18.5	15.7	86.1	134.5	14.4	29.2	---	---	14
D	2266.7	H	394942	7017827	6.9	13.4	36.0	110.4	1.1	15.4	---	---	11
E	2281.3	B	394956	7018357	10.8	4.9	157.0	102.6	36.2	60.9	---	---	0
F	2283.5	B	394961	7018436	7.6	4.4	157.0	84.8	36.2	60.9	---	---	16
G	2302.1	B	394979	7019099	14.0	30.2	99.4	162.9	12.9	39.8	---	---	0
H	2310.5	B	395006	7019400	2.7	5.0	12.6	67.5	0.0	3.3	---	---	1
I	2321.5	B	395018	7019788	7.2	16.8	8.7	140.2	8.3	10.0	---	---	0
J	2325.0	B	395016	7019923	4.7	5.0	23.4	116.2	1.6	8.5	---	---	0
K	2329.7	B	395016	7020104	8.0	19.6	104.8	158.6	13.2	45.8	---	---	0
L	2343.5	B?	395066	7020629	11.4	14.9	87.8	87.2	10.9	42.1	---	---	287
M	2348.6	L	395083	7020803	13.3	16.5	26.2	32.2	38.1	23.6	---	---	0
N	2352.5	L	395091	7020931	11.5	14.0	49.3	35.9	8.2	29.2	1.0	0	0
O	2358.5	L	395093	7021124	4.9	8.8	55.1	65.8	26.4	28.1	---	---	0
P	2368.7	B?	395054	7021459	12.7	10.9	115.5	70.9	10.7	42.5	1.6	22	0
Q	2376.0	B?	395038	7021717	3.9	5.0	152.4	134.4	50.7	56.7	0.7	31	4
R	2381.0	B?	395045	7021897	22.1	9.5	121.2	4.1	3.1	53.6	4.6	19	399

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30110		FLIGHT 1										
A	2768.8	B	395341	7017424	18.2	6.1	94.2	1.6	27.3	33.1	---	---	6
B	2752.8	B	395342	7017906	5.0	6.3	28.1	31.1	10.0	8.9	---	---	0
C	2744.7	B	395350	7018133	14.6	15.4	230.5	172.3	27.8	71.5	---	---	0
D	2740.5	B	395353	7018254	13.4	17.1	230.5	172.3	27.8	71.5	---	---	0
E	2731.4	B	395362	7018544	10.1	18.4	114.0	106.8	14.1	41.1	---	---	7
F	2707.7	B	395379	7019378	35.4	14.4	221.5	78.3	52.2	79.4	---	---	0
G	2695.0	B?	395389	7019818	5.2	3.3	26.8	3.2	3.6	5.0	1.7	54	0
H	2690.4	B?	395393	7019975	10.8	7.1	2.8	8.3	5.1	0.0	---	---	0
I	2681.6	B	395403	7020265	8.0	13.5	114.8	92.8	6.6	33.2	---	---	0
J	2675.8	B	395408	7020445	5.4	6.1	58.4	89.0	1.5	17.9	---	---	0
K	2657.3	L	395430	7020966	16.9	19.5	185.6	169.0	34.8	63.8	---	---	41
L	2653.3	L	395440	7021061	7.0	8.6	108.4	110.5	37.8	56.9	---	---	0
M	2647.6	L	395446	7021193	5.6	4.4	59.6	58.0	28.8	13.0	---	---	0
N	2644.0	L	395444	7021277	5.8	8.8	58.3	33.4	27.3	36.8	---	---	0
O	2634.3	M	395449	7021534	2.1	25.9	270.0	578.0	0.8	169.6	---	---	0
P	2621.2	B?	395453	7021906	23.5	42.3	287.9	310.6	21.0	136.3	0.9	5	545
LINE	30120		FLIGHT 1										
A	2855.9	B	395772	7017967	1.5	2.5	64.7	34.3	0.0	22.0	---	---	0
B	2862.6	B	395791	7018185	4.4	8.4	42.2	134.9	3.3	14.4	---	---	0
C	2868.5	B	395791	7018377	22.0	17.3	216.1	42.1	69.7	99.0	---	---	0
D	2872.2	B	395784	7018495	27.1	7.1	236.2	110.7	69.7	102.2	---	---	0
E	2884.5	B	395795	7018925	7.9	11.9	107.9	87.8	23.4	44.2	---	---	0
F	2893.5	B	395822	7019268	1.3	3.1	11.6	46.0	0.0	5.2	---	---	0
G	2903.2	D	395813	7019646	38.8	24.4	230.9	136.8	19.8	67.8	---	---	0
H	2907.9	B	395812	7019829	13.2	8.1	70.9	120.0	11.9	22.9	---	---	0
I	2909.6	B	395812	7019895	14.2	24.7	70.9	120.0	11.7	22.9	---	---	0
J	2916.5	B	395818	7020170	11.4	14.6	107.2	213.2	24.5	38.2	---	---	0
K	2919.1	B	395825	7020275	6.8	21.0	70.9	218.2	23.8	19.2	---	---	0
L	2924.4	D	395843	7020493	42.6	19.4	254.4	153.7	128.6	93.0	---	---	0
M	2928.5	B	395854	7020659	15.0	11.4	0.0	145.6	0.0	0.0	---	---	0
N	2932.2	B	395861	7020810	28.3	18.6	112.4	44.6	6.6	25.7	---	---	0
O	2937.2	B?	395864	7021012	14.3	20.9	212.1	258.0	31.7	72.9	---	---	0
P	2939.6	B?	395864	7021109	13.5	21.3	212.1	258.0	31.7	72.9	---	---	0
Q	2944.5	L	395858	7021296	13.9	12.1	154.4	90.5	0.0	41.3	---	---	0
R	2947.6	L	395851	7021405	9.1	4.2	35.3	55.2	35.8	4.1	---	---	0
S	2951.5	L	395848	7021537	0.0	1.3	78.4	22.5	35.8	25.6	---	---	343

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30120		FLIGHT	1									
T	2953.9	L	395852	7021614	16.2	17.7	70.0	84.7	17.8	42.8	---	---	0
U	2962.3	B?	395874	7021897	26.6	7.4	178.6	89.8	23.9	79.4	8.9	23	174
V	2969.1	B?	395866	7022149	22.7	20.6	129.6	93.2	51.2	51.8	1.8	8	0
LINE	30130		FLIGHT	1									
A	3564.2	B	396131	7017408	15.1	9.8	245.0	62.8	85.0	80.8	---	---	0
B	3541.4	B	396139	7018023	18.9	22.4	136.6	97.3	12.4	38.7	---	---	0
C	3539.0	B	396144	7018088	8.4	8.9	136.6	97.3	12.4	38.7	---	---	0
D	3526.2	D	396154	7018476	11.2	5.8	40.7	32.9	2.0	13.8	---	---	0
E	3515.0	B	396172	7018884	7.3	0.1	66.7	0.7	31.4	25.4	---	---	0
F	3497.2	B	396192	7019552	4.1	12.3	24.9	88.3	0.1	8.7	---	---	0
G	3479.8	B	396211	7020193	10.7	13.5	36.6	71.9	16.8	19.9	---	---	0
H	3473.7	B	396220	7020411	27.3	7.9	282.4	39.7	65.7	98.2	---	---	0
I	3471.1	B	396222	7020502	18.0	15.8	282.4	39.7	65.7	98.2	---	---	0
J	3466.7	D	396225	7020654	26.6	15.4	51.1	35.5	9.1	2.6	---	---	0
K	3460.7	B	396225	7020857	12.6	22.7	54.9	156.1	1.1	13.7	---	---	0
L	3456.4	D	396224	7021002	28.5	36.2	142.6	206.2	2.0	35.4	---	---	0
M	3450.0	D	396225	7021213	42.1	15.4	99.7	48.5	18.9	33.1	7.1	11	0
N	3440.3	B	396234	7021513	14.5	23.2	228.1	283.3	25.6	83.1	---	---	32
O	3432.2	L	396265	7021743	6.6	0.5	34.9	74.0	45.9	21.2	---	---	0
P	3427.8	L	396271	7021861	4.7	1.6	45.4	71.4	18.0	0.9	---	---	0
Q	3420.0	B?	396274	7022084	24.5	33.5	245.7	294.6	106.0	128.4	1.2	10	0
R	3417.9	B?	396274	7022146	31.5	45.2	250.9	398.5	82.7	128.5	1.2	9	801
S	3416.6	M	396274	7022184	31.5	61.4	250.9	398.5	0.0	128.5	---	---	800
T	3414.4	M	396273	7022250	49.7	61.6	250.9	398.5	0.0	128.5	---	---	0
U	3404.7	M	396277	7022555	9.5	16.3	136.4	95.6	51.4	19.8	---	---	289
V	3403.4	B?	396279	7022597	18.6	1.3	83.6	80.7	32.5	19.8	-65.5	36	0
W	3401.6	M	396282	7022655	4.2	4.1	43.8	80.7	32.5	15.0	---	---	15
X	3395.7	M	396283	7022849	0.4	33.0	28.8	216.1	71.8	19.4	---	---	1142
Y	3391.2	B?	396282	7022998	7.7	20.7	58.3	83.2	89.6	11.8	0.4	9	204
Z	3379.2	S	396294	7023407	3.0	8.5	11.5	32.2	4.6	4.8	---	---	0
AA	3368.5	D	396308	7023777	27.7	27.9	167.8	229.2	10.9	49.0	---	---	19
AB	3356.4	B?	396321	7024192	55.0	41.7	285.6	241.1	13.1	69.9	---	---	3
AC	3347.6	B?	396333	7024500	5.5	9.9	109.2	121.1	8.5	34.7	---	---	0
AD	3344.9	B?	396335	7024596	16.4	20.0	111.1	117.0	7.6	33.5	---	---	11
AE	3334.0	S	396334	7024982	3.6	3.8	20.6	116.8	2.3	15.4	---	---	0
AF	3315.5	S	396370	7025611	0.9	3.5	27.4	38.6	1.2	10.9	---	---	12
AG	3309.1	L	396371	7025820	8.0	14.7	65.8	118.1	4.6	24.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30130		FLIGHT 1										
AH	3305.0	L	396372	7025954	35.5	47.6	65.8	107.6	6.7	24.5	---	---	0
AI	3282.4	S	396391	7026686	6.1	11.3	57.6	231.3	2.6	34.8	---	---	0
AJ	3258.2	S	396418	7027343	5.7	21.4	134.7	312.3	8.5	49.5	---	---	0
AK	3237.4	H	396402	7027907	5.3	13.6	21.4	69.3	5.7	7.2	---	---	0
LINE	30140		FLIGHT 1										
A	3658.5	S?	396518	7017367	3.1	16.8	25.5	245.1	2.7	14.8	---	---	0
B	3672.2	B	396541	7017716	2.1	0.0	33.2	0.0	17.1	19.1	---	---	0
C	3678.1	B	396534	7017859	5.2	11.2	38.9	91.9	46.2	7.8	---	---	0
D	3689.4	B	396568	7018166	18.8	5.8	100.2	55.8	11.5	26.9	---	---	0
E	3692.2	B	396579	7018248	10.5	9.5	100.2	55.8	12.3	26.9	---	---	0
F	3696.3	B	396589	7018372	7.2	18.8	34.0	71.5	9.4	17.9	---	---	0
G	3700.5	B	396595	7018507	5.9	11.2	44.6	71.5	2.5	17.3	---	---	11
H	3726.0	B	396614	7019517	4.6	1.4	36.8	42.4	5.5	10.6	---	---	0
I	3748.9	B	396643	7020546	0.7	16.6	38.4	137.7	7.1	23.3	---	---	1
J	3762.0	B	396648	7021123	15.1	21.1	61.6	95.0	8.9	21.6	---	---	0
K	3770.6	D	396655	7021499	49.1	22.8	129.9	69.5	19.1	40.8	---	---	0
L	3776.2	B	396663	7021740	21.2	14.5	186.9	150.8	73.2	91.3	---	---	0
M	3778.8	B	396665	7021851	18.4	17.1	186.9	32.8	73.2	91.3	---	---	0
N	3784.1	L	396671	7022060	6.7	1.8	31.7	49.3	18.2	4.9	---	---	0
O	3788.5	L	396681	7022219	8.5	2.4	58.0	26.8	31.3	60.7	---	---	0
P	3798.9	B?	396704	7022576	21.2	23.5	181.5	208.8	49.1	78.8	1.4	0	1029
Q	3804.6	B?	396702	7022786	9.4	12.9	77.9	113.5	49.3	10.0	---	---	0
R	3807.1	M	396701	7022878	21.4	12.9	77.9	113.5	0.0	10.0	---	---	0
S	3811.7	B?	396699	7023050	37.5	29.5	124.8	228.1	19.5	55.4	2.5	11	1443
T	3825.8	S	396706	7023619	9.1	14.1	62.9	113.2	9.6	18.0	---	---	0
U	3834.6	D	396717	7023989	18.9	15.5	90.4	80.0	6.4	30.9	---	---	0
V	3837.9	S?	396720	7024126	10.1	21.9	125.4	172.7	8.0	37.1	---	---	0
W	3840.7	S?	396722	7024239	17.2	24.2	125.4	172.7	8.0	37.1	---	---	0
X	3846.8	B?	396729	7024476	4.6	7.5	0.7	0.4	2.6	1.0	---	---	7
Y	3852.4	S	396737	7024692	12.7	19.2	72.3	143.6	4.2	27.1	---	---	17
Z	3865.3	S	396745	7025189	6.2	21.7	43.2	139.9	1.7	21.9	---	---	11
AA	3876.7	S?	396771	7025653	8.8	13.1	47.0	95.7	4.8	18.3	---	---	0
AB	3886.0	L	396784	7026032	8.3	16.0	4.3	46.9	1.3	8.5	---	---	0
AC	3892.5	L	396770	7026282	23.2	10.1	40.4	12.0	8.7	11.4	---	---	20
AD	3900.5	S	396759	7026573	4.9	15.3	7.5	95.4	0.5	8.9	---	---	0
AE	3928.9	S	396848	7027641	3.7	20.5	44.3	137.1	1.8	18.1	---	---	0
AF	3939.2	S	396852	7028002	13.7	26.9	101.4	147.4	9.3	32.0	---	---	133

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30140		FLIGHT 1										
AG	3951.3	S	396837	7028316	5.2	8.9	41.6	53.4	4.6	16.0	---	---	0
AH	4014.4	M	396843	7028899	5.8	14.7	5.5	95.8	0.4	15.9	---	---	0
AI	4018.9	B?	396835	7028926	6.9	7.3	42.0	91.8	23.4	10.9	1.0	35	0
AJ	4038.1	B?	396829	7029013	1.9	9.3	22.6	128.4	0.0	17.9	---	---	0
AK	4057.3	M	396843	7029111	3.1	10.0	16.7	150.5	0.0	21.9	---	---	0
AL	4076.7	M	396885	7029235	0.8	1.5	16.6	39.9	0.1	6.9	---	---	160
LINE	30150		FLIGHT 1										
A	4650.3	H	396941	7017301	3.8	23.2	122.7	220.5	10.9	46.7	---	---	24
B	4633.9	D	396935	7017800	6.1	10.0	30.6	47.8	4.8	8.7	---	---	0
C	4624.1	B?	396957	7017980	3.1	10.5	36.1	55.6	5.7	8.4	---	---	7
D	4608.0	D	396963	7018187	40.9	15.4	166.2	67.8	85.8	59.7	6.8	10	0
E	4601.7	B?	396955	7018272	3.9	14.4	19.0	52.2	15.2	5.2	---	---	4
F	4575.5	B?	396935	7018583	2.0	7.1	7.5	46.4	1.0	6.8	---	---	0
G	4538.0	B	396959	7019070	8.7	5.5	157.8	100.5	24.5	53.6	2.0	31	0
H	4533.8	B	396964	7019145	38.9	22.3	157.8	100.5	24.5	53.6	---	---	0
I	4509.0	B	396992	7019707	6.6	5.5	32.5	45.6	1.2	9.6	---	---	0
J	4495.1	B	397001	7020144	1.8	4.5	88.6	103.3	5.0	18.3	---	---	0
K	4490.4	B	397008	7020295	7.9	10.6	88.6	82.2	10.6	31.2	---	---	0
L	4475.4	B	397016	7020755	3.8	9.3	19.5	51.8	6.5	10.3	---	---	0
M	4459.5	B	397032	7021240	6.1	4.3	22.9	25.1	4.6	11.2	1.6	41	0
N	4441.0	B	397048	7021885	12.7	6.0	111.0	50.0	93.2	32.7	3.4	34	0
O	4429.6	L	397051	7022220	9.9	9.1	65.3	101.7	30.5	50.9	---	---	0
P	4423.8	L	397049	7022364	16.9	3.0	10.1	41.0	8.4	13.1	---	---	23
Q	4419.8	L	397050	7022470	6.4	6.0	22.3	83.7	26.5	11.3	---	---	0
R	4416.3	L	397055	7022564	5.9	10.4	87.5	50.0	71.3	18.0	---	---	0
S	4414.2	L	397059	7022624	12.0	27.6	87.5	207.0	68.9	19.0	---	---	0
T	4409.4	M	397066	7022775	0.0	21.9	105.8	207.0	56.9	59.4	---	---	908
U	4401.9	S?	397077	7023037	22.7	11.9	123.9	59.3	80.3	9.6	3.6	19	0
V	4398.7	M	397087	7023150	0.0	0.3	0.0	0.0	0.0	6.9	---	---	1076
W	4393.1	S	397104	7023346	7.0	15.8	39.1	138.0	40.1	23.5	0.5	7	0
X	4360.6	S	397120	7024446	2.8	10.8	45.8	123.2	5.0	19.9	---	---	0
Y	4346.1	B?	397144	7024937	7.9	15.8	46.8	81.1	0.6	14.6	---	---	0
Z	4331.6	S	397154	7025429	7.1	25.2	40.9	175.0	1.4	23.5	---	---	26
AA	4319.1	S	397172	7025844	6.0	12.5	47.6	120.5	2.8	20.1	---	---	0
AB	4305.6	L	397188	7026306	9.8	25.8	26.7	105.9	0.3	13.9	---	---	4
AC	4297.3	L	397189	7026585	28.6	23.6	57.0	50.6	10.6	17.6	---	---	0
AD	4267.8	S	397217	7027556	12.8	24.2	120.2	210.7	4.9	37.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30150		FLIGHT 1										
AE	4256.5	S	397221	7027862	13.4	22.3	88.6	238.2	3.2	32.0	---	---	0
AF	4242.5	S	397229	7028173	13.5	8.4	53.6	111.2	5.6	19.4	---	---	82
AG	4221.5	S	397245	7028648	4.6	6.9	45.0	95.4	3.8	18.0	---	---	17
AH	4209.5	S	397248	7028838	1.1	7.2	50.8	152.5	3.6	28.7	---	---	0
LINE	30160		FLIGHT 5										
A	3176.0	B	397345	7016821	12.1	15.1	58.9	101.4	6.1	22.2	---	---	0
B	3184.7	B	397342	7016995	12.6	30.1	91.8	141.7	12.7	35.0	---	---	12
C	3197.9	B	397336	7017290	13.6	19.6	126.6	106.2	13.9	40.1	---	---	2
D	3203.6	D	397334	7017399	13.1	18.2	126.6	106.2	13.9	40.1	---	---	0
E	3210.8	D	397328	7017506	8.6	11.3	0.4	0.9	1.8	0.4	---	---	0
F	3219.7	D	397348	7017592	13.6	20.7	76.4	125.1	12.9	28.8	---	---	0
G	3228.8	B	397355	7017656	5.3	9.1	31.1	42.0	1.9	10.4	---	---	2
H	3238.8	D	397358	7017722	6.7	11.8	23.7	82.2	2.4	20.0	---	---	0
I	3260.0	B?	397358	7017876	3.0	5.3	34.8	40.0	5.9	9.4	---	---	0
J	3323.5	B	397354	7018330	72.7	21.5	380.4	117.0	273.6	139.0	---	---	0
K	3345.6	D	397369	7018476	30.3	33.3	354.3	251.1	77.1	128.9	---	---	0
L	3368.3	D	397377	7018596	51.6	114.9	224.9	532.4	18.3	77.2	---	---	0
M	3393.5	B	397378	7018794	9.7	15.5	57.0	79.7	3.0	17.1	---	---	0
N	3403.3	B	397378	7018854	5.5	11.2	33.9	74.3	2.4	14.3	---	---	0
O	3451.0	B?	397389	7019120	2.6	4.5	7.8	64.7	2.5	9.7	---	---	0
P	3475.9	D	397392	7019413	87.9	75.1	533.9	520.1	44.6	180.9	---	---	1
Q	3482.4	D	397389	7019531	65.2	103.7	265.8	412.4	76.8	180.9	---	---	3
R	3490.4	B	397395	7019699	48.2	11.9	211.9	76.8	76.8	95.4	---	---	0
S	3498.8	B	397398	7019918	11.1	16.6	144.9	137.4	15.2	41.2	---	---	0
T	3509.4	B	397399	7020234	5.3	8.1	42.1	60.4	7.2	10.5	---	---	2
U	3515.5	B	397409	7020434	2.4	13.2	10.0	62.4	1.3	5.1	---	---	0
V	3531.1	B	397454	7021043	88.2	107.7	787.8	492.1	142.5	275.5	---	---	0
W	3535.8	B	397468	7021233	76.3	52.8	787.8	613.8	142.5	275.5	---	---	0
X	3538.9	B	397471	7021364	59.3	66.2	787.8	613.8	142.5	275.5	---	---	0
Y	3548.0	B	397460	7021752	14.6	7.7	45.8	19.0	15.4	13.8	3.0	34	0
Z	3560.8	D	397464	7022285	24.9	16.6	187.2	189.0	39.7	71.2	---	---	0
AA	3567.1	L	397477	7022524	10.7	12.9	59.7	37.3	1.0	48.3	---	---	0
AB	3573.2	L	397487	7022709	1.8	2.2	27.4	14.8	49.3	37.1	-0.5	0	0
AC	3577.3	L	397492	7022806	11.7	6.2	0.0	70.5	35.4	36.8	---	---	0
AD	3581.7	L	397498	7022899	39.1	40.3	301.1	311.2	31.7	164.7	---	---	0
AE	3587.0	L	397504	7023025	20.2	29.2	301.1	311.2	8.2	164.7	1.1	1	1539
AF	3597.7	B?	397508	7023372	42.4	30.7	151.5	307.4	196.7	45.8	2.9	14	1505

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30160		FLIGHT 5										
AG	3599.6	B?	397509	7023442	1.8	49.1	151.5	307.4	0.0	45.8	-0.1	1	1536
AH	3605.8	B	397509	7023678	78.9	35.6	617.6	126.2	375.3	115.8	---	---	0
AI	3607.9	B	397510	7023762	52.9	26.5	617.6	126.2	375.3	115.8	---	---	0
AJ	3628.2	S	397540	7024592	10.3	40.0	125.3	267.8	8.6	44.9	---	---	0
AK	3641.5	S	397550	7025139	7.0	15.0	18.4	29.1	3.4	4.4	---	---	13
AL	3648.1	S	397558	7025415	5.0	14.4	12.8	51.5	2.2	7.4	---	---	8
AM	3661.4	S	397574	7025972	3.7	18.3	59.9	173.8	3.2	27.0	---	---	10
AN	3666.3	B?	397579	7026173	3.0	6.0	28.2	43.2	3.5	27.0	---	---	3
AO	3677.8	L	397592	7026624	14.6	42.4	43.9	122.4	3.8	20.0	---	---	9
AP	3686.8	L	397607	7026960	18.8	27.7	62.1	118.3	11.3	21.6	---	---	26
AQ	3690.8	B?	397607	7027110	8.6	19.1	62.1	118.3	11.3	21.6	---	---	8
AR	3696.3	S?	397604	7027321	5.7	13.5	1.4	9.3	2.4	1.4	---	---	0
AS	3711.4	S	397638	7027908	5.3	18.0	80.1	110.9	4.9	20.6	---	---	141
AT	3718.6	B?	397659	7028153	9.2	13.8	11.4	10.9	3.7	4.9	---	---	0
AU	3726.6	B?	397657	7028374	22.3	29.1	51.5	64.0	13.9	13.1	---	---	95
AV	3734.5	S?	397636	7028596	12.8	9.9	54.3	48.7	12.3	13.6	---	---	0
AW	3741.9	S?	397638	7028803	14.4	18.7	73.9	58.9	4.4	21.0	---	---	12
AX	3754.0	S?	397673	7029122	10.4	25.5	104.3	176.8	8.5	37.9	---	---	0
AY	3775.0	B?	397665	7029387	1.2	9.1	28.5	58.2	2.8	10.9	---	---	0
AZ	3808.5	B?	397677	7029616	9.5	27.1	73.7	184.4	11.6	25.9	---	---	0
LINE	30170		FLIGHT 5										
A	2972.5	B	397746	7016739	68.7	77.2	334.0	310.5	32.7	108.5	---	---	0
B	2965.4	B	397726	7016948	36.5	107.4	394.8	805.3	11.0	139.2	---	---	0
C	2958.1	B	397702	7017102	14.7	31.4	379.6	558.4	23.7	135.0	---	---	4
D	2903.1	B?	397697	7017427	59.5	80.9	82.3	103.9	8.5	30.1	---	---	1
E	2894.0	D	397699	7017449	26.0	107.5	381.6	686.4	37.2	158.0	0.5	1	1
F	2892.9	D	397699	7017452	26.0	41.5	381.6	490.7	37.2	158.0	---	---	1
G	2857.5	B	397707	7017750	42.5	91.7	242.4	490.1	23.3	101.5	---	---	2
H	2832.6	B?	397754	7018067	4.9	19.5	37.4	90.4	4.7	12.4	---	---	0
I	2809.6	D	397789	7018270	82.6	83.2	187.7	316.8	27.4	71.2	---	---	0
J	2706.5	B	397782	7018760	8.1	7.4	113.6	80.1	18.7	34.0	---	---	0
K	2572.2	D	397800	7019679	1.8	8.0	17.4	22.7	5.6	9.2	---	---	0
L	2545.1	B	397818	7020080	14.1	20.5	54.8	87.8	8.7	19.6	---	---	0
M	2533.0	D	397826	7020350	11.4	4.0	26.6	12.1	19.3	9.8	4.9	36	0
N	2525.5	S	397838	7020599	4.0	28.3	19.0	130.0	5.3	5.9	---	---	0
O	2516.3	S	397846	7020941	2.5	20.1	0.1	99.9	0.6	3.3	---	---	1
P	2503.0	D	397854	7021461	83.1	48.6	333.1	218.9	78.8	106.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30170		FLIGHT 5										
Q	2499.3	B	397860	7021606	47.5	46.1	333.1	218.9	103.1	106.5	---	---	0
R	2493.6	B	397866	7021831	50.4	15.8	275.2	64.1	103.1	82.8	---	---	0
S	2485.1	S?	397874	7022162	26.8	12.6	109.1	35.4	9.5	28.6	---	---	0
T	2474.4	S	397885	7022547	8.9	21.0	89.0	94.0	18.6	12.1	---	---	0
U	2464.9	L	397896	7022821	45.1	50.0	307.0	272.9	50.0	128.9	---	---	822
V	2459.9	L	397900	7022950	19.6	10.1	307.0	268.2	50.0	128.9	---	---	0
W	2455.3	L	397900	7023070	0.0	2.5	38.9	6.4	26.9	24.8	---	---	326
X	2452.5	L	397901	7023147	0.0	4.6	6.3	24.4	78.5	26.4	---	---	0
Y	2449.6	L	397902	7023237	7.3	13.0	21.2	54.1	78.5	31.9	---	---	1085
Z	2444.0	B?	397910	7023438	5.4	25.8	83.6	184.8	98.9	39.5	0.2	0	516
AA	2439.3	M	397922	7023621	0.0	9.5	546.5	459.5	234.0	204.8	---	---	1250
AB	2437.6	M	397925	7023691	63.8	108.9	546.5	459.5	234.0	204.8	---	---	1163
AC	2435.0	D	397930	7023797	197.8	108.9	546.5	459.5	234.0	204.8	---	---	443
AD	2430.7	B	397936	7023976	13.1	19.3	116.5	124.6	21.2	35.5	---	---	360
AE	2426.6	D	397941	7024142	42.8	2.6	138.9	212.5	32.9	48.1	---	---	0
AF	2406.6	S	397942	7024876	18.3	43.3	145.8	287.7	11.6	50.8	---	---	0
AG	2395.9	S	397966	7025298	5.6	34.8	37.3	200.6	2.2	28.0	---	---	7
AH	2382.7	S	397973	7025839	10.2	30.1	54.3	125.5	2.9	17.2	---	---	16
AI	2373.2	S	397976	7026230	8.0	17.5	45.1	103.4	2.4	4.5	---	---	5
AJ	2369.3	S	397986	7026391	5.9	7.4	45.1	103.4	5.3	20.3	---	---	11
AK	2364.5	S	398003	7026590	6.3	18.5	52.5	115.3	3.2	21.1	---	---	8
AL	2358.7	L	398022	7026830	9.6	23.3	0.0	55.6	2.1	8.3	---	---	12
AM	2334.8	S	398067	7027757	6.5	21.7	48.2	169.8	6.8	27.4	---	---	0
AN	2326.3	L	398062	7028013	35.2	34.5	43.1	110.8	14.0	16.7	---	---	184
AO	2320.4	D?	398050	7028182	8.4	19.7	24.8	61.4	14.0	7.6	---	---	192
AP	2312.9	B?	398042	7028409	4.6	7.0	24.7	140.9	15.5	15.8	---	---	0
AQ	2309.6	B?	398047	7028516	7.4	32.3	24.7	140.9	1.0	15.8	---	---	0
AR	2287.3	B?	398065	7029213	17.9	21.1	87.7	125.4	6.5	26.1	---	---	0
AS	2278.3	H	398054	7029419	4.9	20.5	65.3	156.7	7.6	27.3	---	---	0
AT	2259.7	S	398094	7029744	1.9	14.7	29.9	121.3	6.0	6.8	---	---	7
LINE	30180		FLIGHT 5										
A	1481.0	B	398139	7016752	13.8	37.8	38.2	138.7	0.0	14.6	---	---	8
B	1491.1	D	398118	7016949	10.5	18.2	69.8	41.0	6.0	17.2	---	---	0
C	1504.7	B	398136	7017066	11.2	10.4	97.8	90.9	8.5	29.1	---	---	0
D	1543.9	B	398147	7017364	6.1	9.9	16.1	47.2	1.8	8.2	---	---	0
E	1557.1	B	398155	7017464	3.8	10.4	24.6	76.1	2.2	11.9	---	---	0
F	1566.0	B?	398154	7017520	3.9	5.3	17.7	47.4	2.5	8.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30180		FLIGHT	5									
G	1592.1	S?	398159	7017687	0.6	10.3	9.9	86.8	0.7	13.2	---	---	0
H	1640.8	S?	398164	7018168	1.0	0.7	0.3	0.0	0.8	0.4	---	---	1
I	1651.9	S?	398168	7018248	0.9	4.4	3.7	54.5	0.6	5.4	---	---	0
J	1717.6	D	398181	7018642	11.8	20.5	41.7	93.6	7.2	15.5	---	---	0
K	1733.4	B	398182	7018888	7.2	4.4	78.0	0.0	15.0	25.1	---	---	0
L	1742.0	B	398197	7019094	10.0	4.5	89.3	35.7	19.2	20.6	3.3	29	0
M	1773.7	B	398210	7019946	10.5	6.7	43.8	75.4	13.7	25.7	---	---	0
N	1782.0	B	398218	7020038	10.6	5.3	69.9	32.6	9.3	20.3	2.9	35	0
O	1797.4	B	398234	7020221	41.0	58.3	473.1	524.2	25.5	143.1	---	---	0
P	1804.6	B	398230	7020322	109.4	162.4	468.9	524.2	12.4	142.6	---	---	0
Q	1813.1	D	398234	7020484	34.6	94.4	41.6	296.4	5.3	26.1	---	---	0
R	1815.3	B	398235	7020537	15.9	67.5	41.6	296.4	5.4	26.1	---	---	0
S	1825.5	S	398241	7020828	0.4	25.1	26.3	247.0	0.5	30.7	---	---	0
T	1834.9	B?	398252	7021109	8.3	28.6	70.4	173.3	2.1	25.2	---	---	0
U	1838.5	B?	398253	7021210	7.6	1.8	34.4	0.0	3.8	14.1	---	---	0
V	1845.2	D	398269	7021382	7.0	21.3	18.4	94.7	6.9	14.3	---	---	2
W	1851.3	D	398272	7021538	8.7	10.5	6.2	93.1	16.5	11.3	---	---	1
X	1859.4	D	398273	7021780	150.1	107.0	892.3	466.7	267.2	304.5	---	---	0
Y	1862.8	D	398281	7021893	75.5	51.9	698.1	466.7	188.9	241.9	---	---	0
Z	1867.0	D	398284	7022039	45.5	14.8	698.1	24.1	9.7	241.9	---	---	0
AA	1875.8	B?	398280	7022360	9.0	15.3	21.0	28.2	32.0	11.3	---	---	0
AB	1881.6	B	398281	7022576	8.1	0.3	21.0	5.7	32.0	11.3	---	---	0
AC	1890.9	B	398300	7022908	30.4	16.3	175.1	192.8	71.3	74.9	---	---	688
AD	1897.5	M	398309	7023112	13.3	23.8	60.0	307.7	22.4	46.3	---	---	1209
AE	1914.6	L	398315	7023438	2.4	2.0	84.0	58.4	49.3	14.2	---	---	4
AF	1919.4	L	398311	7023517	15.5	19.3	66.2	168.7	40.0	65.2	---	---	233
AG	1934.2	D	398326	7023858	203.3	85.0	832.8	462.0	371.6	285.2	---	---	0
AH	1937.0	D	398328	7023933	48.8	67.4	832.8	124.5	137.9	285.2	---	---	1311
AI	1938.7	M	398331	7023977	48.8	67.4	31.8	124.5	137.9	8.5	---	---	1311
AJ	1949.0	D	398339	7024291	72.0	18.2	186.3	203.4	148.7	62.6	---	---	0
AK	1967.0	S	398357	7024904	3.9	16.6	78.0	67.0	8.6	7.5	---	---	0
AL	1972.5	S	398366	7025094	10.3	40.2	78.0	280.0	4.4	33.4	---	---	3
AM	1982.4	S	398380	7025445	5.1	13.6	33.7	172.7	2.6	22.7	0.4	15	13
AN	1989.2	B?	398386	7025693	5.3	16.5	1.2	0.5	3.2	1.8	---	---	1
AO	1996.3	B?	398389	7025953	18.4	56.5	94.6	287.9	6.5	43.1	---	---	50
AP	2004.2	B?	398393	7026233	10.2	8.7	81.5	96.0	6.5	30.0	---	---	0
AQ	2013.0	S?	398411	7026531	13.2	19.6	4.2	164.1	1.9	22.9	---	---	0
AR	2018.0	S	398419	7026694	6.1	23.1	54.9	164.1	3.2	23.0	---	---	11

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30180		FLIGHT 5										
AS	2028.6	L	398422	7027052	8.1	16.4	3.7	27.1	0.9	2.0	---	---	6
AT	2037.2	B?	398431	7027344	16.3	33.7	57.3	156.8	1.2	22.3	---	---	22
AU	2050.9	S	398437	7027821	3.7	21.1	38.5	95.6	2.5	17.2	---	---	0
AV	2066.1	L	398456	7028349	23.5	19.1	36.3	33.8	10.6	12.8	---	---	95
AW	2077.0	B?	398478	7028736	5.9	4.5	3.4	12.8	3.2	0.3	---	---	0
AX	2081.1	B?	398483	7028889	10.7	10.4	62.2	36.3	4.6	16.9	---	---	92
AY	2085.7	B?	398482	7029064	6.3	7.5	62.2	44.8	9.3	16.9	---	---	11
AZ	2093.0	S	398485	7029324	11.3	15.2	94.7	62.9	8.1	26.8	---	---	0
BA	2111.2	B?	398489	7029702	3.3	2.5	21.4	42.6	3.4	5.0	---	---	0
LINE	30190		FLIGHT 5										
A	1289.6	B?	398482	7016789	9.1	31.9	89.1	185.2	8.2	34.2	---	---	2
B	1266.5	B?	398529	7017275	7.9	20.6	45.9	91.5	3.6	19.8	---	---	1
C	1227.7	B	398549	7017669	22.3	34.7	76.4	160.1	7.7	29.9	---	---	1
D	1115.9	B?	398585	7018616	1.7	6.7	21.0	37.2	2.4	5.3	---	---	0
E	1107.9	B?	398586	7018646	2.3	16.5	26.6	42.0	3.7	4.9	---	---	0
F	1046.0	B	398585	7018916	1.4	2.0	13.6	9.6	1.9	4.1	---	---	0
G	978.5	B	398608	7019461	10.4	10.9	46.8	45.4	6.9	15.8	---	---	0
H	971.1	D	398612	7019529	5.6	22.8	18.1	122.6	5.6	14.9	---	---	1
I	963.3	B	398617	7019595	2.3	12.9	22.6	118.3	2.3	17.8	---	---	0
J	958.4	B	398614	7019638	3.8	24.3	22.6	118.3	1.5	17.8	---	---	0
K	944.2	S?	398618	7019790	1.0	8.2	12.6	39.4	1.7	6.0	---	---	0
L	922.8	B?	398623	7019992	8.9	14.3	55.4	65.0	3.3	17.4	---	---	0
M	852.3	B?	398634	7020436	1.7	2.4	0.1	13.6	1.1	1.6	---	---	0
N	819.4	B?	398634	7020593	2.9	11.3	17.1	44.6	1.7	8.4	---	---	0
O	763.2	B	398640	7021057	28.5	62.4	246.3	391.1	12.4	83.2	---	---	0
P	752.1	B?	398648	7021272	9.3	11.9	73.9	93.9	2.7	23.7	---	---	0
Q	746.7	B?	398645	7021412	2.4	16.8	0.0	85.6	0.5	10.8	---	---	0
R	739.5	B	398641	7021626	26.0	44.0	43.9	155.1	7.7	14.6	---	---	0
S	731.1	D	398646	7021915	32.5	6.6	189.7	112.8	115.3	73.6	---	---	0
T	726.3	D	398653	7022091	57.7	20.9	189.7	100.1	115.3	73.6	---	---	0
U	721.2	B?	398664	7022290	0.0	0.0	189.7	100.1	63.1	0.0	---	---	0
V	714.5	B	398681	7022550	13.8	10.8	65.4	24.2	27.9	27.4	1.8	21	0
W	696.3	M	398711	7023168	11.3	17.3	147.9	135.1	45.7	63.8	---	---	1477
X	693.5	B?	398710	7023247	21.3	31.8	146.0	151.2	45.7	61.6	1.0	5	557
Y	687.9	M	398710	7023397	19.7	0.0	146.0	318.3	40.2	61.2	---	---	1608
Z	683.7	B?	398711	7023500	22.6	46.4	237.2	318.3	43.6	102.2	0.8	0	0
AA	672.2	L	398714	7023779	0.4	0.8	60.3	9.2	46.9	30.0	-0.2	18	136

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30190		FLIGHT 5										
AB	670.1	L	398713	7023836	0.0	0.0	10.2	9.2	62.4	14.8	---	---	0
AC	661.9	L?	398718	7024099	23.0	62.6	106.4	263.2	82.4	68.5	0.6	0	494
AD	652.1	D	398737	7024457	39.4	45.1	164.1	320.2	14.5	60.4	---	---	0
AE	648.5	S?	398746	7024588	12.2	38.6	164.1	320.2	42.5	60.4	---	---	0
AF	632.3	S	398773	7025179	3.3	11.7	4.8	11.4	3.9	4.0	---	---	0
AG	621.2	S	398775	7025579	3.3	23.0	47.0	141.4	1.8	23.0	---	---	0
AH	598.3	S	398808	7026380	3.9	8.0	23.4	67.2	3.8	11.6	---	---	0
AI	585.2	S	398815	7026849	9.3	35.5	48.6	157.6	4.0	23.6	---	---	0
AJ	575.5	L	398805	7027189	8.2	35.4	0.7	96.1	0.4	6.0	---	---	13
AK	567.5	S	398796	7027475	12.6	19.4	61.8	88.7	4.8	19.2	---	---	30
AL	538.9	L	398885	7028592	17.6	11.8	24.7	16.2	8.7	3.7	---	---	183
AM	532.8	S	398880	7028841	5.5	17.2	47.6	60.9	5.2	13.8	---	---	11
AN	520.6	S	398898	7029278	5.8	24.8	37.7	36.3	1.0	10.6	---	---	0
AO	509.0	B?	398905	7029572	22.5	44.8	139.8	194.0	14.9	51.8	---	---	31
AP	496.7	B?	398906	7029790	9.9	58.7	167.4	451.1	4.4	84.5	---	---	157
AQ	487.9	E	398908	7029956	30.8	56.3	213.4	301.4	12.4	70.1	---	---	0
AR	454.1	S	398916	7030332	5.4	7.7	30.4	63.8	6.6	11.8	---	---	14
LINE	30200		FLIGHT 4										
A	5380.6	D	398948	7016421	30.0	25.5	158.2	76.7	32.2	54.8	---	---	0
B	5389.4	B?	398941	7016619	6.4	14.9	46.7	65.4	5.6	16.0	---	---	0
C	5454.7	B?	398950	7017203	3.6	10.0	16.9	37.7	2.1	7.5	---	---	1
D	5473.5	B?	398943	7017337	4.4	11.9	11.3	67.6	1.5	9.9	---	---	0
E	5516.3	B?	398969	7017615	2.4	7.4	10.6	28.8	0.9	6.2	---	---	0
F	5558.2	D	398965	7017893	7.4	13.6	6.5	76.1	0.7	13.8	---	---	1
G	5569.3	D	398961	7017990	5.5	4.6	38.6	76.1	2.5	12.9	---	---	0
H	5578.8	D	398968	7018063	4.3	8.2	28.8	55.8	2.5	12.5	---	---	0
I	5701.9	B	398992	7018998	7.9	8.8	8.2	0.0	2.7	5.7	---	---	0
J	5721.6	B	399006	7019176	13.5	25.3	44.3	49.1	14.3	14.8	---	---	0
K	5733.0	B	398993	7019331	14.4	7.0	43.7	10.9	14.3	13.0	---	---	0
L	5790.0	S?	398998	7019644	1.3	7.9	5.5	62.1	2.2	6.5	---	---	0
M	5903.2	B?	399018	7020427	2.4	8.4	36.1	46.1	1.8	12.1	---	---	0
N	5966.5	B?	399032	7021031	2.3	15.6	4.9	4.7	0.5	1.2	---	---	0
O	5991.6	D	399034	7021243	79.7	125.5	327.9	516.2	27.6	101.5	---	---	26
P	5998.4	D	399034	7021389	19.6	15.7	327.9	48.0	27.6	101.5	---	---	16
Q	6009.1	B?	399052	7021707	2.1	2.4	71.0	133.7	10.2	19.3	---	---	0
R	6012.3	D	399056	7021820	30.2	23.4	71.0	80.9	10.2	21.2	---	---	0
S	6021.0	B	399064	7022152	20.5	1.0	123.5	1.2	64.5	43.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30200		FLIGHT 4										
T	6047.0	B	399115	7023214	9.5	42.6	85.1	206.2	12.2	56.3	0.3	0	1443
U	6049.1	D	399115	7023298	33.3	42.6	68.4	185.0	12.2	56.3	---	---	0
V	6058.0	D	399124	7023641	7.3	16.0	140.0	156.7	12.7	33.1	0.5	7	0
W	6061.4	B?	399129	7023758	14.6	5.1	179.7	177.2	20.3	70.5	---	---	0
X	6069.7	L	399143	7024015	7.3	6.9	0.0	196.8	3.5	29.8	---	---	1300
Y	6075.2	L	399143	7024156	5.7	1.6	6.7	11.2	24.1	2.3	-5.4	0	749
Z	6077.7	L	399145	7024214	4.2	2.9	17.3	10.5	24.8	32.5	---	---	749
AA	6082.4	L	399152	7024319	30.5	32.6	157.7	190.3	22.3	88.5	---	---	1337
AB	6089.0	L	399165	7024487	9.6	37.2	207.9	393.9	26.4	79.9	---	---	0
AC	6094.7	D	399167	7024667	56.2	78.0	207.9	393.9	20.1	79.9	---	---	0
AD	6104.1	S	399164	7025027	0.3	2.1	0.0	0.0	2.2	0.0	---	---	0
AE	6112.5	S	399171	7025373	8.4	13.9	33.5	66.9	2.9	12.1	---	---	0
AF	6128.8	S	399191	7026043	4.2	6.7	36.5	40.1	4.8	12.4	---	---	0
AG	6148.2	S	399212	7026787	7.8	13.1	31.7	95.4	2.9	12.8	---	---	0
AH	6154.0	B?	399222	7027026	5.3	21.1	35.0	131.3	1.6	17.4	---	---	2
AI	6163.4	L	399222	7027406	13.7	22.6	32.0	50.4	0.6	7.3	---	---	19
AJ	6171.6	S	399237	7027733	13.1	29.6	82.1	127.0	8.4	27.0	---	---	14
AK	6204.0	L	399228	7028904	20.6	11.0	51.8	49.0	12.4	17.8	---	---	52
AL	6218.1	S?	399280	7029337	10.1	14.1	20.0	40.8	3.8	6.6	---	---	0
AM	6236.0	H	399293	7029861	3.2	7.9	23.1	20.8	8.2	8.0	0.3	8	0
LINE	30210		FLIGHT 4										
A	5302.6	S?	399333	7016246	16.0	40.3	111.4	195.1	10.2	37.8	---	---	0
B	5295.0	D	399318	7016463	19.7	27.5	136.1	265.6	6.9	53.7	1.1	8	6
C	5291.5	D	399314	7016574	11.5	29.5	136.1	265.6	6.2	53.7	---	---	0
D	5288.9	B	399315	7016660	22.0	37.7	143.8	245.4	6.2	49.8	---	---	4
E	5254.0	B?	399321	7017244	3.4	4.5	17.2	22.3	2.2	6.4	0.6	10	0
F	5205.5	S	399342	7017724	3.1	5.5	14.8	57.5	0.8	9.7	---	---	0
G	5136.7	S?	399384	7018371	0.0	10.5	27.1	85.3	0.9	12.8	---	---	0
H	5118.4	S?	399385	7018485	5.4	27.4	77.5	91.2	14.3	16.8	---	---	0
I	5017.4	B	399415	7019190	6.1	14.2	41.4	54.9	4.4	13.3	---	---	0
J	4982.0	D	399410	7019439	25.9	39.5	99.5	162.5	8.1	28.8	---	---	0
K	4964.3	B	399418	7019550	7.0	8.1	20.8	40.2	7.3	9.7	---	---	0
L	4952.0	D	399414	7019657	21.5	6.7	77.5	75.0	24.6	18.8	7.1	12	0
M	4851.8	D	399452	7020548	17.8	28.4	79.3	192.0	5.8	19.7	---	---	0
N	4833.5	D	399441	7020769	61.6	62.8	79.9	143.9	4.8	25.6	---	---	2
O	4825.5	B?	399436	7020889	15.3	22.2	94.5	107.2	11.6	26.9	---	---	0
P	4805.9	D	399457	7021160	5.2	28.3	8.1	181.4	0.1	21.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30210		FLIGHT 4										
Q	4781.5	B	399471	7021501	11.6	13.3	45.5	99.3	2.7	13.9	---	---	0
R	4766.3	B	399482	7021859	4.4	9.5	3.6	37.8	0.1	0.0	---	---	0
S	4754.4	B	399490	7022207	24.2	21.0	214.4	147.2	123.9	80.5	---	---	0
T	4747.3	B	399491	7022446	39.2	9.7	214.4	147.2	123.9	80.5	---	---	0
U	4737.3	B	399497	7022792	7.0	16.7	119.3	406.7	8.4	0.0	---	---	0
V	4729.0	B	399507	7023090	9.0	51.9	117.5	399.5	16.1	61.2	---	---	1639
W	4718.6	D	399523	7023453	15.5	27.2	26.8	37.6	4.2	7.2	---	---	0
X	4708.0	B	399534	7023806	5.2	9.3	27.8	41.9	0.0	6.8	---	---	0
Y	4687.9	L	399552	7024358	22.9	29.4	154.6	159.4	37.8	92.7	---	---	0
Z	4682.8	L	399550	7024469	12.8	9.1	89.3	41.1	37.8	55.6	---	---	0
AA	4678.2	L	399543	7024573	0.0	11.4	16.5	0.4	37.2	60.5	-0.1	0	0
AB	4674.8	L	399546	7024661	10.1	9.1	9.6	14.9	12.1	62.6	1.4	0	186
AC	4669.1	B?	399559	7024840	17.7	49.2	47.8	236.1	28.2	76.2	---	---	0
AD	4665.2	B?	399569	7024980	16.5	18.4	52.7	236.1	28.2	27.2	---	---	0
AE	4617.5	S	399614	7026775	3.8	8.6	21.4	46.3	0.2	6.6	---	---	0
AF	4604.0	S?	399633	7027230	9.3	12.3	39.1	78.2	2.7	13.4	---	---	2
AG	4593.4	L	399647	7027558	11.4	24.2	25.2	67.4	0.4	1.9	---	---	0
AH	4584.3	S	399648	7027824	7.5	24.6	56.6	138.4	4.1	23.3	---	---	35
AI	4552.9	S	399677	7028850	5.5	23.1	62.6	173.2	4.4	24.4	---	---	0
AJ	4542.4	L	399680	7029190	24.1	25.9	58.7	146.3	6.8	20.6	---	---	0
AK	4521.4	H	399715	7029805	9.7	20.9	49.1	115.8	5.9	18.0	---	---	0
AL	4508.7	H	399710	7030232	21.6	41.3	115.7	164.4	13.3	36.9	---	---	50
AM	4496.0	S	399730	7030544	2.8	18.4	36.4	104.5	0.8	17.6	---	---	0
LINE	30220		FLIGHT 4										
A	3524.3	D	399725	7016140	7.2	13.2	72.4	124.4	17.2	24.8	---	---	0
B	3553.0	B	399756	7016681	4.9	2.0	34.5	23.4	15.2	17.7	---	---	0
C	3568.8	D	399752	7017013	8.5	12.2	13.4	45.9	3.0	4.0	---	---	2
D	3577.3	B	399758	7017130	16.1	11.5	17.4	40.0	1.4	16.8	---	---	0
E	3590.2	B	399759	7017300	18.7	21.6	158.6	202.3	17.0	53.2	---	---	0
F	3613.9	B	399771	7017595	8.8	13.2	38.7	62.0	2.2	12.7	---	---	0
G	3628.3	B	399775	7017806	5.5	6.9	47.6	44.2	6.1	15.1	---	---	0
H	3647.0	B?	399781	7017997	4.5	4.2	18.7	44.5	0.8	7.5	---	---	0
I	3660.6	B	399781	7018123	48.8	87.6	335.2	502.8	16.2	99.0	---	---	0
J	3668.2	B	399782	7018175	14.7	18.3	215.8	228.2	19.6	71.0	---	---	0
K	3677.3	B	399780	7018223	15.2	0.0	5.9	0.0	19.6	6.2	---	---	0
L	3686.9	B	399781	7018272	12.4	61.3	254.7	437.1	16.1	90.5	---	---	0
M	3713.9	B?	399794	7018443	9.6	32.0	136.9	255.4	8.4	51.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30220		FLIGHT 4										
N	3740.9	B	399797	7018765	11.2	36.8	61.4	228.7	1.7	30.5	---	---	0
O	3761.4	D	399791	7018857	8.1	22.4	21.5	36.1	2.6	8.0	---	---	1
P	3770.5	D	399798	7018929	8.1	14.7	38.5	62.5	4.1	14.6	---	---	0
Q	3778.0	D	399816	7019009	13.5	17.5	31.6	62.5	3.7	11.4	---	---	0
R	3786.3	D	399813	7019137	18.4	17.6	72.2	105.1	3.7	24.6	---	---	0
S	3809.2	D	399805	7019690	23.9	20.5	121.1	116.5	43.9	42.5	---	---	0
T	3819.3	D	399800	7019965	11.5	0.1	43.2	12.6	39.4	21.5	---	---	1
U	3824.1	D	399818	7020090	23.6	19.8	107.0	71.0	26.3	28.4	---	---	0
V	3831.3	B	399830	7020283	10.5	9.5	103.6	71.0	0.0	0.0	---	---	2
W	3841.7	B	399829	7020520	9.5	11.0	93.3	83.7	9.3	25.1	---	---	0
X	3849.8	B	399827	7020621	6.5	5.3	6.9	6.0	1.4	2.9	---	---	1
Y	3856.5	B	399831	7020680	3.8	8.8	39.6	117.2	3.3	17.2	---	---	0
Z	3907.6	S?	399858	7021087	1.0	14.6	0.0	112.6	0.1	12.7	---	---	2
AA	3923.4	B?	399863	7021253	5.8	30.8	37.4	123.4	1.3	17.6	---	---	0
AB	3955.5	B?	399883	7021962	6.7	5.3	16.8	13.0	5.0	2.5	---	---	0
AC	3959.2	B?	399876	7022124	1.1	8.1	8.9	13.0	6.4	2.8	---	---	0
AD	3967.3	B	399887	7022468	7.9	9.1	54.9	44.7	35.8	26.1	---	---	0
AE	3972.8	D	399910	7022693	7.5	1.7	39.0	14.7	35.8	26.1	---	---	0
AF	3977.3	B	399928	7022879	3.6	14.6	30.2	79.2	15.8	7.2	---	---	0
AG	3984.0	B	399937	7023155	8.8	20.0	66.7	191.6	16.0	36.5	---	---	0
AH	3987.8	B	399933	7023306	6.5	25.0	76.6	191.6	16.0	36.5	---	---	1632
AI	3996.0	B?	399919	7023622	4.9	7.1	0.0	102.4	1.2	7.5	0.7	35	0
AJ	3998.5	B?	399919	7023718	3.2	17.4	20.2	102.4	2.1	0.7	---	---	0
AK	4003.0	B?	399927	7023889	15.0	8.4	52.7	50.8	1.0	9.7	---	---	0
AL	4005.6	B?	399932	7023986	13.2	15.6	52.7	50.8	6.2	9.7	---	---	0
AM	4019.2	B?	399952	7024470	37.3	21.7	282.8	148.5	52.4	126.4	---	---	2528
AN	4031.9	L	399964	7024851	8.1	5.9	0.3	34.6	25.2	4.0	---	---	0
AO	4035.6	L	399965	7024939	5.2	6.1	24.1	25.3	20.1	31.9	---	---	0
AP	4042.2	L	399966	7025085	8.6	6.5	57.9	56.3	28.1	29.1	---	---	0
AQ	4065.6	S	399991	7025792	11.0	14.7	55.8	72.8	3.7	19.8	---	---	16
AR	4101.8	S	400021	7027150	5.9	9.8	39.2	92.3	3.0	15.4	---	---	0
AS	4110.1	S?	400033	7027436	1.6	7.2	1.1	20.6	2.8	5.3	---	---	0
AT	4117.7	S	400034	7027690	6.7	27.6	44.1	159.7	2.8	24.1	---	---	11
AU	4124.1	L	400038	7027914	1.5	3.0	19.1	19.8	2.6	0.0	---	---	62
AV	4130.6	S?	400049	7028154	10.3	17.6	44.5	88.1	4.0	14.8	---	---	0
AW	4153.0	S	400083	7028987	8.1	12.0	48.3	130.7	4.4	19.7	---	---	0
AX	4163.3	L	400084	7029323	15.9	9.2	35.1	43.7	7.2	9.5	---	---	27
AY	4168.2	S	400092	7029460	5.9	7.2	35.1	43.7	6.9	9.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30220			FLIGHT 4										
AZ	4193.6	S	400113	7030156	14.5	13.3	104.0	143.0	11.2	34.6	---	---	72
LINE 30230			FLIGHT 4										
A	3441.3	B	400120	7016155	5.5	8.8	25.1	40.6	2.5	8.2	---	---	0
B	3429.0	D	400124	7016627	5.0	2.7	1.9	0.0	3.5	0.9	---	---	0
C	3425.0	B	400139	7016806	3.3	6.5	53.2	102.8	10.3	15.3	---	---	0
D	3420.8	D	400159	7016985	21.4	24.6	93.0	102.8	15.4	30.0	---	---	0
E	3414.5	D	400183	7017217	1.9	2.8	93.0	0.0	15.4	30.0	---	---	2
F	3409.0	D	400184	7017374	2.6	5.8	26.2	6.0	3.0	7.6	---	---	13
G	3402.1	D	400177	7017529	11.3	13.1	66.5	52.8	7.6	23.3	---	---	0
H	3374.0	D	400178	7018036	4.6	7.0	4.4	10.4	0.9	1.6	0.6	20	0
I	3354.9	S	400182	7018357	0.6	5.7	19.2	43.7	5.9	3.0	---	---	6
J	3342.0	S?	400190	7018531	0.9	15.1	0.0	158.1	0.2	16.4	---	---	6
K	3315.8	S?	400185	7018691	1.1	6.3	29.5	64.7	2.5	11.0	---	---	0
L	3256.0	B	400208	7019377	7.8	6.6	72.4	35.5	35.5	25.3	1.4	28	0
M	3240.4	D	400214	7019593	13.7	15.4	91.4	129.6	9.8	31.9	---	---	0
N	3227.1	D	400216	7019734	16.8	25.2	104.3	56.7	16.2	31.6	---	---	0
O	3221.4	B	400218	7019796	3.3	17.2	73.2	101.1	5.6	26.0	---	---	0
P	3122.2	D	400244	7020347	3.5	17.2	15.1	135.8	10.4	23.6	---	---	2
Q	3107.0	D	400238	7020503	10.7	5.0	65.9	66.9	22.6	25.8	3.2	42	0
R	3101.7	D	400237	7020577	13.7	25.7	65.9	66.9	22.6	25.8	---	---	0
S	3068.7	S?	400256	7020987	1.0	17.0	20.4	166.2	8.7	21.8	---	---	0
T	3014.2	B?	400258	7021322	1.4	5.2	11.2	48.7	0.6	6.2	---	---	0
U	2988.0	B?	400261	7021437	2.0	4.0	18.1	45.0	0.6	7.6	---	---	0
V	2980.2	B?	400265	7021472	6.7	12.3	11.9	37.5	1.0	5.4	---	---	0
W	2965.8	S?	400262	7021550	3.0	18.1	23.2	123.1	0.3	14.8	---	---	0
X	2952.1	S?	400255	7021649	2.9	14.2	16.4	69.4	1.1	10.4	---	---	0
Y	2922.0	B?	400259	7022143	9.6	12.2	28.1	71.6	0.8	9.6	---	---	0
Z	2903.7	B	400301	7022726	11.9	26.0	112.5	198.3	45.4	45.6	---	---	0
AA	2901.1	B	400304	7022818	13.0	30.6	128.0	198.3	45.4	45.6	---	---	0
AB	2897.2	D	400312	7022959	22.3	5.6	128.0	39.2	45.4	41.8	---	---	0
AC	2891.0	B	400324	7023186	6.5	8.8	44.7	9.9	45.7	11.1	---	---	0
AD	2885.7	D	400327	7023385	15.6	15.9	69.5	102.7	4.7	29.1	---	---	739
AE	2870.0	B	400339	7023962	3.9	15.3	14.9	52.1	1.0	3.8	---	---	0
AF	2865.0	D	400344	7024153	30.6	21.8	81.9	115.8	81.4	25.0	---	---	0
AG	2859.6	D	400344	7024357	9.3	9.7	59.3	18.9	81.2	9.7	---	---	0
AH	2856.0	B?	400344	7024490	11.9	10.3	141.2	185.0	82.7	82.3	---	---	0
AI	2850.3	D	400350	7024687	22.8	34.5	141.2	185.0	0.0	97.8	1.0	7	2297

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30230		FLIGHT 4										
AJ	2845.0	B	400356	7024852	20.5	18.3	195.1	209.5	18.5	97.8	1.8	11	1107
AK	2842.3	D	400355	7024933	32.7	27.9	123.5	177.0	83.5	52.4	2.2	0	1107
AL	2836.2	L	400362	7025106	11.9	7.4	57.7	57.5	35.1	39.1	---	---	0
AM	2831.2	L	400372	7025240	4.3	6.7	36.5	51.4	28.7	35.2	0.6	0	0
AN	2827.0	L	400371	7025357	4.9	3.2	5.9	8.0	10.4	0.9	---	---	2
AO	2820.1	L	400370	7025565	8.0	9.5	64.7	107.1	12.7	1.6	---	---	0
AP	2808.5	B?	400399	7025957	11.7	3.7	44.2	49.9	7.3	14.9	5.9	31	0
AQ	2790.0	S	400411	7026655	2.6	6.0	29.9	52.8	3.3	9.5	---	---	0
AR	2767.8	S	400436	7027553	5.2	9.2	29.7	70.4	1.6	11.3	---	---	3
AS	2757.5	B?	400449	7027977	8.6	18.1	35.9	50.3	2.4	9.8	---	---	15
AT	2753.3	B?	400458	7028146	2.2	2.8	76.7	138.9	2.5	25.8	---	---	55
AU	2749.5	L	400463	7028290	14.0	18.5	76.7	138.9	3.8	25.8	---	---	0
AV	2724.3	S	400487	7029194	14.8	33.8	74.5	193.9	3.1	29.4	---	---	9
AW	2718.3	L	400490	7029418	15.7	8.4	0.0	2.2	3.6	0.0	---	---	15
AX	2709.5	S	400480	7029745	11.0	14.6	75.5	99.0	2.1	26.8	---	---	0
AY	2705.0	S	400484	7029904	7.8	6.8	63.9	80.4	6.0	19.7	---	---	79
AZ	2693.4	S	400477	7030310	13.4	22.5	34.0	85.7	2.9	11.4	---	---	10
LINE	30240		FLIGHT 4										
A	1716.5	B	400546	7016605	12.6	19.2	24.4	83.9	0.1	9.8	---	---	8
B	1728.9	D	400547	7016865	47.1	21.6	103.4	86.3	22.2	33.4	---	---	2
C	1731.9	B?	400548	7016930	13.4	17.0	103.4	86.3	22.2	33.4	---	---	2
D	1740.5	D	400553	7017112	23.3	20.0	98.0	72.6	18.1	33.4	---	---	0
E	1749.4	D	400555	7017233	8.5	8.6	17.7	28.1	6.4	2.8	---	---	0
F	1769.7	B	400563	7017409	8.8	9.9	52.7	94.9	1.6	15.8	---	---	1
G	1799.3	B	400570	7017656	3.1	3.0	12.1	36.3	2.3	1.9	---	---	0
H	1882.3	D	400605	7018458	7.7	3.6	11.1	13.8	1.7	4.3	---	---	1
I	1952.0	B	400616	7019041	4.4	4.0	18.0	15.3	3.0	4.1	1.1	22	0
J	2117.7	B	400583	7020551	4.6	6.2	31.8	35.7	2.3	11.0	---	---	0
K	2159.0	B?	400639	7020738	3.1	9.9	17.5	38.2	2.6	6.9	---	---	0
L	2214.8	S?	400663	7021020	1.1	9.3	10.3	71.5	2.3	6.7	---	---	0
M	2237.0	B?	400674	7021154	1.3	5.8	9.0	45.7	3.7	4.0	---	---	0
N	2308.6	B?	400690	7022178	5.8	18.9	51.7	75.4	2.8	16.9	---	---	0
O	2338.5	D	400730	7023328	40.8	16.5	201.2	137.7	58.7	82.2	---	---	0
P	2342.5	D	400732	7023473	22.1	36.8	254.5	295.6	58.7	91.2	---	---	0
Q	2345.5	B	400734	7023586	34.7	54.1	254.5	295.6	45.4	91.2	---	---	207
R	2352.1	S	400737	7023840	9.9	19.6	85.1	229.2	0.0	30.2	---	---	0
S	2359.3	D	400745	7024132	10.2	8.0	6.1	33.2	2.8	1.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30240		FLIGHT 4										
T	2365.7	B	400752	7024393	37.7	43.5	111.3	163.4	9.5	30.2	---	---	0
U	2372.0	D	400759	7024643	17.0	11.4	63.0	82.5	9.9	17.5	2.4	22	0
V	2375.2	B?	400762	7024764	0.3	10.1	40.4	93.0	24.7	10.4	---	---	0
W	2381.8	B	400767	7024998	19.4	20.6	85.0	91.0	8.9	29.8	1.4	8	1904
X	2395.4	L	400784	7025407	13.0	29.1	115.7	196.5	37.7	82.2	---	---	0
Y	2397.5	L	400785	7025465	13.3	20.1	115.7	53.1	33.6	38.9	---	---	0
Z	2401.5	L	400783	7025566	1.1	2.9	25.4	2.0	23.4	6.3	---	---	0
AA	2406.3	L	400778	7025679	4.3	2.0	44.5	31.9	18.3	34.6	---	---	22
AB	2409.0	L	400777	7025738	9.2	9.5	86.4	150.1	33.3	59.7	---	---	20
AC	2413.0	L	400785	7025832	6.0	23.1	119.6	150.1	23.7	69.2	---	---	0
AD	2436.2	S	400821	7026607	5.3	13.4	23.3	87.4	2.8	14.7	---	---	0
AE	2442.1	S	400824	7026829	9.4	17.1	10.7	44.8	1.8	7.6	---	---	0
AF	2468.3	S	400855	7027803	0.9	10.3	14.0	90.3	1.7	10.7	---	---	0
AG	2487.3	L	400869	7028439	6.0	17.5	27.4	42.6	1.8	5.9	---	---	0
AH	2498.1	S	400881	7028782	7.3	12.4	43.4	60.7	3.6	12.7	---	---	12
AI	2509.2	S	400901	7029093	4.5	24.8	56.9	125.8	2.7	23.2	---	---	7
AJ	2517.7	S	400905	7029326	10.2	29.1	48.7	141.8	0.7	18.5	---	---	0
AK	2527.9	L	400891	7029603	18.2	6.9	14.5	4.8	7.6	5.2	---	---	0
AL	2537.0	S?	400877	7029882	15.0	17.6	112.8	135.9	7.6	36.0	---	---	0
AM	2544.0	S?	400905	7030124	11.0	17.0	112.8	136.3	7.6	36.0	---	---	22
LINE	30250		FLIGHT 4										
A	1494.9	B	400944	7016616	8.8	29.1	115.5	156.3	12.2	38.5	---	---	5
B	1491.3	D	400950	7016714	19.8	13.3	115.5	156.3	12.2	38.5	---	---	0
C	1488.5	D	400953	7016789	14.1	28.7	100.9	127.1	8.7	29.4	---	---	0
D	1481.1	D	400958	7017004	6.0	10.6	0.0	174.5	0.0	0.0	---	---	6
E	1475.8	D	400972	7017171	79.7	75.6	493.2	174.5	105.2	180.2	---	---	1
F	1472.7	D	400982	7017270	60.6	47.8	493.2	203.0	105.2	180.2	---	---	4
G	1469.1	B?	400987	7017379	43.4	25.3	493.2	203.0	105.2	180.2	---	---	4
H	1467.1	D	400986	7017440	16.4	18.8	493.2	183.0	1.4	65.0	---	---	2
I	1460.0	S?	400984	7017629	6.5	20.2	151.0	236.6	7.9	48.9	0.4	0	0
J	1437.3	S?	400995	7018051	2.7	8.4	32.7	46.2	3.8	13.1	---	---	0
K	1265.9	B?	401018	7019370	6.7	8.2	14.6	98.2	1.0	11.2	---	---	0
L	1134.9	B?	401029	7019738	6.7	13.2	94.8	103.3	6.2	31.0	---	---	0
M	1125.2	B?	401034	7019763	13.9	15.4	94.8	103.3	6.3	31.0	---	---	0
N	1115.8	B?	401037	7019802	11.5	12.2	91.0	94.7	4.2	27.6	---	---	0
O	1042.9	S	401046	7020561	1.7	14.1	11.5	47.3	1.0	7.8	---	---	0
P	960.8	S	401080	7021452	0.9	0.5	10.5	71.2	1.3	7.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30250		FLIGHT 4										
Q	907.9	S?	401094	7021775	1.1	8.8	5.8	35.8	0.5	4.6	---	---	0
R	867.7	S	401097	7022058	2.4	9.7	24.7	49.5	1.1	8.1	---	---	0
S	807.5	S	401118	7023044	2.4	17.0	12.4	67.3	0.0	3.8	---	---	3
T	798.8	D	401125	7023334	7.0	10.8	78.7	57.5	14.2	25.9	---	---	0
U	785.3	D	401138	7023862	14.4	18.6	99.9	107.1	16.0	30.8	---	---	84
V	781.5	B?	401147	7024019	2.3	11.9	100.3	175.3	4.7	32.1	---	---	0
W	778.9	B	401153	7024124	18.6	36.2	100.3	175.3	4.7	32.1	---	---	0
X	766.9	S?	401169	7024602	37.5	47.2	95.8	125.5	21.1	28.8	---	---	0
Y	753.4	D	401168	7025107	58.0	148.7	168.2	836.1	58.7	98.5	---	---	0
Z	747.6	B	401173	7025308	28.0	35.6	76.1	179.0	58.7	34.3	1.3	6	1682
AA	738.0	D	401190	7025639	38.0	12.0	142.5	107.9	75.9	67.1	8.5	9	0
AB	731.6	L	401196	7025832	11.2	18.7	97.8	91.7	25.1	53.6	---	---	0
AC	728.5	L	401200	7025914	4.9	7.7	22.6	33.6	19.1	44.8	---	---	0
AD	724.3	L	401207	7026028	5.9	3.4	25.9	17.1	15.8	32.5	---	---	13
AE	710.6	L	401219	7026483	9.1	14.9	93.4	214.3	7.3	42.3	---	---	3
AF	705.4	S?	401218	7026671	10.3	16.3	38.0	111.9	2.5	18.0	---	---	3
AG	696.4	S	401222	7027000	4.1	13.2	19.1	36.8	2.9	6.7	---	---	0
AH	691.0	B?	401231	7027200	8.9	8.0	19.1	36.8	3.3	3.4	---	---	0
AI	668.5	S	401246	7028074	2.6	6.9	5.3	73.5	2.0	9.1	---	---	2
AJ	656.7	L	401276	7028535	10.0	34.1	29.9	90.9	1.6	12.4	---	---	0
AK	638.7	S	401292	7029217	4.6	4.4	69.6	117.1	4.3	21.8	---	---	31
AL	621.4	L	401303	7029907	22.5	16.3	85.9	46.4	10.4	27.2	---	---	0
AM	612.8	S	401332	7030259	12.9	30.3	105.4	169.4	9.7	34.7	---	---	54
AN	604.2	S	401340	7030605	10.2	15.4	61.1	45.7	4.8	18.8	---	---	224
AO	554.5	S	401387	7032770	1.0	10.3	41.8	79.0	2.3	13.7	---	---	3
AP	543.1	S	401401	7033252	3.6	8.0	33.9	49.6	5.1	12.6	---	---	0
AQ	515.0	B?	401392	7034115	9.1	10.7	37.3	15.3	11.9	11.9	1.0	6	0
AR	499.1	B	401347	7034386	12.0	4.0	52.8	48.9	0.0	13.9	---	---	0
LINE	30260		FLIGHT 3										
A	2895.1	S	401344	7016835	14.3	57.9	152.1	356.9	7.0	63.9	---	---	12
B	2909.6	B	401361	7017216	38.6	26.7	78.5	154.1	51.9	29.2	---	---	0
C	2912.6	B	401369	7017303	23.6	30.3	257.5	165.1	51.9	88.5	---	---	0
D	2916.1	D	401376	7017405	15.0	3.4	257.5	170.5	51.9	88.5	---	---	0
E	2919.8	D	401379	7017515	59.9	24.1	184.5	119.6	41.4	69.9	---	---	1
F	2940.0	B?	401392	7017996	2.1	8.7	26.6	12.0	0.5	12.3	---	---	0
G	2949.3	B?	401387	7018135	4.9	16.9	32.1	92.1	1.6	14.0	---	---	0
H	2968.5	B?	401411	7018337	4.0	3.8	12.5	40.3	1.0	2.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30260		FLIGHT	3									
I	2978.5	B?	401404	7018429	1.5	4.9	13.4	81.4	1.9	3.8	---	---	0
J	3136.5	B	401433	7019504	6.1	5.4	57.4	35.7	11.4	18.5	---	---	0
K	3147.0	B	401425	7019706	3.7	2.6	45.2	12.0	12.2	17.4	---	---	0
L	3158.0	B	401389	7019998	5.1	4.0	44.7	18.4	14.3	18.6	1.3	19	0
M	3190.8	S?	401438	7020354	3.7	8.8	15.8	101.6	2.9	10.3	---	---	0
N	3211.1	S?	401466	7020527	3.7	7.1	40.8	140.4	2.4	14.7	---	---	0
O	3235.4	S?	401487	7020998	7.7	20.3	31.2	105.1	1.5	14.5	---	---	0
P	3267.0	B?	401481	7021451	2.8	15.4	37.8	119.7	2.2	14.1	---	---	0
Q	3280.2	B?	401481	7021588	3.2	29.1	0.7	129.6	1.6	15.9	---	---	0
R	3287.9	B?	401478	7021649	1.0	12.7	13.2	129.6	0.6	15.9	---	---	0
S	3341.2	D	401483	7022610	15.9	57.1	86.5	230.0	3.6	37.5	---	---	0
T	3346.1	D	401501	7022738	31.3	31.9	112.6	153.1	9.3	32.7	---	---	0
U	3366.9	S?	401524	7023226	1.6	7.6	2.3	13.1	0.1	0.9	---	---	0
V	3373.9	B	401537	7023464	22.2	26.8	152.7	99.6	8.0	57.2	---	---	0
W	3379.2	D	401545	7023674	42.8	20.6	201.2	134.0	39.1	70.0	---	---	0
X	3380.9	D	401546	7023744	39.3	5.9	201.2	128.0	39.1	70.0	---	---	0
Y	3392.4	B?	401542	7024249	12.8	12.4	76.5	54.4	0.0	24.5	---	---	96
Z	3406.0	S	401575	7024859	24.6	31.0	131.8	199.3	8.0	45.3	---	---	0
AA	3416.5	S?	401598	7025310	37.8	53.6	107.0	185.8	3.3	25.9	---	---	0
AB	3424.0	B?	401602	7025616	14.6	8.6	26.2	60.9	4.1	11.9	2.6	17	1491
AC	3434.0	S	401597	7026008	11.2	21.2	72.5	178.6	20.3	45.1	---	---	0
AD	3440.2	L	401589	7026228	5.2	5.0	14.9	45.4	12.1	3.5	---	---	0
AE	3446.2	L	401591	7026416	3.9	2.9	46.8	21.6	24.5	28.3	-1.3	0	3
AF	3450.1	L	401600	7026527	6.3	10.5	43.0	76.1	32.1	23.6	---	---	0
AG	3455.9	L	401615	7026705	2.6	3.6	24.8	68.2	32.8	15.1	---	---	0
AH	3476.7	S	401645	7027438	3.4	18.3	18.8	77.3	1.0	10.9	0.2	0	0
AI	3486.5	S	401652	7027793	4.2	18.5	26.1	102.5	4.3	14.9	0.2	0	0
AJ	3496.3	S	401654	7028136	3.0	12.9	21.1	149.2	1.5	19.4	---	---	2
AK	3507.8	L	401689	7028516	3.5	9.8	26.6	54.8	2.8	8.6	---	---	1
AL	3512.8	L	401690	7028677	6.3	14.3	23.4	27.7	1.0	8.4	---	---	0
AM	3525.9	S	401681	7029125	6.8	5.6	51.2	51.7	2.6	14.3	---	---	0
AN	3540.1	B?	401708	7029607	4.0	24.5	64.4	191.7	1.7	28.1	---	---	0
AO	3545.7	S	401713	7029790	9.0	15.8	68.4	197.7	2.4	28.9	---	---	32
AP	3557.3	L	401710	7030166	51.7	47.7	131.0	218.3	21.0	45.4	---	---	0
AQ	3573.2	S	401727	7030635	3.4	11.7	15.5	48.9	4.1	7.1	---	---	349
AR	3585.3	S?	401769	7031004	6.3	6.7	41.4	71.2	5.1	13.9	---	---	108
AS	3597.8	S	401767	7031404	8.0	23.4	23.5	85.4	1.6	12.0	---	---	14
AT	3608.3	B?	401767	7031739	10.9	10.1	49.5	47.4	4.5	15.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30260		FLIGHT 3										
AU	3612.0	B?	401768	7031860	9.7	7.5	49.5	47.4	4.5	15.2	---	---	0
AV	3619.9	B?	401771	7032138	12.3	17.0	68.6	97.8	3.2	19.3	---	---	40
AW	3623.4	B?	401775	7032269	5.0	2.6	68.6	97.8	3.3	19.3	---	---	0
AX	3626.8	B?	401781	7032399	15.5	24.6	75.1	104.1	4.7	23.7	---	---	0
AY	3629.2	B?	401785	7032492	27.2	30.0	75.1	104.1	4.7	23.7	---	---	41
AZ	3634.5	S?	401790	7032699	5.5	10.6	47.3	101.4	5.7	21.2	---	---	0
BA	3669.5	S	401819	7033877	5.4	15.8	29.9	85.1	0.8	11.7	---	---	0
BB	3697.3	B	401827	7034395	29.1	31.9	116.3	165.7	15.4	38.0	---	---	0
LINE	30270		FLIGHT 3										
A	2744.3	B	401767	7017239	6.4	5.4	122.6	74.2	15.5	36.7	1.3	39	4
B	2740.3	B	401780	7017402	22.6	22.4	205.4	187.9	40.0	38.2	---	---	0
C	2735.7	B	401796	7017600	13.9	29.2	206.3	192.7	40.0	77.6	---	---	0
D	2733.1	B	401805	7017715	33.9	30.5	206.3	192.7	40.0	77.6	---	---	1
E	2649.2	B	401807	7019063	7.3	6.4	61.0	61.7	10.3	20.2	---	---	0
F	2639.0	B	401831	7019271	3.7	1.2	33.0	8.7	6.5	8.2	---	---	0
G	2543.0	S?	401862	7020293	1.5	7.2	44.3	55.6	3.8	8.9	---	---	0
H	2516.0	B?	401873	7020607	4.1	10.2	23.8	59.7	1.5	8.4	---	---	0
I	2507.1	B?	401875	7020703	3.8	4.1	1.5	2.7	0.5	1.1	---	---	0
J	2474.3	S	401873	7021131	2.4	3.5	20.9	56.5	1.4	10.0	---	---	0
K	2460.0	S	401876	7021311	3.4	10.2	36.0	74.2	1.6	14.3	---	---	0
L	2433.2	S	401897	7021804	8.6	10.0	42.7	58.6	2.1	13.4	---	---	0
M	2364.7	B?	401925	7022637	9.8	26.0	123.5	251.3	8.2	47.5	---	---	0
N	2359.5	B?	401927	7022714	5.6	20.7	123.5	210.4	8.2	47.5	---	---	1
O	2340.1	B?	401925	7023053	2.5	6.7	11.0	15.3	3.0	3.2	---	---	0
P	2320.4	B	401945	7023700	151.4	13.8	643.2	129.3	474.9	196.1	---	---	0
Q	2301.1	B?	401969	7024437	13.8	6.4	61.4	9.9	2.0	16.1	3.6	30	579
R	2286.5	S?	401981	7024998	20.3	28.4	82.5	120.5	3.3	27.3	---	---	0
S	2277.6	B?	401993	7025322	5.8	8.8	52.8	52.0	2.5	12.5	---	---	0
T	2271.7	B	402003	7025522	23.2	12.7	68.6	79.6	60.9	10.5	---	---	0
U	2263.7	D	402015	7025798	18.4	24.6	42.8	100.1	61.3	29.6	1.1	10	2329
V	2261.2	B?	402016	7025888	0.0	3.9	42.8	100.1	5.0	29.6	-0.1	28	0
W	2258.5	D	402017	7025987	18.4	15.7	31.3	55.0	58.1	29.6	1.8	13	0
X	2246.4	L	402020	7026404	10.9	16.9	94.8	202.3	20.1	56.5	0.8	14	0
Y	2236.2	L	402027	7026695	1.4	3.0	56.9	53.9	23.5	46.2	-0.3	0	16
Z	2231.1	L	402032	7026838	2.3	4.1	56.9	48.4	62.2	43.8	-0.4	0	1
AA	2227.2	L	402036	7026959	1.3	6.4	25.6	61.6	21.4	37.5	-0.1	0	1
AB	2218.8	S?	402042	7027251	5.6	21.5	36.3	165.7	7.6	22.4	0.3	0	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30270		FLIGHT 3										
AC	2211.8	S	402044	7027507	2.7	14.4	12.9	74.4	1.6	10.2	-0.2	1	8
AD	2200.8	S	402064	7027905	1.4	11.8	30.7	55.1	3.8	11.2	-0.1	0	78
AE	2189.1	S	402072	7028350	7.2	14.7	52.7	143.3	5.4	22.9	0.5	14	0
AF	2183.1	L	402075	7028571	2.5	14.6	25.7	91.7	0.8	7.3	-0.2	2	12
AG	2179.5	L	402087	7028701	9.2	16.1	0.3	14.3	3.9	1.8	0.7	18	0
AH	2164.7	S	402106	7029228	4.9	6.9	78.6	87.8	5.6	19.9	---	---	0
AI	2119.0	L	402193	7030348	16.6	11.6	64.8	75.9	11.3	19.3	---	---	0
AJ	2101.2	D	401996	7030732	2.7	13.1	22.4	40.2	3.3	3.2	---	---	0
AK	2093.0	S	401984	7030957	1.0	5.1	27.3	44.7	2.1	8.7	---	---	0
AL	2072.6	S	402145	7031561	4.0	11.9	9.0	65.7	0.3	5.8	---	---	0
AM	2063.4	D	402172	7031834	15.3	19.0	46.2	58.5	3.9	15.0	---	---	0
AN	2057.2	B?	402174	7032014	6.1	9.8	4.3	67.9	3.9	7.9	---	---	0
AO	2049.4	S	402187	7032249	7.2	15.9	78.7	125.1	4.6	27.8	---	---	0
AP	2038.1	S	402201	7032616	11.1	20.6	46.6	99.9	4.3	19.9	---	---	4
AQ	2024.7	B?	402206	7033038	9.7	21.0	32.7	67.5	3.8	12.6	---	---	0
AR	2013.8	S	402200	7033379	6.9	26.6	38.5	128.8	1.9	19.0	---	---	1
AS	2000.1	S	402234	7033865	5.2	16.7	29.4	111.0	2.8	16.2	---	---	3
AT	1975.9	D	402297	7034555	7.6	21.5	31.4	66.4	6.4	13.9	---	---	0
AU	1968.9	D	402274	7034690	27.3	36.4	84.3	135.6	7.2	27.7	---	---	0
LINE	30280		FLIGHT 3										
A	1157.5	B	402139	7017430	25.9	33.2	167.4	139.9	24.1	46.6	---	---	0
B	1165.1	B	402153	7017605	0.4	11.1	165.5	215.3	0.3	45.7	---	---	2
C	1169.7	B	402178	7017715	9.4	25.0	161.8	220.4	33.6	57.2	---	---	0
D	1176.3	B	402201	7017867	21.6	16.0	193.0	139.1	33.6	66.9	---	---	5
E	1189.0	B	402197	7018113	12.6	16.5	107.1	139.0	7.3	32.9	---	---	0
F	1240.9	B	402199	7018576	4.9	9.4	22.9	41.1	3.1	9.4	---	---	0
G	1270.3	D	402236	7018766	83.4	76.3	208.9	306.4	41.2	82.0	---	---	0
H	1301.2	D	402221	7019003	7.2	6.5	0.0	0.0	0.0	0.0	---	---	2
I	1310.9	D	402223	7019090	8.2	16.1	71.3	89.9	8.3	21.4	---	---	0
J	1341.8	B?	402229	7019365	10.1	22.3	37.2	58.2	3.5	14.3	---	---	0
K	1348.1	B?	402230	7019456	10.6	11.1	88.7	69.6	5.5	23.3	---	---	0
L	1366.7	D	402235	7019647	9.6	22.8	24.3	126.9	0.6	15.5	---	---	0
M	1415.5	S	402267	7020445	1.1	3.5	17.9	47.0	1.2	7.5	---	---	0
N	1445.1	S?	402247	7020611	4.4	14.7	40.6	121.8	5.4	15.1	---	---	0
O	1482.3	B?	402257	7021424	7.8	16.0	97.5	117.9	7.9	17.1	---	---	0
P	1490.7	S?	402265	7021546	9.0	17.9	87.9	115.1	8.6	28.1	---	---	0
Q	1507.3	D	402249	7021732	6.6	18.1	37.7	189.9	2.3	25.2	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30280		FLIGHT	3									
R	1517.0	D	402250	7021884	6.5	15.0	23.4	73.6	2.2	15.7	---	---	0
S	1564.3	B	402298	7022643	4.9	6.3	44.6	68.3	3.3	13.9	---	---	0
T	1588.9	D	402291	7022985	7.6	27.2	50.4	205.3	2.1	29.3	---	---	0
U	1596.0	B?	402299	7023177	16.2	39.1	114.4	319.8	1.2	49.2	---	---	0
V	1599.3	B?	402310	7023276	5.0	39.1	114.4	319.8	1.8	49.2	---	---	0
W	1613.7	D	402341	7023705	41.2	75.2	137.0	247.4	19.0	36.5	---	---	0
X	1619.1	B	402333	7023893	331.2	150.9	1355.4	540.4	528.7	510.5	---	---	0
Y	1630.9	H	402349	7024361	11.8	19.5	85.7	101.1	13.8	27.1	---	---	0
Z	1662.0	B?	402400	7025774	14.8	4.0	38.0	20.4	5.6	4.5	7.6	24	0
AA	1666.0	S?	402405	7025960	20.6	14.7	102.1	63.0	5.6	50.6	2.4	8	3233
AB	1675.5	S	402417	7026380	5.9	24.7	56.1	175.7	19.2	23.5	---	---	0
AC	1691.6	L	402440	7026956	4.2	9.0	90.8	48.7	28.9	93.4	0.4	0	0
AD	1695.6	L	402441	7027051	6.5	0.0	95.8	58.4	83.0	96.0	-799.1	5	16
AE	1699.9	L	402445	7027141	6.0	8.4	91.3	59.0	81.9	95.0	0.7	0	0
AF	1709.3	L	402443	7027371	3.9	16.3	50.4	169.6	11.8	28.4	0.2	4	0
AG	1715.0	S	402449	7027552	6.3	12.2	37.1	171.3	3.2	23.5	0.5	23	11
AH	1726.7	S?	402465	7028011	10.3	13.0	58.7	89.1	4.1	19.2	1.0	16	47
AI	1729.5	S	402469	7028132	7.8	9.7	58.7	89.1	4.1	19.2	0.9	20	0
AJ	1737.1	S	402482	7028469	6.3	11.8	9.1	41.5	0.5	2.9	0.6	17	0
AK	1744.3	L	402488	7028785	15.6	20.8	15.5	43.3	2.3	7.1	1.0	5	5
AL	1748.2	B?	402489	7028954	6.4	16.3	86.8	101.4	7.4	26.7	---	---	0
AM	1755.8	S	402499	7029268	2.3	5.1	101.9	140.7	7.1	29.3	---	---	0
AN	1771.3	D	402519	7029883	3.2	10.7	4.2	25.2	2.3	3.1	0.3	1	3
AO	1777.4	D	402547	7030111	12.8	15.7	28.8	56.9	2.9	8.0	1.1	5	0
AP	1785.0	L	402585	7030395	18.7	0.7	50.3	0.0	27.6	20.5	---	---	13
AQ	1789.7	L?	402594	7030564	22.1	11.1	50.3	45.6	27.1	18.7	---	---	0
AR	1803.2	L	402536	7031008	28.9	4.9	67.8	40.9	28.9	20.6	19.0	6	0
AS	1811.6	L	402545	7031265	3.8	14.9	70.4	90.7	3.8	12.7	---	---	0
AT	1814.7	L	402555	7031361	12.0	15.7	16.7	9.9	3.3	1.4	1.0	15	0
AU	1822.7	B?	402580	7031622	9.7	15.6	53.1	61.8	3.4	11.9	0.7	14	0
AV	1833.1	S	402575	7031993	12.2	18.6	87.1	120.5	7.7	26.4	---	---	0
AW	1839.4	B?	402575	7032228	11.5	14.7	0.0	4.5	1.6	0.0	---	---	16
AX	1844.4	D	402586	7032408	23.5	38.9	22.6	89.3	2.1	12.1	---	---	30
AY	1849.2	B	402594	7032593	125.4	74.0	440.2	342.8	64.9	159.2	---	---	0
AZ	1853.8	B	402595	7032777	16.2	22.8	440.2	58.8	60.2	159.2	---	---	22
BA	1861.4	S	402607	7033083	1.5	7.6	49.4	80.5	7.0	18.3	---	---	0
BB	1874.0	B?	402626	7033572	13.7	63.7	152.2	421.9	6.6	63.5	---	---	4
BC	1875.9	S?	402626	7033647	22.2	83.0	152.2	421.9	6.9	63.5	---	---	4

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30280		FLIGHT 3										
BD	1888.9	S	402629	7034163	2.1	7.2	29.2	56.0	1.9	10.8	---	---	0
BE	1902.9	B?	402662	7034535	3.6	8.5	54.2	155.9	2.7	24.2	---	---	0
LINE	30290		FLIGHT 3										
A	1029.1	B	402617	7017966	4.7	7.3	8.0	31.3	7.3	3.0	---	---	0
B	1023.5	B	402620	7018199	22.1	29.2	122.8	186.6	15.2	44.6	---	---	0
C	1020.1	E	402618	7018309	18.8	35.1	122.8	186.6	15.2	44.6	---	---	0
D	996.5	B	402597	7018667	2.5	4.5	8.0	27.7	0.8	3.5	---	---	1
E	974.4	D	402610	7018882	30.4	29.3	174.3	163.3	31.6	60.5	---	---	0
F	964.6	B	402618	7019026	15.6	9.2	20.9	12.5	22.9	11.0	---	---	0
G	956.3	D	402632	7019127	13.3	11.8	73.9	113.3	16.5	24.1	---	---	0
H	936.4	D	402631	7019318	5.2	12.2	30.9	166.4	2.4	16.5	---	---	0
I	930.7	D	402635	7019380	19.7	37.7	95.7	170.5	10.2	36.0	---	---	0
J	907.8	D	402639	7019633	5.0	49.0	4.5	124.4	0.3	13.4	---	---	0
K	874.0	B	402632	7020005	2.3	3.0	23.0	20.7	6.5	10.0	---	---	0
L	858.9	B	402642	7020276	7.3	7.6	7.8	42.2	2.8	3.7	---	---	0
M	840.2	S?	402668	7020530	2.0	32.5	34.4	332.1	5.2	37.9	-0.1	12	5
N	813.1	B?	402664	7020764	2.1	12.4	61.5	133.2	3.9	18.4	---	---	0
O	795.4	B?	402679	7020957	4.4	7.7	3.4	16.1	1.8	16.1	---	---	0
P	784.2	D	402675	7021106	5.7	4.6	0.0	0.4	0.1	0.0	---	---	0
Q	771.7	B?	402681	7021308	6.9	9.1	20.6	56.0	2.5	8.9	---	---	0
R	750.7	B?	402699	7021739	18.7	44.5	144.9	219.7	13.6	50.5	---	---	0
S	728.0	B?	402735	7022301	9.3	5.5	32.4	18.5	3.1	8.8	2.3	18	0
T	684.7	D	402725	7023058	7.3	18.8	43.9	73.6	1.9	15.5	---	---	0
U	675.5	D	402744	7023281	9.2	13.3	14.8	16.5	1.9	3.8	---	---	0
V	671.2	D	402748	7023390	12.4	20.3	44.2	70.4	0.2	12.2	---	---	0
W	665.5	D	402742	7023536	6.4	13.5	44.2	70.4	3.8	8.5	---	---	0
X	660.2	B	402738	7023705	4.6	4.7	23.3	5.1	1.3	0.0	---	---	0
Y	653.8	B	402744	7023930	13.3	14.6	42.5	56.0	26.9	27.6	---	---	0
Z	649.1	D	402753	7024100	13.3	1.2	70.7	75.3	26.9	26.2	---	---	0
AA	639.7	H	402764	7024457	5.6	8.0	11.8	31.8	2.3	4.6	---	---	0
AB	625.1	S?	402781	7025019	9.0	10.0	56.8	39.2	17.4	24.1	---	---	1095
AC	610.8	S	402805	7025553	17.6	14.3	63.8	117.2	0.2	20.5	---	---	0
AD	600.3	B?	402801	7025929	11.4	9.3	52.0	33.6	33.9	4.7	---	---	0
AE	596.0	M	402798	7026085	8.8	6.9	0.0	6.9	33.9	10.4	---	---	0
AF	581.5	S?	402824	7026597	10.3	55.4	103.3	367.3	4.2	63.5	0.3	0	0
AG	565.9	L	402835	7027060	3.7	10.0	87.2	106.3	47.5	28.9	---	---	0
AH	561.9	L	402832	7027164	2.8	0.2	89.1	58.9	44.5	15.7	-32.9	38	20

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30290		FLIGHT 3										
AI	556.2	L	402847	7027329	8.5	27.9	125.0	255.5	21.0	35.7	0.4	0	15
AJ	551.8	S	402863	7027480	17.9	51.0	125.0	261.2	14.4	58.0	---	---	0
AK	545.9	S?	402862	7027690	10.0	32.1	61.4	170.8	8.7	28.1	0.4	3	17
AL	519.7	S	402916	7028667	5.1	21.2	28.9	136.7	3.8	13.3	0.3	3	0
AM	512.8	L	402908	7028928	14.2	34.2	2.8	79.2	1.9	1.2	0.6	9	8
AN	504.7	S?	402889	7029230	20.5	38.9	153.8	167.5	14.6	48.3	---	---	0
LINE	30291		FLIGHT 11										
A	6283.8	B?	402872	7028427	10.2	27.6	48.9	106.9	2.4	15.7	---	---	0
B	6277.7	S	402884	7028659	2.6	7.7	14.2	86.6	2.1	11.6	---	---	0
C	6270.5	L	402895	7028919	13.4	31.5	24.8	45.4	4.0	9.8	---	---	9
D	6261.7	S	402907	7029220	10.0	15.8	120.6	78.0	10.3	32.9	---	---	0
E	6236.6	D	402924	7030079	9.8	24.9	50.9	153.8	1.6	20.4	---	---	0
F	6227.4	L	402933	7030402	22.0	6.9	4.5	0.0	14.6	1.5	---	---	0
G	6220.0	L	402930	7030674	29.9	10.2	49.8	39.5	12.7	20.0	---	---	0
H	6210.5	L	402945	7030988	23.1	7.8	33.4	36.7	16.3	3.2	---	---	69
I	6203.6	B?	402950	7031204	4.1	9.6	27.4	42.4	4.2	5.3	---	---	0
J	6200.0	L	402952	7031324	2.4	17.8	18.9	36.6	4.1	2.8	---	---	0
K	6192.6	B?	402966	7031579	6.5	13.3	27.2	43.7	1.5	8.2	---	---	0
L	6178.3	S	402977	7032081	9.4	10.1	50.7	84.3	1.2	12.9	---	---	39
M	6176.8	E	402977	7032138	15.3	25.0	50.7	84.3	1.2	12.9	---	---	0
N	6169.7	B?	402985	7032398	13.6	9.5	35.5	49.8	3.3	9.9	---	---	21
O	6164.1	B?	402992	7032598	6.6	10.7	7.3	49.2	3.8	3.6	---	---	0
P	6154.5	H	403005	7032926	7.5	34.3	117.7	350.7	10.1	54.6	---	---	0
Q	6133.5	H	403012	7033588	2.4	6.5	24.8	44.7	2.7	7.0	---	---	0
R	6115.8	H	403030	7034073	2.6	8.7	58.8	88.4	5.1	16.2	---	---	0
S	6089.0	B?	403046	7034609	2.3	5.0	34.2	22.0	4.8	6.9	---	---	0
LINE	30301		FLIGHT 11										
A	5157.3	B	402990	7017989	15.7	19.7	91.1	94.1	15.1	33.9	---	---	0
B	5160.2	B	402990	7018084	15.7	25.2	91.1	94.1	30.2	33.9	---	---	0
C	5166.3	B	402992	7018266	41.9	33.2	242.7	227.4	30.2	77.2	---	---	0
D	5169.6	B?	402995	7018351	35.9	49.8	242.7	227.4	30.2	77.2	---	---	4
E	5183.3	D	403005	7018546	36.0	65.9	348.3	382.7	29.8	105.4	---	---	0
F	5220.2	B	403016	7018848	14.9	10.6	125.8	74.3	43.3	53.2	---	---	0
G	5249.3	B?	403023	7019085	3.5	18.4	32.6	98.5	3.7	18.0	---	---	0
H	5270.7	B?	403051	7019253	2.7	6.7	21.0	30.7	1.7	7.2	---	---	0
I	5293.1	B?	403056	7019324	4.4	8.4	25.1	53.2	2.0	10.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30301		FLIGHT	11									
J	5339.5	B?	403031	7019573	2.1	35.0	23.4	111.7	1.2	15.8	---	---	0
K	5350.8	B?	403037	7019676	7.3	20.5	38.3	109.2	1.7	17.0	---	---	0
L	5365.1	B?	403045	7019779	10.1	43.5	92.7	230.8	5.9	40.7	---	---	0
M	5389.1	B?	403048	7019940	4.7	15.7	28.1	110.6	2.9	16.9	---	---	0
N	5457.9	S?	403038	7020506	0.3	10.5	14.8	71.0	3.7	5.4	---	---	0
O	5485.8	S?	403037	7020742	4.9	14.8	62.7	94.1	7.2	23.2	---	---	0
P	5493.3	B?	403051	7020811	8.8	17.2	46.4	87.0	2.3	17.8	---	---	0
Q	5516.4	H	403072	7021101	11.9	22.6	190.8	244.4	15.3	63.1	---	---	0
R	5535.7	B?	403052	7021352	10.7	33.9	63.9	237.8	3.9	32.1	---	---	2
S	5540.0	B?	403054	7021398	3.8	15.3	53.3	237.8	2.2	32.1	---	---	2
T	5559.4	B?	403072	7021679	2.2	8.9	32.6	84.6	1.6	11.3	---	---	0
U	5569.7	B?	403087	7021882	10.4	9.5	76.4	88.0	6.3	23.4	---	---	0
V	5585.8	B?	403076	7022157	3.6	5.6	33.2	60.0	4.8	13.9	---	---	0
W	5611.6	B?	403078	7022393	4.3	20.1	23.5	51.9	3.3	8.6	---	---	0
X	5626.4	B?	403088	7022495	8.7	13.9	4.9	44.3	0.7	8.4	---	---	0
Y	5649.0	B?	403110	7022638	2.7	5.2	6.3	37.9	1.2	6.4	---	---	0
Z	5693.5	S?	403126	7022916	1.6	6.3	7.8	28.2	1.7	5.9	---	---	0
AA	5704.9	B?	403131	7023040	3.3	3.9	5.2	10.1	4.0	2.0	---	---	1
AB	5725.9	H	403157	7023528	2.5	4.7	17.9	47.8	2.1	9.1	---	---	0
AC	5739.3	D	403173	7024071	7.5	1.6	44.7	54.2	2.2	11.4	---	---	1
AD	5743.4	D	403177	7024258	18.1	16.6	62.9	82.8	7.5	19.1	---	---	0
AE	5769.5	B	403201	7025426	35.1	24.8	178.9	119.0	28.1	75.6	---	---	877
AF	5772.2	B	403207	7025540	17.4	11.8	174.1	119.0	28.1	75.1	---	---	884
AG	5777.5	B	403215	7025764	18.0	17.4	139.3	106.1	27.1	75.7	1.6	10	0
AH	5784.1	B	403223	7026039	6.1	7.6	0.0	0.5	10.4	0.0	---	---	0
AI	5791.9	B	403231	7026354	10.8	19.8	102.4	151.9	14.4	48.4	---	---	0
AJ	5795.6	B?	403237	7026498	13.7	16.5	102.4	151.9	14.4	48.4	1.1	13	2640
AK	5811.7	L	403246	7027062	6.7	11.0	74.2	143.4	5.3	1.8	---	---	0
AL	5819.9	L	403252	7027286	2.8	4.1	64.6	4.2	73.1	124.5	-0.5	0	30
AM	5827.1	L	403265	7027458	3.8	10.4	66.0	70.3	37.4	108.0	---	---	49
AN	5831.0	L	403271	7027558	7.1	9.8	98.1	112.8	30.3	98.9	0.8	0	0
AO	5837.8	L	403274	7027759	0.9	10.4	49.7	111.5	31.4	17.9	---	---	21
AP	5839.7	L	403275	7027817	3.1	10.4	49.7	111.5	21.9	17.9	---	---	21
AQ	5866.9	B	403296	7028841	11.7	20.1	76.7	130.1	4.0	23.6	---	---	0
AR	5868.8	B	403299	7028918	12.0	10.7	76.7	130.1	3.5	23.6	---	---	0
AS	5873.9	L	403303	7029129	10.5	23.3	14.6	63.5	4.6	9.7	---	---	0
AT	5879.6	B	403305	7029365	15.8	15.5	134.8	115.0	12.9	40.9	---	---	20
AU	5909.0	L	403336	7030526	9.7	2.2	20.8	7.0	6.9	3.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30301		FLIGHT	11									
AV	5918.8	L	403353	7030871	14.4	11.3	37.5	28.6	18.9	8.1	---	---	0
AW	5922.0	L	403358	7030975	18.2	11.9	37.5	28.3	22.5	17.9	---	---	0
AX	5932.2	B?	403368	7031255	9.7	17.1	35.5	88.4	6.9	16.9	---	---	0
AY	5941.4	B?	403372	7031539	0.0	6.1	0.0	88.0	2.8	4.9	-0.1	35	24
AZ	5946.0	B?	403383	7031701	8.8	14.6	15.6	41.7	8.3	7.0	---	---	0
BA	5953.0	B	403411	7031978	14.7	23.6	72.2	104.8	7.3	21.4	---	---	21
BB	5955.5	B?	403418	7032085	0.9	6.6	72.2	127.4	4.1	14.4	---	---	23
BC	5957.5	B?	403422	7032170	3.1	12.2	36.8	127.4	2.3	14.4	---	---	22
BD	5961.2	B	403426	7032333	4.6	8.7	0.4	5.6	7.2	14.4	---	---	8
BE	5966.0	D	403425	7032538	5.3	10.2	0.4	5.6	24.5	1.5	---	---	0
BF	5971.0	D	403419	7032739	39.7	32.3	122.7	121.1	24.5	40.6	2.5	4	31
BG	5973.2	B	403420	7032823	18.2	34.3	122.7	121.1	19.4	40.6	---	---	31
BH	6004.0	S	403421	7033987	1.7	3.6	9.6	28.6	2.9	4.7	---	---	1
LINE	30310		FLIGHT	2									
A	4957.7	D	403401	7018358	14.4	31.7	268.2	132.1	41.6	77.4	---	---	0
B	4952.4	B	403399	7018529	55.9	61.6	268.2	172.8	43.0	77.4	---	---	0
C	4950.1	B	403402	7018594	15.6	16.7	39.5	350.0	81.0	200.5	---	---	0
D	4943.8	B	403414	7018755	64.2	71.5	616.7	560.0	81.0	208.3	---	---	1
E	4931.0	D	403425	7019018	5.4	19.5	23.3	94.6	2.6	13.7	---	---	0
F	4918.7	B	403433	7019307	9.8	15.2	63.5	102.7	3.8	21.4	---	---	0
G	4901.9	B	403431	7019658	17.5	29.7	78.6	190.5	4.2	24.7	---	---	0
H	4858.2	B?	403458	7020346	3.6	8.5	14.5	18.5	0.8	5.0	---	---	0
I	4849.9	B?	403474	7020484	5.7	15.6	26.4	62.2	2.1	11.7	---	---	0
J	4819.9	B?	403506	7020808	7.0	12.7	79.1	102.2	6.8	25.8	---	---	0
K	4767.4	B	403576	7021633	26.5	46.2	200.2	313.2	13.7	65.6	---	---	0
L	4763.0	B	403578	7021729	20.1	48.6	294.8	487.8	18.6	103.4	---	---	0
M	4757.7	D	403587	7021805	33.1	102.5	223.2	778.5	15.8	129.1	---	---	0
N	4751.8	D	403593	7021867	50.7	124.1	205.8	787.0	2.6	129.1	---	---	0
O	4721.4	B	403586	7022083	45.7	39.7	0.0	434.7	2.9	0.0	---	---	0
P	4708.5	B	403562	7022173	41.0	43.1	0.0	0.0	16.5	0.0	---	---	0
Q	4689.9	B	403547	7022317	23.0	90.4	81.6	584.1	0.1	65.6	---	---	3
R	4679.4	B	403536	7022389	14.5	20.4	482.5	0.0	20.9	148.0	---	---	0
S	4650.3	B	403514	7022588	72.8	206.3	400.6	753.9	15.7	123.8	---	---	0
T	4621.7	D	403548	7022949	3.9	29.9	2.0	71.7	0.1	7.5	---	---	3
U	4585.2	D	403540	7023316	19.5	21.7	79.4	108.2	3.6	23.3	---	---	0
V	4543.2	H	403556	7024327	3.9	14.7	45.5	92.6	6.2	16.1	---	---	0
W	4528.8	B?	403591	7024859	28.9	33.0	173.1	212.3	12.6	54.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30310		FLIGHT 2										
X	4526.2	D	403596	7024958	11.2	18.2	173.1	212.3	12.6	54.0	---	---	0
Y	4523.5	D	403598	7025062	8.7	18.0	173.1	212.3	11.5	54.0	---	---	0
Z	4510.1	B	403609	7025582	2.5	1.8	12.0	127.3	6.5	0.0	---	---	0
AA	4501.3	D	403611	7025915	23.8	25.2	150.7	141.8	17.7	60.1	---	---	1077
AB	4495.0	D	403612	7026156	11.6	3.7	54.2	33.6	24.8	17.4	5.6	28	0
AC	4486.0	D	403626	7026502	9.7	6.4	36.7	44.3	73.2	19.6	2.0	27	0
AD	4479.7	B	403635	7026741	14.9	37.1	109.2	214.5	59.4	59.1	0.6	0	1938
AE	4475.7	D	403638	7026885	13.7	24.2	101.9	214.5	34.8	59.1	0.8	2	0
AF	4463.5	L	403630	7027255	2.8	12.1	68.2	82.6	13.7	52.2	---	---	0
AG	4456.0	L	403632	7027430	11.6	6.7	64.2	96.9	11.0	34.7	2.5	0	0
AH	4450.9	L	403637	7027553	2.4	0.0	34.9	82.5	31.6	15.8	---	---	0
AI	4447.0	L	403644	7027662	5.1	13.6	35.2	134.1	18.8	18.3	0.4	0	0
AJ	4438.8	S	403651	7027936	2.0	12.9	54.3	228.5	6.8	35.6	-0.1	3	1
AK	4410.6	S	403716	7029016	11.4	25.3	39.9	108.6	10.0	14.6	---	---	0
AL	4403.7	L	403725	7029279	15.8	13.9	91.1	43.9	4.1	6.7	---	---	0
AM	4389.1	S	403738	7029782	0.3	3.7	4.6	40.4	7.0	9.1	---	---	0
AN	4381.4	S	403745	7030000	7.4	16.5	114.1	170.5	8.2	38.2	---	---	0
AO	4366.5	S	403736	7030362	3.5	22.5	58.4	198.3	3.7	30.2	---	---	0
AP	4350.0	L	403748	7030801	17.1	12.3	23.4	0.0	19.0	14.9	---	---	7
AQ	4346.3	L	403753	7030923	21.0	5.3	35.2	65.5	13.0	13.5	---	---	0
AR	4341.2	L	403764	7031098	39.7	27.7	53.6	83.7	15.1	21.0	---	---	19
AS	4309.1	B?	403791	7032283	8.7	4.1	2.2	8.5	4.4	1.1	---	---	12
AT	4301.4	D	403799	7032559	40.8	23.3	104.6	86.0	18.7	34.7	---	---	0
AU	4295.7	D	403806	7032749	44.0	46.1	176.7	183.3	25.1	57.9	---	---	0
AV	4293.4	D	403807	7032825	54.7	40.6	213.2	165.3	34.8	69.5	---	---	12
AW	4291.5	B	403807	7032888	41.0	33.2	213.2	165.3	34.8	69.5	---	---	12
AX	4284.8	B?	403805	7033114	9.2	12.3	20.4	50.3	4.5	7.1	---	---	0
AY	4281.2	S	403806	7033238	3.6	11.5	23.0	62.7	2.6	8.7	---	---	0
AZ	4265.2	S	403831	7033784	1.9	13.1	13.5	169.9	0.9	16.5	---	---	0
BA	4257.4	S?	403838	7033966	2.7	24.5	12.9	34.1	0.2	1.8	---	---	2
BB	4239.1	B?	403837	7034175	3.6	19.4	15.0	132.4	0.6	18.4	---	---	2
BC	4231.3	B?	403842	7034247	5.9	26.7	45.0	257.7	1.6	34.2	---	---	0
BD	4196.7	B?	403868	7034625	12.5	23.6	65.7	130.0	3.4	25.5	---	---	0
LINE	30320		FLIGHT 2										
A	3326.9	B	403781	7018158	1.8	8.8	19.9	87.0	8.3	10.0	---	---	0
B	3341.4	B	403811	7018603	21.3	22.8	131.9	93.4	18.6	42.2	---	---	3
C	3370.0	S?	403834	7018983	5.8	7.4	21.6	55.4	1.4	9.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30320		FLIGHT	2									
D	3427.0	B?	403849	7019448	4.5	11.3	8.6	49.3	1.0	5.1	---	---	0
E	3443.7	S?	403836	7019806	4.4	14.0	61.1	75.6	5.7	20.0	---	---	1
F	3463.7	B?	403828	7020281	11.5	19.9	70.5	135.1	4.4	25.8	---	---	0
G	3470.9	S?	403821	7020450	4.2	16.5	18.4	44.0	0.3	5.7	---	---	2
H	3478.5	B?	403820	7020633	5.9	18.2	16.2	38.2	3.4	6.5	---	---	1
I	3486.1	B?	403826	7020846	5.0	11.3	21.3	90.8	2.5	11.7	---	---	0
J	3500.3	B?	403799	7021279	20.0	24.9	152.8	141.3	15.2	45.6	---	---	0
K	3502.1	B?	403793	7021326	11.1	19.8	152.8	141.3	15.2	45.6	---	---	0
L	3509.8	B	403790	7021495	11.4	11.1	101.8	49.3	24.7	35.9	---	---	0
M	3526.1	B	403838	7021650	32.3	32.9	122.7	105.7	23.3	44.1	---	---	0
N	3553.6	B	403843	7021776	40.4	46.4	510.9	1099.2	13.5	179.3	---	---	0
O	3579.5	B	403851	7021942	10.1	15.2	88.7	122.1	13.3	33.3	---	---	0
P	3637.5	B	403894	7022295	3.7	15.2	56.6	208.7	0.9	30.5	---	---	0
Q	3666.5	B	403913	7022508	2.4	10.6	9.2	64.4	2.0	8.8	---	---	0
R	3682.6	B	403924	7022658	6.5	14.9	68.8	2.2	5.0	17.4	---	---	0
S	3695.6	B	403938	7022813	19.2	25.7	149.8	149.7	10.2	43.4	---	---	0
T	3715.4	D	403933	7023063	5.2	26.6	19.8	92.8	2.1	6.8	---	---	2
U	3728.2	D	403943	7023185	3.3	24.0	9.0	141.8	1.0	17.4	---	---	0
V	3755.0	B	403945	7023514	8.2	6.4	25.1	28.0	2.5	7.6	1.6	2	0
W	3765.9	B?	403946	7023842	5.2	15.8	37.5	75.6	4.4	16.3	---	---	0
X	3785.1	B	403980	7024680	7.3	8.1	72.7	90.0	8.6	26.4	---	---	0
Y	3788.0	B	403983	7024810	7.1	18.6	72.7	64.8	8.6	26.4	---	---	0
Z	3790.4	B	403984	7024913	0.3	0.0	0.0	64.8	1.2	18.1	---	---	0
AA	3793.2	D	403986	7025036	19.2	16.8	145.6	116.7	7.4	41.4	---	---	0
AB	3796.5	B	403991	7025179	19.1	27.0	145.6	116.7	15.5	41.4	---	---	0
AC	3811.7	H	404001	7025819	5.9	6.1	58.2	69.7	11.1	16.1	---	---	0
AD	3820.8	B?	404020	7026184	7.9	8.2	22.9	41.3	8.4	3.3	---	---	414
AE	3827.0	B	404023	7026433	5.3	2.6	6.6	2.0	8.4	1.3	---	---	0
AF	3832.2	B?	404024	7026638	6.1	7.5	21.4	45.3	7.6	3.4	---	---	0
AG	3840.1	D	404041	7026935	43.3	24.5	197.2	86.6	62.4	82.5	---	---	0
AH	3850.6	B?	404066	7027285	10.9	7.7	58.4	56.7	14.0	28.8	---	---	0
AI	3857.1	L	404061	7027466	5.4	20.2	70.9	73.0	3.7	22.9	---	---	0
AJ	3864.1	L	404056	7027612	0.0	0.7	59.7	44.4	32.4	20.8	-0.1	0	26
AK	3870.1	L	404059	7027714	2.6	6.3	83.8	53.9	31.3	21.2	-0.3	0	0
AL	3873.6	L	404063	7027781	5.4	18.1	124.5	174.7	38.9	23.8	0.3	0	0
AM	3877.1	L	404071	7027858	5.8	25.8	77.3	176.5	63.5	21.5	---	---	0
AN	3884.9	S?	404075	7028054	0.0	48.8	9.8	506.2	60.7	78.1	-0.1	46	16
AO	3912.5	S	404096	7028910	5.0	18.6	50.4	163.0	5.9	20.2	---	---	10

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30320		FLIGHT 2										
AP	3928.8	L	404116	7029515	3.2	3.8	48.0	2.8	6.6	3.3	---	---	0
AQ	3935.5	S	404125	7029788	0.3	5.2	52.3	101.8	3.6	20.6	---	---	27
AR	3955.7	L	404079	7030560	7.4	2.9	0.0	0.0	2.1	8.3	---	---	0
AS	3962.9	L	404114	7030775	22.7	9.8	26.0	63.6	27.9	11.1	---	---	87
AT	3965.0	L	404138	7030822	1.9	9.8	26.0	63.6	27.9	26.9	---	---	83
AU	3970.7	S?	404186	7030943	1.9	8.4	19.2	79.8	9.0	20.0	-0.2	4	1
AV	3989.3	L	404157	7031408	37.4	25.5	89.0	134.7	21.4	31.0	---	---	20
AW	4016.0	B?	404183	7032123	8.5	10.6	46.9	55.2	6.3	16.0	0.9	18	3
AX	4022.4	D	404190	7032280	14.6	20.8	53.7	74.2	5.9	20.1	---	---	12
AY	4031.0	D	404195	7032514	26.5	25.4	77.9	76.9	8.1	20.5	---	---	22
AZ	4033.5	D	404196	7032589	22.2	33.9	77.9	76.9	5.7	20.5	---	---	0
BA	4039.1	D	404196	7032766	34.4	35.1	128.5	121.5	8.7	35.1	---	---	0
BB	4042.0	D	404196	7032859	22.9	23.9	128.5	121.5	15.0	42.3	---	---	11
BC	4044.6	B	404199	7032942	33.4	14.1	156.9	180.4	15.0	42.0	---	---	4
BD	4046.5	D	404202	7033001	33.4	39.8	156.9	180.4	15.0	42.0	---	---	12
BE	4050.3	B	404209	7033122	17.4	11.4	125.0	160.3	4.3	36.4	---	---	10
BF	4054.0	B?	404216	7033236	4.9	29.9	29.7	94.9	5.5	16.3	---	---	1
BG	4109.6	H	404288	7034502	2.2	14.3	30.0	101.4	2.8	15.6	---	---	8
LINE	30330		FLIGHT 2										
A	3172.0	B	404188	7018133	7.6	5.0	67.7	42.1	12.0	24.4	1.9	29	0
B	3167.2	B	404197	7018304	4.7	11.6	67.7	61.5	4.2	14.6	---	---	7
C	3158.9	B	404227	7018610	13.5	9.9	47.0	42.0	7.4	13.4	---	---	0
D	3145.7	B	404235	7019027	20.4	22.1	107.4	213.3	2.9	37.6	---	---	3
E	3132.0	D	404258	7019212	4.9	15.2	62.7	68.2	4.4	17.4	---	---	0
F	3124.1	D	404261	7019275	3.8	6.2	25.8	2.0	1.4	9.4	---	---	0
G	3114.5	B	404256	7019366	4.7	7.9	15.9	40.3	0.2	6.7	---	---	0
H	3106.2	D	404262	7019510	6.4	10.7	31.9	40.7	7.9	6.7	---	---	0
I	3096.0	H	404280	7019798	3.4	12.5	62.5	53.7	9.5	20.5	---	---	0
J	3068.5	B	404285	7020607	2.0	14.2	12.0	98.1	0.2	11.2	---	---	3
K	3045.9	B	404307	7021078	20.8	18.6	97.9	46.2	24.4	33.5	---	---	0
L	3025.9	B	404313	7021412	13.3	40.1	173.2	247.8	20.6	56.3	---	---	0
M	2971.0	B	404324	7021935	6.0	6.0	5.7	16.9	1.4	2.5	---	---	0
N	2954.3	B	404329	7022075	7.0	7.4	55.7	67.7	3.3	17.0	---	---	0
O	2920.9	S	404344	7022368	1.8	10.9	22.0	83.4	2.1	8.3	---	---	0
P	2848.8	B	404340	7023033	9.9	36.8	72.3	97.0	7.3	21.3	---	---	0
Q	2836.0	B	404339	7023106	4.6	3.0	0.5	1.0	3.0	0.0	---	---	0
R	2819.4	B	404343	7023213	17.1	11.0	32.7	85.3	1.3	12.9	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30330		FLIGHT 2										
S	2752.1	H	404369	7024196	6.0	9.3	41.4	70.1	3.4	13.9	---	---	0
T	2732.0	B	404389	7024828	3.2	6.9	37.8	27.5	5.2	11.7	0.4	14	1
U	2727.1	B	404395	7024993	3.1	4.0	51.2	33.2	5.0	14.2	---	---	0
V	2724.3	B	404397	7025086	8.9	12.6	51.2	33.2	5.0	14.2	---	---	0
W	2712.3	B	404400	7025478	23.1	21.9	108.1	83.1	7.1	26.5	---	---	0
X	2705.1	H	404409	7025709	0.5	4.1	108.1	66.9	5.0	18.1	---	---	0
Y	2689.9	B?	404420	7026192	10.5	19.0	56.2	82.1	6.2	20.7	---	---	0
Z	2677.7	B	404430	7026589	7.9	12.4	83.5	91.5	9.5	32.1	---	---	0
AA	2652.5	B	404455	7027372	3.5	6.7	70.1	37.8	17.6	34.8	---	---	1475
AB	2640.5	L	404424	7027644	1.8	6.8	78.7	72.1	21.8	47.2	---	---	0
AC	2632.9	L	404430	7027785	6.0	3.7	50.3	138.7	27.4	39.2	---	---	0
AD	2621.0	S	404460	7028055	6.0	20.1	25.0	112.8	24.7	24.6	0.3	2	11
AE	2598.0	B?	404501	7028813	9.5	9.0	41.5	43.8	1.4	10.5	1.3	12	0
AF	2579.4	L	404521	7029452	28.3	12.7	160.0	103.8	39.5	56.7	---	---	0
AG	2574.4	L	404525	7029619	12.6	14.6	160.0	17.3	39.5	10.8	---	---	82
AH	2566.6	S	404529	7029869	0.9	7.8	2.2	67.3	3.4	8.4	---	---	25
AI	2538.6	L	404471	7030616	15.7	3.1	33.5	34.9	17.5	7.8	---	---	9
AJ	2508.5	S?	404576	7031473	3.4	10.6	9.1	41.9	3.1	7.4	---	---	2
AK	2493.0	L	404580	7031924	29.8	23.5	141.9	129.6	24.0	42.8	---	---	8
AL	2480.6	D?	404592	7032232	8.6	8.1	14.0	39.1	5.9	8.7	---	---	0
AM	2469.5	B	404594	7032439	8.6	9.4	34.7	48.8	1.6	10.1	---	---	10
AN	2462.0	B	404589	7032562	21.1	43.5	24.3	146.3	0.7	12.3	---	---	0
AO	2451.3	B	404604	7032777	29.2	14.3	157.2	100.7	18.1	45.1	---	---	9
AP	2443.9	D	404602	7032957	32.2	52.1	179.1	272.0	24.6	59.7	---	---	2
AQ	2441.9	D	404602	7033006	21.5	39.7	179.1	272.0	24.6	59.7	---	---	9
AR	2437.7	B	404605	7033110	17.2	42.7	138.9	230.6	5.1	36.7	---	---	0
AS	2420.5	S?	404626	7033471	2.7	12.4	22.0	71.7	0.7	11.8	---	---	0
AT	2407.9	S	404627	7033682	5.4	13.3	38.2	202.2	2.9	28.7	---	---	1
AU	2385.5	S	404646	7034085	2.9	9.7	14.9	39.7	1.0	5.8	---	---	0
AV	2354.9	S?	404661	7034779	5.9	16.4	76.6	109.4	6.5	27.3	---	---	0
LINE	30340		FLIGHT 2										
A	1230.5	B	404572	7018210	12.4	11.0	48.9	55.4	10.9	18.8	---	---	0
B	1253.5	B	404612	7018874	4.5	15.6	33.1	120.7	2.7	12.4	---	---	0
C	1257.8	B	404614	7018968	7.3	11.0	33.1	93.7	0.5	12.4	---	---	0
D	1265.8	D	404618	7019102	14.6	32.9	57.6	141.9	0.3	25.1	---	---	0
E	1282.7	B	404622	7019309	14.2	34.9	56.2	214.9	0.9	31.7	---	---	0
F	1291.1	B	404628	7019408	13.8	40.4	67.4	246.1	4.1	36.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30340		FLIGHT 2										
G	1301.2	B	404638	7019549	4.5	16.0	50.6	133.6	3.6	21.2	---	---	0
H	1311.4	D	404637	7019789	13.0	1.3	50.6	24.0	3.4	21.0	---	---	0
I	1358.5	D	404666	7020836	9.2	38.9	92.2	183.9	9.6	36.6	---	---	1
J	1370.2	D	404679	7020939	36.1	56.6	179.0	163.9	13.3	51.8	---	---	0
K	1380.1	D	404695	7021038	32.0	38.9	182.2	123.4	37.8	56.0	---	---	0
L	1433.9	B?	404687	7021595	3.4	4.3	27.9	49.5	4.7	12.0	---	---	0
M	1484.4	D	404693	7021876	5.6	7.3	24.4	56.3	0.8	8.6	---	---	0
N	1507.3	B?	404692	7022057	2.8	7.8	15.7	26.6	2.1	4.7	---	---	0
O	1543.6	B?	404721	7022315	4.2	8.6	4.6	8.0	2.7	1.1	---	---	0
P	1586.1	S?	404776	7022633	1.3	4.5	6.7	31.8	1.3	3.4	---	---	0
Q	1640.3	B?	404734	7022947	0.5	7.8	6.3	39.3	2.7	3.7	---	---	0
R	1668.1	B	404730	7023278	10.7	11.3	34.9	62.9	3.7	9.2	---	---	0
S	1682.3	B?	404742	7023447	2.7	7.6	13.2	44.2	0.4	5.9	---	---	0
T	1730.0	B	404786	7024981	3.0	4.7	45.7	41.4	8.1	15.3	---	---	0
U	1743.8	S?	404802	7025588	18.5	43.4	127.7	239.4	7.6	43.3	---	---	0
V	1752.6	S?	404820	7025952	6.4	11.1	114.5	100.0	6.8	27.5	---	---	0
W	1772.6	B?	404835	7026712	8.1	11.7	87.5	42.7	15.3	30.9	---	---	0
X	1792.7	B	404867	7027451	66.9	30.0	309.2	113.8	75.4	147.6	---	---	2246
Y	1798.5	L	404886	7027655	20.9	28.5	309.2	57.7	61.9	147.6	---	---	0
Z	1808.9	L	404914	7027968	0.2	4.1	93.9	63.4	35.5	35.8	-0.1	0	0
AA	1817.5	L	404919	7028194	5.5	15.3	115.8	132.0	25.8	38.5	---	---	0
AB	1843.0	B	404920	7028980	13.7	19.2	71.5	144.3	5.6	27.6	---	---	0
AC	2131.5	L	405006	7032573	14.4	17.5	98.3	121.5	20.8	34.5	1.1	0	1
AD	2135.5	B?	405012	7032679	8.0	7.1	96.3	98.9	6.2	1.5	---	---	12
AE	2143.5	D?	405005	7032855	67.4	41.3	169.3	140.7	45.4	66.5	---	---	0
AF	2148.2	B?	405000	7032950	18.7	7.6	169.3	140.7	45.4	66.5	---	---	0
AG	2162.1	B	405012	7033257	7.0	14.4	45.2	60.2	3.2	13.2	---	---	2
AH	2184.9	L	405045	7033929	14.4	7.2	48.1	54.6	13.2	13.0	---	---	13
AI	2209.8	H	405086	7034786	2.3	11.5	6.9	46.4	1.0	8.0	---	---	0
LINE	30350		FLIGHT 2										
A	1068.0	B	404972	7018416	5.7	3.8	14.7	14.7	9.7	6.8	1.7	35	10
B	1061.0	B	404989	7018740	7.4	7.5	10.5	15.3	1.8	0.5	1.1	14	0
C	1045.5	B?	405041	7019427	8.5	7.9	42.1	49.1	7.4	13.5	---	---	0
D	1037.1	B?	405039	7019662	10.1	19.1	34.4	99.1	3.3	13.9	---	---	1
E	1026.2	B?	405057	7019958	5.9	10.3	16.2	32.4	1.3	6.1	---	---	0
F	1018.8	B?	405079	7020173	9.1	35.1	58.3	117.4	2.1	19.1	---	---	0
G	1014.0	B	405075	7020303	5.8	27.2	58.3	119.8	1.9	18.7	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30350		FLIGHT 2										
H	1001.4	B?	405089	7020553	3.2	15.2	27.0	119.3	3.6	12.6	---	---	0
I	991.5	B?	405082	7020664	5.1	38.2	58.4	234.9	0.1	30.4	---	---	3
J	956.0	B	405067	7020964	9.6	9.2	59.2	124.7	11.4	18.7	---	---	0
K	932.4	B	405062	7021088	5.3	6.2	59.0	74.4	8.1	11.5	---	---	0
L	851.4	B?	405094	7022020	10.9	12.2	63.5	114.9	8.2	19.0	---	---	0
M	842.6	B?	405102	7022075	1.9	6.4	15.0	25.7	3.6	4.1	---	---	0
N	827.4	B?	405103	7022178	4.3	14.1	21.6	32.4	3.1	8.5	---	---	0
O	778.6	B	405142	7022918	8.8	37.7	57.8	191.5	0.1	26.3	---	---	2
P	759.0	B	405160	7023289	43.9	32.8	190.5	152.4	14.1	54.4	---	---	0
Q	695.7	H	405211	7025195	7.0	7.0	116.3	98.3	9.8	33.8	---	---	0
R	662.3	B	405249	7026374	10.1	16.0	71.0	114.4	6.3	21.1	---	---	0
S	658.7	B	405252	7026494	7.9	11.9	69.7	133.5	10.6	20.9	---	---	0
T	644.0	B	405246	7026986	4.9	11.0	101.9	61.1	16.8	48.5	0.4	8	0
U	621.6	B?	405254	7027735	24.8	25.2	106.3	82.8	6.1	42.2	---	---	0
V	611.1	L	405264	7028035	7.2	3.1	71.9	196.5	16.8	14.0	3.1	0	10
W	605.5	L	405281	7028188	2.4	14.8	102.2	151.5	17.9	23.1	---	---	0
X	601.7	L	405291	7028304	10.6	18.4	44.3	66.9	8.8	34.1	---	---	0
Y	600.5	L	405294	7028344	10.6	18.4	44.3	66.9	13.9	34.1	---	---	0
Z	580.1	S	405279	7029049	1.3	8.7	53.8	135.9	2.9	20.2	---	---	0
AA	568.3	S	405353	7029459	1.2	2.5	2.3	4.1	4.1	6.3	---	---	0
AB	554.4	L	405388	7029949	3.2	1.7	4.8	4.7	19.1	21.3	---	---	0
AC	544.8	L	405322	7030287	22.3	4.1	38.0	25.5	79.0	48.1	15.7	0	0
AD	538.9	L	405332	7030504	21.7	2.0	12.2	14.9	32.9	36.9	-41.8	8	5
AE	529.8	L	405334	7030844	8.2	1.5	9.8	2.7	37.1	34.2	-11.3	30	15
AF	472.4	S	405404	7033121	3.2	6.6	27.1	48.6	8.6	16.5	---	---	1
AG	453.7	S	405437	7033887	2.1	5.5	42.6	76.0	4.1	16.6	---	---	4
LINE	30360		FLIGHT 5										
A	5051.8	D	405414	7017951	10.7	18.1	25.5	115.5	17.7	9.7	---	---	0
B	5037.7	B	405424	7018508	13.0	27.9	97.6	189.9	17.4	37.7	---	---	2
C	5030.2	D	405420	7018792	37.0	71.2	90.5	299.2	0.0	34.0	---	---	0
D	5026.3	B	405412	7018935	0.0	34.4	85.1	528.1	0.1	66.4	---	---	0
E	5023.7	D	405409	7019024	20.5	113.3	112.3	393.0	7.1	52.4	---	---	0
F	5021.2	D	405409	7019098	23.8	56.3	112.3	393.0	7.1	52.4	---	---	0
G	5010.6	D	405431	7019327	30.3	46.2	13.1	91.2	2.7	8.7	---	---	0
H	5004.3	D	405441	7019429	4.2	9.4	54.6	0.9	7.6	5.2	---	---	2
I	4997.8	D	405439	7019526	15.9	28.2	54.6	175.5	7.6	32.9	---	---	0
J	4960.4	B	405459	7019851	8.1	19.1	62.1	101.2	5.5	20.9	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30360		FLIGHT	5									
K	4950.2	B	405462	7020007	14.9	15.5	63.5	92.7	1.8	21.7	---	---	0
L	4909.0	B?	405474	7020406	4.8	13.4	26.8	131.9	2.7	17.3	---	---	0
M	4897.6	S?	405485	7020506	3.7	23.2	39.6	223.4	1.0	24.8	---	---	0
N	4881.3	B?	405495	7020597	2.6	10.7	10.4	59.0	1.8	7.9	---	---	0
O	4824.3	B	405483	7020943	3.7	11.4	30.5	84.4	7.0	8.1	---	---	0
P	4807.5	B	405476	7021134	10.9	13.3	61.3	102.6	7.3	13.2	---	---	0
Q	4708.0	D	405508	7022044	8.0	11.7	34.5	33.0	5.0	12.3	---	---	0
R	4677.5	B?	405523	7022232	8.1	13.2	48.4	96.2	4.2	18.8	---	---	0
S	4651.3	B	405541	7022468	7.9	16.9	77.6	168.9	10.2	21.2	---	---	1
T	4600.6	B?	405532	7022789	4.1	7.5	48.1	72.8	2.1	16.3	---	---	0
U	4577.6	B?	405545	7022948	8.9	17.3	134.1	154.4	12.9	41.4	---	---	0
V	4546.7	B?	405547	7023246	5.5	8.7	43.6	84.3	3.2	16.7	---	---	0
W	4529.9	B?	405557	7023467	2.2	4.5	1.2	28.2	1.2	2.6	---	---	5
X	4503.2	B	405566	7023676	20.4	33.4	219.0	383.6	14.4	69.9	---	---	0
Y	4460.7	H	405595	7024520	8.4	9.7	72.9	92.4	6.8	25.9	---	---	33
Z	4458.2	B?	405598	7024622	6.3	4.7	72.9	92.4	6.8	25.9	---	---	0
AA	4447.6	B?	405612	7025071	19.5	34.8	97.1	223.6	4.0	35.4	---	---	7
AB	4442.2	H	405620	7025302	9.2	8.8	178.6	207.1	17.2	57.3	---	---	0
AC	4437.3	B?	405618	7025509	35.0	42.4	178.6	207.1	17.2	57.3	---	---	1
AD	4428.9	S	405615	7025869	3.7	15.2	4.4	70.5	0.1	8.9	---	---	0
AE	4405.8	H	405652	7026839	25.9	17.8	206.0	163.0	26.8	59.7	---	---	0
AF	4400.3	B?	405658	7027069	24.5	20.1	146.8	93.7	51.9	45.7	---	---	0
AG	4392.2	B	405667	7027397	42.7	43.3	193.8	179.7	51.9	65.6	---	---	560
AH	4390.7	M	405668	7027455	42.7	43.3	193.8	179.7	56.7	65.6	---	---	560
AI	4388.1	D	405671	7027558	14.4	14.9	258.4	344.2	56.7	77.4	---	---	0
AJ	4385.6	D	405674	7027657	90.8	64.8	434.0	362.1	156.7	173.7	---	---	0
AK	4381.5	D	405676	7027812	137.7	76.1	434.0	381.0	156.7	173.7	---	---	2313
AL	4372.4	L	405702	7028115	17.3	13.6	161.1	148.2	17.5	61.2	---	---	0
AM	4369.1	L	405712	7028206	5.1	7.2	51.5	77.5	20.9	25.2	---	---	0
AN	4360.1	L	405709	7028438	2.6	2.3	79.4	54.0	56.2	39.4	-0.9	15	11
AO	4356.0	L	405705	7028557	2.5	2.1	60.7	49.4	56.2	64.2	-0.9	18	0
AP	4352.5	L	405705	7028671	9.0	9.1	41.8	6.0	28.0	6.1	1.2	1	0
AQ	4321.3	L	405780	7029611	1.8	8.1	18.2	93.1	23.1	36.4	---	---	0
AR	4295.9	L	405627	7029945	8.0	2.6	14.2	3.9	24.7	62.0	---	---	0
AS	4288.1	L	405655	7030143	23.0	10.2	69.9	34.7	79.1	76.9	---	---	0
AT	4283.6	L	405657	7030275	4.2	3.6	35.9	10.7	170.7	135.1	1.1	30	11
AU	4275.9	L	405674	7030517	0.0	2.4	2.7	5.9	80.2	126.3	-0.1	7	0
AV	4267.7	L	405731	7030781	1.0	0.9	29.8	11.6	86.1	97.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30360		FLIGHT 5										
AW	4263.6	L	405754	7030915	9.3	2.3	25.3	13.4	125.2	79.6	-7.5	21	12
AX	4254.2	L	405787	7031236	16.5	1.7	30.2	17.1	77.7	164.6	-32.1	7	4
AY	4252.2	L	405791	7031306	16.5	2.5	27.0	17.1	44.2	164.6	-18.9	5	4
AZ	4247.3	L	405804	7031475	0.4	2.0	27.0	13.9	60.5	68.7	-0.1	0	4
BA	4245.4	L	405804	7031540	5.8	4.9	27.0	11.4	108.4	68.7	1.3	9	0
BB	4184.5	H	405851	7034065	5.3	14.7	52.2	76.5	7.3	17.8	---	---	17
BC	4160.0	H	405888	7035186	1.7	4.3	88.3	6.2	18.0	21.5	---	---	0
LINE	30370		FLIGHT 5										
A	5207.3	B?	405772	7017939	26.2	30.7	148.5	168.6	29.4	63.5	---	---	0
B	5212.7	B	405776	7018090	7.6	0.3	44.8	46.2	17.8	19.8	---	---	4
C	5216.9	B	405788	7018202	4.6	14.6	30.0	48.3	6.3	15.8	---	---	0
D	5226.6	D	405799	7018482	21.1	21.6	50.7	130.1	6.9	25.0	---	---	3
E	5230.4	B?	405801	7018605	5.0	23.6	57.6	138.4	6.0	26.7	---	---	0
F	5237.5	B?	405813	7018839	7.8	0.8	0.0	5.7	1.7	0.0	---	---	5
G	5248.3	D	405839	7019148	11.9	39.5	51.2	177.3	5.4	26.5	---	---	0
H	5252.0	D	405846	7019243	12.9	25.0	51.2	177.3	5.2	26.5	---	---	1
I	5267.2	B	405837	7019484	5.4	13.9	43.2	79.2	2.8	16.1	---	---	0
J	5283.5	D	405849	7019612	10.6	50.3	54.4	220.0	0.1	32.0	---	---	1
K	5298.3	B	405841	7019706	52.9	103.2	222.2	537.7	13.5	92.2	---	---	0
L	5312.8	B	405849	7019807	39.8	94.8	73.7	409.0	3.1	51.6	---	---	0
M	5331.4	D	405855	7019928	25.2	40.2	74.2	181.9	7.0	31.0	---	---	1
N	5349.9	B	405862	7020065	5.0	5.6	30.1	52.8	1.4	12.1	---	---	0
O	5367.4	B	405866	7020165	4.4	7.9	20.0	47.8	1.8	8.7	---	---	0
P	5424.9	S?	405880	7020510	3.3	13.6	21.5	79.3	1.0	13.5	---	---	0
Q	5463.5	B	405912	7020939	16.9	6.8	74.5	38.8	13.2	23.1	---	---	0
R	5471.7	B	405922	7021041	19.2	30.9	182.3	198.4	17.6	57.9	---	---	0
S	5525.3	B?	405901	7021391	8.1	8.8	54.3	21.6	3.2	9.4	---	---	0
T	5549.6	B?	405909	7021663	9.4	15.7	91.8	70.5	9.6	24.4	---	---	0
U	5560.0	B?	405912	7021750	8.2	10.0	37.8	36.2	4.9	12.0	---	---	0
V	5569.3	B?	405925	7021806	4.0	4.8	22.6	42.9	4.7	8.2	---	---	0
W	5580.3	B?	405925	7021879	2.0	0.3	4.9	0.2	3.2	0.1	---	---	0
X	5613.5	B?	405909	7022081	3.4	19.8	10.4	128.2	1.9	16.6	---	---	2
Y	5629.5	B	405913	7022251	7.5	21.7	66.2	162.0	9.2	24.2	---	---	0
Z	5640.1	B	405911	7022412	8.2	9.2	98.8	143.3	7.1	31.2	---	---	0
AA	5737.3	B	405977	7023788	14.9	22.2	71.5	124.5	5.8	27.1	---	---	0
AB	5753.4	B	405964	7024109	5.0	18.7	50.6	267.0	0.7	38.2	---	---	0
AC	5764.9	B	405979	7024468	3.5	4.5	45.3	272.8	5.4	11.9	---	---	21

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30370		FLIGHT 5										
AD	5776.6	S?	406015	7024951	14.2	43.2	51.7	154.5	2.2	21.0	---	---	0
AE	5783.8	B?	406018	7025275	3.4	11.3	139.6	164.1	12.7	41.7	---	---	0
AF	5788.0	B?	406018	7025465	27.1	30.7	139.6	164.1	15.6	41.7	---	---	0
AG	5798.8	B?	406026	7025951	10.4	14.4	107.6	92.0	11.3	32.4	---	---	1
AH	5815.6	H	406051	7026708	17.3	11.3	122.9	98.0	16.9	33.3	---	---	1
AI	5824.6	H	406066	7027101	10.2	10.3	82.5	92.0	17.8	27.9	---	---	0
AJ	5833.8	H	406065	7027492	13.2	16.5	82.0	159.1	8.3	21.2	---	---	0
AK	5841.0	B	406065	7027793	16.9	12.4	124.1	59.9	44.9	44.1	2.1	11	0
AL	5848.2	B?	406074	7028090	4.7	5.1	35.0	22.6	1.8	7.7	---	---	936
AM	5867.2	L	406088	7028778	0.6	2.6	47.5	35.0	20.5	44.5	---	---	0
AN	5870.1	L	406083	7028866	3.2	3.7	49.8	35.0	12.1	44.5	---	---	0
AO	5873.6	L	406081	7028968	0.8	0.0	102.0	64.8	37.9	23.0	-396.6	100	0
AP	5882.4	L	406083	7029218	3.1	12.0	83.5	111.7	24.0	34.7	0.2	0	0
AQ	5897.1	L	406093	7029686	0.5	1.0	1.5	19.5	25.7	28.2	-0.3	69	7
AR	5908.2	L	406160	7030011	14.2	5.9	75.6	15.8	93.4	160.6	4.2	10	0
AS	5914.1	L	406169	7030177	17.6	21.7	123.9	134.5	99.2	85.9	---	---	2
AT	5918.1	L	406145	7030291	51.1	31.5	124.4	164.6	162.7	67.1	---	---	2
AU	5925.5	L	406116	7030511	48.4	53.8	220.8	204.7	68.7	68.0	---	---	0
AV	5935.7	L	406141	7030818	23.6	37.3	142.1	217.8	51.9	77.4	---	---	0
AW	5938.5	B?	406153	7030898	21.4	19.6	142.1	217.8	51.9	77.4	1.8	15	17
AX	5948.0	B?	406173	7031154	22.1	8.5	55.5	74.9	26.2	17.9	---	---	0
AY	5972.4	B?	406190	7031865	11.8	14.3	44.0	96.1	24.2	36.5	1.1	16	0
AZ	5975.5	S?	406187	7031960	6.8	14.8	44.0	96.1	66.3	73.5	0.5	13	0
BA	6002.3	L	406199	7032768	1.7	1.9	12.3	12.9	237.8	168.4	-0.6	48	0
BB	6012.2	L	406179	7033069	1.1	5.2	32.8	60.5	148.5	109.8	---	---	3
BC	6018.1	L	406198	7033245	13.0	20.5	46.1	122.4	68.8	147.0	0.8	14	0
BD	6027.0	B?	406231	7033518	41.6	19.5	162.7	154.4	174.9	114.7	5.1	14	0
BE	6051.9	S	406251	7034308	5.1	15.8	56.4	165.9	33.5	57.9	0.3	7	12
BF	6078.2	S	406259	7035087	8.0	9.9	62.6	45.0	13.3	31.5	---	---	3
BG	6093.0	H	406275	7035507	11.4	14.0	290.7	267.6	30.2	95.6	---	---	2
LINE	30380		FLIGHT 8										
A	1363.9	H	406195	7018005	20.4	38.0	107.8	260.7	3.2	44.6	---	---	0
B	1353.7	B	406230	7018401	12.6	29.0	236.6	337.9	19.5	85.2	---	---	0
C	1349.1	D	406236	7018575	69.4	63.6	236.6	337.9	19.5	85.2	---	---	7
D	1343.8	B	406238	7018749	23.0	29.9	132.6	137.5	19.5	85.2	---	---	3
E	1323.7	B?	406238	7019086	2.1	11.2	7.0	68.1	2.8	2.3	---	---	0
F	1284.4	B?	406230	7019402	4.2	6.6	19.9	45.5	2.8	6.9	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30380		FLIGHT 8										
G	1235.9	B	406190	7019628	19.2	33.8	139.9	180.7	13.3	44.4	---	---	0
H	1222.1	B	406213	7019866	14.4	21.4	48.4	117.6	1.6	19.1	---	---	2
I	1212.6	B	406234	7020044	6.7	21.9	103.5	171.7	5.2	34.3	---	---	5
J	1203.5	B	406249	7020197	16.4	30.1	103.5	171.7	6.8	34.3	---	---	4
K	1192.0	B	406268	7020341	1.6	10.9	43.7	35.7	2.5	10.8	---	---	2
L	1139.5	D	406324	7020665	4.1	6.8	0.6	0.2	3.9	0.0	---	---	0
M	1110.6	B	406325	7021120	55.5	87.0	313.2	379.8	23.9	92.6	---	---	0
N	1068.6	B	406317	7021670	9.4	13.7	146.4	171.3	13.8	46.3	---	---	0
O	1038.4	D	406332	7022032	9.2	14.9	62.4	106.1	6.3	19.5	---	---	0
P	1021.3	B	406323	7022171	5.6	17.2	49.3	0.0	7.2	0.0	---	---	0
Q	1008.8	B	406329	7022272	0.0	31.7	0.0	168.3	1.5	16.1	---	---	0
R	993.9	B	406333	7022334	5.9	32.7	91.7	154.4	7.4	28.5	---	---	0
S	978.3	B	406345	7022403	6.3	3.3	53.4	83.4	3.8	12.1	---	---	0
T	945.0	B	406352	7022685	3.9	3.6	5.5	6.7	4.1	1.0	---	---	1
U	917.2	D	406348	7023054	34.7	42.1	152.4	142.5	7.6	30.9	---	---	0
V	902.8	B	406363	7023224	7.4	11.4	39.4	45.1	5.5	12.9	---	---	6
W	895.9	B	406366	7023307	10.2	15.1	39.4	45.1	2.6	12.9	---	---	0
X	881.2	B	406382	7023484	8.2	15.9	83.8	126.6	3.8	27.5	---	---	0
Y	876.8	B	406387	7023545	12.3	15.4	83.8	126.6	3.2	27.5	---	---	28
Z	864.4	D	406390	7023741	15.3	18.7	20.4	93.3	9.5	14.1	---	---	0
AA	852.0	D	406393	7023972	13.4	6.3	77.9	27.6	13.2	24.7	3.4	34	0
AB	825.1	S	406402	7024748	8.8	18.2	70.2	106.3	6.1	20.4	---	---	0
AC	817.0	B?	406412	7025071	21.5	32.8	107.5	189.7	3.7	33.0	---	---	1
AD	812.8	B?	406411	7025242	10.1	18.3	106.8	189.7	2.7	33.0	---	---	0
AE	801.5	B?	406415	7025700	6.8	14.8	169.0	101.9	19.0	40.9	---	---	0
AF	797.9	B?	406422	7025849	12.3	12.7	169.0	147.7	19.0	50.5	---	---	5
AG	782.5	B	406455	7026471	13.7	37.8	82.2	209.2	2.1	22.1	---	---	38
AH	780.2	B	406459	7026563	16.1	34.9	82.2	209.2	2.1	22.1	---	---	38
AI	778.5	B	406461	7026633	16.1	34.9	82.2	224.1	2.1	22.1	---	---	8
AJ	760.7	H	406487	7027365	11.4	23.0	132.0	202.8	12.8	39.7	---	---	0
AK	753.9	B	406495	7027660	17.5	12.9	80.4	61.4	12.8	30.9	---	---	0
AL	745.0	B	406500	7028041	13.0	7.4	74.5	47.2	18.4	26.0	2.7	29	1104
AM	711.0	L	406562	7029227	0.8	7.3	53.5	75.2	27.8	21.4	-0.1	0	0
AN	705.5	L	406577	7029357	8.7	6.7	119.1	100.1	81.7	102.4	---	---	0
AO	688.5	L	406564	7029644	13.2	12.7	58.2	26.0	120.9	79.4	---	---	0
AP	678.9	L	406553	7029802	16.5	11.1	52.0	39.9	156.6	114.8	2.3	3	7
AQ	651.7	L	406568	7030390	21.8	24.9	242.3	87.0	16.9	36.4	---	---	0
AR	646.6	L	406565	7030526	15.2	24.8	157.2	58.9	25.7	69.1	---	---	15

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30380		FLIGHT 8										
AS	640.9	B	406555	7030687	39.6	13.4	157.2	1.0	53.3	69.1	---	---	0
AT	634.7	B?	406558	7030846	54.8	72.1	439.3	603.1	83.7	170.6	---	---	0
AU	632.2	B?	406565	7030901	71.1	111.5	502.5	603.1	83.7	170.6	---	---	0
AV	617.4	B?	406580	7031157	3.2	16.7	3.2	14.6	16.7	3.7	0.2	8	41
AW	601.5	D?	406589	7031331	86.7	117.1	264.9	302.5	41.6	90.1	---	---	0
AX	590.9	D?	406584	7031470	23.6	29.9	70.7	116.0	47.8	33.1	---	---	0
AY	560.9	S?	406600	7031804	7.6	25.4	53.5	234.3	8.1	42.4	---	---	0
AZ	531.5	S?	406597	7032156	8.3	23.4	83.5	173.9	9.9	35.4	---	---	0
BA	525.5	S?	406607	7032261	7.2	21.4	83.5	173.9	13.0	32.8	---	---	0
BB	510.2	S	406618	7032581	4.3	14.0	26.3	105.6	17.2	30.8	0.3	12	5
BC	488.6	B?	406643	7033337	8.5	38.3	80.6	192.4	33.9	51.2	0.3	0	0
BD	485.0	D?	406643	7033458	17.9	51.2	80.6	192.4	27.2	38.9	0.6	0	17
BE	475.3	B?	406653	7033732	57.4	91.4	244.0	312.4	41.5	69.2	---	---	0
BF	454.6	L	406681	7034174	6.8	28.6	25.8	84.6	64.1	56.7	---	---	0
BG	425.6	L	406712	7034659	53.6	32.1	77.2	35.1	203.0	204.2	---	---	0
LINE	30390		FLIGHT 8										
A	1528.5	B	406603	7018476	59.3	59.1	291.4	280.4	14.5	78.4	---	---	3
B	1539.1	B	406622	7018676	11.7	15.5	38.6	76.5	3.6	14.1	---	---	1
C	1558.2	B	406633	7018888	1.5	17.9	33.4	136.6	1.6	19.4	---	---	0
D	1564.2	B?	406636	7018944	6.3	31.4	30.1	170.7	0.1	22.5	---	---	0
E	1571.6	B?	406644	7018993	4.9	12.6	30.1	169.2	1.4	22.6	---	---	0
F	1596.8	B?	406651	7019173	2.3	9.6	16.5	39.0	2.2	6.2	---	---	0
G	1642.4	B	406659	7019555	13.6	15.9	112.8	54.1	9.4	34.2	---	---	0
H	1652.3	B	406631	7019721	16.4	30.1	112.8	128.0	5.0	33.3	---	---	0
I	1662.2	B	406652	7019901	17.7	26.1	47.9	76.8	5.6	18.7	---	---	0
J	1683.6	B	406661	7020347	57.1	73.4	209.2	263.7	9.2	60.2	---	---	0
K	1687.8	B	406659	7020433	37.7	41.3	209.2	252.9	9.9	60.2	---	---	0
L	1745.2	B?	406697	7020836	3.3	7.9	25.6	42.2	1.1	8.3	---	---	0
M	1754.1	B?	406700	7020888	4.5	7.7	23.3	42.2	3.2	7.2	---	---	0
N	1771.3	B?	406700	7021007	6.7	13.1	32.8	57.1	3.3	13.0	---	---	0
O	1891.5	S?	406729	7021513	0.5	10.7	36.0	1.5	4.6	4.8	---	---	0
P	1909.8	B	406682	7021707	11.8	29.6	156.7	212.7	20.3	58.0	---	---	1
Q	1927.6	B	406691	7021784	11.5	41.5	86.0	158.3	7.6	33.0	---	---	0
R	1976.6	B	406733	7022059	26.6	56.6	110.7	255.2	13.8	45.8	---	---	0
S	2027.4	B	406732	7022304	15.2	25.2	77.7	240.3	5.5	36.2	---	---	0
T	2066.0	B	406744	7022508	19.8	49.5	197.2	282.4	19.9	69.1	---	---	0
U	2075.1	B	406753	7022596	43.8	79.2	100.2	139.0	7.9	32.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30390		FLIGHT 8										
V	2088.0	B	406752	7022763	43.0	32.4	285.0	211.4	40.3	83.4	---	---	0
W	2099.7	B	406753	7022953	13.8	20.0	135.1	179.3	19.2	49.5	---	---	18
X	2134.9	B?	406766	7023666	7.3	16.6	76.5	98.6	6.2	26.0	---	---	0
Y	2164.8	D	406784	7023946	7.4	24.3	20.1	59.6	1.0	8.4	---	---	0
Z	2183.6	D	406784	7024308	17.7	32.7	75.9	183.7	7.2	32.1	---	---	16
AA	2205.2	S?	406819	7025228	7.2	27.7	41.0	127.7	7.0	16.7	---	---	1
AB	2214.3	D	406812	7025611	22.5	22.7	92.0	78.6	16.0	24.2	---	---	0
AC	2220.4	D	406821	7025861	21.3	28.4	340.6	151.7	39.6	105.3	---	---	0
AD	2225.9	B	406830	7026074	69.4	74.4	340.6	316.1	39.8	105.3	---	---	0
AE	2230.7	B	406829	7026246	20.5	13.5	340.6	316.1	39.8	105.3	---	---	0
AF	2257.8	B	406849	7027105	30.0	37.2	148.0	150.8	22.9	51.1	---	---	0
AG	2270.0	B	406874	7027478	18.0	32.5	183.4	258.3	22.8	64.9	0.8	8	0
AH	2276.0	B	406870	7027684	11.6	19.5	168.0	170.8	25.3	64.9	---	---	0
AI	2286.9	B	406877	7028086	19.3	11.6	210.8	46.5	33.6	64.0	---	---	0
AJ	2321.0	L	406938	7029371	19.7	7.6	40.1	26.8	43.6	23.1	5.1	10	0
AK	2329.2	L	406954	7029572	1.2	3.8	27.4	4.8	25.0	30.2	-0.2	12	3
AL	2335.4	L	406956	7029712	4.6	16.0	61.0	176.4	17.9	27.2	---	---	17
AM	2344.3	L	406960	7029894	5.9	23.5	37.5	107.2	5.6	27.1	0.3	3	22
AN	2364.1	L	406966	7030149	1.8	4.3	148.0	53.4	24.9	28.7	---	---	2
AO	2382.2	L	406948	7030377	6.4	14.3	67.7	136.8	52.4	69.9	---	---	0
AP	2396.0	B?	406961	7030755	191.8	114.5	921.2	593.5	212.3	330.8	6.1	0	0
AQ	2400.4	B?	406962	7030895	179.6	113.3	921.2	1229.6	212.3	330.8	---	---	0
AR	2403.9	B	406967	7031004	228.7	232.0	1187.5	1229.6	184.9	439.1	---	---	37
AS	2407.0	B	406974	7031097	191.6	170.6	1329.6	964.2	184.9	439.1	---	---	39
AT	2410.3	B	406980	7031192	101.8	115.2	1329.6	964.2	184.9	439.1	---	---	50
AU	2415.8	B	406987	7031349	115.8	56.2	743.0	187.2	177.9	269.6	---	---	0
AV	2420.7	B	406990	7031497	222.2	134.9	743.0	509.8	177.9	269.6	---	---	0
AW	2434.5	S	406994	7031904	1.0	9.9	1.1	19.2	5.2	3.3	-0.1	4	0
AX	2451.5	S	407002	7032262	0.0	10.1	11.5	52.5	3.7	10.2	-0.1	36	1
AY	2464.8	S	407007	7032559	2.2	8.0	22.2	82.3	4.3	14.3	-0.2	14	2
AZ	2490.3	B?	407012	7033053	4.7	15.9	18.9	60.7	9.5	13.7	---	---	5
BA	2509.4	B?	407030	7033304	9.6	27.5	94.3	201.3	11.1	29.6	---	---	0
BB	2512.0	B?	407031	7033355	9.9	29.4	94.3	201.3	8.2	29.6	---	---	0
BC	2530.0	S?	407045	7033741	12.5	48.1	79.5	241.2	10.1	51.9	---	---	0
BD	2544.6	D	407060	7033969	20.9	41.3	146.2	70.6	9.1	52.4	---	---	40
BE	2550.5	D	407062	7034072	56.0	76.2	427.0	459.6	20.0	132.9	---	---	0
BF	2556.2	D	407060	7034184	102.1	90.2	427.0	459.6	36.3	132.9	---	---	24
BG	2594.5	B?	407077	7034742	88.5	133.9	299.6	535.5	67.1	122.4	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30390		FLIGHT 8										
BH	2606.7	B?	407086	7034960	152.9	229.0	616.3	1048.2	62.4	206.6	---	---	0
BI	2631.1	L	407100	7035313	27.6	11.7	65.4	75.9	199.5	74.7	5.1	11	0
LINE	30400		FLIGHT 8										
A	3762.3	D	407018	7017914	13.5	33.6	78.7	134.8	5.4	29.3	---	---	0
B	3753.8	D	407004	7018164	28.1	39.6	37.9	388.3	6.1	55.2	---	---	15
C	3745.9	D	407005	7018372	46.0	84.3	93.8	388.3	3.3	55.2	---	---	3
D	3726.3	B?	407036	7018732	4.5	13.9	46.9	98.9	1.1	17.2	---	---	0
E	3704.0	B?	407083	7019068	9.6	14.3	103.2	160.5	7.4	35.2	---	---	0
F	3681.1	B?	407095	7019383	5.2	31.5	45.5	146.7	7.1	11.1	---	---	3
G	3661.1	B	407084	7019609	15.2	39.6	84.9	284.2	2.8	33.4	---	---	0
H	3596.2	B?	407080	7019953	9.5	39.3	101.3	226.4	4.2	34.0	---	---	0
I	3567.0	B	407064	7020133	5.8	11.9	96.1	110.8	6.2	25.7	---	---	0
J	3524.1	B	407096	7020494	3.5	3.5	28.7	34.5	3.7	8.0	---	---	0
K	3497.5	B	407102	7020666	5.9	6.8	38.8	38.3	4.8	12.3	---	---	0
L	3481.8	B?	407061	7020846	19.9	31.7	103.7	150.5	8.6	34.0	---	---	0
M	3439.8	B?	407110	7021324	2.1	5.8	0.7	20.0	0.2	2.1	---	---	0
N	3387.5	B?	407111	7021670	6.1	9.9	49.6	49.4	4.5	15.7	---	---	1
O	3362.7	B?	407134	7022002	1.7	41.8	36.2	269.8	4.5	30.2	---	---	0
P	3358.6	B?	407132	7022042	10.0	43.8	0.0	269.8	0.0	30.2	---	---	4
Q	3340.9	B	407137	7022219	7.6	15.6	56.7	27.6	7.6	16.5	---	---	0
R	3291.5	B	407145	7022617	6.4	16.6	75.3	164.5	4.2	25.3	---	---	0
S	3276.4	B	407156	7022716	4.5	8.2	54.9	72.2	4.6	20.8	---	---	22
T	3245.4	B	407147	7023142	19.7	22.2	204.3	200.7	15.4	61.3	---	---	0
U	3230.7	B	407169	7023414	10.6	13.8	39.3	62.1	2.0	11.1	---	---	0
V	3221.5	D	407164	7023589	14.9	24.0	77.0	109.2	8.6	25.2	---	---	0
W	3213.7	D	407174	7023724	11.5	36.5	77.0	109.2	4.4	25.2	---	---	5
X	3203.6	D	407179	7023875	17.6	25.8	50.0	71.7	1.2	11.7	---	---	0
Y	3159.5	D?	407192	7024231	2.2	5.7	3.4	32.0	0.0	2.7	---	---	0
Z	3121.2	S	407220	7025137	8.6	23.7	78.4	158.5	4.3	28.6	---	---	0
AA	3107.7	H	407237	7025535	8.3	25.8	33.0	112.0	4.7	14.1	---	---	0
AB	3101.9	B	407234	7025717	4.4	2.8	1.3	0.0	4.0	0.5	---	---	2
AC	3090.1	B	407234	7026056	9.9	24.6	215.1	283.3	23.0	71.6	---	---	0
AD	3084.4	B	407243	7026179	14.5	13.1	215.1	205.6	23.0	49.4	---	---	3
AE	3077.9	B	407240	7026293	13.8	20.9	137.5	205.6	8.5	49.4	---	---	0
AF	3059.7	S	407252	7026631	9.0	17.8	68.1	137.7	3.1	20.6	---	---	0
AG	3049.0	B?	407259	7026880	10.3	47.2	58.5	234.1	0.5	27.4	---	---	8
AH	3044.8	B?	407266	7027011	9.9	26.9	58.5	234.1	3.4	27.4	---	---	11

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30400		FLIGHT 8										
AI	3035.6	B	407274	7027335	14.3	22.2	25.2	123.9	10.4	11.1	---	---	1
AJ	3028.5	B	407278	7027589	8.8	13.3	117.3	114.8	13.3	34.9	---	---	0
AK	2989.3	L	407330	7028752	12.1	4.0	55.7	46.2	28.0	26.4	---	---	857
AL	2982.0	L	407297	7028912	7.1	6.0	58.4	53.3	51.4	37.1	---	---	0
AM	2977.8	L	407304	7029002	15.9	0.1	58.4	53.3	9.1	20.1	---	---	0
AN	2970.1	L	407325	7029181	20.7	34.1	110.8	230.4	5.5	23.5	---	---	0
AO	2965.0	L	407336	7029311	22.3	38.3	110.8	230.4	9.5	51.6	---	---	0
AP	2944.4	S	407349	7029960	3.6	20.0	11.3	43.0	4.8	9.0	---	---	53
AQ	2927.4	B?	407368	7030474	72.1	47.5	348.9	221.8	44.9	98.1	---	---	0
AR	2922.8	B?	407375	7030608	41.1	15.3	57.3	221.8	65.8	82.9	---	---	0
AS	2919.0	B?	407382	7030715	112.7	43.8	290.5	187.9	106.0	105.7	---	---	0
AT	2901.6	L	407415	7031147	10.1	5.3	238.2	34.2	68.9	96.0	---	---	34
AU	2892.7	L	407410	7031408	8.1	2.9	43.7	67.8	24.4	41.6	-4.3	0	0
AV	2880.0	L	407397	7031839	10.6	15.4	22.0	61.6	8.2	18.5	0.8	10	0
AW	2851.0	S	407430	7032877	3.9	15.8	22.3	54.3	3.1	10.5	---	---	1
AX	2817.3	S	407493	7033553	3.6	17.5	11.3	60.7	1.9	6.6	---	---	0
AY	2796.9	D	407450	7033939	21.9	41.0	80.8	142.0	7.0	28.5	---	---	15
AZ	2784.5	D	407447	7034186	27.4	57.4	42.5	110.5	7.7	20.7	---	---	0
BA	2779.1	D	407453	7034302	3.3	8.3	70.9	110.5	8.2	28.6	---	---	0
BB	2775.3	D	407464	7034400	11.4	12.3	86.4	110.3	7.8	28.6	---	---	0
BC	2772.3	B	407475	7034481	7.8	16.8	72.7	110.3	2.9	21.7	---	---	53
BD	2756.1	B	407485	7034956	31.3	9.6	250.7	83.2	109.3	106.3	---	---	3
BE	2733.2	L	407522	7035651	14.0	12.2	82.9	94.9	142.1	135.2	1.6	10	23
BF	2730.5	L	407522	7035731	14.0	12.3	57.4	94.9	85.7	62.4	1.6	5	23
LINE	30410		FLIGHT 8										
A	3966.7	B?	407383	7017978	10.6	16.4	14.0	63.0	2.0	10.0	---	---	0
B	3987.0	B	407408	7018148	9.1	27.0	8.1	105.7	4.1	16.3	---	---	0
C	4002.0	B	407420	7018267	10.7	21.2	143.6	180.5	13.4	55.2	---	---	0
D	4036.9	B?	407435	7018513	2.6	0.0	31.6	132.6	2.0	19.3	---	---	0
E	4051.9	B?	407437	7018598	0.6	9.5	10.4	63.7	0.1	8.8	---	---	0
F	4085.6	B?	407450	7018867	0.9	10.1	6.4	28.0	1.7	3.8	---	---	0
G	4104.4	B?	407454	7019071	1.1	6.4	24.7	47.5	1.8	8.5	---	---	0
H	4158.9	S	407466	7019499	2.3	8.0	35.2	101.5	1.3	14.5	---	---	0
I	4219.2	B?	407479	7020073	9.3	34.3	97.0	191.6	2.6	31.2	---	---	0
J	4255.6	B	407495	7020425	16.7	31.3	164.4	257.4	12.0	58.6	---	---	0
K	4261.8	B	407483	7020512	11.3	42.9	80.5	158.7	6.1	27.9	---	---	1
L	4276.0	D	407494	7020678	16.1	18.3	32.3	68.4	2.9	13.4	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30410		FLIGHT 8										
M	4283.9	B	407488	7020743	18.1	44.8	83.6	164.6	3.5	29.3	---	---	0
N	4329.7	B	407483	7020970	10.7	86.5	174.2	405.4	11.4	60.7	---	---	0
O	4415.3	S?	407504	7021415	4.3	22.0	41.4	125.4	2.4	21.1	---	---	0
P	4442.8	S	407507	7021635	4.6	17.6	35.9	82.5	2.3	12.8	---	---	0
Q	4463.2	S?	407522	7021794	3.4	10.8	18.2	58.0	0.4	8.6	---	---	0
R	4485.6	B?	407541	7021955	0.9	25.0	49.2	105.6	2.8	16.9	---	---	0
S	4494.8	B?	407540	7022039	6.2	19.2	75.6	196.2	3.9	30.5	---	---	0
T	4541.7	B?	407547	7022296	3.3	23.4	66.8	117.2	4.8	21.1	---	---	0
U	4553.9	D	407521	7022446	53.2	60.2	125.0	184.8	4.2	37.9	---	---	12
V	4570.3	B	407574	7022688	5.7	8.2	33.2	56.6	1.1	8.5	---	---	0
W	4613.8	S	407585	7023472	4.1	10.1	4.5	31.6	1.0	3.8	---	---	0
X	4638.7	B	407583	7023893	8.1	33.3	25.4	129.8	0.8	16.9	---	---	0
Y	4656.8	B	407578	7024180	6.3	13.1	22.4	51.3	2.1	8.2	---	---	0
Z	4666.0	D	407582	7024271	9.7	8.9	19.8	72.2	4.5	11.6	1.3	38	0
AA	4681.6	S?	407600	7024401	1.1	20.5	0.0	146.5	2.8	20.6	-0.1	11	0
AB	4701.1	S	407614	7024731	9.8	37.2	57.6	197.0	4.0	29.6	---	---	3
AC	4709.1	S	407628	7024977	9.6	11.7	69.3	127.4	7.7	28.7	---	---	3
AD	4719.5	S	407606	7025361	10.9	34.7	55.7	210.7	0.7	27.6	---	---	1
AE	4732.5	B?	407627	7025739	5.1	3.9	17.4	18.3	3.2	5.1	---	---	4
AF	4739.3	B?	407636	7025856	11.4	24.2	74.9	94.6	8.4	23.5	---	---	0
AG	4752.3	D	407643	7026152	21.2	13.5	106.8	100.6	12.9	31.3	---	---	0
AH	4767.7	S	407677	7026550	4.8	10.9	48.1	52.3	2.6	18.5	---	---	8
AI	4773.2	D	407684	7026718	10.5	21.4	62.5	153.2	2.6	25.6	---	---	14
AJ	4778.7	B?	407683	7026898	8.4	20.9	80.7	130.9	4.8	25.3	---	---	0
AK	4781.4	B?	407679	7026989	14.3	22.7	80.7	130.9	3.7	25.3	---	---	0
AL	4791.7	B	407668	7027338	22.3	46.8	72.1	243.8	2.9	22.7	---	---	1
AM	4806.0	B	407673	7027816	15.2	15.0	69.7	30.8	10.1	21.6	---	---	0
AN	4834.0	L	407724	7028772	26.9	2.9	60.8	0.2	22.6	35.4	---	---	1168
AO	4857.2	B	407721	7029391	34.7	80.4	170.2	382.5	9.6	65.2	---	---	0
AP	4864.4	B?	407720	7029622	0.0	5.6	13.2	7.8	7.5	5.3	---	---	0
AQ	4868.4	B?	407725	7029754	4.4	10.0	0.0	0.3	2.2	0.0	---	---	0
AR	4879.4	B?	407748	7030081	4.9	17.5	31.8	139.1	1.7	19.4	---	---	21
AS	4883.2	B?	407755	7030176	13.5	33.0	31.8	139.1	1.9	19.4	---	---	21
AT	4890.3	D	407762	7030347	37.7	68.1	220.0	254.3	7.7	38.0	---	---	26
AU	4900.3	B	407764	7030588	302.3	319.1	1556.2	1413.5	188.1	482.2	---	---	0
AV	4910.3	B	407760	7030828	157.1	59.1	542.9	184.5	138.0	177.5	---	---	0
AW	4917.0	B	407782	7030982	51.3	33.7	542.9	30.3	138.0	177.5	3.5	12	0
AX	4928.1	D?	407796	7031261	119.8	74.9	100.4	240.5	40.0	90.4	---	---	15

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30410		FLIGHT 8										
AY	4955.7	L	407818	7031916	0.5	0.6	62.3	60.9	57.6	27.2	-0.3	64	0
AZ	4965.9	L	407814	7032169	1.0	7.1	163.7	170.7	75.6	38.2	---	---	0
BA	4993.8	S	407805	7033031	2.0	7.4	37.6	101.8	3.0	11.9	-0.2	19	10
BB	5036.8	B	407827	7034078	19.3	17.8	107.8	79.5	15.8	34.5	---	---	2
BC	5040.1	B	407833	7034149	23.5	28.3	107.8	81.9	15.8	31.2	---	---	2
BD	5047.1	B	407836	7034287	5.2	18.8	175.9	264.4	13.3	57.6	---	---	0
BE	5051.7	D	407844	7034384	46.7	118.4	175.9	264.4	10.2	57.6	---	---	77
BF	5065.0	S	407871	7034665	3.4	22.0	2.9	100.5	4.4	12.0	---	---	0
BG	5081.7	D	407876	7034963	288.9	246.8	894.5	983.7	110.4	263.0	---	---	16
BH	5094.2	D	407886	7035227	34.9	42.7	41.7	104.5	12.6	16.2	---	---	8
BI	5098.6	B?	407881	7035331	13.4	19.8	41.7	104.5	2.9	15.7	---	---	0
BJ	5107.1	D?	407892	7035543	10.3	13.5	54.4	20.3	8.2	9.3	---	---	0
BK	5131.5	L	407944	7036084	29.6	12.6	83.6	0.5	51.1	112.1	---	---	0
BL	5147.6	L	407909	7036434	25.1	8.6	24.1	81.5	25.3	43.8	---	---	0
LINE	30420		FLIGHT 8										
A	6270.7	D	407787	7018286	7.3	11.4	8.8	33.2	2.3	4.8	---	---	0
B	6250.3	S?	407806	7018516	0.8	9.9	1.2	77.3	0.0	9.1	---	---	0
C	6217.8	S	407855	7018807	1.6	7.7	84.5	181.0	3.4	30.0	---	---	0
D	6187.5	S?	407879	7019126	9.4	10.5	87.9	80.4	5.1	24.2	---	---	0
E	6138.3	B?	407855	7019584	10.9	24.8	61.6	102.0	4.6	16.5	---	---	1
F	6130.5	B?	407850	7019677	7.1	22.1	51.1	109.2	3.0	19.7	---	---	3
G	6121.9	B?	407848	7019774	6.4	4.3	0.4	3.0	0.5	3.7	---	---	0
H	6073.3	B?	407880	7020218	11.4	24.4	76.2	178.2	3.4	29.7	---	---	0
I	6047.0	S	407906	7020590	1.8	9.7	25.5	92.8	1.5	15.0	---	---	0
J	6013.2	B?	407904	7020802	1.8	22.3	27.4	205.0	1.2	25.2	---	---	0
K	6003.5	B?	407904	7020885	8.7	19.5	37.7	19.7	3.7	1.3	---	---	0
L	5991.0	B	407896	7021049	11.6	32.7	51.6	103.7	4.8	14.7	---	---	0
M	5977.2	B?	407927	7021204	9.4	33.6	23.0	128.0	0.8	13.7	---	---	0
N	5950.0	B?	407940	7021365	4.9	29.7	92.4	256.0	2.0	34.8	---	---	0
O	5906.9	B?	407916	7021823	3.4	5.7	22.5	65.2	3.3	9.7	---	---	19
P	5860.4	B?	407946	7022211	1.6	18.4	24.1	105.1	1.3	12.5	---	---	0
Q	5827.9	D	407944	7022415	7.5	21.6	47.9	111.2	2.4	14.6	---	---	0
R	5785.6	S?	407960	7022841	2.1	6.9	4.9	19.4	1.0	2.2	---	---	0
S	5738.8	S?	407970	7023378	2.1	9.3	28.7	98.2	4.0	9.5	---	---	19
T	5692.6	S?	407986	7023991	4.3	18.6	17.4	99.3	1.1	12.6	---	---	0
U	5614.5	D	408039	7024668	13.1	18.4	33.7	78.6	1.1	11.9	---	---	0
V	5586.5	B?	408043	7025180	10.0	36.7	94.9	295.7	1.2	44.3	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30420		FLIGHT 8										
W	5574.6	B?	408043	7025375	9.9	22.8	104.5	193.7	6.0	31.0	---	---	0
X	5562.0	B	408043	7025646	7.6	10.8	42.3	95.0	4.3	17.3	0.8	15	1
Y	5551.5	B	408051	7025935	3.5	14.5	0.0	51.0	0.2	0.0	---	---	1
Z	5544.4	B	408046	7026155	23.7	58.3	102.4	261.7	6.4	42.0	---	---	0
AA	5537.7	B	408034	7026401	11.3	17.8	114.4	125.7	11.3	30.9	---	---	3
AB	5534.4	B	408030	7026527	23.5	32.1	114.4	125.7	11.3	30.9	---	---	1
AC	5531.9	B	408031	7026622	22.0	34.4	114.4	125.7	11.3	30.9	---	---	0
AD	5525.2	B?	408066	7026869	14.7	37.0	107.2	252.3	3.1	40.8	---	---	33
AE	5520.6	B?	408105	7027031	9.3	22.7	96.1	252.3	3.1	40.8	---	---	0
AF	5518.0	B?	408125	7027123	15.7	42.6	96.1	224.3	3.1	34.3	---	---	0
AG	5503.3	B	408018	7027608	20.4	22.2	57.3	105.6	5.5	16.6	---	---	1
AH	5493.0	D	407981	7027907	9.9	4.8	57.1	20.1	19.1	20.7	---	---	5
AI	5472.9	B	408424	7028289	0.6	3.1	3.6	5.0	1.5	2.0	---	---	0
AJ	5455.0	B	408183	7028790	5.8	3.8	51.7	49.7	18.5	18.8	1.7	32	1263
AK	5446.6	B	408121	7029087	4.3	6.3	30.8	40.6	2.0	10.8	---	---	0
AL	5443.6	D	408120	7029202	17.0	14.7	0.0	0.0	0.0	0.0	---	---	0
AM	5437.0	B	408133	7029466	48.0	65.6	259.1	331.0	26.4	83.7	---	---	0
AN	5435.1	B	408139	7029545	43.6	46.6	259.1	331.0	26.4	83.7	---	---	0
AO	5431.6	D	408149	7029700	73.2	56.3	257.9	215.4	34.5	86.2	---	---	0
AP	5418.6	B	408162	7030297	12.9	16.8	75.5	0.0	0.0	14.5	---	---	31
AQ	5412.1	B	408160	7030588	113.0	36.1	339.7	124.6	140.7	176.1	---	---	0
AR	5405.8	D	408176	7030881	151.6	82.7	633.0	416.6	147.1	213.8	---	---	15
AS	5402.8	D	408186	7031015	49.4	37.0	633.0	416.6	147.1	213.8	---	---	18
AT	5400.5	D	408191	7031111	83.5	51.5	192.1	157.5	52.2	64.9	---	---	29
AU	5398.0	D	408197	7031216	18.8	22.8	192.1	157.5	46.5	56.6	---	---	33
AV	5392.4	D	408207	7031443	57.9	50.0	207.1	208.7	30.4	67.4	---	---	0
AW	5387.1	D	408203	7031631	15.3	21.8	81.3	63.4	11.3	12.1	---	---	0
AX	5384.2	D	408199	7031727	7.1	12.4	56.7	63.4	5.5	12.7	---	---	0
AY	5347.9	L	408242	7032809	3.7	3.8	242.6	254.9	73.9	49.6	0.9	0	0
AZ	5335.5	L	408258	7033063	3.2	4.2	126.0	185.0	25.0	26.5	0.6	32	4
BA	5322.0	S	408246	7033369	2.7	9.2	26.9	55.9	6.6	25.9	---	---	1
BB	5305.3	S	408261	7033849	2.9	23.1	19.9	124.7	5.6	15.4	---	---	4
BC	5278.3	B	408280	7034574	17.0	16.8	81.1	87.2	12.7	26.6	---	---	39
BD	5272.2	B	408284	7034801	83.8	42.7	408.5	150.1	136.2	151.4	---	---	0
BE	5269.0	D	408293	7034930	81.9	41.6	411.5	150.1	136.2	151.4	---	---	0
BF	5267.0	B	408300	7035013	148.4	78.9	590.9	244.0	196.4	202.7	---	---	4
BG	5263.3	D	408308	7035161	148.4	78.9	590.9	244.0	196.4	202.7	---	---	4
BH	5251.8	B?	408309	7035604	29.5	56.4	80.6	225.2	9.3	34.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30420			FLIGHT 8										
BI	5228.0	L	408284	7036362	18.0	9.6	98.7	60.0	220.0	185.1	3.2	25	0
LINE 30430			FLIGHT 9										
A	1710.4	S?	408230	7018058	4.1	18.2	34.2	180.2	1.7	24.2	---	---	12
B	1682.7	D	408265	7018487	29.9	20.5	141.6	98.6	10.3	34.4	---	---	58
C	1676.5	D	408267	7018629	7.0	12.0	141.6	98.6	9.9	26.5	---	---	0
D	1670.5	D	408260	7018752	1.4	1.0	56.9	56.3	12.2	20.8	---	---	0
E	1655.2	B	408252	7018988	14.9	28.6	85.8	157.6	7.6	30.7	---	---	0
F	1640.0	B	408253	7019185	18.7	29.8	97.6	224.5	3.3	35.5	---	---	0
G	1629.4	B	408263	7019326	8.4	37.0	97.6	232.3	6.1	36.1	---	---	0
H	1618.9	B	408260	7019440	12.4	52.4	37.7	238.2	3.9	32.2	---	---	11
I	1599.8	B?	408255	7019615	11.5	82.7	142.4	423.3	3.7	67.5	---	---	8
J	1565.9	B	408261	7019895	9.7	13.5	15.7	82.3	3.1	5.5	---	---	0
K	1529.7	B	408275	7020055	5.0	27.5	98.7	311.3	7.1	43.4	---	---	3
L	1510.9	B?	408292	7020241	4.0	15.3	66.0	96.2	2.8	19.3	---	---	0
M	1443.2	B?	408302	7020761	6.4	19.5	25.2	43.3	2.1	9.5	---	---	0
N	1419.4	B?	408315	7020899	5.5	4.1	44.6	16.2	4.5	6.0	---	---	3
O	1351.2	B?	408316	7021340	4.7	15.8	34.7	135.1	2.7	19.0	---	---	8
P	1337.8	B?	408320	7021394	0.6	17.2	11.9	130.5	1.8	11.6	---	---	0
Q	1324.8	B?	408321	7021454	4.5	13.9	32.9	147.8	3.9	15.9	---	---	0
R	1293.4	B	408341	7021753	3.2	17.1	19.0	36.4	2.1	7.9	---	---	2
S	1224.8	B?	408345	7022344	2.1	4.0	3.1	18.0	1.3	0.3	---	---	0
T	1202.0	B?	408350	7022464	4.8	15.7	9.2	52.7	1.3	5.2	---	---	0
U	1185.8	B?	408351	7022586	5.4	11.9	12.1	4.6	1.9	0.8	---	---	0
V	1142.0	B?	408355	7022887	1.7	5.1	15.7	60.6	2.3	5.6	---	---	1
W	1088.5	B	408375	7023128	3.9	10.4	4.3	44.8	4.6	4.5	---	---	0
X	1036.2	B	408357	7023572	4.7	8.3	37.2	38.0	6.6	10.4	---	---	0
Y	845.3	B?	408418	7024770	1.8	29.2	10.4	83.8	0.5	9.4	---	---	4
Z	784.5	D	408447	7025519	9.9	18.7	88.1	149.0	7.3	27.7	---	---	0
AA	779.9	D	408442	7025620	16.4	23.4	79.4	149.0	7.3	27.7	---	---	0
AB	770.6	B	408436	7025775	8.6	27.1	79.4	108.5	5.5	25.7	---	---	3
AC	759.0	D	408444	7025989	15.9	26.5	45.5	26.0	4.9	6.6	---	---	0
AD	751.5	B	408451	7026192	11.4	38.8	88.8	144.7	8.3	30.8	---	---	0
AE	747.8	D	408458	7026308	8.5	2.0	88.8	144.7	12.0	42.4	---	---	4
AF	743.9	B?	408465	7026440	13.0	21.5	136.9	172.2	12.0	42.4	---	---	1
AG	740.3	B?	408471	7026567	13.0	15.9	136.9	172.2	13.0	42.4	---	---	1
AH	731.9	B?	408486	7026872	18.7	35.3	114.7	177.9	13.6	39.8	---	---	0
AI	724.0	B?	408514	7027177	4.7	8.1	30.3	54.0	0.7	10.0	0.5	20	23

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30430		FLIGHT 9										
AJ	706.7	D	408530	7027818	15.8	21.7	42.9	104.0	8.3	13.4	---	---	0
AK	699.3	B	408510	7028061	12.7	19.2	60.1	100.3	15.1	22.8	---	---	0
AL	693.4	L?	408497	7028256	0.7	8.9	60.1	29.8	33.3	2.4	---	---	0
AM	688.7	D	408499	7028416	18.8	0.0	32.3	29.8	45.1	2.7	---	---	0
AN	676.2	M	408540	7028880	24.7	5.0	137.5	244.7	5.3	40.1	---	---	1446
AO	673.1	B?	408550	7029005	24.7	47.6	137.5	244.7	5.3	40.1	---	---	0
AP	664.2	B?	408573	7029388	6.3	10.8	198.8	97.9	14.3	58.2	---	---	0
AQ	660.3	D	408583	7029563	41.4	30.5	198.8	150.7	20.0	58.2	---	---	0
AR	658.1	B	408589	7029664	36.6	37.0	198.8	114.1	20.0	58.2	---	---	0
AS	647.0	S	408599	7030177	2.7	12.7	0.1	53.4	0.3	2.6	---	---	42
AT	636.6	B	408595	7030631	106.1	42.8	337.1	117.9	100.3	119.2	---	---	16
AU	633.8	B	408594	7030745	56.2	41.7	290.3	157.8	100.3	96.3	---	---	61
AV	625.5	B	408597	7031048	116.7	50.7	291.0	223.0	108.9	145.0	---	---	0
AW	618.1	B	408598	7031289	227.8	141.5	804.8	542.3	522.9	278.7	---	---	3
AX	613.5	B	408600	7031432	776.9	528.7	2465.4	2009.7	522.9	855.6	---	---	5
AY	610.2	E	408605	7031525	187.0	194.7	2465.4	630.9	522.9	855.6	---	---	0
AZ	599.5	B?	408616	7031748	2.1	15.3	9.6	84.4	3.2	10.5	---	---	0
BA	554.0	S	408619	7032801	4.0	9.4	70.0	68.4	8.1	10.2	---	---	0
BB	539.3	L	408672	7033313	2.3	4.8	86.7	207.1	40.9	55.4	-0.4	38	0
BC	534.1	L	408682	7033451	3.4	4.3	139.9	186.2	46.4	50.3	0.6	31	0
BD	519.1	L	408663	7033858	3.2	7.5	53.5	36.6	24.8	41.3	0.4	0	0
BE	505.7	S	408663	7034298	1.4	7.0	7.2	88.1	6.5	2.4	---	---	3
BF	494.6	B?	408693	7034705	45.1	38.5	208.2	192.1	37.9	74.1	---	---	0
BG	489.6	B?	408703	7034890	7.3	16.6	175.5	192.1	37.9	19.6	---	---	19
BH	484.0	B	408706	7035099	41.0	5.8	175.5	281.6	65.2	122.4	28.2	23	0
BI	478.3	B	408711	7035315	90.1	68.3	382.7	281.6	65.2	122.4	---	---	0
BJ	469.3	B	408718	7035674	35.5	59.0	128.9	220.8	10.7	47.1	---	---	0
BK	454.7	S	408731	7036299	4.6	19.4	26.5	88.5	79.5	50.0	---	---	0
BL	447.0	L	408759	7036602	3.6	17.1	11.4	149.3	80.0	80.9	0.2	1	0
LINE	30440		FLIGHT 9										
A	1935.7	B	408638	7018147	11.2	22.1	63.1	160.5	1.2	22.4	---	---	0
B	1981.3	B	408634	7018514	3.1	4.3	2.0	18.4	1.0	1.3	---	---	0
C	2013.5	B?	408646	7018802	7.7	13.0	28.2	67.9	2.7	11.7	---	---	1
D	2040.5	B	408671	7019099	15.0	26.1	74.6	156.0	5.9	26.7	---	---	0
E	2050.5	D	408672	7019240	13.5	66.7	91.5	259.5	6.0	42.5	---	---	24
F	2063.7	B	408684	7019402	17.5	21.0	114.8	100.8	15.1	31.6	---	---	0
G	2072.5	B	408681	7019467	8.1	21.8	71.4	48.6	15.1	22.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30440		FLIGHT	9									
H	2087.2	B	408676	7019575	15.4	20.4	77.6	142.2	6.2	29.7	---	---	4
I	2125.3	B	408691	7020205	9.2	12.9	127.9	172.7	11.5	42.2	---	---	10
J	2133.2	D	408690	7020362	18.2	26.1	125.6	215.3	12.7	40.3	---	---	0
K	2139.0	B	408695	7020495	16.2	40.8	77.4	176.1	4.7	29.4	---	---	0
L	2197.1	B	408709	7021284	10.5	20.3	93.1	170.6	4.9	32.1	---	---	0
M	2236.1	B?	408736	7021618	8.9	16.5	65.1	133.8	4.4	24.6	---	---	0
N	2262.9	B?	408750	7021857	7.1	23.4	0.0	33.3	0.3	2.3	---	---	0
O	2319.6	B?	408738	7022127	9.2	21.3	81.9	182.0	5.0	29.0	---	---	0
P	2342.3	B?	408742	7022235	2.1	8.0	40.4	0.0	2.7	9.6	---	---	0
Q	2351.4	B?	408738	7022294	2.9	7.2	49.4	71.0	1.8	16.0	---	---	0
R	2367.0	B?	408740	7022403	3.7	4.6	14.6	94.6	2.5	14.7	---	---	18
S	2445.7	B	408776	7023063	9.4	30.1	40.2	120.8	3.9	16.9	---	---	5
T	2497.2	B	408772	7023881	18.7	41.5	118.3	213.6	10.1	39.1	---	---	10
U	2529.1	S	408768	7024447	0.9	9.0	11.2	63.1	1.2	7.7	---	---	0
V	2566.3	B?	408799	7024736	2.3	9.2	6.9	44.2	2.5	0.6	---	---	0
W	2576.3	S	408810	7024824	4.4	6.1	7.2	61.1	2.2	6.1	---	---	0
X	2611.2	B?	408816	7025243	28.9	42.8	171.5	217.8	16.5	57.1	---	---	6
Y	2615.0	B	408807	7025358	24.9	42.4	171.5	217.8	16.5	57.1	---	---	0
Z	2621.8	B	408817	7025587	6.0	7.9	59.7	148.4	7.4	17.6	---	---	0
AA	2625.3	B	408831	7025691	16.7	20.7	59.7	148.4	7.4	17.6	---	---	0
AB	2635.9	B	408839	7025909	6.7	18.3	36.9	90.5	0.2	15.2	---	---	2
AC	2647.5	B	408855	7026186	25.2	31.7	108.3	90.1	11.2	32.9	---	---	1
AD	2651.2	B	408859	7026302	8.2	21.7	108.3	90.1	11.2	32.9	---	---	0
AE	2658.8	B	408848	7026568	12.8	20.3	125.5	155.6	14.7	42.5	---	---	6
AF	2665.7	B	408845	7026822	12.7	19.2	125.5	154.4	13.7	43.4	---	---	0
AG	2671.2	D	408852	7027027	10.1	19.6	57.1	154.4	4.4	36.4	---	---	0
AH	2683.4	S	408885	7027508	6.1	18.8	4.4	43.3	0.4	3.3	---	---	15
AI	2696.9	S	408877	7028025	13.5	17.6	50.1	57.9	10.8	18.2	---	---	0
AJ	2703.7	L?	408871	7028229	16.5	1.2	11.9	0.0	14.1	18.2	---	---	21
AK	2715.7	B	408896	7028509	18.6	39.5	141.9	256.6	14.1	52.7	---	---	0
AL	2749.8	D	408938	7029446	42.3	65.4	295.7	378.3	37.8	83.9	---	---	0
AM	2752.8	B	408934	7029526	47.3	78.5	295.7	378.3	37.8	83.9	---	---	0
AN	2771.0	B?	408926	7030009	5.8	3.2	17.7	32.5	0.0	6.1	---	---	3
AO	2776.7	S?	408932	7030158	2.4	16.3	3.4	55.8	0.5	5.0	---	---	0
AP	2782.7	S?	408941	7030309	11.9	15.1	26.0	44.8	1.5	4.0	---	---	0
AQ	2794.1	B	408961	7030600	201.7	223.5	732.7	747.4	95.1	252.7	---	---	7
AR	2795.7	B	408964	7030636	193.5	223.5	732.7	747.4	95.1	252.7	---	---	7
AS	2807.5	B	408970	7030857	203.9	231.1	683.6	786.8	34.4	212.1	---	---	27

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30440 FLIGHT 9													
AT	2811.2	B	408968	7030927	139.6	187.2	683.6	787.3	34.4	212.1	---	---	33
AU	2820.4	B	408972	7031093	169.0	114.1	605.2	550.8	99.4	204.3	---	---	0
AV	2825.0	B	408978	7031169	174.7	161.3	746.7	748.9	99.4	239.6	---	---	0
AW	2833.8	B	408982	7031319	36.9	97.2	164.0	337.2	20.6	50.5	---	---	0
AX	2840.0	D	408979	7031415	31.5	6.3	488.4	337.2	159.9	164.0	---	---	4
AY	2848.0	D	408973	7031505	146.9	86.4	488.4	256.3	159.9	164.0	---	---	0
LINE 30441 FLIGHT 9													
A	3016.1	S?	409016	7031735	2.5	21.7	8.6	122.5	0.5	13.2	---	---	0
B	3120.7	B?	409010	7032186	2.0	18.3	3.9	68.9	1.2	8.4	---	---	7
C	3156.0	S?	409025	7032952	3.5	9.8	21.9	69.1	2.1	10.8	---	---	0
D	3171.9	S	409046	7033287	2.9	10.9	6.7	51.8	4.2	10.8	---	---	0
E	3192.0	S	409064	7033663	1.9	5.8	28.5	42.9	9.5	10.8	---	---	1
F	3214.1	L	409055	7034069	1.1	6.8	42.8	71.9	29.3	8.5	---	---	1
G	3220.8	L	409050	7034191	1.5	2.1	52.4	68.8	37.6	39.2	---	---	0
H	3228.7	L	409055	7034328	3.6	2.0	37.7	30.4	27.0	8.4	-1.8	0	3
I	3240.2	L	409074	7034528	3.6	4.8	82.5	71.0	32.5	20.4	---	---	2
J	3247.0	L	409083	7034658	32.6	34.6	151.1	209.9	38.5	44.6	1.7	0	0
K	3254.5	L	409077	7034837	47.2	30.2	278.3	237.5	39.4	79.1	---	---	0
L	3259.1	L	409073	7034959	33.9	34.3	278.3	237.5	47.5	68.7	---	---	0
M	3270.8	B?	409084	7035312	68.0	38.7	223.1	157.8	31.7	70.7	---	---	0
N	3282.6	B?	409113	7035646	28.2	20.5	108.9	81.0	1.9	31.6	---	---	0
O	3286.9	B?	409112	7035763	22.0	12.8	108.9	81.0	9.0	31.4	---	---	0
P	3297.6	B	409096	7036037	7.8	15.6	15.2	36.0	2.8	10.5	---	---	0
Q	3315.1	S?	409123	7036469	14.8	80.9	110.1	433.9	14.2	64.4	---	---	0
LINE 30450 FLIGHT 12													
A	2250.5	B?	409040	7017985	6.3	11.1	16.1	51.2	3.7	7.7	---	---	0
B	2238.9	B?	409033	7018151	6.5	6.1	51.3	64.7	5.5	15.1	---	---	0
C	2204.6	S?	409047	7018757	9.1	16.9	22.2	76.9	0.7	10.7	---	---	0
D	2154.5	B?	409060	7019185	3.8	19.9	87.8	182.0	5.0	30.3	---	---	0
E	2126.5	B?	409067	7019465	25.3	45.0	135.8	314.5	4.6	54.7	---	---	0
F	2088.1	B?	409101	7019958	6.1	18.7	35.9	62.8	3.3	12.3	---	---	5
G	2072.9	B?	409102	7020254	2.3	23.2	82.5	121.8	8.3	24.2	---	---	9
H	2066.7	B?	409110	7020378	12.1	24.8	103.3	268.3	8.2	36.8	---	---	0
I	2055.8	B?	409114	7020553	6.9	23.4	9.3	42.7	0.0	4.3	---	---	0
J	2032.9	B?	409118	7020882	8.1	21.4	31.6	80.2	3.2	13.5	---	---	0
K	2002.5	H	409085	7021441	14.0	13.5	113.5	91.5	19.1	36.9	---	---	57

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30450		FLIGHT	12									
L	1982.6	B	409124	7021926	5.0	8.7	39.3	51.4	5.3	13.9	---	---	9
M	1955.0	B?	409134	7022097	15.5	26.1	77.1	159.4	4.6	30.6	---	---	9
N	1920.2	B	409146	7022295	3.6	4.5	28.0	0.0	0.3	0.0	---	---	0
O	1877.7	B	409152	7022581	27.5	15.0	109.2	52.1	17.7	38.5	---	---	0
P	1839.4	B?	409159	7023007	7.4	15.1	54.3	75.4	2.9	13.4	---	---	0
Q	1779.4	B?	409191	7023225	3.4	19.8	3.7	163.8	1.2	19.3	---	---	0
R	1619.9	S?	409183	7023598	1.4	4.9	5.1	46.5	1.5	6.7	---	---	0
S	1515.8	B?	409204	7023998	4.5	9.7	22.9	59.7	1.0	8.6	---	---	0
T	1502.8	S?	409213	7024125	3.2	5.9	23.0	57.4	1.8	6.0	---	---	7
U	1379.6	B	409246	7025222	10.5	20.4	53.3	68.1	3.2	16.7	---	---	0
V	1359.8	B?	409261	7025705	14.3	1.6	84.3	99.6	1.4	30.0	---	---	0
W	1350.1	B?	409267	7026001	6.9	13.0	38.4	99.6	6.1	10.7	---	---	5
X	1342.2	B?	409262	7026260	8.9	25.3	43.1	40.0	6.1	12.8	---	---	0
Y	1332.1	S?	409263	7026649	46.4	53.2	248.5	245.6	19.5	69.1	---	---	0
Z	1323.2	S?	409276	7027007	17.7	34.9	123.4	224.0	9.9	43.7	---	---	0
AA	1315.8	B?	409300	7027286	7.7	19.8	25.0	204.0	5.2	9.9	---	---	40
AB	1312.8	D	409308	7027394	9.2	11.9	38.9	64.7	2.0	12.7	---	---	41
AC	1302.0	B	409324	7027747	9.1	14.2	1.3	16.4	0.4	0.1	---	---	1
AD	1294.4	B?	409328	7027975	1.9	13.4	9.1	41.6	1.6	5.7	---	---	0
AE	1287.6	B	409325	7028200	1.9	0.0	26.6	11.1	5.4	11.9	---	---	26
AF	1277.1	B	409316	7028567	32.7	61.6	235.8	313.7	37.7	74.9	---	---	0
AG	1273.1	B	409319	7028711	30.7	57.3	235.8	313.7	37.7	74.9	---	---	0
AH	1267.5	D	409334	7028916	19.1	30.6	93.8	139.9	28.2	29.1	---	---	0
AI	1261.5	B	409351	7029139	5.9	6.0	154.9	13.0	18.8	48.6	---	---	1043
AJ	1256.6	D	409363	7029332	29.8	26.2	154.9	107.0	18.8	48.6	---	---	0
AK	1253.9	B	409368	7029439	29.8	26.1	154.9	107.0	18.8	48.6	---	---	0
AL	1239.7	S	409381	7029957	7.0	10.3	30.0	59.2	2.3	11.2	---	---	0
AM	1220.0	D	409376	7030570	144.4	62.5	459.0	287.7	80.3	163.2	---	---	8
AN	1213.9	D	409378	7030722	94.4	50.2	459.0	201.1	123.1	163.2	---	---	47
AO	1207.0	B	409386	7030882	16.6	29.5	227.9	136.6	3.7	88.2	---	---	49
AP	1201.7	D	409390	7030999	46.6	43.2	158.6	276.3	6.8	38.3	---	---	18
AQ	1198.1	D	409388	7031075	56.4	62.8	158.6	276.3	4.3	38.3	---	---	17
AR	1193.3	D	409387	7031172	42.7	57.6	118.7	124.3	25.8	32.9	---	---	12
AS	1185.4	D	409394	7031326	60.2	33.8	205.1	111.0	25.8	46.2	---	---	3
AT	1180.9	D	409395	7031409	52.7	52.4	205.1	111.0	13.7	46.2	---	---	3
AU	1174.8	D	409393	7031515	22.7	28.1	45.6	90.8	26.8	42.6	---	---	0
AV	1162.7	D	409398	7031667	62.8	102.7	330.8	565.9	38.6	131.9	---	---	0
AW	1080.9	S	409442	7033186	1.8	9.7	14.2	54.0	2.4	7.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30450		FLIGHT	12									
AX	1070.9	S	409453	7033536	5.2	12.4	11.8	52.5	2.1	8.3	0.4	15	0
AY	1050.5	S	409469	7034181	5.8	10.3	36.6	89.8	2.8	14.9	---	---	2
AZ	1031.7	L	409483	7034526	9.8	12.7	47.7	149.4	9.1	21.3	---	---	0
BA	1019.3	L	409485	7034792	14.3	34.6	57.4	149.6	20.0	24.6	---	---	3
BB	1015.1	L	409495	7034874	4.5	2.0	26.6	110.3	9.1	11.7	-2.7	72	3
BC	1005.3	L	409509	7035052	14.0	23.2	103.6	250.9	60.5	87.9	---	---	0
BD	999.0	L	409507	7035170	25.1	38.0	104.1	251.5	53.9	99.6	---	---	0
BE	994.9	L	409511	7035250	8.6	6.9	205.5	149.2	91.1	134.1	1.5	0	6
BF	985.1	L	409510	7035426	11.2	8.2	168.8	105.3	67.1	37.5	---	---	5
BG	971.9	L	409498	7035664	30.7	59.3	21.9	292.1	26.7	28.9	---	---	0
BH	967.6	L	409499	7035757	45.1	85.9	169.5	292.1	31.0	68.7	---	---	0
BI	963.1	L	409514	7035874	10.5	7.4	169.5	257.2	31.0	51.4	---	---	0
BJ	959.2	L	409537	7035981	0.0	0.0	49.4	17.9	14.8	30.1	---	---	0
BK	956.6	L	409552	7036051	3.6	2.4	13.6	145.0	14.8	13.9	---	---	22
BL	951.7	S	409572	7036180	7.0	24.6	19.2	145.0	7.0	6.5	---	---	22
LINE	30460		FLIGHT	12									
A	2397.1	D	409387	7018039	13.1	25.3	56.6	119.1	3.9	21.5	---	---	1
B	2410.6	D	409393	7018133	7.4	19.8	60.1	203.0	0.8	28.1	---	---	0
C	2421.5	B?	409398	7018226	2.0	5.7	0.0	0.0	1.6	0.0	---	---	9
D	2438.7	D	409425	7018367	7.4	9.5	25.3	48.8	1.7	9.1	---	---	0
E	2504.4	B?	409463	7018826	5.7	17.8	27.0	78.5	2.1	9.0	---	---	0
F	2528.5	B?	409454	7018972	3.6	22.7	77.2	286.8	1.5	42.6	---	---	0
G	2571.8	B?	409449	7019512	10.1	28.5	37.4	125.3	2.6	16.2	---	---	0
H	2612.6	D	409495	7019930	8.4	36.2	45.0	156.0	2.6	20.9	---	---	0
I	2620.2	D	409503	7020033	14.6	21.4	44.9	41.6	5.3	8.8	---	---	1
J	2629.6	B	409509	7020144	5.2	14.2	49.2	51.6	4.3	8.7	---	---	0
K	2640.1	B?	409507	7020244	4.0	15.5	0.0	181.8	0.3	20.4	---	---	0
L	2668.3	B?	409533	7020643	3.6	9.5	7.4	49.7	2.7	5.5	---	---	0
M	2681.4	S	409526	7020739	3.8	11.5	35.1	103.9	0.5	17.7	---	---	0
N	2710.2	S?	409539	7020950	2.1	13.2	12.1	104.4	1.4	10.1	---	---	9
O	2734.5	B?	409551	7021222	3.2	8.3	10.2	39.1	1.2	2.7	---	---	0
P	2757.5	D	409536	7021625	27.6	43.0	140.4	146.7	18.3	46.7	---	---	0
Q	2762.3	D	409539	7021759	22.0	15.1	140.4	93.0	18.3	46.7	---	---	53
R	2766.5	D	409543	7021869	15.3	13.2	107.4	93.0	13.8	35.5	1.7	0	98
S	2845.6	S?	409562	7022553	2.1	10.9	19.1	76.1	2.6	11.3	---	---	1
T	2867.9	S?	409575	7022923	4.2	14.6	43.3	108.1	4.4	18.4	---	---	0
U	2897.1	D	409555	7023304	10.1	22.3	98.2	103.0	4.4	28.4	---	---	22

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30460		FLIGHT	12									
V	2914.2	S?	409566	7023624	4.0	5.5	44.8	36.0	4.9	15.1	---	---	0
W	2942.9	B?	409583	7024014	5.8	26.8	51.2	195.0	2.6	25.8	---	---	0
X	3011.0	D?	409604	7024325	7.5	10.0	42.7	91.7	2.5	14.2	0.8	11	1
Y	3029.8	B?	409619	7024462	4.2	0.0	21.0	16.2	6.0	6.5	---	---	0
Z	3092.1	D	409631	7024930	33.7	30.2	73.1	82.3	14.9	23.2	---	---	10
AA	3107.5	B?	409628	7025252	10.1	7.1	60.5	70.3	5.0	19.1	1.9	25	0
AB	3123.6	B	409625	7025778	5.8	12.3	35.2	84.0	1.1	10.8	---	---	0
AC	3126.5	B	409625	7025880	4.0	13.8	35.2	84.0	0.9	10.8	---	---	0
AD	3128.8	B	409624	7025962	8.7	12.8	35.2	84.0	0.9	10.8	---	---	6
AE	3133.0	B	409623	7026114	6.3	5.5	81.3	211.5	5.0	36.0	---	---	6
AF	3137.8	B	409624	7026284	6.3	26.9	81.3	211.5	5.0	36.0	---	---	0
AG	3145.6	B?	409629	7026572	11.1	23.0	0.0	0.0	1.8	10.2	---	---	0
AH	3157.9	B	409658	7027078	20.4	36.8	88.5	223.5	6.8	35.9	---	---	0
AI	3162.0	B	409677	7027250	15.5	23.6	87.4	146.6	6.8	29.0	---	---	0
AJ	3177.1	S	409687	7027886	4.6	21.7	10.8	115.1	2.4	9.3	---	---	51
AK	3198.8	B	409712	7028769	8.2	32.8	71.1	132.1	6.8	21.5	---	---	0
AL	3203.3	B	409730	7028949	8.3	14.9	71.1	132.1	8.3	21.5	---	---	0
AM	3213.4	B	409751	7029321	3.9	3.8	1.6	20.8	0.0	0.8	0.9	40	1033
AN	3217.7	B	409751	7029462	8.8	20.1	77.0	126.3	19.5	20.8	---	---	0
AO	3220.4	D	409750	7029549	45.2	28.5	116.0	162.6	30.4	38.9	---	---	0
AP	3225.1	B	409754	7029706	2.7	20.7	116.0	162.6	30.4	38.9	---	---	0
AQ	3233.5	D	409758	7029983	13.7	39.0	78.1	143.5	9.4	29.7	---	---	0
AR	3236.4	D	409758	7030080	19.2	55.7	78.1	170.7	3.1	29.7	---	---	0
AS	3240.4	B	409758	7030210	9.4	10.6	49.2	170.7	0.1	20.3	---	---	6
AT	3254.0	B	409766	7030647	247.3	78.0	889.6	357.2	373.5	315.4	---	---	15
AU	3256.6	B	409769	7030720	189.4	58.9	889.6	372.8	373.5	315.4	---	---	16
AV	3268.2	D	409774	7031024	17.7	39.2	75.3	139.2	0.0	22.6	---	---	0
AW	3272.5	D	409776	7031141	36.2	57.4	222.1	333.0	6.3	65.8	---	---	31
AX	3275.8	D	409780	7031229	65.3	93.4	222.1	333.0	6.3	65.8	---	---	36
AY	3293.1	B	409785	7031517	13.5	32.6	100.8	275.3	6.6	40.0	---	---	0
AZ	3306.3	B	409794	7031669	0.0	22.0	10.7	37.5	1.9	3.0	---	---	0
BA	3312.0	D	409810	7031748	67.8	140.3	355.3	779.0	31.5	142.7	---	---	2
BB	3320.1	D	409814	7031873	47.7	52.5	355.3	401.6	31.5	142.7	---	---	4
BC	3388.1	S	409857	7033725	3.2	5.6	19.8	54.5	2.1	7.7	0.5	35	0
BD	3404.2	S	409908	7034385	4.1	13.9	21.3	59.6	4.6	10.2	0.3	3	0
BE	3416.0	S	409901	7034774	0.8	7.3	20.6	81.5	4.4	11.9	---	---	0
BF	3429.8	B?	409901	7035150	11.1	27.7	156.7	297.2	7.0	51.6	---	---	0
BG	3434.0	B?	409908	7035294	23.0	53.9	156.7	297.2	8.0	51.6	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30460		FLIGHT	12									
BH	3436.0	B?	409913	7035365	37.0	68.6	156.7	297.2	8.0	51.6	---	---	1
BI	3446.1	L	409934	7035648	0.0	6.7	20.1	26.4	5.0	5.9	---	---	0
BJ	3456.3	L	409943	7035866	33.0	47.6	236.2	242.9	33.9	75.5	---	---	0
BK	3472.1	L	409900	7036184	1.6	5.5	143.8	199.3	73.5	42.9	-0.2	0	0
BL	3480.5	L	409909	7036378	6.4	30.5	143.3	283.6	70.9	98.5	0.3	0	0
LINE	30470		FLIGHT	12									
A	4636.4	B	409837	7017985	6.0	17.3	77.6	141.1	4.6	26.7	---	---	0
B	4606.1	S	409802	7018638	2.7	11.2	2.7	32.3	3.3	4.5	---	---	0
C	4585.1	B?	409843	7019012	9.5	12.4	65.0	82.0	4.9	13.4	---	---	0
D	4580.6	B?	409847	7019069	17.1	15.0	65.0	82.0	2.3	13.4	---	---	7
E	4564.3	S?	409859	7019270	4.4	10.8	24.1	43.5	2.7	9.2	---	---	0
F	4554.7	B?	409861	7019382	2.3	12.9	42.1	61.3	1.2	12.8	---	---	4
G	4544.2	B?	409869	7019565	7.3	6.5	40.2	54.7	3.5	9.9	---	---	5
H	4530.9	S?	409882	7019800	2.0	14.7	21.3	158.3	1.3	19.0	---	---	0
I	4507.5	S?	409889	7020076	3.5	22.6	27.4	135.6	1.8	17.6	---	---	1
J	4485.9	B?	409888	7020275	8.6	33.8	56.0	108.6	2.6	18.8	---	---	1
K	4480.0	B?	409887	7020336	1.7	10.1	36.8	109.2	3.5	8.5	---	---	0
L	4469.6	B?	409880	7020446	10.9	13.7	59.2	64.4	3.2	15.8	---	---	0
M	4446.4	B?	409895	7020597	6.9	31.6	44.3	332.7	1.1	38.5	---	---	1
N	4422.5	B?	409882	7020774	4.7	11.4	7.9	19.2	0.6	2.0	---	---	0
O	4401.9	B?	409912	7021109	6.8	19.4	33.5	89.0	2.4	13.6	---	---	0
P	4366.7	B	409926	7021751	9.1	10.9	15.4	75.5	4.8	3.3	---	---	0
Q	4349.7	B?	409924	7021936	4.8	19.0	129.2	93.4	12.0	47.3	---	---	58
R	4340.4	B	409929	7022038	11.6	15.0	106.1	136.8	15.9	40.9	---	---	0
S	4330.4	B?	409930	7022189	19.3	43.6	115.0	219.0	13.9	51.5	---	---	9
T	4313.2	B?	409940	7022477	10.8	26.5	96.3	153.8	8.9	31.7	---	---	7
U	4288.0	B?	409963	7022839	6.0	3.5	40.2	24.7	4.7	10.9	2.0	28	8
V	4273.7	B?	409963	7023060	6.5	12.7	28.0	66.7	2.1	12.3	---	---	0
W	4215.7	B	410000	7023411	10.1	9.7	32.3	43.4	8.2	11.3	---	---	0
X	4205.1	B	409983	7023498	20.1	34.4	121.9	113.6	11.4	31.2	---	---	44
Y	4184.1	B	409984	7023791	19.8	30.3	67.2	119.9	12.9	30.7	---	---	0
Z	4168.1	D	409993	7023992	11.6	18.7	44.7	37.2	4.9	12.6	---	---	7
AA	4125.7	S	410008	7024398	0.9	11.3	12.4	104.0	1.6	13.4	---	---	0
AB	4081.5	D	410018	7024684	68.3	51.3	93.9	139.0	8.0	34.7	---	---	0
AC	4001.0	B	410063	7025521	9.7	16.0	51.6	90.7	5.2	20.0	---	---	0
AD	3992.1	B	410044	7025765	11.3	11.4	54.1	73.9	5.5	16.7	---	---	1
AE	3970.7	B	410075	7026435	6.7	12.5	47.9	96.1	3.4	18.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30470		FLIGHT	12									
AF	3950.9	B	410087	7027191	19.0	26.6	100.6	138.9	6.4	28.1	---	---	21
AG	3935.8	B	410108	7027764	8.5	17.3	5.7	72.2	1.4	6.3	---	---	87
AH	3931.7	B	410112	7027921	31.6	44.1	845.8	1020.9	7.6	243.2	---	---	104
AI	3928.7	B	410114	7028031	117.0	189.8	845.8	1020.9	43.2	243.2	---	---	125
AJ	3922.7	B	410124	7028245	48.5	82.4	845.8	1020.9	29.7	243.2	---	---	58
AK	3918.5	B	410133	7028389	20.1	11.1	99.5	84.6	29.7	68.5	---	---	45
AL	3905.8	B	410133	7028832	25.9	56.3	160.1	254.9	9.7	55.9	---	---	24
AM	3901.9	B	410133	7028976	16.1	18.5	160.1	254.9	20.8	55.9	---	---	0
AN	3897.2	B	410137	7029150	11.9	18.2	56.0	97.1	31.6	32.5	---	---	0
AO	3890.0	B?	410148	7029423	6.5	6.4	44.9	25.1	0.0	15.9	1.1	25	1037
AP	3886.8	B?	410152	7029547	0.5	0.7	48.7	183.3	7.1	1.8	---	---	0
AQ	3882.6	B	410158	7029711	32.2	30.9	108.6	183.3	7.1	35.7	---	---	0
AR	3880.6	B	410161	7029788	32.2	43.2	108.6	183.3	20.1	35.7	---	---	0
AS	3877.7	B	410164	7029899	12.2	20.9	108.6	183.3	12.1	35.7	---	---	0
AT	3873.4	B	410170	7030063	2.7	2.2	0.5	0.0	2.6	0.0	---	---	0
AU	3859.8	D	410182	7030547	189.3	153.9	676.0	552.2	202.5	296.3	---	---	21
AV	3856.7	D	410182	7030643	30.9	48.1	659.6	527.8	243.6	279.5	---	---	0
AW	3854.1	B	410183	7030716	156.9	77.5	659.6	527.8	243.6	242.8	---	---	0
AX	3835.4	D	410191	7031189	29.4	65.6	51.4	215.7	0.6	25.1	---	---	16
AY	3824.4	B?	410199	7031390	4.7	6.6	0.0	0.0	4.2	0.0	---	---	0
AZ	3806.9	B	410199	7031606	22.7	52.5	247.8	511.0	8.0	91.7	---	---	3
BA	3796.3	B	410209	7031746	22.5	42.1	247.8	511.0	19.8	91.7	---	---	0
BB	3779.5	B?	410215	7031921	5.0	3.1	25.4	13.3	5.7	6.2	---	---	0
BC	3766.8	B?	410231	7032000	0.2	3.3	0.4	87.3	1.6	0.4	---	---	1
BD	3758.4	B?	410234	7032070	7.9	27.3	100.3	148.8	4.6	36.7	---	---	0
BE	3752.8	B?	410232	7032157	15.0	18.7	100.3	148.8	4.0	36.7	---	---	49
BF	3716.6	S	410237	7032765	1.4	5.9	1.8	25.6	1.4	3.8	-0.2	17	4
BG	3683.0	S	410265	7033619	3.2	6.9	15.8	95.9	1.8	12.5	0.4	31	0
BH	3630.7	S	410319	7035225	8.2	26.1	77.4	137.6	6.1	25.9	---	---	1
BI	3624.9	D	410318	7035399	25.7	17.0	107.3	178.5	7.3	34.2	---	---	0
BJ	3610.7	B	410329	7035833	11.8	16.1	28.8	47.9	2.4	10.2	---	---	0
LINE	30480		FLIGHT	12									
A	4790.7	B?	410215	7017973	9.5	11.6	80.3	72.9	4.4	21.7	---	---	0
B	4811.1	B?	410218	7018210	1.6	16.6	20.9	87.0	2.6	10.7	---	---	0
C	4888.6	B?	410258	7018816	0.7	5.5	1.6	29.4	0.6	4.1	---	---	0
D	4925.5	B?	410258	7019078	2.8	26.0	39.6	168.7	1.7	25.1	---	---	0
E	4932.6	B?	410263	7019144	4.9	7.7	43.5	23.5	3.1	18.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30480		FLIGHT	12									
F	4939.2	D	410267	7019235	17.8	13.3	86.3	57.8	11.9	24.2	---	---	1
G	4949.7	B?	410298	7019415	9.1	9.8	18.2	10.4	3.2	3.9	---	---	0
H	4978.3	S?	410293	7019714	2.7	9.2	45.8	138.8	3.7	21.1	---	---	0
I	5007.7	S?	410293	7019996	3.9	10.2	31.8	107.8	2.5	12.5	---	---	0
J	5023.7	S?	410288	7020191	8.9	25.6	42.6	106.1	2.4	18.5	---	---	0
K	5045.5	B?	410302	7020435	4.9	9.8	28.7	54.5	0.6	10.1	---	---	1
L	5062.4	B?	410314	7020599	6.3	20.3	46.1	82.0	3.1	14.8	---	---	0
M	5069.6	B?	410322	7020730	8.5	17.7	44.5	71.9	2.0	7.5	---	---	0
N	5088.2	B?	410331	7021119	10.4	16.5	75.7	129.9	6.2	22.2	---	---	0
O	5114.2	B?	410331	7021394	0.4	20.6	0.0	68.9	1.3	7.0	---	---	0
P	5120.2	B?	410340	7021440	2.7	12.7	10.0	68.9	1.5	7.0	---	---	0
Q	5148.0	B	410321	7021873	9.1	6.8	55.7	14.1	5.1	17.1	---	---	0
R	5157.6	B	410292	7022289	5.0	7.1	39.8	56.6	9.2	12.7	---	---	0
S	5173.4	B	410383	7022883	16.9	19.9	17.3	94.1	7.3	7.5	---	---	0
T	5183.9	D	410370	7023158	52.1	26.8	252.5	195.6	27.1	80.9	---	---	0
U	5192.6	B	410374	7023354	45.9	24.5	169.8	177.2	33.2	67.7	---	---	59
V	5195.2	B	410380	7023409	12.5	24.5	169.8	177.2	33.2	67.7	---	---	61
W	5212.6	B	410383	7023601	12.5	45.4	14.8	199.7	6.7	20.4	---	---	0
X	5224.6	B	410384	7023706	35.2	31.6	94.0	51.3	19.7	32.1	---	---	0
Y	5244.2	B	410415	7023847	8.1	12.6	176.6	174.7	30.2	57.1	---	---	0
Z	5271.7	B?	410392	7024056	2.4	5.1	0.0	40.9	0.3	5.5	---	---	0
AA	5288.1	B	410424	7024205	30.5	68.2	220.0	294.2	11.0	67.1	---	---	3
AB	5323.9	B	410398	7024525	3.9	23.9	47.9	170.2	2.1	32.0	---	---	0
AC	5338.3	B	410410	7024636	13.2	12.1	34.4	3.1	3.3	8.5	---	---	2
AD	5345.4	D	410406	7024701	31.9	39.8	103.5	288.3	6.5	43.0	---	---	12
AE	5359.6	B	410438	7024893	6.6	7.6	70.0	63.7	3.7	18.6	---	---	2
AF	5365.7	D	410436	7025025	13.2	5.9	70.0	63.7	8.2	18.6	3.7	23	0
AG	5379.9	B	410423	7025495	17.0	36.4	84.5	113.8	14.2	29.5	---	---	0
AH	5393.2	B	410438	7025978	10.1	15.4	124.6	181.8	8.5	36.7	---	---	0
AI	5396.3	B	410445	7026088	13.4	35.1	124.6	181.8	9.7	36.7	---	---	1
AJ	5403.0	B	410460	7026327	17.8	17.9	57.3	102.8	9.2	16.3	---	---	0
AK	5412.3	S?	410466	7026690	13.0	19.7	40.7	158.0	0.4	27.4	---	---	9
AL	5432.4	S	410493	7027515	8.6	17.3	11.2	111.6	5.0	11.6	---	---	8
AM	5443.0	S?	410496	7027931	14.7	26.1	80.4	187.0	2.6	31.1	---	---	6
AN	5444.7	S?	410498	7027996	14.7	33.2	80.4	187.0	2.6	31.1	---	---	6
AO	5465.6	B	410541	7028864	31.0	49.2	188.1	234.2	21.8	57.0	---	---	0
AP	5474.6	B	410536	7029239	13.0	21.5	118.9	67.0	15.5	34.8	---	---	86
AQ	5486.0	B	410537	7029665	14.6	14.2	151.4	135.6	30.8	49.1	1.5	17	271

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30480		FLIGHT 12										
AR	5490.2	D	410546	7029806	35.6	40.5	151.4	135.6	30.8	49.1	---	---	0
AS	5502.5	M	410574	7030213	0.9	12.0	54.9	151.2	0.0	20.7	---	---	12
AT	5507.4	B?	410585	7030381	14.1	22.6	54.9	151.2	9.3	20.7	---	---	0
AU	5517.2	B	410585	7030722	79.5	28.1	265.2	47.1	103.9	119.3	---	---	0
AV	5523.1	B	410583	7030915	43.4	50.1	259.1	191.6	103.9	77.8	---	---	0
AW	5525.5	D	410588	7030985	61.3	44.7	259.1	191.6	15.9	77.8	---	---	9
AX	5538.5	D	410609	7031298	23.0	45.5	61.9	149.9	0.3	22.8	---	---	5
AY	5542.4	D	410609	7031386	6.1	14.6	111.5	134.0	4.6	33.0	---	---	0
AZ	5547.0	D	410608	7031487	17.8	38.5	111.5	134.0	4.6	33.0	---	---	0
BA	5551.7	D	410609	7031580	19.8	24.8	62.2	146.6	8.1	27.7	---	---	55
BB	5563.2	D	410611	7031728	11.1	20.9	82.5	122.7	4.7	22.5	---	---	0
BC	5586.7	D	410616	7031955	15.7	25.5	61.2	220.1	18.9	16.7	---	---	0
BD	5591.3	M	410630	7032011	0.1	8.3	148.4	260.9	0.0	61.2	---	---	69
BE	5598.1	D	410647	7032126	40.3	56.0	148.4	260.9	61.1	61.2	---	---	0
BF	5603.3	D	410645	7032230	11.1	21.5	139.0	93.8	35.9	42.3	---	---	1
BG	5609.0	D	410642	7032349	44.5	45.1	156.0	170.6	35.9	44.1	---	---	0
BH	5700.2	S?	410680	7034159	2.1	5.2	21.8	107.0	2.8	11.8	---	---	0
BI	5762.5	M	410718	7035169	0.1	25.4	22.3	146.0	10.3	18.3	---	---	0
BJ	5776.5	B	410707	7035446	21.4	52.9	139.5	272.4	8.7	45.1	---	---	0
BK	5784.7	B	410718	7035705	11.6	31.9	61.7	98.7	7.4	23.4	---	---	0
BL	5789.4	D	410724	7035883	12.0	5.6	11.5	17.7	1.6	0.0	---	---	0
BM	5799.1	S	410732	7036251	9.9	24.0	47.9	149.4	0.9	18.8	---	---	23
LINE	30490		FLIGHT 13										
A	1349.3	B	410680	7019339	15.1	23.7	123.9	157.0	13.3	40.4	---	---	0
B	1337.9	B	410694	7019535	3.4	10.5	38.9	79.5	3.0	14.0	---	---	0
C	1326.0	B	410685	7019767	4.9	14.1	13.8	64.2	4.5	8.8	---	---	2
D	1305.0	B	410681	7020191	6.7	21.9	97.0	183.3	6.7	37.4	---	---	0
E	1255.3	S	410689	7020891	2.7	11.6	25.4	65.3	1.0	8.6	---	---	0
F	1228.6	B?	410723	7021214	4.3	16.6	71.0	209.8	1.4	29.7	---	---	0
G	1216.2	B?	410727	7021287	3.9	8.0	38.4	83.5	1.5	12.6	---	---	0
H	1196.0	B?	410733	7021402	1.7	3.8	36.3	15.0	1.4	1.9	---	---	0
I	1185.0	B?	410735	7021487	1.2	5.9	1.4	48.5	0.6	4.7	---	---	0
J	1144.4	D	410754	7022111	32.1	38.3	183.6	222.1	16.8	58.7	---	---	16
K	1140.9	B?	410758	7022213	28.0	36.7	183.6	222.1	16.8	58.7	---	---	0
L	1133.8	B	410760	7022407	4.5	22.2	121.9	170.6	9.1	41.1	---	---	0
M	1131.1	B	410764	7022471	12.6	19.8	121.9	170.6	9.1	41.1	---	---	5
N	1110.5	B	410755	7022796	7.9	15.9	0.3	8.5	2.0	2.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30490		FLIGHT	13									
O	1100.3	B	410728	7022948	33.1	52.6	158.6	257.2	15.5	54.0	---	---	18
P	1097.4	B	410730	7023013	15.2	32.3	158.6	257.2	15.5	54.0	---	---	63
Q	1087.8	B	410752	7023282	30.6	23.3	87.2	56.8	14.2	24.5	---	---	0
R	1083.7	B	410769	7023396	13.0	5.1	87.2	112.9	14.2	24.5	---	---	0
S	1079.6	B	410782	7023508	11.6	7.7	81.4	112.9	7.8	31.5	---	---	49
T	1075.4	B	410784	7023619	14.8	35.7	28.5	91.1	0.0	1.7	---	---	26
U	1068.1	B	410781	7023794	17.5	16.3	145.4	78.9	52.1	54.0	---	---	14
V	1065.2	B	410785	7023856	11.1	8.2	195.9	200.2	52.1	54.0	---	---	0
W	1061.2	B	410794	7023940	33.1	47.0	195.9	200.2	52.6	72.1	---	---	35
X	1046.4	B	410803	7024208	25.3	53.3	78.0	237.3	11.9	28.3	---	---	5
Y	1037.4	B	410805	7024317	4.6	35.3	89.1	277.5	4.0	43.5	---	---	0
Z	1008.1	B	410818	7024483	16.8	26.3	186.9	283.0	12.6	52.4	---	---	0
AA	988.4	B	410815	7024597	18.3	10.9	118.1	191.6	12.7	43.2	---	---	10
AB	934.1	B	410837	7024995	13.3	7.8	97.4	80.7	29.1	37.9	---	---	17
AC	923.0	B	410848	7025178	19.9	41.8	148.3	176.8	22.9	50.4	---	---	3
AD	913.0	B	410856	7025426	28.2	25.4	183.8	119.7	28.9	58.0	---	---	7
AE	897.5	B?	410871	7025884	8.1	21.5	38.0	158.0	0.3	16.2	---	---	0
AF	885.1	B?	410882	7026328	9.5	13.5	55.3	120.4	4.5	21.0	---	---	0
AG	875.2	B	410895	7026691	3.1	6.2	48.8	74.8	4.2	17.2	---	---	1
AH	868.1	B	410903	7026952	8.8	14.7	76.4	77.1	6.5	25.1	---	---	0
AI	853.3	S	410899	7027520	2.4	11.5	6.4	34.4	3.7	5.9	---	---	6
AJ	845.0	B?	410910	7027842	9.6	11.5	60.8	65.4	6.3	13.6	---	---	6
AK	810.6	H	410965	7029096	4.3	15.0	116.3	156.1	15.9	38.5	---	---	0
AL	795.5	B	410966	7029674	16.0	9.3	123.1	91.0	32.2	48.2	2.8	20	418
AM	782.8	S	410990	7030180	2.9	11.7	11.9	63.2	4.0	7.3	---	---	0
AN	772.5	B	411000	7030598	28.6	11.3	231.2	88.9	94.4	88.7	---	---	13
AO	769.0	B	411003	7030735	44.3	34.1	372.6	263.3	94.4	123.5	---	---	19
AP	766.0	B	411006	7030851	45.4	48.3	294.1	263.3	153.1	123.5	---	---	20
AQ	761.5	B	411008	7031009	44.4	6.6	321.9	262.8	153.1	116.7	27.0	0	0
AR	753.1	B	411014	7031228	16.3	15.9	94.7	45.6	6.6	7.7	---	---	0
AS	746.2	D	411016	7031400	9.6	25.8	0.0	56.7	0.8	4.2	---	---	9
AT	744.0	D	411015	7031460	9.3	21.6	0.0	59.0	0.0	4.2	---	---	3
AU	735.6	D	411001	7031678	30.0	24.8	89.3	0.2	9.7	19.1	---	---	0
AV	727.5	B	411008	7031833	7.2	17.0	117.7	285.9	6.7	44.8	---	---	40
AW	694.3	D	411018	7032319	10.2	13.0	34.2	31.2	8.7	12.4	---	---	0
AX	686.0	B	411031	7032506	5.8	6.7	67.8	43.9	8.9	20.6	0.9	27	0
AY	665.3	M	411062	7032900	1.3	3.4	0.0	29.6	2.5	3.6	---	---	33
AZ	648.2	M	411067	7033139	4.2	3.6	18.0	43.5	3.9	6.2	---	---	21

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30490		FLIGHT	13									
BA	642.4	M	411071	7033225	1.6	9.1	18.0	43.5	10.1	6.9	---	---	0
BB	638.2	M	411072	7033310	0.0	0.0	5.5	5.0	12.1	1.7	---	---	139
BC	588.2	S	411114	7034778	2.8	11.8	10.7	80.8	1.2	11.2	---	---	0
BD	574.3	S?	411112	7035107	1.8	10.8	2.0	40.0	1.1	5.4	---	---	0
BE	550.1	E	411135	7035443	14.8	30.4	109.1	165.5	3.2	36.8	---	---	0
BF	541.3	B	411144	7035647	8.4	22.1	107.6	132.3	8.1	34.7	---	---	0
BG	531.7	D	411153	7035947	6.7	6.4	14.7	30.1	2.3	7.3	---	---	0
BH	517.2	S	411152	7036488	9.3	25.4	54.9	170.6	2.0	24.3	---	---	0
BI	504.9	B?	411142	7036995	10.0	13.2	60.4	50.7	12.1	13.9	---	---	50
BJ	502.0	B?	411147	7037118	10.4	8.1	60.4	63.1	10.7	25.1	---	---	0
BK	496.8	S?	411155	7037320	17.9	31.6	72.0	153.6	5.9	24.9	---	---	0
LINE	30500		FLIGHT	13									
A	1614.8	B?	410989	7018032	3.3	19.6	17.3	90.5	2.0	10.4	---	---	0
B	1619.4	B?	410979	7018121	4.2	14.4	17.3	90.5	1.1	10.4	---	---	13
C	1634.4	S?	411019	7018315	3.4	5.3	12.8	34.9	1.9	5.0	---	---	0
D	1756.9	B	411053	7019221	14.5	22.4	149.3	153.7	3.1	43.8	---	---	0
E	1760.7	D	411056	7019328	28.2	23.8	183.6	157.4	19.8	55.4	---	---	2
F	1764.9	B	411065	7019447	11.2	7.7	183.6	157.4	19.8	55.4	---	---	3
G	1784.9	B	411087	7019718	4.9	50.7	126.5	583.2	5.9	78.6	---	---	0
H	1798.7	B	411091	7019877	9.1	50.5	12.8	141.7	1.9	16.0	---	---	8
I	1804.7	B	411101	7019958	10.3	36.0	98.7	334.8	1.2	47.5	---	---	0
J	1814.1	B	411116	7020151	14.4	17.9	64.3	317.0	6.8	45.9	---	---	0
K	1823.8	B	411119	7020384	4.7	7.5	0.8	36.9	3.2	0.0	---	---	0
L	1850.6	S?	411120	7020937	0.9	4.2	39.0	107.2	1.7	19.2	---	---	2
M	1871.1	B?	411131	7021220	4.3	7.5	55.7	88.5	3.9	18.1	---	---	0
N	1879.5	B?	411120	7021324	3.1	9.2	6.2	37.8	3.3	4.8	---	---	0
O	1889.9	B?	411110	7021518	8.6	12.3	7.5	65.1	3.6	1.5	---	---	8
P	1902.0	B	411152	7021787	6.7	9.1	59.8	45.6	11.6	21.7	0.8	5	0
Q	1916.4	B	411156	7022066	11.7	31.3	98.2	213.1	8.0	40.6	---	---	0
R	1925.1	B	411152	7022227	8.8	13.4	18.2	58.1	9.1	3.2	---	---	7
S	1934.7	B	411173	7022376	10.8	36.8	70.1	322.3	0.2	44.3	---	---	0
T	1953.7	B	411193	7022639	12.4	16.8	72.7	172.7	4.9	24.4	---	---	21
U	1961.4	B	411187	7022778	14.2	30.8	47.8	144.8	3.0	15.9	---	---	22
V	1966.2	B	411187	7022873	6.8	5.5	4.4	16.1	6.6	0.7	---	---	0
W	1972.5	B	411181	7023020	25.0	16.5	176.2	89.4	33.3	60.3	---	---	37
X	1975.7	B	411177	7023107	22.5	9.4	176.2	89.4	33.3	60.3	---	---	37
Y	1987.9	B	411182	7023455	27.9	32.4	92.7	131.6	8.5	25.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30500		FLIGHT	13									
Z	1999.7	S?	411203	7023782	6.3	15.6	46.1	145.8	0.0	18.4	---	---	24
AA	2002.9	B?	411207	7023858	13.3	27.3	46.1	145.8	0.7	18.4	---	---	19
AB	2053.3	B	411212	7024174	2.8	11.0	8.6	58.3	3.7	11.5	---	---	0
AC	2066.2	B	411216	7024262	5.3	17.0	14.8	88.8	2.9	10.8	---	---	3
AD	2090.8	B	411221	7024478	23.1	23.4	189.3	175.4	7.6	43.3	---	---	3
AE	2108.2	B	411219	7024614	22.3	66.4	98.8	140.6	0.1	23.5	---	---	0
AF	2118.8	B?	411209	7024720	10.4	29.1	52.6	84.0	4.0	14.1	---	---	16
AG	2133.7	B	411209	7024881	10.3	13.4	31.6	14.7	5.0	4.7	---	---	3
AH	2142.8	B	411209	7024999	28.5	31.4	228.0	180.9	26.1	65.7	---	---	0
AI	2180.3	B	411247	7025505	10.7	13.2	49.7	41.9	8.2	8.0	---	---	40
AJ	2188.5	S?	411257	7025767	5.0	9.6	40.6	46.5	4.1	13.7	---	---	0
AK	2198.4	S?	411253	7026133	7.1	15.0	5.2	29.1	2.4	2.5	---	---	0
AL	2212.6	S?	411275	7026709	5.6	9.1	60.3	48.4	3.8	10.7	---	---	0
AM	2233.5	S?	411299	7027533	3.4	7.7	26.4	93.9	4.1	12.6	---	---	5
AN	2284.6	B	411348	7029466	6.6	11.3	10.6	12.4	4.0	4.9	---	---	0
AO	2291.8	D	411347	7029706	40.3	25.7	180.8	164.4	37.7	70.1	---	---	84
AP	2294.8	B?	411353	7029808	33.5	22.2	180.8	147.4	37.7	70.1	---	---	20
AQ	2305.7	B	411375	7030174	4.4	7.8	9.2	39.0	4.7	3.0	---	---	0
AR	2315.1	B	411383	7030477	2.3	9.1	35.6	155.8	4.6	24.4	---	---	0
AS	2317.5	B?	411382	7030553	2.4	21.3	35.6	155.8	4.6	24.5	---	---	0
AT	2323.8	D	411381	7030761	77.6	78.0	198.9	196.3	19.3	56.1	---	---	9
AU	2327.1	D	411385	7030870	10.2	0.0	198.9	196.3	78.0	38.4	---	---	20
AV	2330.2	D	411392	7030971	46.9	48.6	169.8	35.8	77.9	48.3	---	---	20
AW	2334.6	D	411404	7031109	34.7	3.2	103.1	4.7	121.0	144.0	---	---	22
AX	2338.6	B	411408	7031210	73.5	101.3	420.9	294.8	121.0	144.0	---	---	0
AY	2339.9	D	411408	7031236	86.3	101.3	420.9	294.8	121.0	144.0	---	---	0
AZ	2357.6	D	411404	7031516	17.7	16.9	2.4	16.7	2.2	0.5	---	---	0
BA	2363.0	B	411406	7031606	15.1	16.8	92.7	53.1	5.0	22.1	---	---	0
BB	2372.5	B	411424	7031747	8.1	8.6	0.2	16.2	16.5	4.1	---	---	3
BC	2385.8	B	411430	7031865	16.2	11.5	71.0	54.1	20.8	22.2	---	---	0
BD	2395.7	B?	411429	7031956	6.7	6.8	36.7	11.7	5.9	11.7	---	---	0
BE	2404.1	D	411424	7032068	5.3	10.1	35.9	40.3	3.3	11.6	---	---	0
BF	2418.9	B	411439	7032319	10.7	14.6	65.2	88.3	3.9	21.6	---	---	0
BG	2422.7	B	411431	7032410	13.8	17.7	62.8	88.3	20.2	22.2	---	---	0
BH	2430.4	D	411414	7032652	34.7	29.4	140.9	168.7	24.0	44.9	---	---	0
BI	2468.1	S	411499	7034098	3.0	9.8	18.2	49.4	5.2	7.4	0.3	8	0
BJ	2474.9	S	411484	7034369	2.3	12.5	15.2	61.5	4.8	8.2	---	---	1
BK	2499.0	S?	411506	7034996	1.9	12.4	10.1	33.2	3.3	4.8	-0.1	14	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30500		FLIGHT	13									
BL	2534.0	E	411524	7035361	12.8	26.0	19.8	186.0	2.6	10.2	---	---	1
BM	2540.2	S	411527	7035513	2.6	14.0	112.4	186.6	8.6	41.0	---	---	0
BN	2562.8	S	411552	7036327	8.5	21.3	36.0	148.7	0.7	18.7	---	---	0
BO	2573.8	S	411540	7036701	7.4	21.9	67.4	103.2	9.6	23.6	---	---	10
BP	2586.7	B	411555	7037083	16.2	38.2	101.0	212.9	9.8	32.9	---	---	22
BQ	2595.0	B?	411560	7037291	15.9	37.3	77.1	161.7	5.9	29.2	---	---	17
BR	2612.1	B?	411584	7037610	11.9	34.1	13.9	90.4	2.6	9.6	---	---	1
BS	2620.2	S?	411584	7037716	4.9	20.8	77.9	215.7	4.7	33.0	---	---	0
LINE	30510		FLIGHT	13									
A	4179.0	B?	411478	7018802	2.8	9.3	14.4	48.0	1.7	7.5	---	---	0
B	4161.2	B	411500	7019198	8.0	22.6	147.0	284.8	11.6	59.7	---	---	0
C	4156.1	B	411504	7019304	22.6	65.5	123.1	287.7	12.5	61.0	---	---	0
D	4151.9	B	411516	7019384	17.2	15.2	123.1	171.8	9.2	45.1	---	---	1
E	4137.8	B	411496	7019627	6.5	51.1	53.9	240.0	6.7	36.1	---	---	6
F	4128.2	B	411504	7019740	2.6	9.4	0.0	0.4	0.1	0.0	---	---	0
G	4083.9	S?	411518	7020662	4.4	15.9	44.0	125.3	1.9	18.5	---	---	0
H	4059.3	S?	411544	7021224	5.5	23.7	58.0	166.2	1.3	23.0	---	---	1
I	4014.6	B?	411559	7022036	0.4	20.5	0.0	129.3	0.0	12.7	---	---	1
J	3983.7	B	411588	7022461	7.6	16.7	108.8	113.6	6.9	29.1	---	---	34
K	3979.2	B	411589	7022536	21.0	22.4	108.8	113.6	6.9	29.1	---	---	34
L	3970.0	B	411604	7022683	8.8	19.9	107.5	93.5	7.7	29.5	---	---	0
M	3964.7	B	411600	7022770	12.0	23.1	112.8	198.4	7.2	28.8	---	---	0
N	3951.4	B	411592	7022965	10.1	27.2	104.6	120.4	8.0	28.1	---	---	39
O	3944.0	B	411589	7023092	10.9	17.8	104.6	120.4	12.4	28.1	0.8	2	0
P	3938.3	D	411587	7023207	14.0	37.3	108.7	116.4	33.8	52.9	---	---	0
Q	3929.4	D	411599	7023376	33.7	10.8	150.8	68.2	33.8	54.4	---	---	24
R	3922.2	B?	411594	7023527	7.8	7.0	83.5	67.5	3.3	15.9	---	---	29
S	3889.6	B	411603	7023992	20.8	24.0	141.4	140.6	10.1	40.0	---	---	0
T	3872.5	D	411614	7024245	126.7	119.9	600.0	611.2	31.5	159.5	---	---	0
U	3832.8	B	411634	7024446	2.4	7.6	6.8	30.7	1.5	3.8	---	---	0
V	3802.7	B	411608	7024579	14.3	7.5	228.0	156.5	5.9	53.3	---	---	0
W	3778.0	B	411624	7024810	26.1	28.2	50.2	74.9	7.5	20.1	---	---	2
X	3764.8	B	411627	7025096	77.3	69.1	464.8	398.1	50.1	154.8	---	---	23
Y	3759.3	B	411645	7025251	17.3	37.9	51.7	160.4	10.7	35.2	---	---	0
Z	3743.8	S?	411655	7025751	7.3	8.1	71.5	116.8	7.2	25.1	---	---	50
AA	3722.3	S	411699	7026620	4.9	7.0	36.3	70.5	4.8	15.4	---	---	5
AB	3698.6	S	411698	7027611	5.3	11.4	44.0	64.7	1.7	13.9	---	---	9

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30510		FLIGHT	13									
AC	3681.1	S	411743	7028317	4.6	16.8	4.7	56.7	2.8	8.3	0.3	2	3
AD	3671.6	S	411736	7028656	4.7	11.3	12.6	32.9	1.7	1.9	---	---	8
AE	3657.5	B	411742	7029174	6.0	12.1	75.2	67.4	11.7	18.4	---	---	0
AF	3641.2	B	411779	7029766	13.5	10.1	39.9	74.3	4.8	12.6	---	---	0
AG	3635.3	B	411785	7029977	51.6	27.3	254.3	134.0	61.2	91.2	---	---	257
AH	3615.0	S	411791	7030620	4.4	22.4	60.5	185.8	2.5	26.5	---	---	0
AI	3600.7	B?	411811	7030951	21.0	41.9	127.4	229.0	8.9	44.0	---	---	0
AJ	3583.3	D	411843	7031335	163.7	90.8	413.4	337.4	98.4	109.5	---	---	48
AK	3576.2	D	411856	7031503	192.9	213.2	694.6	879.3	94.0	233.1	---	---	0
AL	3568.7	D	411860	7031652	38.9	62.3	310.4	273.9	5.1	118.7	---	---	59
AM	3560.3	D	411828	7031785	47.4	74.8	131.0	250.2	58.1	49.5	---	---	3
AN	3546.3	D	411845	7031956	18.8	14.2	61.1	47.8	14.8	21.9	---	---	0
AO	3531.0	D	411830	7032131	6.6	12.4	6.4	27.3	0.1	0.8	---	---	21
AP	3520.1	B	411853	7032344	39.3	52.0	290.9	392.8	15.4	99.2	---	---	0
AQ	3511.9	D	411847	7032500	11.4	27.8	184.4	119.6	48.5	99.3	---	---	0
AR	3507.9	D	411855	7032586	19.5	2.0	174.1	119.6	35.9	50.6	---	---	0
AS	3502.7	B	411872	7032708	32.8	51.0	188.1	216.7	25.7	62.0	---	---	2
AT	3429.7	S	411892	7034234	1.0	8.0	10.2	59.4	1.0	8.6	-0.1	8	0
AU	3408.1	S?	411916	7034871	2.5	5.2	9.1	33.2	5.5	4.0	-0.4	52	4
AV	3383.4	B	411906	7035205	15.1	16.1	145.6	127.5	13.0	43.6	---	---	0
AW	3373.9	B	411913	7035353	26.2	31.3	147.6	130.4	14.3	34.3	---	---	1
AX	3350.3	S	411942	7035987	6.4	27.7	62.3	152.9	5.9	26.8	---	---	2
AY	3333.5	S	411962	7036521	6.6	11.6	51.3	131.3	4.3	19.5	---	---	0
AZ	3317.3	B	411969	7037032	18.9	15.0	98.5	59.6	45.0	30.1	---	---	0
BA	3307.4	D	411981	7037326	12.4	36.6	50.7	63.2	3.6	14.2	0.5	0	420
BB	3300.3	B	411990	7037537	13.1	9.5	50.7	68.2	3.6	10.2	---	---	0
BC	3296.0	B	411993	7037649	1.0	4.6	12.9	89.3	5.9	8.0	---	---	0
BD	3292.6	B	411994	7037724	5.8	20.6	14.1	89.3	5.9	8.0	---	---	0
BE	3276.6	B	412012	7037969	8.4	22.6	45.1	209.4	1.8	30.7	---	---	8
BF	3258.6	B?	412018	7038210	11.7	24.3	98.1	175.0	8.0	32.1	---	---	2
BG	3251.0	B	412044	7038431	13.7	8.7	75.8	47.7	65.8	28.8	2.4	25	6
BH	3244.6	D	412029	7038607	46.2	13.8	75.8	45.7	65.8	28.8	---	---	2
BI	3222.6	B	412012	7038892	211.6	159.1	831.0	767.1	149.0	289.0	---	---	0
BJ	3173.9	M	412045	7039425	0.9	0.7	2.4	7.2	1.0	4.0	---	---	559
BK	3002.3	B	412099	7040836	5.4	9.8	105.0	108.0	13.5	32.2	---	---	0
BL	2999.1	B	412095	7040892	9.7	15.2	105.0	108.0	13.5	32.4	---	---	0
BM	2974.2	B	412089	7041248	18.9	16.3	55.6	80.4	11.0	17.2	---	---	0
BN	2960.2	S	412085	7041661	3.3	15.2	59.9	134.8	3.7	25.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30510			FLIGHT 13										
BO	2921.7	S	412073	7042499	2.1	10.9	3.6	33.4	0.2	4.3	---	---	0
LINE 30520			FLIGHT 13										
A	4359.4	B?	411736	7018155	3.6	7.2	10.0	29.9	0.6	3.6	---	---	2
B	4400.3	S	411786	7018473	0.5	8.2	3.9	17.1	1.5	2.2	---	---	3
C	4454.8	S	411878	7018831	2.8	5.3	0.6	51.0	1.2	6.2	-0.4	49	2
D	4497.6	B?	411861	7019218	9.0	8.6	106.0	99.8	8.5	29.2	---	---	0
E	4512.7	B	411872	7019355	14.5	30.6	85.3	219.9	5.2	31.5	---	---	0
F	4525.1	B	411889	7019460	4.1	6.8	47.1	0.0	2.7	16.1	---	---	0
G	4534.4	B	411895	7019559	14.1	14.3	47.1	127.5	2.7	16.1	---	---	0
H	4573.7	B	411910	7020010	7.5	6.6	50.0	45.2	2.5	12.3	---	---	0
I	4587.9	B	411911	7020218	4.9	18.7	67.0	209.0	2.2	29.4	---	---	0
J	4597.6	B	411917	7020298	7.6	11.5	34.8	57.9	1.6	10.8	---	---	0
K	4636.8	B	411949	7020793	4.1	15.6	32.0	131.4	4.1	19.1	---	---	0
L	4647.0	B	411936	7020925	4.3	5.5	41.3	1.7	6.0	19.3	---	---	0
M	4655.1	B	411926	7021069	6.4	21.0	95.3	149.9	8.4	34.7	---	---	0
N	4689.0	B	411946	7021478	5.2	9.4	37.9	31.3	6.5	9.4	---	---	0
O	4700.7	B	411966	7021714	27.9	29.6	191.7	208.3	27.2	63.5	---	---	13
P	4705.3	B	411967	7021843	19.6	15.0	189.4	148.0	27.2	61.4	---	---	0
Q	4728.3	S	411956	7022295	1.2	11.3	12.9	86.3	0.1	12.7	---	---	0
R	4745.7	B?	411970	7022625	17.1	38.1	149.7	195.3	8.7	41.3	---	---	0
S	4766.2	B	411984	7022921	1.4	13.4	54.6	113.8	6.0	18.8	---	---	27
T	4792.7	D	411994	7023294	31.4	59.4	134.8	452.6	9.3	50.3	---	---	2
U	4809.1	B	412021	7023571	1.4	6.5	0.0	0.0	0.0	0.0	---	---	8
V	4823.0	D	412013	7023775	107.2	114.8	328.0	328.4	31.2	107.6	---	---	0
W	4838.7	B	412018	7024061	19.8	37.6	71.8	143.7	8.1	30.8	---	---	0
X	4840.9	B	412021	7024104	15.3	20.5	71.8	143.7	8.1	30.8	---	---	0
Y	4848.9	B	412035	7024257	11.0	6.1	19.6	28.2	6.4	3.9	---	---	40
Z	4893.9	B	412041	7024795	48.6	30.1	285.3	501.4	35.2	82.9	---	---	0
AA	4895.8	B	412041	7024847	27.2	30.1	295.7	501.4	35.2	121.6	---	---	0
AB	4899.0	B	412043	7024943	41.6	75.0	198.3	255.6	35.2	122.6	---	---	0
AC	4901.3	B	412046	7025014	55.5	65.3	198.3	255.6	35.2	122.6	---	---	0
AD	4904.0	B	412052	7025101	63.6	93.8	325.1	446.1	14.7	88.6	---	---	62
AE	4913.3	B	412055	7025434	13.2	19.0	43.5	106.3	0.8	13.9	---	---	45
AF	4936.9	S	412083	7026402	6.2	23.1	73.5	176.4	7.6	30.0	---	---	0
AG	4957.9	S	412096	7027288	4.1	15.7	20.7	73.0	2.2	10.4	---	---	1
AH	4962.9	S	412097	7027498	3.1	15.7	31.2	83.6	1.8	16.0	---	---	0
AI	4971.0	S	412120	7027824	2.7	12.8	47.0	138.5	4.6	23.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30520		FLIGHT	13									
AJ	4990.9	S	412120	7028609	5.5	4.5	24.5	98.1	0.4	12.2	---	---	2
AK	5005.5	S	412136	7029216	15.8	17.0	97.5	86.4	10.1	26.3	---	---	0
AL	5024.7	B	412205	7029954	17.6	14.5	120.2	78.0	17.2	37.5	---	---	0
AM	5029.0	B	412192	7030102	22.2	9.9	120.2	28.2	20.0	37.5	4.4	17	0
AN	5038.7	B?	412174	7030439	5.7	20.1	0.1	65.0	6.4	2.6	---	---	2
AO	5045.6	B?	412190	7030668	2.2	11.4	15.1	92.7	0.7	8.9	-0.2	9	30
AP	5054.2	D	412217	7030947	20.8	29.6	64.5	83.7	7.0	16.4	---	---	0
AQ	5062.4	B	412239	7031198	30.2	44.9	162.2	264.0	17.1	46.8	---	---	0
AR	5068.0	D	412231	7031384	7.8	32.0	162.2	96.8	17.4	46.8	---	---	1
AS	5072.4	D	412220	7031531	21.8	0.0	41.0	96.8	17.4	13.7	---	---	23
AT	5083.0	B	412228	7031888	36.1	21.9	216.5	176.2	34.3	68.7	---	---	0
AU	5087.7	D	412240	7032033	38.0	45.4	216.5	151.5	34.3	68.7	---	---	0
AV	5092.1	D	412241	7032157	20.9	15.2	43.6	0.1	27.0	19.2	---	---	71
AW	5097.1	B	412231	7032286	0.6	7.2	81.0	143.4	0.8	27.9	---	---	0
AX	5100.6	B	412227	7032375	15.3	13.3	81.0	143.4	11.9	27.9	---	---	5
AY	5103.3	D	412224	7032439	49.5	39.7	130.4	143.4	29.5	45.5	---	---	5
AZ	5109.6	D	412225	7032576	23.9	12.6	130.4	59.6	29.5	45.5	---	---	0
BA	5118.2	D	412230	7032704	4.6	9.3	39.4	58.6	5.7	9.8	---	---	0
BB	5193.4	S	412311	7034392	0.9	9.1	10.0	53.3	2.5	7.1	---	---	0
BC	5229.9	D	412349	7035153	58.8	52.8	301.7	348.5	43.9	113.0	---	---	5
BD	5233.0	D	412345	7035216	22.2	66.0	301.7	348.5	43.9	113.0	---	---	0
BE	5236.3	D	412332	7035286	55.2	29.2	275.9	341.1	43.9	113.0	---	---	0
BF	5257.8	B	412348	7035943	9.4	11.8	73.4	78.8	7.4	20.4	---	---	9
BG	5284.6	B	412374	7036946	24.3	41.6	116.7	152.6	13.2	36.7	---	---	0
BH	5306.3	B	412389	7037592	18.3	23.4	97.8	114.3	8.0	28.8	---	---	0
BI	5327.3	B	412400	7038071	11.0	46.1	4.5	22.5	0.4	4.1	---	---	0
BJ	5342.1	D	412394	7038268	148.2	133.9	210.1	311.6	16.2	74.3	---	---	1
BK	5348.4	B	412385	7038419	10.9	23.8	68.1	112.7	15.5	27.1	---	---	0
BL	5376.1	B	412402	7038876	13.7	15.6	96.1	74.4	26.1	28.1	---	---	0
BM	5457.1	D	412475	7040468	12.3	13.2	38.7	38.2	11.5	12.6	---	---	0
BN	5476.8	B	412491	7040754	0.3	4.0	90.1	69.2	26.5	35.2	---	---	3
BO	5483.3	B	412487	7040835	12.5	6.8	144.2	69.6	81.1	49.0	---	---	2
BP	5487.7	B	412487	7040905	8.5	9.6	144.2	69.4	81.1	49.0	---	---	0
BQ	5506.0	B	412478	7041336	8.7	10.3	66.3	106.4	11.1	26.1	1.0	1	4
BR	5509.1	B	412491	7041460	16.1	11.9	66.3	106.4	11.1	26.1	---	---	4
BS	5539.5	S	412511	7041987	0.8	5.3	3.3	28.1	0.2	3.7	---	---	0
BT	5608.9	D	412529	7042679	59.1	65.1	106.0	111.7	28.5	40.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30530		FLIGHT	14									
A	2269.2	D	412286	7018160	7.5	9.8	24.4	17.4	0.9	5.4	---	---	0
B	2232.0	S	412272	7018870	1.9	7.1	0.9	21.5	0.7	3.0	---	---	1
C	2166.8	B?	412263	7019322	4.8	3.8	20.7	81.6	3.2	6.7	---	---	0
D	2116.5	B?	412300	7019827	1.5	9.5	28.1	60.1	2.9	14.6	---	---	0
E	2091.4	S?	412296	7020159	2.0	7.5	17.9	46.7	0.9	7.2	---	---	0
F	2058.6	B	412328	7020626	27.4	90.3	228.2	646.3	13.3	100.9	---	---	0
G	2027.0	B	412334	7020791	14.5	49.7	244.0	542.6	6.1	95.5	---	---	0
H	2002.9	B	412342	7020925	21.2	63.6	96.6	295.4	4.5	44.9	---	---	0
I	1977.2	B	412334	7021217	21.5	23.6	145.7	166.4	23.9	50.6	---	---	21
J	1973.8	B	412331	7021281	16.2	26.0	150.2	166.4	23.9	50.6	---	---	21
K	1961.3	B	412340	7021476	8.2	16.4	6.0	22.6	4.1	4.0	---	---	0
L	1919.7	B	412349	7021770	9.2	50.7	190.8	378.2	5.5	70.3	---	---	0
M	1896.7	B	412348	7021898	9.3	22.9	63.5	187.5	1.4	28.6	---	---	0
N	1876.0	B	412358	7022093	20.7	14.2	123.1	26.9	10.3	3.1	---	---	40
O	1863.2	B	412363	7022314	32.5	22.5	212.3	96.5	52.9	71.8	---	---	0
P	1854.9	B	412362	7022474	5.6	24.3	0.0	151.3	0.0	1.7	---	---	32
Q	1846.0	B	412374	7022626	85.5	43.8	591.4	291.8	146.3	218.6	---	---	0
R	1840.0	B	412380	7022722	87.0	72.2	591.4	314.9	146.3	218.6	---	---	0
S	1821.0	B	412397	7023040	28.4	22.4	152.8	12.9	42.2	67.6	2.3	17	0
T	1812.3	B	412398	7023177	69.7	49.7	396.4	261.7	48.0	117.7	---	---	108
U	1804.3	B	412399	7023323	46.8	41.6	111.1	249.2	7.4	47.6	---	---	24
V	1782.0	B	412402	7023644	35.3	36.4	251.1	182.3	71.3	100.1	---	---	0
W	1765.0	B	412405	7023801	8.2	42.9	26.0	33.0	14.7	5.4	---	---	0
X	1749.7	B	412412	7023930	18.0	83.5	236.6	483.6	9.8	102.7	---	---	41
Y	1731.7	B	412414	7024020	92.1	159.2	425.3	692.5	18.2	142.9	---	---	0
Z	1689.3	B	412421	7024359	4.7	10.9	19.5	61.1	12.1	18.0	---	---	69
AA	1674.8	B	412435	7024847	5.2	27.0	50.3	119.4	10.7	23.6	---	---	13
AB	1663.4	B	412459	7025272	8.4	18.1	5.5	18.9	19.8	0.0	---	---	16
AC	1655.2	B	412467	7025601	25.8	21.2	99.2	78.7	19.8	36.4	---	---	0
AD	1651.2	B	412464	7025773	0.0	0.0	147.9	178.5	8.4	37.9	---	---	0
AE	1646.2	B	412463	7025990	25.0	48.6	147.9	178.5	8.4	37.9	---	---	41
AF	1637.3	B	412479	7026379	11.0	21.0	102.2	136.0	16.3	40.8	---	---	0
AG	1635.4	B	412482	7026463	9.6	21.7	102.2	136.0	16.3	40.8	---	---	0
AH	1624.4	S?	412492	7026937	14.9	16.9	75.4	91.0	1.7	27.2	---	---	0
AI	1616.2	S	412503	7027293	7.1	18.9	7.8	97.4	0.7	6.8	---	---	4
AJ	1601.6	S	412523	7027926	8.0	17.7	63.1	113.4	8.0	25.1	---	---	0
AK	1570.1	S	412563	7029190	19.8	30.3	130.7	140.9	8.6	38.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30530		FLIGHT	14									
AL	1546.2	D	412594	7030211	33.5	43.9	170.8	155.1	15.0	47.9	---	---	18
AM	1544.0	B	412597	7030305	23.4	35.4	170.8	155.1	15.0	47.9	---	---	18
AN	1541.1	D	412600	7030425	32.5	18.9	170.8	155.1	15.0	47.9	---	---	0
AO	1526.7	B	412619	7030957	59.7	61.6	498.2	580.2	25.0	144.2	---	---	15
AP	1521.8	B	412637	7031125	63.1	86.3	498.2	580.2	25.2	144.2	---	---	9
AQ	1520.0	B	412644	7031183	63.1	86.3	498.2	580.2	117.0	144.2	---	---	0
AR	1508.2	B	412658	7031534	430.1	339.0	1924.2	1458.8	454.0	673.5	---	---	0
AS	1497.3	D	412638	7031717	272.3	180.8	771.8	667.3	188.0	293.4	---	---	0
AT	1483.3	D	412641	7032044	57.5	44.0	135.1	138.5	13.7	51.8	---	---	20
AU	1480.9	B	412640	7032115	57.5	28.3	135.1	138.5	13.7	51.8	---	---	21
AV	1468.1	B	412647	7032447	51.7	32.9	334.5	180.4	108.0	129.2	---	---	0
AW	1461.9	B	412645	7032578	17.2	20.8	83.6	87.9	107.3	28.0	---	---	3
AX	1433.5	S?	412654	7032935	1.4	13.3	0.4	65.2	1.9	10.9	---	---	2
AY	1404.0	S	412672	7033204	2.0	6.9	15.8	52.0	3.2	9.0	---	---	0
AZ	1276.2	S	412712	7034628	3.0	14.0	7.3	104.4	1.6	13.2	-0.2	20	3
BA	1251.3	S	412711	7034971	1.8	11.0	3.7	33.8	4.1	1.8	-0.1	20	2
BB	1235.2	B	412727	7035161	49.2	86.4	324.6	544.2	27.5	115.2	---	---	5
BC	1230.6	B	412730	7035231	39.1	89.5	324.6	544.2	27.5	115.2	---	---	5
BD	1196.9	B?	412755	7036195	7.6	34.6	42.0	150.4	2.3	21.3	---	---	0
BE	1183.4	B	412777	7036624	13.7	34.0	50.7	128.9	10.6	20.2	---	---	0
BF	1171.1	B	412784	7036893	47.0	18.9	289.4	283.9	52.0	105.8	---	---	0
BG	1165.3	B	412781	7037050	20.5	64.5	152.8	283.9	14.0	61.7	---	---	0
BH	1159.5	B	412781	7037190	19.1	1.1	152.8	283.9	14.0	61.7	---	---	0
BI	1138.1	B	412797	7037663	28.5	27.9	168.9	195.0	52.9	60.3	---	---	0
BJ	1134.1	M	412805	7037785	15.1	28.2	168.9	334.8	52.9	66.9	---	---	145
BK	1131.1	B	412810	7037879	15.1	28.2	136.1	334.8	3.8	66.9	---	---	32
BL	1127.3	B	412815	7037993	26.2	59.5	136.1	334.8	1.2	66.9	---	---	0
BM	1110.6	B?	412804	7038347	5.9	14.3	43.1	51.1	9.9	10.4	---	---	0
BN	1094.0	B	412784	7038569	2.5	8.3	35.3	0.0	11.3	17.2	---	---	0
BO	1083.8	D	412785	7038652	24.4	17.1	38.7	48.9	29.4	10.8	---	---	0
BP	1068.4	D	412805	7038780	72.6	93.3	179.8	203.2	40.6	67.4	---	---	0
BQ	1046.3	B?	412822	7038963	1.1	12.6	24.4	54.3	0.4	12.0	---	---	12
BR	914.5	B?	412865	7040021	9.0	19.2	71.0	109.2	3.1	21.2	---	---	0
BS	905.1	D	412863	7040153	10.1	0.2	85.4	80.0	21.8	33.2	---	---	0
BT	897.0	D	412856	7040234	13.3	11.7	85.4	80.0	2.4	33.2	---	---	1
BU	830.3	B	412871	7040700	7.9	2.5	206.7	81.1	117.9	62.6	---	---	0
BV	801.1	D	412879	7040867	15.6	16.0	86.0	71.8	11.8	32.6	---	---	0
BW	793.1	D	412881	7040955	21.3	11.1	144.8	63.1	50.0	58.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30530		FLIGHT	14									
BX	787.0	D	412878	7041033	9.7	0.2	144.8	40.0	50.0	58.5	---	---	0
BY	749.3	S	412877	7041536	2.4	15.1	11.8	64.6	2.8	11.0	---	---	0
BZ	717.9	S?	412867	7041896	1.6	10.2	5.6	44.9	1.9	4.6	-0.1	14	0
CA	645.4	D	412906	7042515	16.3	12.4	48.0	10.6	22.9	17.5	---	---	0
CB	637.3	D	412912	7042591	31.4	16.7	48.0	30.4	22.9	17.5	---	---	0
LINE	30540		FLIGHT	14									
A	2445.9	S	412627	7018343	2.3	6.3	2.7	29.2	1.4	5.0	---	---	0
B	2545.0	B	412684	7019226	25.8	50.7	160.4	299.6	6.6	55.7	---	---	10
C	2555.2	B	412689	7019343	1.7	6.5	121.0	94.1	4.0	18.1	---	---	0
D	2605.4	B	412689	7019919	9.3	24.5	56.3	97.4	3.8	14.0	---	---	0
E	2615.7	B	412697	7020093	5.5	14.8	8.7	24.7	2.7	6.0	---	---	38
F	2630.6	B	412708	7020381	42.4	38.4	288.3	191.4	55.0	99.3	---	---	12
G	2639.5	B	412714	7020480	9.4	7.3	226.7	129.7	45.9	78.8	---	---	0
H	2649.6	B	412713	7020563	18.3	32.3	105.8	152.2	15.2	31.5	---	---	4
I	2680.0	B	412719	7020788	20.3	111.9	132.7	634.1	13.5	82.2	---	---	0
J	2694.9	B	412721	7020954	17.3	28.9	51.8	104.7	8.4	0.1	---	---	0
K	2710.5	B	412740	7021225	10.5	10.8	109.4	75.7	24.8	40.1	---	---	66
L	2738.2	B	412734	7021570	9.9	14.6	50.5	66.6	6.7	15.9	---	---	2
M	2748.6	B	412739	7021656	5.4	20.9	50.8	91.5	2.3	17.0	---	---	0
N	2769.5	B?	412743	7021770	2.7	28.4	4.8	337.4	1.6	39.4	-0.1	4	0
O	2814.0	B	412746	7022185	33.5	87.0	211.9	440.6	15.2	79.8	---	---	0
P	2835.7	B	412780	7022524	7.5	28.7	65.8	125.5	14.0	25.7	---	---	0
Q	2842.5	B	412785	7022630	23.3	23.1	128.3	124.6	15.8	38.0	---	---	0
R	2854.8	D	412779	7022761	16.7	32.9	82.8	65.9	0.0	21.0	---	---	0
S	2864.6	D	412784	7022887	12.6	17.8	88.4	44.2	3.1	18.8	---	---	0
T	2869.1	B	412785	7022963	20.2	19.1	126.6	301.2	10.4	51.5	---	---	126
U	2876.2	B	412776	7023119	24.9	54.8	157.1	301.2	23.0	50.7	---	---	0
V	2896.7	B	412775	7023445	43.7	47.8	300.6	344.7	70.2	111.2	---	---	0
W	2906.8	B	412805	7023639	20.3	19.3	90.0	157.8	14.6	28.6	---	---	53
X	2909.3	B	412811	7023701	14.3	19.3	90.0	109.0	12.0	28.6	---	---	53
Y	2912.2	B	412815	7023776	0.6	15.2	0.0	109.0	12.0	0.0	---	---	0
Z	2914.8	B	412814	7023844	33.8	19.9	5.5	54.6	0.0	0.9	---	---	2
AA	2924.2	B	412810	7024115	28.9	17.7	90.3	50.5	10.8	36.5	---	---	75
AB	2930.5	B	412811	7024297	25.7	1.3	97.2	3.8	62.6	37.6	---	---	0
AC	2938.3	B	412820	7024551	20.2	78.2	173.5	522.8	32.2	59.3	---	---	48
AD	2941.6	B	412829	7024671	4.4	60.7	35.6	522.8	32.2	59.3	---	---	79
AE	2947.0	B	412845	7024873	38.1	32.8	228.0	148.6	10.2	53.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30540		FLIGHT	14									
AF	2953.8	B	412850	7025122	23.7	18.1	217.9	150.7	18.3	69.2	---	---	0
AG	2959.1	B	412850	7025315	33.4	46.8	223.8	213.6	18.3	69.2	---	---	15
AH	2974.2	B	412850	7025887	15.7	18.5	136.6	29.6	13.1	31.7	---	---	0
AI	2978.0	B	412853	7026041	17.3	32.1	136.6	202.1	11.0	37.6	0.8	6	47
AJ	2980.2	B	412856	7026131	9.5	32.1	136.6	202.1	0.8	37.6	---	---	47
AK	2986.7	B	412862	7026403	5.7	9.6	326.7	269.4	33.8	100.9	---	---	0
AL	2989.0	B	412863	7026502	43.8	38.1	326.7	269.4	33.8	100.9	---	---	0
AM	2991.4	B	412866	7026607	54.1	56.6	326.7	240.9	33.8	100.9	---	---	0
AN	2997.3	B	412878	7026863	13.4	37.1	206.1	240.9	20.0	72.5	---	---	0
AO	3008.9	S	412904	7027355	10.9	26.3	97.0	184.7	1.0	33.2	---	---	2
AP	3021.5	S	412921	7027889	7.8	20.6	5.1	62.7	2.6	4.4	---	---	1
AQ	3033.8	S	412926	7028419	8.9	25.7	64.4	110.3	7.8	26.9	---	---	5
AR	3046.2	S?	412942	7028951	8.4	31.0	60.8	195.2	3.5	32.1	---	---	18
AS	3051.0	S?	412950	7029150	12.8	25.4	69.2	95.1	4.5	21.2	---	---	19
AT	3065.8	S	412955	7029725	13.9	21.6	76.1	100.1	4.3	21.9	---	---	6
AU	3076.9	S	412969	7030112	0.8	6.4	0.2	24.5	1.0	2.4	---	---	2
AV	3089.9	D	412987	7030570	87.0	22.9	266.2	130.8	103.8	99.8	---	---	126
AW	3095.8	B	412989	7030737	7.8	16.2	266.2	26.3	103.8	99.8	---	---	48
AX	3105.8	B	412985	7031012	48.8	130.7	299.9	647.2	10.1	106.5	---	---	0
AY	3108.3	D	412987	7031085	87.5	189.7	299.9	647.2	10.1	106.5	---	---	0
AZ	3137.4	D	413021	7031757	16.2	20.5	72.2	117.2	14.9	25.3	---	---	0
BA	3150.4	D	413024	7031873	56.3	109.6	429.2	493.8	77.8	136.8	---	---	0
BB	3158.0	D	413026	7031921	64.4	62.5	429.2	493.8	38.2	136.8	---	---	0
BC	3204.4	D	413036	7032435	42.4	25.7	135.7	140.7	48.8	47.4	---	---	0
BD	3212.0	D	413033	7032635	21.1	3.5	135.3	61.5	48.8	44.4	---	---	0
BE	3216.6	D	413042	7032745	19.3	18.4	135.3	61.5	32.9	44.4	---	---	10
BF	3225.2	B	413051	7032906	4.7	9.9	22.8	14.5	6.7	6.0	---	---	0
BG	3268.2	S	413068	7033510	2.1	9.1	1.2	27.3	0.2	3.5	---	---	0
BH	3348.3	S	413099	7034462	0.7	13.3	9.9	80.7	1.0	11.1	---	---	1
BI	3382.8	S	413126	7034714	2.5	5.1	11.4	54.2	0.7	8.5	---	---	0
BJ	3430.2	D	413106	7035144	87.5	72.0	280.0	253.9	23.6	84.8	---	---	0
BK	3433.1	D	413112	7035214	60.0	66.0	280.0	253.9	23.6	84.8	---	---	0
BL	3452.4	S	413137	7035879	6.3	13.3	59.9	93.5	3.1	18.0	---	---	0
BM	3468.0	B?	413150	7036304	8.1	11.7	31.6	51.1	3.1	10.6	---	---	0
BN	3478.1	B?	413155	7036485	9.7	39.5	70.0	188.1	4.2	34.4	---	---	5
BO	3482.5	B?	413154	7036596	6.8	27.3	77.9	188.1	5.8	34.4	---	---	0
BP	3485.6	B?	413153	7036688	10.0	20.2	77.9	188.1	6.3	34.4	---	---	0
BQ	3489.2	B?	413157	7036780	7.7	18.7	77.9	117.5	6.0	31.9	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30540		FLIGHT	14									
BR	3503.0	B	413174	7037031	7.4	8.0	95.0	60.3	14.6	35.7	---	---	0
BS	3506.2	B	413170	7037082	10.2	24.9	95.0	60.3	15.6	35.7	---	---	0
BT	3519.0	B	413168	7037256	6.5	12.7	36.4	102.4	0.7	19.6	---	---	0
BU	3532.2	B	413191	7037677	8.5	23.6	89.7	131.7	7.4	36.2	---	---	0
BV	3543.1	B	413187	7038083	9.6	5.9	72.2	26.6	17.9	28.8	---	---	6
BW	3558.8	B	413222	7038525	32.2	28.7	97.9	80.4	22.7	33.7	---	---	0
BX	3621.4	B	413227	7039107	5.3	8.1	29.8	62.6	3.6	12.0	---	---	3
BY	3701.9	D	413251	7039928	36.2	13.2	164.0	43.8	113.2	45.0	---	---	0
BZ	3713.3	D	413251	7040120	39.0	33.7	124.9	168.4	17.1	45.9	---	---	0
CA	3723.7	D	413253	7040288	6.0	11.2	58.7	43.7	36.8	23.2	---	---	0
CB	3729.7	D	413265	7040397	9.4	8.7	58.7	25.5	36.8	23.2	---	---	0
CC	3738.6	B	413274	7040559	5.2	8.3	99.8	46.2	33.3	36.2	---	---	0
CD	3750.8	B	413281	7040722	13.3	7.2	111.2	29.4	71.7	37.7	---	---	0
CE	3758.2	B	413277	7040844	28.6	8.3	111.2	31.4	71.7	37.7	---	---	0
CF	3767.9	D	413290	7041038	26.4	17.0	45.9	84.8	35.4	16.1	---	---	0
CG	3782.5	D	413277	7041359	15.3	16.6	32.1	41.0	6.4	8.7	---	---	0
CH	3803.7	S	413290	7041625	0.8	10.2	6.4	49.2	0.0	5.8	-0.1	15	49
CI	3880.6	D	413327	7042328	54.7	27.7	95.6	55.9	15.2	27.8	---	---	0
CJ	3891.0	B	413334	7042416	9.2	8.2	256.0	56.6	182.9	51.8	---	---	0
CK	3954.0	D	413343	7043134	16.5	5.6	12.3	14.5	14.5	5.2	5.8	14	0
LINE	30551		FLIGHT	33									
A	1910.6	D	413055	7017897	17.9	20.3	115.4	273.0	0.2	40.7	---	---	0
B	1921.2	D	413057	7017981	11.1	23.3	115.4	0.0	0.4	5.4	---	---	2
C	2014.0	S	413075	7018890	1.1	9.0	3.2	30.2	3.0	4.1	-0.1	0	9
D	2029.4	S?	413089	7019171	6.8	28.2	15.5	116.0	0.0	15.6	0.3	3	13
E	2038.5	B?	413101	7019388	10.6	15.8	87.0	91.2	5.5	20.3	0.8	10	19
F	2043.4	B?	413100	7019513	6.8	11.6	79.2	68.3	5.7	20.3	---	---	0
G	2052.8	B?	413101	7019668	6.1	4.4	0.0	67.1	2.4	0.0	---	---	0
H	2069.4	B?	413107	7019792	7.1	25.9	31.5	256.6	5.2	33.7	---	---	0
I	2088.8	B	413116	7020032	45.7	10.5	290.1	244.0	29.3	82.5	---	---	0
J	2100.0	B	413114	7020262	12.0	10.1	39.3	124.9	0.0	16.9	---	---	2
K	2145.3	B	413122	7020775	79.4	82.8	419.4	388.4	56.9	137.1	---	---	0
L	2170.0	B	413128	7020970	10.7	20.9	164.8	222.1	16.3	54.8	---	---	0
M	2182.4	B	413138	7021118	3.8	11.9	4.2	118.0	0.8	1.7	---	---	0
N	2202.9	D	413149	7021383	30.1	35.2	240.4	166.4	50.5	80.9	---	---	76
O	2213.7	B	413146	7021486	25.2	44.5	132.9	146.6	33.9	51.6	---	---	0
P	2256.0	B	413159	7022044	34.7	54.2	339.3	459.7	38.2	113.7	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30551		FLIGHT	33									
Q	2263.4	B	413161	7022158	35.5	95.4	339.3	512.2	38.2	108.2	---	---	129
R	2275.2	B	413173	7022338	29.7	39.1	149.8	163.6	16.7	52.6	---	---	0
S	2300.9	B	413181	7022845	132.5	90.2	928.8	345.1	406.7	335.8	---	---	0
T	2313.6	B	413183	7023180	72.9	55.1	340.0	197.3	101.6	103.6	---	---	10
U	2318.7	D	413188	7023316	60.2	32.4	239.7	394.5	101.6	85.3	---	---	16
V	2322.4	D	413193	7023419	45.3	79.2	239.7	394.5	51.8	85.3	---	---	17
W	2340.2	B	413206	7023942	40.9	38.0	108.5	135.6	25.3	42.9	---	---	0
X	2346.6	B	413215	7024067	18.2	23.9	108.5	135.6	24.9	42.9	---	---	69
Y	2359.4	B	413226	7024252	5.8	5.8	12.9	0.0	9.3	3.9	---	---	0
Z	2402.9	B	413236	7024794	21.5	55.8	182.3	233.7	25.3	64.2	---	---	26
AA	2408.3	D	413241	7024955	12.0	25.0	88.0	166.5	0.0	64.2	---	---	10
AB	2410.6	B?	413242	7025036	12.0	25.0	44.2	166.5	1.2	15.7	---	---	10
AC	2417.3	B	413247	7025292	6.0	4.4	117.2	100.6	11.7	36.2	---	---	0
AD	2422.1	S?	413255	7025484	37.5	58.3	170.9	231.0	11.6	53.8	---	---	0
AE	2444.4	B	413282	7026383	8.4	12.8	83.7	156.2	28.3	34.4	---	---	0
AF	2455.3	B	413305	7026841	21.2	14.0	126.8	47.3	28.3	38.0	---	---	0
AG	2471.7	S	413312	7027522	6.8	11.7	79.1	140.5	4.6	26.5	---	---	5
AH	2495.1	S	413344	7028500	10.6	12.9	51.6	60.3	4.3	14.5	---	---	7
AI	2510.2	S	413359	7029131	5.4	20.4	60.7	146.4	5.9	24.9	---	---	0
AJ	2518.5	S	413370	7029472	5.4	16.5	25.4	71.0	2.7	13.2	---	---	0
AK	2549.1	B	413401	7030603	25.9	35.1	161.2	178.8	13.4	47.5	---	---	208
AL	2551.5	B	413404	7030681	19.3	6.6	161.2	178.8	13.4	47.5	---	---	208
AM	2555.6	D	413413	7030804	8.3	22.1	161.2	72.2	13.4	47.5	---	---	0
AN	2584.7	M	413436	7031660	0.0	0.9	5.5	0.0	0.0	0.6	---	---	104
AO	2611.7	D	413443	7032060	3.5	6.8	24.2	37.8	6.3	7.9	0.4	37	0
AP	2625.4	B	413447	7032178	1.6	12.9	9.5	114.1	0.6	15.2	-0.1	6	0
AQ	2633.9	B	413452	7032272	2.0	23.1	60.0	113.2	12.8	18.7	---	---	11
AR	2646.7	D	413446	7032426	36.4	43.5	161.6	202.0	29.7	63.2	---	---	0
AS	2670.2	B?	413457	7032712	6.7	9.2	9.8	76.0	1.5	1.4	---	---	0
AT	2678.8	D	413467	7032847	33.5	24.3	284.1	195.3	50.5	90.6	---	---	0
AU	2683.2	D	413470	7032915	73.2	37.7	284.1	195.3	59.7	90.6	---	---	14
AV	2692.2	B	413471	7033052	15.2	17.6	48.0	185.0	12.0	14.2	---	---	5
AW	2704.1	B?	413472	7033204	1.8	9.9	4.1	41.4	1.7	6.7	---	---	0
AX	2716.2	D	413483	7033335	34.8	59.3	64.6	166.8	7.6	24.1	---	---	0
AY	2821.7	S	413521	7034742	2.4	13.7	6.4	63.7	1.6	7.5	---	---	0
AZ	2837.4	S?	413523	7034953	2.9	7.8	12.3	0.0	1.7	4.4	---	---	0
BA	2848.7	D	413513	7035125	16.9	41.3	74.6	178.4	2.9	29.4	---	---	6
BB	2855.0	B	413518	7035225	15.1	39.0	89.2	177.6	13.0	39.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30551		FLIGHT	33									
BC	2863.0	B?	413523	7035386	6.6	13.9	25.2	35.3	13.0	7.8	---	---	0
BD	2879.9	S	413543	7035907	6.9	20.2	77.5	182.3	4.7	30.9	---	---	2
BE	2912.0	B?	413566	7036496	10.8	26.6	32.5	133.7	3.0	17.2	---	---	5
BF	2922.0	S?	413578	7036740	19.6	51.8	136.3	313.5	6.2	54.3	---	---	0
BG	2931.5	B?	413575	7036999	15.8	7.0	64.2	20.4	2.3	4.0	---	---	1
BH	2943.9	D	413585	7037290	57.9	41.3	197.9	180.8	26.0	62.3	---	---	0
BI	2950.5	B	413591	7037442	10.5	20.9	1.0	12.7	18.6	17.6	---	---	128
BJ	2960.8	D	413592	7037668	8.4	17.8	93.4	168.5	6.4	33.7	---	---	0
BK	2962.9	B	413592	7037724	8.5	20.2	93.4	223.1	6.4	33.7	---	---	0
BL	2969.9	B	413591	7037909	32.5	36.4	567.6	223.1	180.2	235.0	---	---	0
BM	2972.0	B	413590	7037953	42.1	17.0	567.6	303.9	180.2	235.0	6.2	26	4
BN	3011.1	D	413618	7038563	62.5	47.0	293.8	199.3	68.2	102.7	---	---	0
BO	3014.4	D	413617	7038620	63.2	37.3	293.8	199.3	68.2	102.7	---	---	0
BP	3081.9	D	413646	7039349	45.6	38.6	95.7	120.1	33.4	39.8	---	---	0
BQ	3093.9	D	413645	7039446	0.7	29.2	27.3	125.1	0.5	14.5	---	---	0
BR	3147.0	D	413659	7040005	92.3	45.1	214.4	94.1	83.8	77.3	---	---	0
BS	3171.7	B	413659	7040444	3.1	4.2	134.4	13.2	50.5	46.3	---	---	0
BT	3177.9	B	413674	7040547	113.6	52.5	368.1	194.5	152.7	118.8	---	---	4
BU	3183.4	D	413678	7040656	40.9	8.8	315.8	173.8	152.7	110.6	---	---	1
BV	3185.5	D	413682	7040702	87.4	49.7	315.8	183.8	82.9	110.6	---	---	1
BW	3188.4	D	413686	7040769	0.0	15.0	279.3	183.8	72.8	103.5	---	---	0
BX	3195.0	D	413686	7040927	69.2	31.6	255.3	122.8	85.2	92.0	---	---	0
BY	3198.8	D	413684	7041024	54.3	25.5	255.3	122.8	85.2	92.0	---	---	3
BZ	3204.7	B	413687	7041178	1.0	1.9	12.0	7.8	8.9	5.8	---	---	0
CA	3210.8	D	413691	7041340	18.1	14.9	43.1	67.2	3.9	12.0	---	---	0
CB	3286.9	D	413723	7042242	22.9	15.4	43.7	52.2	9.3	15.7	---	---	0
CC	3294.6	B	413740	7042327	7.4	10.0	43.7	52.2	8.3	15.7	---	---	0
CD	3317.9	D	413736	7042483	15.5	6.3	34.7	57.6	9.9	14.6	---	---	0
LINE	30560		FLIGHT	15									
A	2388.3	B	413456	7017802	10.5	27.9	76.8	108.6	3.0	21.2	---	---	0
B	2360.0	S	413452	7018077	0.6	12.2	7.0	52.1	3.5	6.9	-0.1	13	7
C	2315.1	S	413481	7018657	1.5	6.9	4.8	25.8	3.0	4.0	---	---	3
D	2262.9	S	413458	7019084	1.2	10.1	3.5	35.1	2.1	4.5	---	---	0
E	2224.2	S	413492	7019471	3.2	21.0	59.5	153.8	4.5	24.9	---	---	7
F	2216.5	S	413498	7019562	2.1	18.0	12.5	116.4	1.9	16.7	---	---	5
G	2193.9	B	413512	7019714	4.9	15.9	55.7	203.0	3.1	28.8	---	---	0
H	2178.1	D	413511	7019817	9.7	26.9	64.2	222.2	6.9	30.7	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30560		FLIGHT	15									
I	2102.8	B	413511	7020254	34.0	60.3	201.1	674.5	4.4	12.0	---	---	0
J	2081.0	B	413517	7020476	2.8	7.8	56.0	13.2	51.9	26.1	---	---	13
K	2073.3	B	413526	7020566	14.7	30.7	40.3	100.1	4.3	18.1	---	---	0
L	2054.5	B	413544	7020730	17.4	18.8	21.9	27.7	3.7	9.0	---	---	0
M	2040.4	B	413549	7020897	109.6	179.1	984.1	1473.6	37.9	365.5	---	---	0
N	2028.1	B	413538	7021023	110.4	266.8	1113.1	1793.9	82.9	411.3	---	---	64
O	1992.0	D	413554	7021279	21.4	34.9	72.4	143.9	6.4	22.3	---	---	41
P	1977.5	B	413557	7021372	6.8	11.3	26.5	62.3	3.0	10.0	---	---	0
Q	1938.6	B	413569	7021601	59.0	38.6	643.2	623.5	12.0	212.9	---	---	0
R	1928.8	B	413566	7021693	84.7	48.3	643.2	623.5	76.1	212.9	---	---	0
S	1913.4	B	413579	7021883	22.3	61.2	160.8	330.1	6.6	57.9	---	---	0
T	1898.2	B	413590	7022036	5.4	14.9	25.6	76.0	1.7	0.9	---	---	0
U	1887.0	B?	413597	7022283	6.3	18.6	56.7	27.8	6.2	17.0	---	---	0
V	1869.5	B?	413594	7022895	40.8	99.5	350.3	520.8	27.7	120.3	---	---	0
W	1858.7	B	413612	7023257	11.7	22.7	53.7	114.9	6.7	24.1	---	---	13
X	1851.3	B	413604	7023477	10.2	11.3	25.3	129.3	2.5	15.9	---	---	3
Y	1844.3	D	413599	7023665	29.3	48.7	25.3	129.3	2.5	15.9	---	---	0
Z	1836.3	B	413619	7023871	10.3	23.0	67.5	83.9	8.9	20.3	---	---	50
AA	1826.0	B	413627	7024103	14.7	33.2	67.5	93.3	10.2	20.0	---	---	29
AB	1785.7	B?	413637	7024547	1.1	12.0	13.0	56.9	2.4	9.1	---	---	0
AC	1769.3	B?	413638	7024722	8.1	17.2	43.8	92.5	5.6	13.8	---	---	0
AD	1752.3	B	413648	7025021	11.1	16.0	62.8	63.3	7.0	17.2	---	---	0
AE	1740.8	B	413663	7025288	12.2	33.1	91.0	178.3	6.2	34.2	---	---	0
AF	1725.9	B	413666	7025694	33.8	44.3	122.0	178.0	12.1	37.7	---	---	0
AG	1713.0	B	413683	7026207	3.1	8.6	28.8	81.7	2.1	12.1	---	---	35
AH	1693.8	B?	413691	7027009	2.0	10.0	70.6	32.0	9.0	7.2	---	---	0
AI	1679.5	S?	413722	7027583	13.2	34.5	80.1	180.5	5.7	33.2	---	---	0
AJ	1663.1	S	413737	7028181	7.3	24.4	24.1	107.3	5.7	15.7	---	---	0
AK	1648.0	S	413746	7028769	1.5	16.0	5.1	18.0	1.6	2.3	---	---	11
AL	1635.3	S	413763	7029265	2.5	17.3	45.2	171.9	3.1	27.0	---	---	8
AM	1616.8	S	413795	7029962	6.8	16.1	29.4	64.7	1.2	11.8	---	---	0
AN	1608.7	B?	413813	7030289	3.4	17.8	215.8	127.0	0.4	25.0	---	---	0
AO	1603.3	B	413817	7030508	31.4	20.8	215.8	211.7	46.8	71.1	---	---	0
AP	1596.8	B	413834	7030767	31.8	48.9	215.8	193.5	34.5	71.1	---	---	86
AQ	1586.4	M	413868	7031160	0.1	3.4	0.1	23.0	0.7	2.9	---	---	107
AR	1576.8	M	413880	7031527	1.1	3.6	8.4	21.2	8.2	3.3	---	---	89
AS	1572.6	M	413871	7031671	4.7	2.2	5.5	13.1	6.1	3.0	---	---	88
AT	1541.4	D	413854	7032173	9.9	9.0	21.4	43.1	3.1	7.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30560		FLIGHT	15									
AU	1512.0	D	413841	7032408	94.1	150.1	363.8	581.8	23.5	128.7	---	---	30
AV	1507.6	D	413847	7032449	42.7	45.9	363.8	581.8	23.2	128.7	---	---	0
AW	1493.6	B	413869	7032562	5.9	58.9	100.9	538.5	6.2	93.8	---	---	15
AX	1441.1	B	413854	7033089	16.7	13.3	244.4	191.6	33.9	81.1	---	---	3
AY	1435.9	B	413868	7033152	11.8	1.4	244.4	113.2	33.9	81.1	---	---	0
AZ	1412.6	D	413890	7033452	38.1	37.6	142.2	142.9	22.0	44.6	---	---	0
BA	1390.0	S	413908	7034080	3.1	9.6	7.3	36.8	4.6	4.3	0.3	25	0
BB	1331.7	S?	413923	7034895	2.1	39.3	9.8	188.8	0.2	24.4	-0.1	14	2
BC	1317.0	S?	413934	7035038	3.1	33.3	80.6	221.5	3.5	26.8	0.1	0	0
BD	1303.4	B?	413928	7035202	8.8	22.3	30.2	100.1	4.9	11.0	---	---	0
BE	1289.3	B?	413921	7035361	10.8	18.2	30.1	63.0	5.2	11.8	---	---	3
BF	1264.4	S	413963	7035995	10.8	34.9	73.8	149.9	1.5	27.6	---	---	0
BG	1230.2	B	413977	7036461	10.3	30.1	120.8	237.8	6.3	42.9	---	---	0
BH	1224.1	D	413986	7036562	10.9	31.6	120.8	180.0	8.0	36.6	---	---	2
BI	1217.9	B	414000	7036718	4.5	2.7	91.6	157.8	7.0	31.3	---	---	0
BJ	1214.2	B	414004	7036833	19.4	34.6	91.6	157.8	7.0	31.3	---	---	0
BK	1194.7	D	413968	7037422	17.7	26.1	96.5	103.5	16.9	25.2	---	---	61
BL	1192.2	D	413970	7037503	12.8	17.5	96.5	103.5	16.9	25.2	---	---	0
BM	1186.4	B	413989	7037707	19.9	4.0	192.1	139.5	45.9	80.3	---	---	0
BN	1183.7	B	413998	7037800	34.1	15.2	192.1	139.5	45.9	80.3	---	---	11
BO	1175.4	B	414017	7038119	32.8	19.8	113.5	76.9	43.3	44.0	---	---	0
BP	1166.0	D	414030	7038500	25.5	18.5	119.8	70.9	36.1	44.7	---	---	0
BQ	1164.2	D	414031	7038568	27.1	18.5	119.8	70.9	36.1	44.7	---	---	0
BR	1125.3	D	414054	7039304	9.5	20.9	35.0	61.7	6.5	12.8	---	---	7
BS	1119.5	D	414057	7039375	6.7	13.2	96.9	96.5	33.7	37.7	---	---	4
BT	1109.0	B	414050	7039541	7.9	7.3	96.9	13.5	33.7	37.7	---	---	0
BU	1060.9	D	414049	7040205	9.7	5.2	18.5	39.9	5.9	29.7	---	---	0
BV	1041.7	D	414075	7040372	5.3	38.0	72.1	81.8	9.6	27.9	---	---	9
BW	1019.0	B	414080	7040484	20.6	17.8	125.0	123.1	28.9	46.8	---	---	0
BX	1017.5	D	414081	7040491	31.5	27.2	125.0	123.1	28.9	46.8	---	---	0
BY	1003.5	B	414089	7040565	13.7	19.8	114.4	53.8	41.5	42.2	---	---	0
BZ	988.7	D	414084	7040794	11.2	1.3	47.1	6.1	36.1	14.5	---	---	0
CA	977.9	D	414093	7040994	21.3	4.9	47.1	44.9	36.1	14.5	---	---	9
CB	970.5	D	414082	7041117	21.5	24.5	49.1	78.3	37.2	9.2	---	---	0
CC	967.5	D	414085	7041171	21.5	35.4	49.1	38.5	37.2	1.1	---	---	0
CD	958.4	D	414106	7041332	54.9	32.6	188.2	276.6	17.2	66.2	---	---	11
CE	952.1	D	414094	7041445	51.6	104.1	188.2	276.6	17.2	66.2	---	---	0
CF	930.6	B?	414083	7041776	2.2	8.1	0.9	21.7	0.5	2.4	---	---	5

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30560		FLIGHT	15									
CG	904.0	D	414120	7042144	8.9	6.6	29.3	32.4	10.0	10.0	1.7	8	0
CH	873.1	D	414126	7042410	23.5	10.3	29.7	16.8	0.2	12.6	---	---	1
CI	862.3	D	414118	7042571	10.2	11.5	27.8	23.2	13.0	10.7	---	---	0
CJ	727.0	D	414135	7043149	10.1	4.7	12.2	29.1	7.6	4.4	3.2	28	0
LINE	30570		FLIGHT	15									
A	2502.0	B?	413892	7017653	7.0	7.1	31.4	47.0	1.7	8.7	---	---	0
B	2517.3	B?	413879	7017763	5.7	18.0	12.8	27.4	2.0	5.3	---	---	0
C	2572.5	S	413834	7018191	2.6	9.8	1.8	52.4	0.7	5.1	-0.2	22	2
D	2656.0	S?	413882	7018919	0.3	15.1	4.8	68.5	4.8	7.3	-0.1	28	0
E	2677.4	B?	413906	7019045	1.7	29.5	6.9	91.0	1.1	11.8	-0.1	6	0
F	2722.4	B?	413901	7019291	2.0	17.1	6.5	37.0	1.3	5.4	-0.1	6	0
G	2742.4	B	413915	7019457	4.8	31.5	68.2	144.7	3.9	25.8	---	---	0
H	2754.4	B	413924	7019576	9.0	21.7	39.5	85.9	3.4	15.9	---	---	9
I	2760.8	B	413927	7019633	10.9	16.7	66.5	211.5	2.5	6.2	---	---	0
J	2772.5	B	413914	7019714	5.2	33.4	77.1	211.5	3.2	35.8	---	---	0
K	2790.2	B?	413905	7019829	0.0	28.8	0.0	209.9	0.6	21.4	-0.1	49	10
L	2792.7	B?	413907	7019849	3.3	12.3	55.5	209.9	15.2	21.4	0.3	23	0
M	2807.1	S?	413910	7019974	1.1	24.3	10.3	106.5	16.5	7.6	-0.1	9	0
N	2819.8	B?	413912	7020112	11.5	23.4	120.9	190.6	5.3	35.8	---	---	0
O	2830.1	B?	413900	7020263	12.8	41.4	120.9	262.6	5.9	44.2	---	---	38
P	2876.4	B?	413947	7020825	4.7	25.0	16.6	129.8	0.7	16.5	---	---	2
Q	2899.0	B?	413943	7021003	2.7	11.7	2.7	52.3	0.5	7.3	---	---	6
R	2915.8	B?	413925	7021212	9.3	62.3	25.1	277.9	2.4	33.0	0.2	0	0
S	2925.6	B?	413925	7021354	0.5	10.1	0.5	97.9	3.6	13.0	-0.1	19	0
T	2947.6	B?	413967	7021852	11.8	1.1	59.9	36.5	6.7	13.4	---	---	0
U	2958.6	B?	413954	7022240	24.0	21.6	265.2	296.0	30.5	80.6	---	---	23
V	2974.4	B	413963	7022707	3.8	2.7	5.6	0.0	1.3	1.2	---	---	0
W	2983.3	B	413977	7022891	10.8	14.8	12.2	60.8	0.4	7.3	---	---	0
X	2995.5	B	413984	7023056	27.1	26.8	125.5	106.2	4.9	34.5	---	---	0
Y	3004.3	B	413985	7023161	18.5	12.2	125.5	106.2	5.1	34.5	---	---	0
Z	3007.7	B	413987	7023187	26.3	9.7	84.6	46.1	5.1	24.5	---	---	0
AA	3020.8	D	413988	7023298	69.0	63.1	198.8	201.3	11.0	48.1	---	---	97
AB	3031.9	B	413999	7023417	20.8	14.7	208.3	184.0	15.1	51.6	---	---	0
AC	3044.1	B	414012	7023556	0.0	0.0	0.1	91.4	0.0	5.7	---	---	0
AD	3051.6	B	414017	7023629	6.3	26.8	70.4	47.0	12.9	15.7	---	---	48
AE	3065.1	B	414018	7023764	12.4	54.3	51.7	170.8	4.1	26.6	---	---	18
AF	3084.9	B?	414024	7023947	2.7	15.8	29.4	106.1	2.1	17.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30570		FLIGHT	15									
AG	3105.4	S?	414039	7024073	2.4	12.2	26.7	90.4	4.1	15.1	---	---	2
AH	3165.8	B	414026	7024716	11.0	17.6	57.3	42.8	28.0	19.5	---	---	28
AI	3184.5	D	414052	7025052	21.9	55.1	184.4	312.0	36.3	79.7	---	---	0
AJ	3195.6	B	414067	7025453	30.0	51.5	169.8	272.6	4.4	51.5	---	---	0
AK	3204.8	B	414081	7025827	19.3	24.0	106.0	114.1	10.0	32.7	---	---	42
AL	3220.0	B	414079	7026449	3.1	0.7	19.6	0.0	9.8	18.5	---	---	0
AM	3230.8	S	414088	7026901	2.1	5.7	31.8	95.5	13.2	18.5	---	---	0
AN	3250.6	S	414108	7027745	8.5	14.9	67.2	108.9	6.6	24.1	---	---	0
AO	3278.6	B	414148	7028934	21.6	53.1	125.5	269.3	2.0	34.1	---	---	6
AP	3291.5	S	414149	7029442	15.1	20.1	45.9	112.0	4.2	18.3	---	---	17
AQ	3318.5	S	414186	7030548	11.4	16.5	131.3	142.1	18.0	42.8	---	---	0
AR	3339.0	S	414211	7031138	1.9	8.3	4.0	33.3	3.2	4.5	-0.2	12	7
AS	3360.8	M	414237	7031671	1.9	1.5	0.0	13.7	3.4	1.3	---	---	104
AT	3410.6	S	414239	7032169	1.7	7.5	11.2	42.2	0.2	6.3	-0.2	27	0
AU	3435.9	D	414234	7032366	23.2	38.3	77.2	133.3	9.0	28.5	---	---	0
AV	3464.2	D	414271	7032686	8.4	36.2	106.9	270.8	14.0	45.5	---	---	0
AW	3471.9	B	414266	7032735	7.7	17.8	106.9	270.8	14.0	45.5	---	---	3
AX	3475.9	D	414263	7032764	15.4	32.9	35.8	270.8	7.7	46.4	---	---	0
AY	3507.7	D	414263	7033112	18.9	15.8	91.7	99.3	11.7	27.4	---	---	0
AZ	3512.2	D	414267	7033204	24.3	17.1	110.5	99.3	19.5	33.9	---	---	2
BA	3582.5	B?	414304	7034258	5.7	18.8	8.2	59.9	3.4	6.7	---	---	1
BB	3614.5	B?	414307	7034663	3.6	18.9	7.3	146.2	3.4	19.1	0.2	10	0
BC	3617.3	M	414306	7034681	0.1	12.3	15.5	146.2	8.9	19.1	---	---	0
BD	3628.3	M	414302	7034746	0.0	5.6	7.7	3.9	8.9	1.5	---	---	2
BE	3643.3	B?	414312	7034843	3.1	6.9	19.6	18.0	11.1	2.5	---	---	0
BF	3684.5	B	414350	7035167	11.3	73.4	83.6	312.0	4.1	45.6	---	---	0
BG	3698.9	B	414331	7035265	4.5	25.0	62.1	96.1	0.9	23.1	---	---	0
BH	3717.3	B	414328	7035429	15.6	15.0	95.3	136.3	6.3	32.0	---	---	0
BI	3724.0	D	414336	7035537	14.0	39.0	95.3	136.3	9.9	32.0	---	---	26
BJ	3738.7	S	414346	7035927	6.8	10.3	56.7	125.0	4.3	21.7	---	---	0
BK	3760.9	D	414351	7036402	21.0	39.8	110.7	254.9	2.3	43.5	---	---	3
BL	3769.0	B	414345	7036595	9.1	24.6	110.7	300.8	5.7	48.4	---	---	0
BM	3775.1	B	414349	7036785	16.0	58.4	60.0	192.4	5.7	29.6	---	---	0
BN	3777.8	B	414354	7036878	12.7	23.2	60.0	192.4	3.4	29.6	---	---	0
BO	3784.4	B	414372	7037115	13.5	41.7	31.3	121.8	4.2	13.5	---	---	0
BP	3803.9	B	414399	7037610	0.0	22.3	17.0	109.0	3.2	15.7	---	---	0
BQ	3814.3	B	414398	7037747	73.4	70.9	327.7	243.3	38.6	102.1	---	---	0
BR	3829.0	B	414383	7038003	26.8	31.6	124.5	108.4	40.0	39.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30570		FLIGHT	15									
BS	3838.0	B	414389	7038197	10.9	2.3	12.3	28.4	40.0	34.6	---	---	13
BT	3852.0	B	414419	7038431	10.7	8.4	73.2	50.0	9.1	23.0	1.7	26	0
BU	3942.5	B	414435	7039256	1.8	5.2	70.2	70.3	7.4	23.9	---	---	0
BV	4015.2	D	414466	7039971	4.1	10.1	55.3	106.3	4.0	20.4	---	---	2
BW	4022.8	D	414458	7040061	24.8	29.7	156.5	110.1	31.2	57.8	---	---	0
BX	4025.4	D	414455	7040095	52.3	51.0	156.5	110.1	31.2	57.8	---	---	0
BY	4034.5	B	414448	7040241	65.9	19.3	245.0	163.1	89.5	84.2	---	---	29
BZ	4042.8	B	414443	7040403	40.7	13.2	245.0	163.1	89.5	84.2	---	---	8
CA	4047.2	B	414442	7040535	1.5	3.7	25.2	42.1	101.6	22.3	---	---	12
CB	4049.1	D	414441	7040602	0.3	21.6	25.2	42.1	38.2	22.3	---	---	8
CC	4051.6	D	414439	7040699	35.1	11.6	134.8	42.1	101.6	42.8	---	---	0
CD	4054.6	D	414443	7040822	25.3	0.0	134.8	0.0	101.6	42.8	---	---	2
CE	4057.7	D	414455	7040950	23.4	2.2	134.8	202.7	101.6	42.8	---	---	2
CF	4061.2	B	414472	7041087	0.2	37.1	82.1	202.7	25.8	34.7	---	---	0
CG	4065.2	D	414489	7041228	29.2	37.9	82.1	202.7	9.8	34.7	---	---	0
CH	4070.1	D	414498	7041386	11.8	7.8	57.8	202.7	9.8	34.7	---	---	0
CI	4100.1	B?	414509	7041848	1.2	13.7	1.6	104.5	1.3	12.9	---	---	0
CJ	4142.8	M	414521	7042144	0.9	11.8	0.0	140.3	15.5	6.3	---	---	0
CK	4146.2	B?	414523	7042179	4.5	22.6	9.8	140.3	15.5	16.5	---	---	0
CL	4164.5	D	414521	7042419	77.8	91.0	182.3	209.7	30.5	56.6	---	---	0
CM	4172.0	D	414528	7042509	27.8	69.1	182.3	241.4	23.2	51.9	---	---	0
CN	4182.3	D	414544	7042709	29.0	31.6	6.2	21.2	11.0	0.0	---	---	0
CO	4185.0	D	414550	7042787	20.4	21.4	20.6	21.2	1.5	2.1	---	---	0
CP	4194.3	D	414563	7043080	49.2	32.4	126.3	106.2	12.4	40.6	---	---	2
CQ	4197.0	D	414565	7043159	37.5	30.6	126.3	106.2	12.4	40.6	---	---	2
CR	4204.2	B	414580	7043306	20.5	26.9	114.8	71.4	8.2	30.5	---	---	0
CS	4211.5	D	414569	7043485	47.6	50.7	144.7	128.4	41.5	50.3	---	---	0
CT	4219.2	D	414553	7043744	26.5	25.8	121.1	75.8	41.5	46.9	---	---	0
LINE	30580		FLIGHT	15									
A	5726.8	B	414276	7017711	21.1	27.5	250.1	325.0	15.7	78.2	---	---	3
B	5697.2	S	414242	7018174	2.1	6.9	5.0	40.1	1.4	3.5	---	---	0
C	5636.9	S?	414286	7018818	0.7	8.0	2.3	38.3	1.3	2.3	---	---	0
D	5602.8	S	414288	7019069	1.2	5.3	10.0	35.8	0.6	5.3	-0.2	20	0
E	5569.5	D	414278	7019455	9.4	24.5	44.0	103.7	2.4	17.1	---	---	0
F	5525.7	B?	414317	7019858	2.8	16.7	14.2	62.0	2.1	8.5	---	---	0
G	5511.6	D	414331	7020079	5.3	16.7	36.9	55.5	2.3	5.8	---	---	0
H	5500.1	S	414331	7020238	1.7	14.4	47.4	116.6	1.1	18.7	---	---	3

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30580		FLIGHT	15									
I	5364.3	B	414370	7021967	23.9	28.9	147.2	110.5	27.8	49.6	---	---	0
J	5355.0	B	414381	7022427	13.6	12.2	47.1	38.0	10.4	17.7	---	---	0
K	5350.5	B	414393	7022634	0.7	13.3	180.6	42.0	1.7	49.6	---	---	0
L	5347.7	B	414399	7022744	25.7	47.9	180.6	342.6	4.6	49.6	---	---	6
M	5344.6	D	414402	7022850	108.8	81.3	547.4	342.6	74.4	205.2	---	---	0
N	5334.9	B	414405	7023119	5.6	11.2	19.8	46.4	3.2	6.4	---	---	23
O	5314.0	B?	414390	7023456	15.9	62.9	86.9	408.2	5.8	54.9	---	---	0
P	5292.3	B	414407	7023699	14.6	35.1	100.4	210.5	2.8	32.3	---	---	6
Q	5288.1	B	414409	7023775	6.4	22.2	100.4	210.5	2.0	32.3	---	---	6
R	5276.4	B?	414429	7023954	3.5	4.2	0.0	0.0	2.3	0.0	---	---	0
S	5264.0	B	414432	7024136	14.4	38.8	68.6	211.1	0.9	32.4	---	---	22
T	5246.6	B	414443	7024490	8.4	20.8	66.0	116.6	6.5	23.5	---	---	7
U	5234.0	B	414448	7024813	27.8	39.1	170.0	151.6	18.9	53.1	---	---	24
V	5208.5	B	414494	7025619	13.3	10.9	50.5	52.5	9.7	13.3	1.7	25	0
W	5202.9	B	414496	7025832	5.5	12.1	50.5	52.5	9.7	13.3	---	---	17
X	5194.6	B	414497	7026170	16.3	22.6	50.6	54.3	12.4	14.7	---	---	14
Y	5181.8	B	414495	7026722	27.5	21.1	252.0	125.4	61.7	90.4	---	---	0
Z	5155.8	B	414537	7027858	12.5	12.5	61.4	59.2	13.6	21.8	---	---	0
AA	5146.5	B	414536	7028250	2.8	15.3	16.0	67.5	2.8	9.2	---	---	1
AB	5138.3	B	414546	7028589	3.3	11.4	7.7	35.6	4.0	7.6	---	---	0
AC	5130.5	B	414569	7028934	15.5	16.0	72.2	54.3	0.6	16.4	---	---	0
AD	5114.7	D	414584	7029618	19.0	40.4	99.7	254.1	6.7	40.6	---	---	16
AE	5109.8	L?	414587	7029811	3.9	9.4	65.5	254.1	1.0	8.0	---	---	4
AF	5090.0	B	414587	7030607	11.7	8.6	140.9	181.7	14.8	46.7	1.9	24	0
AG	5068.8	S	414652	7031389	0.0	5.5	8.7	38.9	10.3	6.6	-0.1	27	128
AH	5040.3	D	414653	7032103	5.1	6.6	13.6	40.8	2.7	6.7	---	---	4
AI	4996.3	D	414647	7032571	21.4	18.1	73.5	85.1	21.4	26.1	---	---	3
AJ	4983.7	D	414679	7032814	4.6	8.4	23.1	27.0	9.6	8.1	---	---	0
AK	4967.9	D	414693	7033134	30.7	43.1	69.5	153.5	2.4	23.1	---	---	2
AL	4960.8	D	414695	7033354	33.0	33.5	72.9	79.2	17.3	23.1	---	---	3
AM	4953.6	B	414676	7033584	34.5	40.5	177.4	190.8	22.0	62.0	---	---	2
AN	4952.2	B	414674	7033627	34.5	40.5	177.4	190.8	22.0	62.0	---	---	2
AO	4925.7	D	414705	7034299	6.4	12.7	8.1	16.4	1.2	2.6	---	---	0
AP	4885.0	S?	414736	7034789	4.7	8.4	18.3	70.4	4.1	9.5	---	---	0
AQ	4856.5	S	414740	7035297	1.7	6.7	13.3	89.4	3.1	10.4	---	---	0
AR	4815.9	S	414746	7035873	7.3	19.8	71.0	121.3	4.9	24.3	---	---	0
AS	4792.2	B	414766	7036365	12.8	27.6	57.1	110.4	1.6	20.2	---	---	0
AT	4777.7	B?	414768	7036655	7.0	10.2	41.6	93.7	3.6	16.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30580		FLIGHT	15									
AU	4771.5	B?	414765	7036854	19.4	39.2	68.4	144.7	4.7	22.9	---	---	0
AV	4759.7	B?	414789	7037285	11.7	19.8	64.4	125.3	110.7	15.2	---	---	0
AW	4749.5	B	414812	7037615	50.8	78.3	191.8	374.4	40.0	94.2	1.3	7	1468
AX	4744.8	D	414813	7037741	63.6	52.1	210.2	186.7	40.0	94.2	---	---	0
AY	4738.5	D	414809	7037900	30.4	15.8	159.0	87.6	83.6	62.2	---	---	0
AZ	4650.0	B	414857	7039506	0.3	1.4	1.3	3.1	0.9	2.1	---	---	0
BA	4635.9	D	414862	7039743	11.8	21.3	26.4	51.0	8.1	10.8	---	---	0
BB	4632.4	D	414861	7039793	1.3	10.2	26.4	44.0	7.7	10.9	---	---	0
BC	4612.8	D	414857	7039963	14.0	7.4	158.0	61.3	3.3	52.0	---	---	20
BD	4582.7	B	414853	7040175	95.7	38.3	431.3	156.8	207.2	144.0	---	---	4
BE	4570.2	D	414862	7040264	8.5	8.8	48.4	42.2	46.7	12.3	---	---	0
BF	4551.2	B	414868	7040362	41.8	14.1	321.5	194.2	81.2	132.0	---	---	0
BG	4534.0	B	414877	7040557	15.5	7.2	80.8	7.8	57.9	26.1	3.7	27	13
BH	4530.7	D	414879	7040626	15.4	4.3	180.2	7.8	142.4	40.6	---	---	12
BI	4524.2	D	414881	7040775	36.3	9.0	180.2	13.3	142.4	17.8	---	---	0
BJ	4520.0	B	414883	7040895	6.9	2.2	0.4	46.6	4.1	17.8	---	---	0
BK	4515.2	D	414892	7041040	18.6	36.0	53.7	45.9	0.0	0.0	---	---	0
BL	4510.3	B	414893	7041203	24.6	19.8	221.8	112.5	93.0	56.4	---	---	0
BM	4508.1	B	414891	7041275	74.7	32.6	221.8	112.5	93.0	56.4	---	---	0
BN	4506.6	D	414888	7041324	74.7	27.9	221.8	112.5	93.0	56.4	---	---	28
BO	4391.0	D	414926	7042365	7.2	2.4	0.4	0.1	0.6	0.1	---	---	0
BP	4374.9	D	414941	7042591	58.8	39.1	159.1	92.0	60.9	55.4	---	---	2
BQ	4362.4	D	414939	7042817	14.8	13.5	61.3	26.1	8.5	19.6	---	---	0
BR	4345.7	D	414956	7043172	5.5	19.6	1.3	8.9	0.3	0.4	---	---	0
BS	4332.7	B	414954	7043366	26.7	34.3	279.8	213.5	81.8	99.8	---	---	0
BT	4329.3	B	414947	7043424	43.5	43.2	279.8	213.5	82.2	99.8	---	---	0
BU	4315.6	D	414910	7043649	156.0	147.7	341.7	484.1	51.5	118.4	---	---	1
BV	4306.4	D	414933	7043830	57.8	33.7	113.5	114.2	20.7	42.4	---	---	0
LINE	30590		FLIGHT	16									
A	2673.5	B	414690	7017880	61.1	108.7	337.2	516.1	12.7	103.1	---	---	0
B	2638.9	S?	414644	7018140	2.5	5.0	5.1	44.5	1.1	6.2	---	---	3
C	2603.2	S	414631	7018354	0.4	14.3	7.8	85.5	7.7	11.9	-0.1	17	8
D	2495.1	S?	414683	7018989	0.8	6.8	8.2	24.2	2.0	4.2	---	---	0
E	2483.3	S?	414687	7019097	0.9	5.2	6.6	84.2	0.5	11.0	---	---	0
F	2427.0	B?	414702	7019465	4.4	17.6	29.1	46.7	0.9	9.2	---	---	0
G	2405.7	S	414702	7019662	2.3	8.2	6.5	26.0	2.2	3.5	---	---	0
H	2386.9	S	414710	7019773	2.6	4.1	5.5	51.4	1.0	7.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30590		FLIGHT	16									
I	2343.3	M	414723	7020050	1.0	6.7	14.2	92.1	13.1	12.4	---	---	5
J	2302.9	S?	414707	7020225	3.5	5.1	14.7	51.4	5.3	8.9	---	---	0
K	2179.6	S	414730	7020749	2.3	3.6	15.7	49.4	1.9	1.7	---	---	0
L	2138.4	B	414766	7021367	17.7	15.5	100.9	60.6	24.6	41.6	---	---	0
M	2124.1	B	414785	7021846	4.9	10.1	7.1	30.5	3.3	2.7	---	---	161
N	2118.0	B	414780	7022047	12.5	7.7	52.0	60.9	3.3	15.3	2.4	33	163
O	2108.2	B	414749	7022313	10.5	11.7	43.4	74.6	6.1	15.0	---	---	0
P	2095.9	B?	414755	7022584	12.3	10.7	27.5	43.7	4.3	9.6	---	---	0
Q	2083.2	B	414748	7022777	5.0	14.0	1.7	37.3	3.0	0.2	---	---	71
R	2068.7	B	414772	7022913	9.2	84.6	32.6	533.9	5.8	61.1	---	---	0
S	2047.6	B	414788	7023019	5.8	8.2	0.0	86.7	5.6	5.1	---	---	0
T	2026.8	B	414808	7023147	11.3	34.9	45.1	227.3	9.2	38.8	---	---	0
U	2012.6	B	414814	7023247	28.9	61.2	147.0	260.6	7.2	54.3	---	---	0
V	2009.4	B	414811	7023282	15.9	31.9	147.0	260.6	6.4	54.3	---	---	38
W	1997.4	B	414793	7023394	11.5	115.4	179.4	641.6	15.5	98.7	---	---	0
X	1992.2	B	414791	7023447	27.0	93.7	179.4	641.6	19.2	98.7	---	---	0
Y	1979.6	B	414799	7023581	76.2	191.1	656.5	1211.5	25.4	224.9	1.0	4	0
Z	1977.4	B	414802	7023607	81.7	191.1	656.5	1211.5	25.4	224.9	1.1	4	0
AA	1942.0	B	414830	7024053	27.0	28.3	156.8	196.6	15.8	53.3	---	---	49
AB	1935.8	B	414839	7024223	4.0	20.0	156.8	196.6	15.8	53.3	---	---	51
AC	1931.1	B	414843	7024366	7.3	8.8	63.4	196.6	15.8	53.3	---	---	35
AD	1925.1	D	414845	7024544	15.2	17.7	67.0	102.9	4.2	17.8	---	---	0
AE	1916.6	B?	414850	7024765	10.9	29.1	30.6	99.0	1.6	11.3	---	---	8
AF	1906.6	S	414853	7025006	4.2	25.0	3.0	81.4	2.0	11.6	---	---	0
AG	1888.3	S?	414868	7025540	66.4	110.4	338.2	473.7	18.4	105.6	---	---	4
AH	1885.8	S?	414872	7025623	33.6	79.2	338.2	473.7	18.4	105.6	---	---	0
AI	1868.8	S	414887	7026216	5.1	7.3	34.3	37.7	11.5	6.5	---	---	13
AJ	1860.6	B	414900	7026527	53.5	35.1	271.7	101.5	64.4	87.7	---	---	14
AK	1856.5	B	414905	7026687	27.9	31.3	271.7	188.6	64.4	87.7	---	---	11
AL	1847.5	B	414906	7027034	40.0	40.0	280.2	201.2	59.3	96.1	---	---	10
AM	1826.7	B?	414937	7027833	3.1	16.0	39.8	41.5	13.8	14.3	---	---	0
AN	1815.2	S	414939	7028261	4.4	16.2	36.3	87.6	3.3	13.4	---	---	0
AO	1791.5	B	414961	7029177	9.3	8.1	100.4	77.0	9.3	29.1	---	---	0
AP	1788.0	B	414965	7029317	15.3	23.4	100.4	77.0	9.3	29.1	0.9	9	0
AQ	1784.2	S	414970	7029466	5.7	18.0	100.4	133.7	8.3	34.5	---	---	0
AR	1772.7	L?	414987	7029892	6.3	35.7	30.3	259.3	2.4	33.1	---	---	10
AS	1754.2	B?	415000	7030548	21.1	23.6	102.8	102.9	23.3	33.3	---	---	0
AT	1739.6	D	415024	7031070	12.2	32.6	88.7	168.9	11.9	36.0	0.5	0	396

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	CP 7200 HZ Quad ppm	CP 900 HZ Real ppm	CP 900 HZ Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30590		FLIGHT	16							
AU	1714.5	D	415049	7031822	85.5	79.3	241.4	217.2	20.0	76.7	7
AV	1705.4	B	415042	7032014	34.2	88.3	246.6	423.0	25.4	91.1	36
AW	1699.2	B	415049	7032115	50.8	70.3	454.8	632.8	6.4	145.6	0
AX	1693.4	B	415049	7032199	37.7	73.5	526.2	632.8	28.3	166.0	0
AY	1644.4	B	415068	7032907	154.9	73.4	876.3	313.2	335.5	321.0	0
AZ	1639.8	B	415070	7033008	166.3	80.3	876.3	317.6	335.5	321.0	0
BA	1631.8	B	415081	7033178	30.7	42.7	47.0	97.0	10.5	12.1	28
BB	1623.5	D	415081	7033327	5.3	24.0	48.1	127.6	7.4	17.4	0
BC	1617.7	B	415086	7033413	13.6	38.2	61.4	127.6	10.1	17.4	0
BD	1605.9	B	415093	7033576	6.3	15.3	39.7	111.1	11.5	11.0	2
BE	1597.0	B	415101	7033706	8.3	16.0	0.0	56.7	0.0	35.2	0
BF	1585.4	D	415122	7033931	70.8	48.8	290.3	218.1	43.6	90.0	0
BG	1582.3	B	415129	7034020	37.9	34.9	290.3	218.1	43.6	90.0	0
BH	1578.0	B	415129	7034152	16.7	22.9	29.5	53.7	43.6	13.1	2
BI	1570.6	D	415121	7034373	10.7	24.3	20.0	46.7	4.6	8.4	5
BJ	1558.4	S	415113	7034710	3.5	10.7	8.4	37.9	2.9	5.7	0
BK	1512.7	S	415135	7035203	3.2	12.4	7.3	97.4	1.1	12.6	11
BL	1480.4	S	415138	7035376	2.6	4.7	16.2	122.9	1.2	16.9	0
BM	1455.0	S?	415140	7035589	2.6	18.0	10.6	96.5	1.2	9.9	0
BN	1437.1	S	415157	7035857	2.6	9.9	27.5	34.1	4.3	11.2	9
BO	1411.1	D	415147	7036326	8.2	5.5	26.9	22.6	2.3	9.0	0
BP	1402.3	D	415151	7036453	13.9	21.9	26.9	40.5	3.0	9.7	0
BQ	1386.5	D	415152	7036612	21.6	78.8	106.8	376.5	7.2	58.0	0
BR	1360.5	B?	415176	7036976	17.7	28.9	115.7	140.8	11.2	36.1	0
BS	1356.6	B?	415185	7037059	17.6	11.1	115.7	394.0	9.3	35.5	0
BT	1352.8	B?	415204	7037140	3.4	65.0	92.2	394.0	8.9	44.7	0
BU	1337.6	D	415091	7037577	17.9	26.4	87.9	126.9	10.1	39.8	1391
BV	1331.2	B	415009	7037838	6.5	1.9	87.9	126.9	36.7	39.8	0
BW	1324.1	B	415044	7038171	5.6	0.3	55.7	16.9	36.7	18.3	0
BX	1303.0	B	415209	7038853	6.4	4.8	36.0	19.9	12.4	10.8	0
BY	1263.0	D	415261	7039483	6.9	1.9	33.5	25.6	7.9	10.4	1
BZ	1237.3	D	415259	7039852	66.0	6.6	240.4	112.9	161.0	66.0	80
CA	1214.6	B	415267	7039975	397.8	459.1	1643.9	2545.9	284.4	414.6	0
CB	1183.0	D	415280	7040138	14.0	10.6	0.0	15.4	27.7	0.0	0
CC	1170.4	B	415284	7040209	14.3	11.2	271.3	95.8	146.9	85.7	0
CD	1157.7	B	415292	7040275	84.6	34.7	263.5	69.2	157.9	79.8	0
CE	1110.5	D	415289	7040541	157.0	44.6	302.5	128.5	189.8	102.2	0
CF	1107.0	D	415290	7040596	157.0	52.8	225.6	128.5	113.2	83.0	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30590		FLIGHT	16									
CG	1096.8	D	415321	7040789	8.4	10.1	14.5	13.5	7.9	3.3	---	---	2
CH	1092.4	B	415334	7040896	5.1	5.2	14.5	13.5	3.1	1.4	---	---	0
CI	1086.8	B	415333	7041049	2.9	7.2	30.1	24.9	6.9	12.2	---	---	0
CJ	1081.5	B	415296	7041214	9.5	4.6	30.1	24.9	11.7	12.6	3.0	12	0
CK	854.9	S	415328	7042569	1.0	2.1	9.4	51.7	1.4	5.2	---	---	0
CL	817.0	B	415344	7042753	9.7	13.7	31.8	51.0	2.0	11.0	---	---	0
CM	799.2	D	415350	7042848	12.5	22.0	52.8	86.0	2.6	17.4	---	---	1
CN	788.0	B	415371	7042991	4.2	2.5	47.0	0.3	0.0	12.3	---	---	0
CO	780.3	D	415377	7043153	31.0	39.4	121.8	136.5	23.5	42.0	---	---	0
CP	778.0	D	415376	7043215	39.9	39.9	121.8	136.5	28.4	42.0	---	---	0
CQ	766.9	D	415360	7043585	21.1	20.8	30.7	83.5	64.5	13.8	---	---	53
CR	757.3	D	415371	7043938	68.2	37.9	160.6	131.9	40.5	60.9	---	---	0
LINE	30600		FLIGHT	16									
A	2813.0	S	415032	7017792	3.2	20.5	26.7	148.1	0.1	15.7	---	---	0
B	2835.9	B?	415053	7018008	5.8	20.0	44.8	66.2	3.4	19.9	---	---	0
C	2884.2	S?	415074	7018349	8.3	33.4	21.9	164.0	0.5	16.2	---	---	0
D	2988.7	D	415134	7019445	7.3	13.2	15.2	39.0	0.9	6.1	---	---	0
E	3048.0	S	415127	7019816	1.3	6.6	1.0	51.9	2.0	4.8	---	---	0
F	3069.9	S	415130	7020266	3.8	13.9	24.2	82.5	3.2	12.2	---	---	0
G	3082.6	B	415121	7020684	7.9	10.2	105.4	90.0	11.5	35.1	---	---	0
H	3097.6	B	415139	7021196	15.2	20.8	141.3	140.2	23.4	56.5	---	---	12
I	3118.3	S?	415152	7021666	7.6	17.6	30.1	80.4	1.5	12.5	---	---	0
J	3130.0	B?	415166	7021819	2.7	16.6	19.6	66.0	0.0	8.6	---	---	0
K	3134.6	B?	415167	7021861	3.0	15.1	11.2	66.0	0.5	8.6	---	---	14
L	3170.5	M	415181	7022085	1.8	4.6	2.4	27.4	0.4	1.8	---	---	6
M	3205.9	B?	415180	7022183	5.4	4.2	12.3	37.1	2.1	8.6	---	---	2
N	3245.4	B	415178	7022305	4.3	60.4	72.2	729.7	13.5	90.9	0.1	9	2
O	3273.5	B	415187	7022389	11.5	52.3	119.6	256.8	4.1	41.9	---	---	0
P	3383.8	D	415236	7023971	25.5	16.1	114.6	107.9	4.6	30.7	---	---	0
Q	3386.1	D	415236	7024026	25.5	14.5	114.6	107.9	6.9	30.7	---	---	0
R	3412.0	B?	415246	7024399	2.7	14.8	31.7	78.4	1.4	15.8	---	---	24
S	3430.0	B	415252	7024695	11.5	3.3	57.2	25.5	10.9	18.6	6.4	38	0
T	3460.6	B	415282	7025804	34.9	32.7	239.3	149.6	24.3	66.5	---	---	23
U	3462.9	B	415286	7025903	36.6	39.8	239.3	149.6	24.3	66.5	---	---	25
V	3466.0	B	415289	7026039	1.7	13.3	239.3	149.6	24.3	66.5	---	---	25
W	3475.0	B	415284	7026419	51.3	48.7	291.4	220.3	59.7	102.1	---	---	5
X	3478.4	B	415286	7026556	32.9	34.8	291.4	265.9	58.5	102.1	---	---	8

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30600		FLIGHT	16									
Y	3481.9	B	415288	7026691	20.6	26.2	287.3	265.9	58.5	99.9	---	---	11
Z	3484.4	B	415291	7026786	27.2	23.3	287.3	265.9	51.5	99.9	---	---	0
AA	3491.7	B	415303	7027060	10.4	12.0	159.3	86.3	33.0	52.2	---	---	8
AB	3498.8	B	415316	7027332	22.4	12.3	154.2	84.3	40.9	50.9	---	---	12
AC	3521.9	B	415346	7028315	3.5	14.7	38.0	67.3	4.1	13.8	---	---	0
AD	3535.9	B	415356	7028917	11.4	12.0	35.3	49.8	5.6	14.4	---	---	0
AE	3541.6	B	415365	7029152	12.0	22.8	84.5	86.1	15.3	28.9	---	---	0
AF	3551.0	B	415380	7029527	13.4	21.7	114.4	145.5	9.5	33.6	---	---	0
AG	3561.5	B	415391	7029933	14.2	45.6	92.9	217.5	13.2	41.5	---	---	1
AH	3577.8	B	415410	7030604	6.3	10.2	61.7	74.8	1.3	20.4	---	---	10
AI	3581.1	B	415409	7030740	10.1	15.6	61.7	74.8	7.3	20.4	---	---	0
AJ	3592.6	B	415430	7031192	25.7	15.4	160.4	120.2	10.9	69.6	---	---	0
AK	3596.6	B	415438	7031340	46.2	42.5	193.0	159.8	10.9	69.6	2.3	0	1078
AL	3603.2	B?	415443	7031569	0.9	11.8	193.0	43.2	24.7	69.6	---	---	0
AM	3610.4	D	415446	7031796	12.2	8.9	7.5	1.1	21.6	1.3	---	---	0
AN	3623.4	D	415455	7032180	24.5	29.5	180.0	237.0	21.6	63.9	---	---	77
AO	3627.9	D	415459	7032313	39.0	50.6	180.0	237.0	21.6	63.9	---	---	0
AP	3636.5	D	415460	7032562	3.0	4.8	15.7	1.6	0.2	3.8	---	---	0
AQ	3642.9	D	415453	7032725	9.7	16.6	123.7	219.0	14.5	43.8	---	---	36
AR	3648.4	D	415465	7032856	58.5	63.1	123.7	219.0	14.5	43.8	---	---	0
AS	3657.2	B	415492	7033068	54.4	49.3	308.5	266.5	47.0	90.8	---	---	0
AT	3660.5	D	415491	7033152	90.6	34.6	308.5	266.5	168.8	90.8	---	---	0
AU	3667.2	D	415479	7033335	174.4	152.9	636.9	705.6	168.8	209.0	---	---	38
AV	3672.8	D	415469	7033503	47.7	60.2	636.9	185.2	69.1	209.0	---	---	11
AW	3677.3	D	415464	7033646	60.7	35.4	206.9	136.0	28.9	57.6	---	---	0
AX	3681.4	D	415471	7033774	63.0	32.3	206.9	68.4	28.9	57.6	---	---	0
AY	3688.1	B	415493	7033974	65.7	89.4	341.9	412.4	25.5	106.6	---	---	0
AZ	3692.0	D	415500	7034078	95.6	117.6	341.9	412.4	42.6	106.6	---	---	2
BA	3697.2	B?	415504	7034200	6.2	3.8	341.9	412.4	42.6	106.6	---	---	2
BB	3703.4	B?	415508	7034328	9.2	10.5	30.1	30.5	2.8	5.3	---	---	0
BC	3705.8	B?	415510	7034378	9.2	22.2	12.4	30.5	2.5	5.3	---	---	1
BD	3727.5	B?	415528	7034804	4.1	27.2	22.5	134.7	2.8	16.7	---	---	14
BE	3797.0	S?	415541	7035482	1.4	4.9	9.4	10.0	1.5	2.2	---	---	0
BF	3826.3	S?	415548	7035666	3.8	13.7	18.5	83.4	1.1	13.5	---	---	1
BG	3845.9	S	415541	7035882	3.6	8.2	21.0	58.6	3.5	5.9	---	---	1
BH	3863.5	D	415568	7036262	9.5	16.3	30.0	58.9	6.1	12.6	---	---	0
BI	3872.6	D	415572	7036413	12.0	15.2	22.8	32.1	2.6	5.6	---	---	0
BJ	3890.0	B?	415578	7036651	4.4	8.2	37.7	85.4	1.8	3.3	0.5	24	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30600		FLIGHT	16									
BK	3895.6	B?	415576	7036789	6.3	19.6	104.0	85.4	5.8	17.1	---	---	0
BL	3900.3	D	415575	7036940	29.4	31.4	104.0	129.8	6.7	30.9	---	---	0
BM	3903.8	B	415576	7037065	22.4	30.2	104.0	122.2	6.8	30.9	---	---	0
BN	3921.3	B	415606	7037592	14.4	12.4	51.7	101.3	5.4	24.3	---	---	1129
BO	3936.4	B	415595	7037797	34.2	39.8	189.5	229.0	24.9	41.9	---	---	0
BP	3944.0	D	415605	7037959	22.1	23.5	189.5	18.5	24.9	41.9	1.5	8	0
BQ	3952.9	D	415618	7038149	49.2	47.9	76.6	184.7	10.8	24.7	---	---	0
BR	3958.4	D	415618	7038250	38.7	15.5	152.5	120.1	211.3	34.9	---	---	0
BS	3971.5	B	415631	7038451	12.4	36.1	152.9	126.4	210.8	36.2	---	---	7
BT	3988.0	B	415636	7038661	73.2	12.2	356.8	99.2	228.1	123.6	26.9	5	0
BU	3997.0	B	415640	7038773	60.2	17.3	530.6	172.0	354.5	149.9	---	---	0
BV	4022.8	B	415632	7039000	8.8	3.6	125.0	94.0	50.9	43.5	---	---	1
BW	4031.7	D	415649	7039076	18.4	18.2	125.0	94.0	46.3	43.5	---	---	0
BX	4084.4	D	415653	7039613	6.4	21.5	101.8	137.5	7.7	28.4	---	---	0
BY	4110.4	B	415675	7039761	129.1	66.7	260.7	269.9	54.9	79.6	---	---	0
BZ	4117.0	B	415677	7039796	15.7	85.9	222.9	229.6	135.6	129.9	---	---	0
CA	4137.0	B	415681	7039897	46.6	27.9	315.2	72.8	167.5	110.9	---	---	0
CB	4151.7	B	415685	7039971	15.6	2.4	86.8	10.4	60.9	28.8	---	---	0
CC	4162.5	B	415682	7040038	11.4	5.6	126.1	45.0	1.2	37.1	---	---	0
CD	4174.9	B	415665	7040168	47.2	8.0	297.1	34.9	192.9	87.0	---	---	0
CE	4181.5	B	415655	7040245	67.6	13.8	297.1	34.9	192.9	87.0	---	---	0
CF	4197.0	D	415653	7040537	45.2	11.5	270.9	75.2	134.4	107.7	12.2	17	0
CG	4200.9	B	415663	7040630	73.2	23.4	357.7	157.5	131.1	131.6	---	---	0
CH	4202.6	D	415669	7040670	97.9	26.7	357.7	157.5	226.0	131.6	---	---	0
CI	4221.9	D	415693	7041174	11.0	10.1	9.6	12.6	2.3	3.4	---	---	0
CJ	4455.6	B?	415732	7042704	7.5	13.4	42.1	118.3	2.3	18.0	---	---	20
CK	4460.5	D	415739	7042862	18.2	39.9	42.1	118.3	2.3	18.0	---	---	19
CL	4474.3	B	415774	7043285	11.9	21.5	36.9	116.7	1.6	14.8	---	---	0
CM	4479.5	B	415751	7043430	7.7	17.6	36.9	116.7	0.4	16.8	---	---	0
CN	4497.5	D	415775	7043764	63.4	39.1	127.2	139.7	18.9	45.0	---	---	1
CO	4505.8	D	415781	7043895	10.6	11.4	127.2	139.7	17.7	45.0	---	---	2
CP	4510.6	D	415781	7043969	33.5	18.7	106.7	60.1	17.7	26.7	---	---	2
CQ	4523.4	B?	415787	7044117	3.6	12.3	27.0	54.7	4.2	11.1	---	---	0
LINE	30610		FLIGHT	16									
A	6325.6	B	415466	7018228	12.5	7.0	85.0	58.2	5.5	19.4	---	---	4
B	6296.8	S	415488	7019246	3.2	8.9	26.5	51.2	2.4	9.8	---	---	0
C	6291.8	S	415494	7019412	2.1	7.0	26.5	51.2	1.6	9.8	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30610		FLIGHT	16									
D	6276.4	B	415505	7019969	8.5	18.4	74.2	102.7	10.7	30.5	---	---	0
E	6260.4	B	415541	7020593	6.7	18.9	81.4	158.1	3.4	31.7	---	---	0
F	6240.8	S	415560	7021267	3.0	7.6	9.2	26.1	1.5	4.1	---	---	9
G	6223.3	S?	415563	7021668	4.2	9.8	10.6	58.0	1.3	7.8	---	---	3
H	6210.1	S?	415562	7021813	3.9	3.5	6.5	37.7	18.3	6.2	---	---	3
I	6199.5	M	415559	7021942	2.2	29.1	34.5	149.6	5.0	18.8	---	---	42
J	6197.3	B?	415560	7021971	4.5	29.1	34.5	149.6	5.0	18.8	0.2	8	40
K	6157.7	B?	415588	7022383	1.2	19.7	68.1	182.8	6.2	24.4	---	---	0
L	6152.0	B	415582	7022489	6.9	21.3	68.1	182.8	6.8	24.4	0.4	0	0
M	6141.8	B	415599	7022756	12.0	29.2	125.7	169.1	16.6	43.0	---	---	30
N	6118.6	S	415607	7023188	1.6	8.8	4.5	34.9	2.0	6.3	---	---	0
O	6016.1	B?	415630	7024036	5.9	14.9	38.1	149.2	0.5	20.5	0.4	17	0
P	6005.2	B?	415635	7024178	7.5	25.1	44.5	98.1	4.8	15.6	---	---	0
Q	5977.8	S	415645	7024801	6.9	18.4	60.9	116.0	6.9	24.0	---	---	0
R	5965.2	S	415659	7025207	3.0	8.1	12.2	50.4	3.6	5.2	---	---	0
S	5940.5	B	415677	7026060	34.9	37.2	247.0	212.5	33.7	79.0	---	---	13
T	5937.7	B	415677	7026168	8.5	23.2	247.0	212.5	27.2	79.0	---	---	0
U	5934.4	B	415679	7026301	6.0	9.0	119.3	59.2	27.2	34.7	---	---	0
V	5929.7	B	415690	7026493	14.9	6.6	112.5	79.5	18.6	32.7	---	---	4
W	5926.5	B	415702	7026628	11.5	14.6	112.5	79.5	18.6	32.7	---	---	14
X	5920.7	B	415713	7026871	27.7	20.4	134.5	95.2	18.6	37.1	---	---	0
Y	5897.3	B?	415736	7027814	7.9	16.9	29.3	63.4	5.7	15.0	---	---	7
Z	5886.8	B?	415748	7028246	11.0	23.6	74.9	163.5	6.2	29.6	---	---	0
AA	5869.5	B?	415747	7028991	6.7	15.2	34.9	49.2	5.7	14.5	---	---	1
AB	5864.1	B?	415753	7029232	4.0	9.0	37.8	71.2	4.6	12.4	---	---	2
AC	5852.1	B	415782	7029756	7.5	8.7	14.8	31.8	0.8	5.0	---	---	0
AD	5840.1	H	415812	7030206	8.5	39.2	102.4	320.2	6.8	41.9	---	---	0
AE	5820.2	B?	415811	7030952	7.0	12.3	12.5	60.8	1.8	6.0	---	---	14
AF	5816.1	B?	415817	7031108	9.8	4.8	58.0	1.6	18.4	19.8	---	---	12
AG	5812.0	B?	415827	7031264	12.3	10.8	58.0	74.1	18.4	26.2	1.5	15	0
AH	5806.9	B	415842	7031457	7.2	13.0	58.9	74.1	36.2	26.2	---	---	0
AI	5798.6	M	415859	7031777	3.4	18.5	91.7	123.2	22.6	35.8	---	---	346
AJ	5796.0	B?	415865	7031877	19.0	18.5	89.4	123.2	6.7	35.8	1.6	11	228
AK	5784.7	D	415884	7032318	51.1	44.4	90.9	143.7	10.7	32.1	---	---	102
AL	5772.0	B?	415869	7032744	3.1	6.3	0.0	0.0	0.6	0.0	---	---	0
AM	5763.5	B	415877	7032998	15.4	24.5	78.5	149.9	4.1	25.9	---	---	0
AN	5750.7	D	415889	7033374	104.8	30.5	511.6	194.1	240.6	196.6	---	---	26
AO	5745.9	D	415898	7033506	84.2	30.2	511.6	107.6	240.6	196.6	---	---	7

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30610		FLIGHT	16									
AP	5739.1	B	415905	7033675	42.2	43.5	161.1	262.3	0.8	64.0	---	---	0
AQ	5735.7	B	415910	7033750	32.9	50.2	161.1	262.3	26.1	64.0	---	---	0
AR	5730.2	D	415916	7033860	52.3	20.2	169.0	97.7	26.1	64.0	---	---	2
AS	5716.4	D	415915	7034143	67.7	114.6	195.8	362.8	13.6	66.1	---	---	0
AT	5683.2	S	415930	7034693	2.2	6.5	11.9	42.2	1.7	6.2	---	---	0
AU	5606.5	S	415952	7035730	0.9	4.3	29.2	51.0	1.2	10.5	---	---	0
AV	5577.2	S	415965	7036308	1.9	8.9	35.4	107.2	5.2	18.8	---	---	0
AW	5565.0	D	415973	7036479	7.1	9.7	12.7	24.1	4.3	3.8	---	---	0
AX	5540.9	B?	415978	7036742	5.6	16.9	38.6	151.1	3.9	21.8	---	---	3
AY	5525.7	D	415988	7037034	43.0	66.0	141.1	194.9	22.5	46.5	---	---	0
AZ	5506.8	B	416001	7037698	167.5	98.2	925.0	466.0	701.8	346.9	---	---	1130
BA	5504.2	B	416006	7037792	213.9	61.8	925.0	466.0	701.8	346.9	---	---	0
BB	5501.8	B	416009	7037881	211.8	53.7	925.0	466.0	701.8	346.9	---	---	0
BC	5495.1	B	416021	7038131	3.1	54.7	646.7	306.4	386.9	204.3	---	---	0
BD	5490.5	B	416029	7038283	154.7	71.4	646.7	306.4	386.9	204.3	8.0	0	0
BE	5488.7	B	416029	7038336	154.7	71.4	646.7	306.4	386.9	204.3	---	---	0
BF	5479.4	B	416029	7038528	67.5	49.7	277.0	306.7	78.8	91.7	---	---	0
BG	5474.5	D	416027	7038601	72.8	47.5	277.0	306.7	0.0	91.7	---	---	0
BH	5463.9	B	416032	7038723	165.9	82.7	411.4	216.2	238.3	143.8	---	---	0
BI	5450.1	B	416047	7038866	126.1	27.5	706.9	250.9	381.5	268.4	---	---	0
BJ	5426.0	B	416043	7039108	5.8	3.3	4.0	0.0	8.3	13.7	2.0	38	0
BK	5416.3	D	416053	7039192	13.3	16.6	52.9	102.3	5.9	20.0	---	---	0
BL	5401.7	D	416060	7039341	22.0	9.8	62.3	35.2	38.0	21.4	---	---	0
BM	5357.9	B	416066	7039722	73.6	58.8	123.7	202.1	13.8	31.0	---	---	0
BN	5345.9	B	416068	7039809	366.9	261.2	570.6	878.5	407.7	488.8	---	---	0
BO	5319.8	B?	416067	7040004	30.5	16.7	183.4	94.7	107.3	54.7	---	---	0
BP	5315.0	B	416066	7040052	32.7	14.2	183.4	94.7	181.4	54.7	---	---	0
BQ	5304.8	B	416065	7040210	64.0	16.2	350.1	25.4	242.9	92.8	---	---	0
BR	5294.5	B?	416086	7040410	10.2	30.9	47.9	96.0	8.2	7.6	---	---	0
BS	5279.7	B	416117	7040678	45.7	21.2	224.0	84.6	59.9	83.6	---	---	0
BT	5277.5	B	416114	7040719	26.8	21.3	224.0	94.8	59.9	83.6	---	---	0
BU	5275.8	B	416113	7040749	40.1	27.9	224.0	94.8	59.9	83.6	---	---	0
BV	5263.7	B	416092	7040944	73.1	26.4	478.5	113.7	289.4	142.1	---	---	7
BW	5257.3	B	416081	7041031	110.3	40.1	478.5	113.7	153.5	142.1	---	---	0
BX	5238.0	B	416080	7041239	6.4	6.0	82.4	43.6	48.9	28.3	1.1	20	0
BY	5230.6	D	416088	7041302	18.6	7.7	61.8	43.6	17.4	28.3	---	---	0
BZ	5018.7	D	416135	7042611	12.9	16.5	70.3	93.5	1.7	8.3	---	---	47
CA	5011.9	B	416145	7042746	11.5	27.6	191.9	381.6	6.5	67.3	---	---	238

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30610		FLIGHT	16									
CB	5005.2	D	416146	7042861	55.1	91.9	191.9	381.6	6.6	67.3	---	---	0
CC	4942.0	B	416167	7043317	4.8	17.2	10.7	60.5	2.5	8.5	---	---	0
CD	4925.8	B?	416176	7043451	2.6	7.2	11.9	54.9	7.2	5.8	---	---	3
CE	4909.9	B?	416164	7043547	0.4	35.6	8.4	138.3	2.9	16.4	-0.1	27	3
CF	4897.1	D	416165	7043664	3.7	7.9	14.2	50.5	6.4	6.1	---	---	0
CG	4889.7	B?	416151	7043754	4.2	28.8	12.6	67.7	0.9	7.8	---	---	4
CH	4870.8	D	416130	7043923	4.1	8.7	12.6	3.3	1.5	3.6	---	---	0
LINE	30620		FLIGHT	17									
A	2425.8	B?	415878	7017867	4.5	11.2	17.2	24.6	6.0	3.3	---	---	0
B	2358.3	B	415914	7019792	4.6	12.7	71.8	148.6	5.7	32.6	---	---	7
C	2341.5	B?	415934	7020520	5.9	14.7	7.5	25.5	0.7	3.2	---	---	15
D	2324.3	B?	415945	7021000	2.2	13.9	5.8	66.7	2.4	9.2	---	---	0
E	2301.7	B?	415947	7021339	11.1	23.8	41.0	131.6	40.1	18.1	0.6	25	0
F	2298.9	M	415951	7021363	8.9	27.1	7.4	131.6	1.1	18.1	---	---	25
G	2234.9	S?	415937	7021789	1.4	16.9	17.4	151.3	3.5	18.0	---	---	0
H	2155.2	B	415977	7022404	40.6	41.6	186.3	202.1	12.8	64.3	---	---	7
I	2146.7	B?	415970	7022569	8.6	17.9	59.4	163.5	11.2	9.6	---	---	0
J	2135.0	B?	415988	7022724	3.1	14.5	20.3	56.8	6.2	10.3	0.2	13	26
K	2116.3	M	415987	7022881	0.0	0.8	17.1	38.7	0.0	4.9	---	---	74
L	2102.8	B?	415995	7022978	2.8	36.1	39.1	105.6	23.1	15.2	-0.1	0	6
M	2099.6	B?	415997	7023006	3.1	23.2	19.7	133.0	9.5	16.1	0.1	0	5
N	2040.5	B?	416008	7023274	1.1	8.1	9.9	46.6	5.8	5.1	-0.1	12	12
O	1998.6	S?	416037	7023916	5.8	8.1	33.9	49.1	2.3	11.0	0.7	18	3
P	1974.7	S	416050	7024457	5.5	10.2	29.7	66.5	2.6	11.6	0.5	27	0
Q	1919.0	B	416095	7026025	299.6	127.3	1407.0	504.8	491.8	591.0	11.2	0	0
R	1904.6	B	416104	7026637	34.0	37.8	214.1	163.3	32.5	69.7	---	---	22
S	1883.0	B	416139	7027577	10.4	12.3	67.6	18.6	28.7	28.7	---	---	11
T	1864.8	B?	416146	7028370	7.3	19.3	39.2	96.3	2.3	14.8	---	---	0
U	1853.2	B	416170	7028854	5.6	16.9	27.9	74.8	5.0	9.3	---	---	0
V	1844.7	B	416193	7029207	4.9	9.6	29.9	47.1	10.0	13.8	---	---	0
W	1832.7	S?	416207	7029704	17.2	41.9	82.8	210.4	4.9	32.1	---	---	1
X	1818.0	D	416201	7030276	17.0	47.7	153.5	245.3	16.5	52.1	---	---	0
Y	1809.8	B?	416220	7030578	21.8	32.4	153.5	231.9	16.5	52.1	---	---	12
Z	1789.6	D	416237	7031421	12.4	20.5	77.0	122.9	12.4	23.1	---	---	0
AA	1786.5	D	416246	7031548	10.2	24.2	77.0	117.2	12.4	23.1	---	---	0
AB	1779.6	S	416261	7031818	7.9	51.3	92.2	348.1	0.8	39.4	---	---	1
AC	1770.6	S?	416276	7032140	11.9	36.4	135.8	253.6	8.9	43.3	---	---	33

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30620		FLIGHT	17									
AD	1764.6	B?	416273	7032344	11.6	12.0	134.9	6.5	10.9	1.4	---	---	20
AE	1760.3	B	416268	7032472	62.2	124.8	473.8	549.0	10.9	131.6	---	---	35
AF	1757.1	B	416269	7032555	72.4	124.2	473.8	549.0	16.4	131.6	---	---	34
AG	1710.0	B?	416296	7033369	3.1	20.9	4.9	50.1	19.4	8.8	---	---	0
AH	1702.6	B	416307	7033568	62.0	63.0	286.8	360.6	53.1	96.6	---	---	16
AI	1700.7	B	416308	7033624	63.1	64.9	286.8	360.6	53.1	96.6	---	---	16
AJ	1695.9	D	416315	7033769	29.0	31.8	126.6	153.6	53.1	38.2	---	---	9
AK	1691.4	D	416320	7033907	23.8	28.8	113.7	92.5	25.6	38.6	---	---	4
AL	1687.0	D	416320	7034027	20.8	16.1	113.7	92.5	25.6	38.6	2.1	15	0
AM	1677.3	D	416318	7034220	12.3	18.4	29.4	77.7	12.2	14.9	0.9	22	2
AN	1558.7	S?	416352	7035744	5.3	20.2	57.0	95.2	1.6	15.1	0.3	4	0
AO	1523.9	S	416374	7036466	2.4	3.1	65.1	92.3	8.8	24.2	---	---	0
AP	1490.0	B?	416387	7036798	4.6	19.2	47.5	185.5	10.4	25.3	0.3	7	0
AQ	1477.5	D	416396	7037014	27.5	27.8	97.2	99.5	19.2	32.3	---	---	0
AR	1475.2	B?	416400	7037075	27.5	22.7	97.2	99.5	19.2	32.3	---	---	0
AS	1464.7	S	416400	7037391	2.2	28.3	6.9	43.8	8.9	3.9	---	---	0
AT	1441.7	B	416409	7037851	249.1	150.4	1479.6	547.0	932.6	472.4	---	---	0
AU	1434.9	B	416423	7037960	36.0	1.7	178.6	547.0	335.9	58.0	---	---	0
AV	1428.0	D	416426	7038120	10.8	37.2	34.2	202.8	12.8	1.3	---	---	0
AW	1407.3	B	416416	7038571	136.2	13.9	1117.2	66.0	1001.3	132.3	---	---	0
AX	1398.7	B	416431	7038686	150.0	0.0	1117.2	82.3	1001.3	167.0	---	---	0
AY	1382.2	B	416411	7038794	79.7	30.7	533.7	65.3	393.5	129.6	---	---	0
AZ	1357.9	B	416419	7038908	10.5	6.8	94.0	29.9	50.0	38.5	---	---	0
BA	1341.3	B	416426	7038993	9.3	12.9	0.0	0.0	36.5	0.0	---	---	1
BB	1328.9	B	416428	7039118	128.8	38.3	653.7	436.5	162.8	244.0	---	---	0
BC	1316.0	B	416434	7039223	26.1	20.4	185.5	144.2	69.1	68.7	2.3	6	0
BD	1294.9	B	416447	7039458	17.6	15.7	55.7	27.9	47.8	27.2	---	---	3
BE	1289.5	B	416454	7039522	7.3	0.0	0.1	0.0	39.3	0.0	---	---	0
BF	1278.5	B	416465	7039631	0.0	9.5	242.5	815.9	0.3	81.7	---	---	1
BG	1272.3	B	416470	7039687	223.3	174.9	853.4	815.9	67.4	256.1	---	---	0
BH	1261.8	B	416470	7039786	36.5	46.0	339.7	292.3	16.9	105.6	---	---	0
BI	1223.5	B	416481	7039985	53.4	36.3	397.7	203.8	83.4	124.3	---	---	5
BJ	1205.1	B	416478	7040043	68.0	19.2	450.9	163.0	224.7	161.3	---	---	0
BK	1157.9	B	416485	7040509	16.0	1.4	174.7	30.1	138.1	45.4	---	---	0
BL	1131.6	D	416492	7040908	68.9	44.8	180.3	186.6	42.5	59.3	---	---	0
BM	1120.1	B	416488	7041014	5.7	30.4	58.9	115.5	6.4	21.8	---	---	30
BN	1105.0	B	416480	7041134	0.7	10.6	33.1	102.6	15.8	15.8	---	---	1
BO	1099.1	D	416486	7041205	16.7	6.9	33.1	40.9	15.8	15.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30620		FLIGHT	17									
BP	1089.0	B	416492	7041345	9.3	2.2	77.9	18.3	41.8	22.6	---	---	2
BQ	1082.9	B	416503	7041432	11.9	5.6	77.9	18.3	41.8	22.6	---	---	0
BR	975.4	B?	416522	7042091	0.0	15.7	49.4	196.4	2.9	31.8	---	---	0
BS	927.5	B?	416543	7042530	21.3	48.7	72.2	195.4	5.8	27.2	---	---	0
BT	912.2	D	416557	7042816	50.5	55.7	294.1	464.7	29.0	106.2	---	---	346
BU	908.0	B	416561	7042893	32.5	55.2	301.4	464.7	29.0	106.2	---	---	345
BV	903.5	B	416564	7042963	62.4	83.9	301.4	464.7	29.0	106.2	---	---	0
BW	822.8	D	416565	7043424	7.6	14.4	20.5	55.3	1.1	11.0	---	---	0
BX	785.5	B?	416568	7043832	1.7	8.8	2.4	62.6	2.9	3.7	---	---	5
BY	765.6	B?	416563	7043981	10.6	59.6	42.4	340.6	1.0	41.5	---	---	0
BZ	760.3	B?	416560	7044013	9.1	51.4	42.4	340.6	1.9	41.5	---	---	0
LINE	30630		FLIGHT	17									
A	2581.2	S	416260	7017895	11.4	27.2	97.1	183.3	5.8	30.6	---	---	0
B	2603.0	S	416270	7018305	2.1	25.1	2.2	91.2	4.5	13.1	---	---	40
C	2607.1	M	416271	7018385	1.6	0.0	2.2	91.2	6.1	13.1	---	---	0
D	2629.8	S?	416285	7018727	11.3	24.8	78.7	132.1	12.1	27.8	---	---	0
E	2662.0	B?	416310	7019485	11.0	24.6	117.0	148.6	11.3	39.2	---	---	0
F	2692.8	B?	416309	7020127	5.8	23.2	32.3	76.5	1.6	12.4	---	---	12
G	2697.1	B?	416313	7020193	2.3	3.0	32.3	76.5	1.8	12.4	---	---	12
H	2828.4	S	416364	7021317	1.4	4.1	1.8	38.6	0.8	5.2	---	---	2
I	2842.4	B?	416372	7021429	1.5	3.2	4.1	34.3	2.3	1.9	---	---	0
J	2852.1	B?	416377	7021487	3.1	4.3	2.6	89.5	2.0	10.8	---	---	0
K	2902.4	B	416394	7021798	9.5	7.5	34.7	46.4	14.1	8.1	---	---	0
L	2929.8	B?	416390	7022137	5.2	19.2	28.0	145.4	3.2	17.6	---	---	13
M	2943.6	B?	416373	7022311	7.2	36.0	55.6	154.5	3.8	24.8	---	---	3
N	2950.2	B?	416370	7022392	10.5	19.4	55.6	154.5	2.9	24.8	---	---	0
O	2958.3	B?	416368	7022466	5.8	20.7	48.4	54.9	2.3	18.8	---	---	0
P	2996.6	B?	416391	7022734	2.1	25.0	14.8	98.1	5.2	13.3	---	---	0
Q	3078.7	M	416413	7023263	7.0	22.4	41.5	123.9	17.2	16.0	---	---	0
R	3081.3	B?	416414	7023306	7.0	22.4	42.0	121.2	17.2	15.9	0.4	15	3
S	3102.0	S?	416435	7023614	4.1	20.1	1.1	62.0	1.1	7.8	0.2	11	0
T	3128.6	B?	416451	7023921	8.1	28.4	18.8	112.5	3.8	13.1	---	---	11
U	3150.2	B?	416418	7024275	6.5	45.9	27.3	210.5	3.9	28.6	---	---	0
V	3188.3	S	416463	7025151	4.6	18.4	33.1	110.1	5.3	15.1	---	---	1
W	3200.0	S	416472	7025384	1.9	20.9	23.9	97.4	8.0	9.6	---	---	0
X	3218.1	B	416497	7025831	36.1	41.0	152.7	150.4	21.3	51.5	---	---	0
Y	3237.7	B	416489	7026569	21.1	17.7	88.6	64.7	16.4	26.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30630		FLIGHT	17									
Z	3250.2	B	416520	7027062	9.2	21.1	57.5	115.9	11.5	24.4	---	---	0
AA	3267.8	B	416537	7027784	7.5	9.8	35.5	53.8	29.0	20.0	---	---	3
AB	3283.3	B?	416553	7028429	9.7	13.9	52.6	75.7	1.3	12.0	---	---	1
AC	3289.0	B?	416561	7028663	7.7	19.3	69.4	89.7	4.9	19.1	---	---	3
AD	3302.2	B	416590	7029220	10.9	18.4	43.9	64.4	10.7	18.6	---	---	4
AE	3314.2	B	416595	7029718	8.6	26.7	52.1	136.1	4.2	20.6	---	---	0
AF	3324.9	B	416605	7030148	10.5	16.0	109.2	181.3	4.5	13.1	---	---	3
AG	3330.5	B	416623	7030376	10.1	24.1	81.9	181.3	14.5	38.5	---	---	0
AH	3341.6	B	416636	7030823	22.3	43.5	158.7	255.4	18.0	53.8	---	---	1
AI	3362.8	B	416647	7031645	5.3	9.2	17.9	24.6	3.6	8.6	---	---	0
AJ	3376.1	B	416671	7032162	19.9	35.9	72.3	135.2	5.8	21.2	---	---	4
AK	3381.0	B	416666	7032358	12.5	35.4	72.3	139.5	5.8	23.8	---	---	152
AL	3392.2	B	416676	7032781	16.0	22.2	73.6	88.2	5.2	24.8	---	---	63
AM	3429.9	S?	416690	7033263	1.7	2.0	6.0	41.5	0.5	5.4	---	---	1
AN	3489.9	B	416722	7033893	8.0	16.2	46.7	70.0	1.9	16.1	---	---	0
AO	3500.8	D	416718	7034053	28.8	41.2	113.7	162.9	20.1	39.1	---	---	0
AP	3510.0	D	416723	7034145	16.9	30.7	55.5	113.9	2.2	17.3	---	---	0
AQ	3530.1	D	416729	7034320	14.6	22.5	17.5	68.5	2.8	9.6	---	---	0
AR	3542.7	B	416709	7034403	4.2	21.3	127.2	191.8	8.1	37.0	---	---	0
AS	3548.7	B	416713	7034456	14.5	26.6	119.1	176.6	11.5	37.2	---	---	0
AT	3569.1	S	416732	7034692	3.1	12.6	9.6	32.0	1.4	6.0	---	---	1
AU	3615.0	M	416747	7035347	1.1	9.1	3.6	39.0	1.5	5.3	---	---	0
AV	3620.3	S?	416752	7035389	1.1	11.5	13.0	25.4	7.8	3.4	---	---	0
AW	3638.0	S	416780	7035660	4.9	19.0	24.8	78.6	2.0	11.0	---	---	3
AX	3651.0	S	416717	7035987	3.2	18.9	17.5	80.3	3.7	13.4	---	---	3
AY	3669.8	D	416787	7036564	13.1	17.8	52.0	78.6	3.8	15.3	---	---	53
AZ	3678.3	D	416777	7036685	12.2	15.2	49.3	79.2	3.2	15.1	---	---	0
BA	3688.2	B	416788	7036822	6.1	5.3	49.3	0.0	2.3	12.6	---	---	0
BB	3695.4	B	416805	7036975	11.3	26.4	161.9	207.1	15.4	48.0	---	---	0
BC	3700.6	B	416814	7037123	40.2	55.5	161.9	207.1	15.2	48.0	---	---	0
BD	3724.4	D	416826	7037668	107.7	167.5	447.4	672.9	109.2	173.8	1.7	0	919
BE	3731.3	D	416822	7037721	12.5	0.0	447.4	672.9	109.2	173.8	---	---	0
BF	3741.3	B	416824	7037845	61.6	27.8	540.9	516.3	127.7	153.5	---	---	0
BG	3744.8	B	416829	7037921	7.0	31.9	0.0	180.6	127.7	0.0	---	---	0
BH	3753.5	B	416843	7038173	75.3	12.1	365.5	180.6	157.4	91.4	28.7	1	0
BI	3759.6	B	416844	7038314	24.4	8.3	529.4	24.6	361.5	130.5	---	---	0
BJ	3770.6	B	416852	7038434	40.1	13.1	18.1	52.4	12.3	8.4	---	---	0
BK	3787.0	B	416856	7038571	117.9	34.3	824.0	119.0	642.1	161.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30630		FLIGHT	17									
BL	3804.6	B	416855	7038765	141.7	45.7	550.3	271.8	214.6	201.1	---	---	0
BM	3810.2	B	416857	7038843	70.5	22.5	550.3	271.8	204.5	201.1	---	---	10
BN	3815.8	B	416860	7038944	54.8	56.5	483.8	272.1	204.5	186.8	---	---	4
BO	3824.6	B	416862	7039106	138.1	88.9	470.1	335.8	212.1	147.4	---	---	0
BP	3843.0	B	416865	7039266	0.0	4.5	201.0	149.7	201.7	68.3	---	---	0
BQ	3853.4	B	416871	7039381	45.7	3.1	350.7	158.9	236.6	117.0	---	---	0
BR	3857.0	B	416876	7039427	15.6	28.3	350.7	158.9	236.6	117.0	---	---	0
BS	3866.4	B	416876	7039568	336.1	113.0	1435.4	500.7	1113.7	284.5	---	---	0
BT	3877.0	B	416875	7039816	86.5	12.6	79.3	0.0	180.4	7.8	34.6	0	0
BU	3892.0	B	416888	7040048	77.4	22.0	313.2	156.6	136.9	90.3	---	---	0
BV	3933.5	B	416864	7040242	193.0	80.1	850.2	356.4	552.8	335.0	---	---	9
BW	3960.4	B	416881	7040588	2.6	11.8	4.4	68.3	1.4	8.0	---	---	4
BX	3970.9	B	416884	7040714	26.7	28.0	108.9	90.0	29.0	36.1	---	---	30
BY	3982.8	B	416894	7040877	362.4	143.0	1176.2	667.9	409.2	450.1	---	---	84
BZ	3992.7	B	416906	7041041	42.7	12.4	27.8	53.7	196.8	9.9	---	---	0
CA	4034.3	B	416890	7041379	10.5	3.1	151.1	48.8	112.6	40.1	---	---	0
CB	4055.4	B	416906	7041465	32.3	0.0	82.8	326.0	0.0	239.3	---	---	0
CC	4069.5	B	416916	7041523	199.2	313.8	994.6	632.2	454.6	346.8	---	---	0
CD	4110.4	B	416920	7042138	11.0	10.5	37.8	42.4	7.4	12.6	---	---	57
CE	4136.0	B	416961	7042491	11.8	8.1	37.7	31.3	8.6	10.9	2.0	27	0
CF	4145.7	B	416962	7042601	15.5	14.8	24.2	49.4	1.7	6.8	---	---	87
CG	4170.5	S?	416956	7042808	1.3	15.3	0.2	73.6	22.2	8.1	-0.1	0	0
CH	4184.3	B	416952	7042929	74.3	77.1	444.3	411.6	63.1	159.5	---	---	382
CI	4192.7	B	416949	7043033	62.5	46.3	444.3	411.6	63.1	159.5	---	---	0
CJ	4196.5	B	416948	7043068	11.2	14.7	35.4	76.6	11.8	22.0	---	---	0
CK	4265.9	B	416949	7043507	37.1	35.6	249.7	206.6	54.4	83.8	---	---	98
CL	4278.1	B	416952	7043669	25.6	23.3	188.0	129.6	9.0	62.9	---	---	0
CM	4300.2	B	416986	7043931	2.2	13.2	7.4	42.0	1.5	6.4	---	---	9
LINE	30640		FLIGHT	17									
A	6468.8	B	416713	7018267	3.6	10.4	23.9	87.5	0.8	9.3	---	---	13
B	6448.8	B	416671	7018815	5.3	9.5	42.4	53.0	6.9	12.6	---	---	0
C	6442.6	B	416706	7019016	2.1	11.4	27.1	83.4	6.4	12.9	---	---	6
D	6417.8	B	416696	7019753	6.6	19.9	0.0	34.2	0.8	1.5	---	---	5
E	6405.8	B	416661	7019977	32.3	43.3	190.6	290.7	11.0	68.7	---	---	13
F	6347.7	S?	416749	7020556	1.8	15.9	14.7	102.6	3.2	10.7	-0.1	8	1
G	6334.8	S?	416762	7020640	4.2	18.3	14.2	76.7	9.4	9.8	0.2	23	4
H	6278.8	S?	416740	7020990	1.6	7.3	1.7	51.5	2.7	5.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30640		FLIGHT	17									
I	6253.8	S?	416742	7021169	1.2	14.3	20.7	40.5	9.1	4.9	---	---	2
J	6234.1	S?	416760	7021324	3.3	37.3	24.5	182.3	11.0	21.3	0.1	7	0
K	6226.9	M	416764	7021368	4.7	6.6	5.4	182.3	3.5	21.3	---	---	5
L	6152.7	B	416764	7021889	3.6	11.2	56.4	114.4	2.8	16.3	---	---	13
M	6140.1	B	416795	7022085	14.3	42.1	32.8	87.3	6.1	13.3	---	---	0
N	6134.1	B?	416780	7022194	0.0	11.2	94.3	341.6	2.9	52.4	---	---	0
O	6128.0	B?	416758	7022287	21.7	75.5	94.3	341.6	4.5	52.4	---	---	7
P	6105.2	B?	416792	7022564	35.8	129.0	211.7	656.0	35.0	102.7	---	---	28
Q	6093.7	M	416796	7022658	3.5	100.5	3.5	699.4	23.9	88.8	---	---	0
R	6057.0	S?	416806	7023024	3.2	9.0	17.7	60.4	0.7	7.2	---	---	10
S	5988.3	S	416815	7024034	6.6	19.8	56.3	172.4	2.0	24.7	---	---	14
T	5977.9	S	416819	7024360	10.3	12.8	56.3	154.1	2.8	24.1	---	---	0
U	5971.2	S	416827	7024557	12.9	29.6	27.5	201.9	1.6	25.5	---	---	5
V	5950.4	S	416849	7025095	2.6	7.2	17.3	37.9	1.0	7.9	---	---	0
W	5935.4	S?	416855	7025544	1.9	7.7	9.4	28.8	3.3	5.9	---	---	0
X	5920.6	B	416874	7025985	25.3	39.3	207.4	239.5	26.9	66.1	---	---	2
Y	5916.3	B	416891	7026130	17.2	47.9	207.4	239.5	26.9	66.1	---	---	21
Z	5889.0	B	416910	7027107	13.4	16.4	93.1	132.7	14.2	35.6	---	---	0
AA	5870.7	B	416937	7027773	3.4	7.8	33.4	28.0	13.4	13.4	---	---	4
AB	5848.7	S	416957	7028660	4.8	14.6	69.7	109.9	3.9	21.6	---	---	3
AC	5835.6	B	416964	7029164	6.4	10.3	45.1	18.5	10.3	0.1	---	---	2
AD	5818.3	B	417014	7029810	14.3	22.5	101.2	184.7	2.0	30.2	---	---	0
AE	5815.3	B	417020	7029922	14.3	38.6	101.2	171.3	1.8	30.2	---	---	10
AF	5807.4	B?	417004	7030221	4.6	0.0	0.0	0.0	13.4	0.0	---	---	10
AG	5798.7	B	416970	7030545	58.8	49.1	330.0	181.3	42.3	101.0	---	---	0
AH	5787.6	B?	417010	7030944	11.0	19.2	55.0	79.0	13.9	23.9	---	---	0
AI	5779.9	S	417044	7031251	4.8	12.3	20.5	53.4	7.4	6.9	---	---	16
AJ	5770.1	B	417054	7031675	9.8	8.2	167.8	208.9	21.0	54.3	---	---	0
AK	5765.1	B	417057	7031894	46.5	45.6	167.8	208.9	21.0	54.3	---	---	0
AL	5752.5	B	417062	7032417	79.9	120.8	440.0	455.6	34.7	141.0	---	---	1
AM	5750.8	B	417059	7032485	102.2	133.3	440.0	455.6	34.7	141.0	---	---	1
AN	5739.6	B	417067	7032921	10.3	30.8	147.3	156.9	44.9	49.3	---	---	0
AO	5727.1	B	417092	7033323	10.0	26.0	36.0	120.0	20.6	19.5	---	---	0
AP	5716.3	B	417085	7033527	4.2	10.0	15.7	81.8	2.3	8.9	---	---	0
AQ	5704.8	D	417088	7033684	5.0	9.5	19.6	81.8	1.3	4.3	---	---	0
AR	5678.3	B?	417091	7034027	7.0	15.0	41.9	93.9	9.3	16.7	---	---	0
AS	5668.2	D	417122	7034158	11.4	18.8	69.5	116.4	6.9	17.0	---	---	0
AT	5663.6	D	417129	7034228	20.3	24.5	69.5	116.4	10.2	17.0	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30640		FLIGHT	17									
AU	5648.9	D	417139	7034447	27.5	43.5	252.1	301.2	31.0	80.5	---	---	2
AV	5644.4	B	417140	7034527	39.7	46.2	252.1	301.2	31.0	80.5	---	---	0
AW	5563.2	S	417152	7035529	1.5	7.0	11.9	37.8	0.8	5.8	---	---	2
AX	5537.1	S	417152	7035878	0.9	3.9	18.1	88.6	0.4	12.2	---	---	1
AY	5518.8	S	417158	7036133	4.3	10.1	26.6	59.8	3.3	12.1	---	---	13
AZ	5499.9	B?	417174	7036521	6.3	19.2	27.3	98.0	8.3	15.7	---	---	59
BA	5495.2	B?	417182	7036598	10.2	11.9	33.4	98.0	10.7	15.8	---	---	61
BB	5488.1	M	417184	7036694	8.0	27.4	109.3	283.1	4.1	36.7	---	---	63
BC	5481.3	D	417191	7036779	16.6	47.9	114.6	307.1	3.4	49.2	---	---	0
BD	5477.2	D	417186	7036843	7.7	36.6	114.6	307.1	16.5	49.2	---	---	0
BE	5471.5	D	417183	7036947	3.1	5.4	175.0	238.0	40.1	54.5	---	---	0
BF	5463.6	B	417197	7037141	26.6	41.8	176.6	183.8	53.7	49.2	---	---	0
BG	5461.0	D	417198	7037222	57.3	30.5	176.6	183.8	53.7	49.2	---	---	0
BH	5457.2	B	417195	7037349	6.9	0.0	135.8	815.2	53.7	46.4	---	---	0
BI	5451.7	B	417190	7037533	25.3	172.8	131.2	815.2	6.3	95.5	0.3	0	0
BJ	5441.3	B	417216	7037870	54.0	42.5	157.2	260.1	24.8	42.0	---	---	0
BK	5437.8	B	417224	7037999	9.4	50.3	157.2	260.1	26.3	42.0	---	---	0
BL	5434.5	B	417225	7038125	18.6	58.9	170.9	354.4	26.3	46.8	---	---	0
BM	5432.2	B	417222	7038210	18.2	61.9	170.9	354.4	0.0	46.8	---	---	0
BN	5423.5	B	417216	7038459	203.6	205.8	1063.6	513.2	489.8	558.6	---	---	0
BO	5421.5	B	417217	7038498	203.6	131.8	1063.6	513.2	489.8	558.6	---	---	0
BP	5415.7	B	417220	7038602	155.6	51.0	914.1	743.9	251.3	408.2	---	---	0
BQ	5410.3	B	417222	7038700	228.8	77.1	1228.0	665.7	505.6	456.2	---	---	0
BR	5404.2	B	417229	7038814	118.7	53.6	1228.0	665.7	578.7	456.2	---	---	5
BS	5399.7	B	417234	7038921	134.8	7.4	874.8	65.6	578.7	282.6	---	---	0
BT	5392.2	B	417244	7039112	19.3	12.7	463.6	49.2	362.3	114.1	---	---	0
BU	5382.7	B	417290	7039353	277.8	167.9	1381.1	652.3	606.0	428.7	---	---	0
BV	5364.0	B	417256	7039719	25.7	26.9	212.8	73.4	164.3	61.2	1.6	0	0
BW	5360.7	D	417260	7039766	38.2	32.7	212.8	73.4	164.3	61.7	---	---	2
BX	5343.9	B	417291	7039971	91.5	35.0	352.1	163.3	83.9	132.6	---	---	0
BY	5332.0	B	417282	7040075	8.5	4.8	74.9	5.8	96.6	25.1	2.3	58	6
BZ	5323.5	B	417288	7040132	6.4	0.6	35.5	41.5	78.9	5.1	---	---	0
CA	5263.7	B	417291	7040524	12.3	6.5	21.6	8.0	11.2	5.9	---	---	0
CB	5245.3	B	417300	7040705	37.4	14.9	111.4	50.3	92.2	30.1	---	---	0
CC	5233.3	B	417292	7040921	26.1	13.5	155.3	68.7	144.4	18.1	---	---	28
CD	5226.0	B	417297	7041016	15.1	11.7	155.3	208.3	144.4	36.6	1.9	36	0
CE	5213.4	B	417278	7041111	36.2	25.3	91.1	188.4	47.6	44.2	---	---	2
CF	5190.7	B	417295	7041245	7.5	3.4	0.2	11.2	2.5	3.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30640		FLIGHT	17									
CG	5166.4	B	417301	7041393	14.0	16.1	52.4	71.1	0.6	14.6	---	---	0
CH	5101.9	D	417328	7041674	12.8	4.7	68.5	28.0	3.8	22.9	---	---	0
CI	5080.0	B	417321	7041847	6.6	0.6	32.2	6.5	23.2	8.3	---	---	0
CJ	4908.1	B	417354	7042675	12.0	26.8	67.1	145.3	3.7	24.3	---	---	0
CK	4883.8	D	417370	7042798	24.3	22.9	141.1	224.4	4.6	40.5	---	---	91
CL	4850.6	B	417374	7043022	76.1	38.9	412.0	152.8	124.7	148.9	---	---	328
CM	4844.3	B	417370	7043126	75.7	48.3	412.0	216.1	124.7	148.9	---	---	0
CN	4825.3	B	417396	7043350	2.0	8.2	9.9	21.0	1.9	2.1	---	---	0
CO	4757.4	B	417370	7043649	96.1	74.6	706.2	333.2	232.3	248.7	---	---	0
CP	4722.9	D	417396	7044061	6.5	12.9	36.5	25.1	7.2	10.2	---	---	28
CQ	4713.0	D	417391	7044210	16.9	15.5	36.5	72.5	8.4	10.9	---	---	0
CR	4696.3	B?	417413	7044356	6.1	4.2	13.4	0.7	4.4	2.0	---	---	1
LINE	30652		FLIGHT	23									
A	4005.2	B?	417081	7018032	2.4	6.5	0.0	1.0	1.2	0.4	---	---	0
B	4014.0	B?	417090	7018142	2.2	11.2	14.9	47.2	2.7	7.5	---	---	0
C	4030.3	B	417111	7018483	7.9	17.9	56.1	49.3	8.2	17.1	---	---	52
D	4037.4	B	417106	7018703	5.9	18.7	9.2	61.2	8.2	8.3	---	---	0
E	4042.6	B	417087	7018842	2.9	10.9	25.2	78.0	2.0	11.1	---	---	3
F	4053.1	B	417097	7019079	7.1	10.8	37.4	34.2	7.5	13.3	---	---	0
G	4073.3	B	417094	7019429	1.5	6.7	23.3	48.9	1.5	8.6	---	---	0
H	4096.0	B?	417140	7019831	6.2	16.7	59.2	98.7	2.7	20.7	0.4	0	0
I	4281.3	S	417147	7021608	0.9	5.4	18.4	41.0	0.9	6.8	---	---	8
J	4305.2	B?	417182	7022010	5.8	23.7	16.0	106.2	0.4	11.2	---	---	0
K	4337.1	S?	417201	7022279	1.6	9.7	5.9	48.7	1.2	5.2	---	---	0
L	4350.3	S?	417206	7022368	1.4	9.5	6.3	40.2	1.0	5.8	---	---	0
M	4369.2	S?	417212	7022487	4.4	11.5	10.1	58.8	1.1	7.5	---	---	0
N	4430.1	B	417198	7022902	7.4	21.6	85.1	99.6	3.4	22.4	---	---	0
O	4461.5	B	417242	7023771	12.8	16.6	59.7	111.6	2.3	18.7	---	---	0
P	4466.0	B	417245	7023878	5.8	22.9	59.7	111.3	2.1	17.2	---	---	3
Q	4500.7	D	417257	7024296	4.5	18.1	32.2	102.8	1.6	13.7	---	---	0
R	4513.4	B?	417254	7024457	8.3	19.5	25.5	79.1	1.9	10.5	---	---	12
S	4531.0	S	417273	7024936	4.5	9.8	6.6	26.2	2.3	4.0	0.4	19	1
T	4543.4	S	417290	7025421	2.8	9.1	8.1	29.8	3.5	5.9	---	---	0
U	4560.9	B	417309	7026026	25.5	30.7	155.9	222.9	19.8	51.7	---	---	0
V	4567.2	B	417308	7026244	14.3	31.1	131.1	222.9	18.2	45.2	---	---	12
W	4593.4	B	417327	7027205	4.5	22.8	61.6	201.9	2.9	31.3	---	---	2
X	4611.9	B	417368	7027911	8.5	31.8	32.8	171.0	9.0	21.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30652		FLIGHT	23									
Y	4634.2	B	417380	7028759	7.8	19.9	54.6	87.6	1.6	15.6	---	---	0
Z	4648.0	B	417401	7029297	5.2	12.9	20.9	43.5	9.9	10.1	---	---	1
AA	4657.7	B	417414	7029665	19.8	32.7	68.7	134.0	11.1	26.8	---	---	8
AB	4669.6	B	417416	7030098	24.3	28.3	216.2	171.5	39.2	73.1	---	---	15
AC	4682.3	S?	417436	7030560	9.1	15.3	30.3	41.1	1.2	7.1	---	---	24
AD	4693.5	B?	417425	7030964	10.4	13.9	28.2	59.1	3.3	9.0	---	---	6
AE	4706.2	S?	417455	7031402	8.1	26.6	97.9	204.0	7.7	37.4	---	---	11
AF	4713.9	B?	417459	7031668	9.6	15.5	108.6	68.6	9.6	27.8	---	---	0
AG	4716.8	B?	417462	7031772	19.5	19.3	108.6	68.6	9.7	27.8	---	---	0
AH	4737.6	S	417487	7032519	18.4	44.0	88.3	218.9	2.6	31.8	---	---	0
AI	4745.7	B?	417490	7032791	10.6	19.0	71.2	135.3	9.9	23.4	---	---	23
AJ	4757.0	B?	417498	7033168	4.3	11.6	80.5	109.4	22.1	26.1	---	---	0
AK	4778.4	S	417504	7033834	7.8	16.9	33.4	60.5	0.2	8.1	---	---	0
AL	4785.3	B?	417506	7034032	1.8	6.0	16.6	21.7	2.2	3.6	---	---	0
AM	4791.8	B	417522	7034220	2.5	2.8	106.0	21.7	22.6	29.7	---	---	3
AN	4796.3	B	417535	7034352	80.2	63.0	206.5	166.4	41.1	63.6	---	---	0
AO	4798.7	B	417538	7034424	57.5	42.8	206.5	166.4	41.1	63.6	---	---	0
AP	4803.4	D	417536	7034560	71.9	58.0	293.7	303.8	41.1	89.8	---	---	0
AQ	4807.4	D	417535	7034678	52.6	59.3	293.7	246.6	32.3	89.8	---	---	0
AR	4815.2	S?	417545	7034895	5.1	13.7	21.0	53.9	3.8	8.4	---	---	1
AS	4836.2	S	417559	7035278	1.4	8.3	4.3	60.9	0.0	6.4	-0.1	13	3
AT	4866.0	B?	417577	7035572	0.9	10.7	2.9	12.3	0.7	1.0	-0.1	4	8
AU	4882.5	B?	417583	7035742	5.7	26.0	29.7	97.2	4.2	13.9	---	---	6
AV	4889.4	B?	417582	7035849	5.9	12.6	33.9	95.2	4.4	14.1	---	---	15
AW	4936.2	S	417594	7036567	2.1	6.2	4.8	20.9	0.1	3.2	---	---	46
AX	4960.1	B	417604	7036890	18.3	28.9	169.2	200.3	5.9	43.0	---	---	0
AY	4966.9	D	417608	7037056	50.4	53.1	313.0	308.6	40.4	95.9	---	---	0
AZ	4969.8	D	417608	7037134	95.3	38.5	459.1	308.6	131.2	152.8	---	---	0
BA	4972.0	D	417607	7037196	55.4	14.0	459.1	371.9	131.2	152.8	---	---	0
BB	4975.4	D	417607	7037291	72.3	69.2	459.1	371.9	131.2	152.8	---	---	0
BC	4980.0	B	417611	7037407	57.1	37.0	456.2	371.9	52.9	148.1	---	---	2
BD	5000.7	B	417628	7037882	32.8	20.4	192.4	182.7	31.5	59.9	---	---	724
BE	5011.8	B	417631	7038194	22.0	13.0	15.1	186.5	0.0	5.7	---	---	0
BF	5016.3	B	417638	7038331	4.3	11.7	4.8	37.4	0.0	1.2	---	---	0
BG	5029.1	D	417634	7038580	12.8	11.3	73.9	76.0	7.6	23.5	---	---	0
BH	5039.8	B	417638	7038724	10.8	7.9	97.9	51.3	28.7	38.0	---	---	8
BI	5057.6	B	417661	7039069	54.6	7.0	354.1	47.8	330.5	100.2	---	---	0
BJ	5079.5	B	417678	7039297	58.4	12.6	332.4	54.8	224.9	97.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30652		FLIGHT	23									
BK	5089.6	B	417675	7039366	0.2	0.0	332.4	0.1	224.9	114.9	---	---	0
BL	5098.6	B	417673	7039434	54.1	23.5	339.9	115.6	143.0	114.4	---	---	0
BM	5115.0	B	417673	7039556	149.5	57.7	968.5	327.8	574.5	255.8	---	---	2
BN	5141.1	B	417683	7039825	257.5	61.7	2268.4	660.8	1187.4	765.8	---	---	4
BO	5159.9	B	417689	7040087	57.2	9.9	52.2	82.5	10.7	49.9	---	---	0
BP	5172.6	B	417699	7040227	191.4	54.7	960.6	265.7	590.0	230.1	---	---	0
BQ	5178.4	B	417699	7040276	7.5	19.5	960.6	265.7	523.4	83.0	---	---	0
BR	5219.6	B	417699	7040618	76.6	22.9	203.5	41.4	144.2	88.2	---	---	1
BS	5227.4	B	417707	7040725	0.0	0.3	178.8	45.6	160.3	26.1	---	---	1
BT	5232.2	D	417710	7040800	38.4	14.9	178.8	45.6	78.5	26.1	---	---	0
BU	5239.1	D	417726	7040909	26.0	19.7	377.7	67.6	265.8	97.0	---	---	0
BV	5244.7	D	417738	7041006	65.3	10.9	377.7	67.6	265.8	97.0	---	---	0
BW	5354.1	D	417731	7041604	16.6	8.2	70.6	29.5	33.3	27.4	---	---	6
BX	5357.4	B	417728	7041659	10.2	13.1	70.6	29.5	33.3	27.4	---	---	0
BY	5373.2	B?	417747	7042122	3.7	5.8	0.0	21.8	1.9	1.2	---	---	0
BZ	5389.0	B	417820	7042673	13.6	8.0	66.1	27.1	20.7	24.5	2.6	0	0
CA	5394.0	B	417795	7042854	6.7	6.1	44.4	39.0	15.6	14.8	1.2	27	0
CB	5407.4	B	417800	7043220	105.0	69.0	738.3	410.7	220.6	263.3	---	---	323
CC	5412.5	B	417805	7043274	114.8	63.7	738.3	410.7	216.1	263.3	---	---	0
CD	5447.9	B	417804	7043599	62.7	59.2	261.9	174.7	46.3	86.4	---	---	101
CE	5455.3	B	417802	7043738	47.4	34.6	261.9	174.7	46.3	86.4	---	---	0
CF	5467.0	B	417814	7043955	143.9	115.7	495.1	427.6	83.4	183.0	---	---	241
CG	5480.7	D	417807	7044191	11.0	15.5	34.2	32.1	2.7	2.4	---	---	30
CH	5487.5	B	417805	7044274	11.7	15.5	109.7	32.1	43.9	35.6	---	---	0
CI	5495.4	D	417809	7044343	35.2	21.6	109.7	62.3	43.9	35.6	---	---	0
CJ	5520.4	B	417802	7044515	15.3	25.0	79.3	111.9	18.5	26.8	---	---	5
CK	5536.8	B	417779	7044766	4.4	5.0	6.5	1.1	3.6	0.2	---	---	0
LINE	30660		FLIGHT	18									
A	3284.8	B	417469	7018516	1.0	12.0	50.7	82.8	7.5	21.9	---	---	0
B	3303.6	B	417474	7018696	5.1	9.5	40.0	76.3	4.4	14.0	---	---	0
C	3343.6	B?	417507	7019037	1.9	23.0	19.8	149.2	4.1	18.1	---	---	0
D	3364.1	B	417496	7019234	15.5	33.1	83.5	143.8	7.1	25.8	---	---	0
E	3388.1	D	417507	7019396	2.7	13.1	10.4	55.0	2.7	9.7	---	---	0
F	3401.2	D	417516	7019521	5.5	21.5	34.2	96.0	3.7	15.6	---	---	2
G	3409.2	B	417520	7019598	7.6	13.4	37.3	96.0	2.6	15.6	---	---	0
H	3558.4	S	417546	7020698	0.8	5.1	0.2	43.4	0.3	4.4	---	---	1
I	3658.0	S	417573	7021849	2.6	14.2	10.2	109.5	1.4	12.8	---	---	4

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30660		FLIGHT	18									
J	3675.4	S	417585	7022035	5.1	9.6	19.6	33.5	0.5	5.1	---	---	0
K	3825.6	D	417629	7023437	1.5	8.6	6.8	30.2	1.1	3.7	---	---	0
L	3852.2	D	417645	7023749	3.9	19.5	15.4	83.3	1.1	11.6	---	---	12
M	3865.8	D	417647	7023910	3.8	61.7	19.7	130.5	2.8	13.9	---	---	8
N	3878.4	B?	417646	7024018	1.3	12.7	17.9	39.4	8.2	1.7	---	---	0
O	3902.4	B?	417683	7024271	6.1	15.2	26.2	80.6	1.6	9.5	---	---	0
P	3909.4	D	417693	7024359	7.8	13.0	26.2	68.2	1.1	9.5	---	---	2
Q	3921.4	S?	417695	7024523	5.0	11.4	0.8	61.2	0.7	6.9	---	---	2
R	3931.1	B?	417665	7024744	6.7	1.7	6.1	128.5	2.5	14.5	---	---	0
S	3938.0	S	417655	7024930	0.2	17.2	6.1	51.0	1.3	7.5	---	---	0
T	3952.4	B	417676	7025404	3.1	8.4	27.5	28.8	7.0	8.4	---	---	4
U	3965.1	B	417693	7025786	1.6	9.8	5.3	54.9	0.9	7.0	---	---	0
V	3983.3	B	417708	7026396	12.1	3.6	87.8	94.7	23.9	28.7	---	---	11
W	4006.1	B	417723	7027245	6.1	13.4	26.1	88.1	3.3	16.3	---	---	18
X	4023.4	B	417749	7027957	7.2	20.2	26.1	86.0	8.5	9.3	---	---	9
Y	4047.0	B	417775	7028943	9.2	17.4	85.8	78.7	1.3	24.2	---	---	10
Z	4060.9	B	417801	7029540	24.4	24.9	111.6	107.5	19.4	35.9	---	---	0
AA	4067.9	B	417809	7029836	25.7	33.9	507.9	201.5	64.3	154.8	---	---	29
AB	4073.9	B	417812	7030079	86.0	38.2	507.9	330.5	64.3	154.8	---	---	0
AC	4079.7	B	417817	7030307	29.5	51.6	507.9	211.1	12.9	154.8	---	---	98
AD	4097.9	S?	417834	7031042	5.6	8.9	15.3	12.2	2.2	3.4	---	---	13
AE	4114.4	B?	417851	7031680	14.5	15.3	27.8	53.9	13.6	12.6	---	---	83
AF	4121.1	B?	417860	7031953	14.1	10.7	73.1	59.0	13.9	24.0	---	---	0
AG	4126.1	B?	417867	7032162	22.5	21.1	73.1	63.8	13.9	24.0	---	---	2
AH	4139.5	B	417879	7032683	12.3	27.5	51.0	152.8	1.0	19.9	---	---	0
AI	4146.3	B	417886	7032916	9.4	23.0	90.9	254.4	0.2	37.0	---	---	3
AJ	4149.0	B	417887	7033010	15.8	31.6	90.9	254.4	4.0	37.0	---	---	10
AK	4155.3	D	417893	7033239	5.4	15.5	47.3	212.7	4.2	29.3	---	---	0
AL	4159.1	B	417900	7033381	27.6	51.9	104.1	212.7	10.4	29.3	---	---	0
AM	4169.3	D	417906	7033780	33.2	17.4	138.9	81.0	13.9	41.0	---	---	17
AN	4182.8	B?	417917	7034279	5.5	16.8	1.2	33.3	11.6	1.4	---	---	0
AO	4190.9	D	417921	7034558	33.4	20.6	89.2	53.2	47.0	107.2	---	---	5
AP	4196.3	D	417929	7034734	70.4	58.6	347.7	319.8	47.0	107.2	---	---	1
AQ	4200.7	B	417937	7034870	29.4	23.1	347.7	319.8	39.0	107.2	---	---	0
AR	4225.1	S?	417951	7035244	1.9	6.5	1.2	27.2	1.2	2.7	---	---	0
AS	4253.8	S	417941	7035607	5.2	11.8	27.1	81.3	0.7	12.9	---	---	13
AT	4333.0	D	417986	7036941	32.3	53.3	163.4	196.0	5.6	41.8	---	---	0
AU	4338.9	B	418002	7037136	94.9	81.5	323.6	308.1	48.2	107.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30660		FLIGHT	18									
AV	4341.8	D	418005	7037234	94.9	81.5	323.6	308.1	60.2	107.2	---	---	0
AW	4343.7	B	418005	7037297	33.6	55.8	323.6	308.1	60.2	98.9	---	---	0
AX	4351.0	B	418005	7037531	26.8	11.0	206.4	19.4	50.7	10.4	---	---	0
AY	4374.7	B	418012	7037925	66.1	62.9	367.5	403.7	46.1	127.9	---	---	0
AZ	4384.2	B	418007	7038044	24.8	33.7	367.5	403.7	46.1	127.9	---	---	0
BA	4390.1	B	418016	7038131	16.9	24.1	177.6	93.4	37.8	58.3	---	---	0
BB	4396.1	B	418029	7038251	14.7	2.8	177.6	124.1	7.6	58.3	---	---	0
BC	4403.7	B	418029	7038393	5.6	18.7	17.4	97.2	1.1	14.6	---	---	0
BD	4435.3	B	418047	7038940	65.5	50.5	434.6	327.1	142.0	163.5	---	---	1
BE	4446.4	B	418050	7039112	37.5	18.1	133.8	80.2	76.6	31.6	---	---	0
BF	4463.2	B	418052	7039284	9.7	10.2	122.0	174.9	159.7	97.3	---	---	0
BG	4474.9	B	418061	7039380	56.0	19.7	397.5	184.6	217.6	133.6	---	---	0
BH	4483.8	B	418061	7039443	101.1	23.3	462.8	174.2	205.8	159.0	---	---	0
BI	4513.8	B	418070	7039640	123.6	60.9	690.2	383.0	89.2	224.8	---	---	2
BJ	4525.3	B	418071	7039794	57.2	6.4	324.6	209.6	327.7	133.8	---	---	0
BK	4529.5	B	418076	7039870	18.6	1.9	53.5	85.2	82.1	50.9	---	---	0
BL	4536.4	B	418080	7040008	106.6	58.5	403.6	179.3	196.4	135.9	---	---	0
BM	4541.6	B	418084	7040109	40.0	24.0	225.5	179.3	160.1	63.9	---	---	0
BN	4551.5	B	418090	7040276	144.7	80.9	574.7	284.9	345.2	155.6	---	---	0
BO	4553.1	B	418090	7040300	144.7	80.9	628.0	284.9	345.2	190.8	---	---	0
BP	4567.4	B	418091	7040478	591.5	226.7	2492.6	1408.0	865.7	1055.6	---	---	2
BQ	4578.8	B	418085	7040629	176.1	132.5	702.9	367.5	392.9	377.3	---	---	0
BR	4603.1	B	418081	7040887	1750.2	500.5	5831.6	1602.5	2913.4	2072.5	---	---	0
BS	4667.7	B	418096	7041136	8.7	1.9	32.5	50.5	99.0	107.3	---	---	0
BT	4678.2	B	418096	7041196	26.6	27.6	312.4	207.4	106.4	107.3	---	---	0
BU	4822.0	B	418143	7041780	6.3	1.3	22.8	3.4	22.3	3.0	---	---	0
BV	4829.0	B	418148	7041952	5.6	1.3	22.8	3.8	22.3	2.6	---	---	0
BW	4860.7	B	418154	7042695	33.0	23.6	166.3	107.4	48.1	63.9	---	---	19
BX	4867.9	B	418175	7042904	71.0	42.9	340.9	178.7	83.5	129.1	---	---	0
BY	4871.6	B	418165	7042989	76.4	44.1	340.9	178.7	83.5	129.1	---	---	46
BZ	4896.4	B	418156	7043295	177.6	109.8	941.0	548.1	328.0	376.8	---	---	0
CA	4898.7	B	418159	7043329	187.3	129.5	1055.6	541.3	328.0	376.8	---	---	235
CB	4921.3	B	418181	7043578	36.9	59.4	234.1	171.8	71.8	82.5	---	---	0
CC	4986.8	B	418186	7043994	46.6	32.9	257.3	145.8	60.6	93.9	---	---	198
CD	5030.3	B	418188	7044328	10.8	10.4	117.9	81.8	51.6	45.9	---	---	0
CE	5042.4	B	418200	7044377	6.3	11.4	117.9	84.9	51.6	45.9	---	---	0
CF	5070.6	D	418227	7044532	24.4	13.8	40.0	37.7	13.5	14.3	---	---	0
CG	5183.5	B	418193	7045120	2.1	1.7	14.2	6.4	5.7	2.7	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30670		FLIGHT	19									
A	664.8	S?	417873	7018216	6.3	13.7	32.6	123.0	1.5	16.0	---	---	46
B	701.7	B?	417887	7018553	2.2	8.5	18.8	39.7	1.2	0.3	---	---	0
C	711.0	S?	417895	7018616	2.6	10.2	18.8	39.7	1.0	7.3	---	---	0
D	815.9	B	417895	7019331	44.5	45.8	175.3	168.6	11.3	50.7	---	---	0
E	844.5	B	417904	7019501	2.0	5.9	20.9	84.1	4.1	12.0	---	---	0
F	881.6	D	417913	7019831	10.2	43.7	23.4	183.9	0.6	24.1	---	---	1
G	1024.0	S	417952	7020682	0.7	7.6	5.7	32.9	5.0	4.5	---	---	0
H	1107.7	S	417979	7021726	0.2	6.0	1.2	46.2	0.4	5.2	---	---	2
I	1152.4	S	417995	7021889	1.4	7.7	12.6	38.8	1.8	5.5	---	---	0
J	1174.6	B?	417969	7022131	2.2	16.4	4.8	23.0	1.0	5.1	---	---	0
K	1322.9	S	418023	7023152	1.6	5.1	8.5	49.5	0.8	6.4	---	---	0
L	1375.7	S?	418027	7023616	3.1	10.2	11.7	38.9	1.1	5.5	---	---	0
M	1411.0	S?	418085	7024724	2.6	7.7	29.3	52.8	6.3	5.4	---	---	0
N	1416.1	S	418074	7024951	4.6	6.4	26.8	52.8	11.4	11.2	---	---	8
O	1433.1	S	418062	7025611	1.9	14.4	30.8	87.2	1.4	15.3	---	---	1
P	1451.0	B	418070	7026317	11.2	52.7	37.2	235.7	7.7	33.4	---	---	5
Q	1458.9	B	418089	7026631	13.4	15.5	71.0	56.6	20.4	24.7	---	---	7
R	1465.6	B	418103	7026911	2.3	1.5	71.0	86.7	20.4	14.0	---	---	17
S	1476.5	B	418140	7027379	8.2	10.9	68.3	137.8	10.2	26.3	---	---	16
T	1495.5	B	418164	7028190	3.4	8.0	11.9	48.8	2.3	0.6	---	---	2
U	1514.1	B	418176	7028978	8.1	10.1	91.6	106.2	6.5	31.6	---	---	3
V	1517.8	B	418183	7029135	12.7	41.1	91.6	130.1	13.0	31.6	---	---	0
W	1526.0	B	418203	7029476	7.9	4.3	11.3	2.2	46.2	5.5	---	---	3
X	1534.7	B	418211	7029839	38.3	39.2	293.7	281.1	52.9	94.6	---	---	0
Y	1537.3	B	418210	7029946	49.3	39.2	293.7	281.1	52.9	94.6	---	---	0
Z	1550.9	S?	418220	7030496	6.5	23.6	71.2	171.3	3.5	29.3	---	---	9
AA	1565.2	S	418237	7031084	2.2	6.3	33.3	75.0	3.3	0.1	---	---	12
AB	1580.6	S	418259	7031719	4.2	11.7	48.1	62.7	4.7	16.2	---	---	0
AC	1589.4	S?	418260	7032079	6.9	20.7	60.5	99.2	4.1	22.4	---	---	0
AD	1612.6	S	418283	7033016	2.7	8.0	46.6	81.3	2.7	12.7	---	---	0
AE	1632.6	B?	418301	7033756	30.4	146.3	304.5	785.0	9.6	112.5	---	---	14
AF	1634.6	B?	418303	7033830	47.0	146.3	304.5	785.0	9.6	112.5	---	---	4
AG	1667.0	D	418337	7034513	44.3	72.1	275.5	475.8	27.1	99.5	1.2	2	0
AH	1689.4	D	418332	7034776	9.5	4.2	63.0	0.0	14.8	19.7	---	---	0
AI	1699.5	B?	418335	7034865	5.5	5.1	0.0	18.7	7.2	2.5	---	---	0
AJ	1709.1	D	418346	7034953	23.7	48.6	58.0	170.8	22.8	38.8	---	---	0
AK	1722.1	D	418355	7035058	33.9	88.0	149.4	331.4	6.2	53.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30670		FLIGHT	19									
AL	1731.0	D	418355	7035127	17.4	55.8	149.4	331.4	41.7	53.0	---	---	0
AM	1740.1	D	418344	7035235	34.4	31.1	210.5	113.7	47.8	76.0	---	---	0
AN	1777.2	D	418364	7036144	44.8	21.4	168.4	63.1	45.1	60.7	---	---	1
AO	1784.8	D	418363	7036304	65.7	64.4	168.4	253.7	45.1	60.7	---	---	0
AP	1798.6	S	418371	7036648	0.3	4.8	0.0	13.5	0.5	1.6	-0.1	19	25
AQ	1808.2	B	418402	7036913	8.5	12.4	17.0	10.2	14.8	3.5	---	---	0
AR	1814.3	D	418413	7037111	58.7	86.5	264.0	336.4	41.1	83.6	---	---	0
AS	1816.4	D	418411	7037185	66.1	77.1	264.0	336.4	41.1	83.6	---	---	0
AT	1822.0	B	418411	7037398	37.1	30.5	249.3	144.1	72.8	88.2	2.4	1	0
AU	1826.3	B	418413	7037565	36.4	20.5	249.3	32.5	72.8	88.2	---	---	0
AV	1837.7	B	418432	7037928	14.5	20.2	43.0	52.7	16.8	16.2	---	---	216
AW	1849.1	B	418425	7038195	65.6	78.1	329.0	279.0	16.8	96.4	---	---	0
AX	1856.2	B	418438	7038330	22.4	20.8	346.0	327.0	19.8	102.7	---	---	0
AY	1872.1	B	418441	7038608	46.9	157.7	282.2	962.7	1.0	115.4	0.7	0	1
AZ	1880.9	B	418457	7038824	23.1	28.4	131.1	199.0	8.7	32.8	---	---	3
BA	1892.5	B	418464	7039156	8.6	31.1	0.0	33.1	11.5	0.8	0.4	0	2
BB	1898.7	B	418464	7039345	29.6	49.2	205.4	190.8	60.7	61.5	---	---	0
BC	1905.7	D	418477	7039553	37.6	33.2	205.4	190.8	51.8	61.5	---	---	1
BD	1911.0	D	418483	7039709	20.7	3.3	119.7	27.1	84.8	32.0	---	---	0
BE	1913.4	B	418482	7039776	36.5	17.6	135.9	27.1	84.8	32.0	---	---	0
BF	1920.7	B	418476	7039976	24.8	10.6	237.6	146.0	131.5	27.5	---	---	3
BG	1923.3	B	418475	7040049	45.0	40.4	237.6	146.0	131.5	60.1	---	---	3
BH	1925.6	B	418476	7040114	45.0	40.4	237.6	146.0	119.0	60.1	---	---	3
BI	1933.5	B	418492	7040319	46.3	28.9	170.1	38.7	129.1	41.7	---	---	0
BJ	1944.4	B	418501	7040499	28.9	20.6	218.7	66.7	139.3	66.9	---	---	0
BK	1962.3	B	418497	7040620	69.3	6.8	0.0	121.0	169.9	61.6	---	---	0
BL	1994.9	B	418502	7040736	7.5	4.5	320.5	174.5	321.4	139.3	---	---	1
BM	2031.3	B	418506	7040916	75.7	67.5	381.0	209.1	164.4	112.6	---	---	0
BN	2039.0	B	418512	7040982	174.4	64.7	587.1	414.1	64.0	240.7	---	---	0
BO	2064.2	B	418514	7041146	750.1	312.7	1465.3	711.8	596.1	452.4	---	---	0
BP	2182.0	B	418525	7041964	10.6	0.6	113.3	19.6	95.9	20.7	---	---	0
BQ	2183.9	B	418519	7041981	10.6	3.1	17.9	15.8	11.8	19.8	---	---	0
BR	2213.6	B?	418516	7042259	3.5	8.7	5.9	16.0	2.4	3.7	---	---	0
BS	2230.9	B	418525	7042342	3.5	7.4	2.2	22.1	1.5	2.3	---	---	10
BT	2246.6	B	418527	7042454	12.6	31.1	116.3	178.0	11.7	33.2	---	---	3
BU	2253.0	B	418527	7042521	28.4	34.4	151.9	91.8	33.9	41.7	---	---	0
BV	2255.4	B	418531	7042551	5.2	29.1	151.9	91.8	33.9	41.7	---	---	23
BW	2268.2	B	418561	7042756	34.5	34.9	135.2	65.0	35.1	47.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30670		FLIGHT	19									
BX	2282.4	B	418571	7043056	210.0	130.2	833.6	526.6	196.7	316.5	---	---	36
BY	2294.8	B	418561	7043232	49.9	65.2	983.9	2022.8	109.1	427.4	---	---	0
BZ	2303.3	B	418546	7043339	166.5	252.0	1492.5	2022.8	251.2	515.2	---	---	0
CA	2325.7	B	418568	7043605	38.8	9.1	280.2	93.6	74.3	96.7	---	---	36
CB	2348.0	B?	418593	7043769	3.1	8.4	23.3	49.4	6.2	9.4	0.3	14	4
CC	2371.3	B	418597	7043889	3.7	6.8	1.0	71.2	0.6	5.4	---	---	0
CD	2399.6	B	418601	7044074	8.3	20.6	20.9	101.4	2.7	15.9	---	---	0
CE	2442.0	D	418623	7044413	13.3	24.0	57.2	65.9	0.9	17.3	---	---	0
CF	2453.7	B	418640	7044559	54.1	24.7	261.0	67.9	122.3	89.5	---	---	29
CG	2462.3	B	418631	7044667	69.4	38.4	261.0	83.9	122.3	89.5	---	---	0
CH	2473.0	B	418617	7044864	32.4	16.9	105.1	51.4	17.9	43.1	4.1	7	0
CI	2479.0	B	418596	7045049	26.0	9.3	31.2	18.2	37.4	10.4	6.3	5	19
CJ	2483.3	D	418599	7045194	37.9	11.2	31.2	9.1	37.4	1.6	---	---	19
CK	2491.6	B	418625	7045443	27.3	28.6	102.6	74.7	28.6	38.0	---	---	0
CL	2497.1	D	418630	7045579	44.2	17.5	125.2	74.7	53.7	52.7	---	---	0
CM	2499.7	B	418633	7045645	90.9	23.6	171.5	51.9	95.2	71.7	---	---	0
LINE	30680		FLIGHT	19									
A	5052.5	S	418289	7018457	6.9	15.6	47.3	91.9	2.3	18.1	---	---	0
B	5036.7	B?	418301	7018646	7.9	14.1	16.5	43.8	2.9	6.9	---	---	47
C	5025.1	B?	418308	7018763	4.6	19.8	3.9	47.2	3.4	4.8	---	---	0
D	5013.8	B?	418302	7018841	3.8	11.7	22.6	116.0	3.3	12.6	---	---	0
E	4916.0	B	418332	7019425	1.8	4.3	37.0	57.9	1.7	11.9	---	---	0
F	4886.1	B	418326	7019591	18.5	21.0	82.5	124.8	5.1	25.1	---	---	0
G	4826.7	M	418340	7020121	1.9	4.2	6.0	73.5	5.9	9.7	---	---	3
H	4813.0	S?	418337	7020197	4.4	10.8	5.0	92.2	7.6	10.0	---	---	0
I	4728.7	S	418358	7020759	2.4	5.4	7.9	57.8	2.7	7.0	---	---	2
J	4552.8	S	418398	7022104	0.0	10.3	3.3	58.9	0.5	6.9	---	---	2
K	4526.3	S?	418406	7022247	3.9	8.2	17.1	119.4	2.7	13.7	---	---	0
L	4516.3	S?	418409	7022296	1.2	17.1	28.4	128.0	1.0	15.6	---	---	0
M	4441.0	S	418396	7022905	1.0	4.8	3.4	27.0	1.6	3.3	---	---	1
N	4425.4	S	418411	7023023	0.5	14.7	2.2	68.9	1.2	8.1	---	---	5
O	4345.9	B?	418430	7023535	1.7	15.8	9.2	53.1	1.1	6.0	---	---	0
P	4321.9	B?	418433	7023668	1.7	6.3	19.4	93.5	1.0	13.9	---	---	0
Q	4216.8	S	418491	7024726	2.9	9.3	13.2	65.8	1.3	9.2	---	---	2
R	4200.1	S	418492	7025041	2.3	7.6	4.1	43.9	1.5	3.5	---	---	0
S	4174.0	B	418503	7025555	8.4	3.5	47.3	28.9	4.2	15.1	3.5	50	0
T	4167.0	B	418493	7025745	8.9	49.0	54.8	245.7	1.1	27.8	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30680		FLIGHT	19									
U	4147.4	B	418521	7026383	20.1	75.5	128.8	440.0	14.7	62.2	---	---	4
V	4117.0	B	418548	7027565	8.0	12.5	39.7	59.3	10.0	15.4	---	---	10
W	4111.5	B	418555	7027801	8.6	6.2	39.7	76.8	8.4	16.5	---	---	0
X	4101.2	B	418565	7028238	8.5	15.4	34.6	76.0	9.7	16.3	---	---	11
Y	4083.3	B	418589	7028998	8.2	16.6	28.7	61.6	0.5	9.1	---	---	0
Z	4069.0	B	418611	7029599	14.3	18.7	42.2	40.1	15.7	20.8	---	---	4
AA	4058.1	B	418622	7030041	20.0	28.0	214.1	281.8	43.9	76.5	---	---	15
AB	4052.9	B	418629	7030245	76.7	54.5	344.6	233.6	43.9	109.9	---	---	0
AC	4035.5	B	418645	7030928	10.1	18.8	55.8	91.9	7.5	23.1	---	---	0
AD	4019.8	B?	418662	7031562	12.8	16.4	87.5	128.0	2.5	28.9	---	---	0
AE	4015.2	B?	418671	7031747	16.3	17.1	87.5	127.7	5.4	28.9	---	---	16
AF	3991.4	D?	418685	7032659	4.9	10.9	18.0	37.0	0.4	4.9	---	---	9
AG	3975.2	S	418697	7033129	5.3	10.7	48.5	83.3	14.3	14.1	---	---	0
AH	3964.6	M	418708	7033410	0.6	0.1	0.6	30.5	13.3	0.7	---	---	99
AI	3946.7	S	418722	7033930	1.5	9.8	12.0	44.7	7.1	6.6	-0.1	10	17
AJ	3918.3	S?	418746	7034556	5.2	7.9	32.2	25.0	3.2	9.0	---	---	0
AK	3909.1	S	418750	7034819	1.0	8.7	23.8	74.1	5.6	11.5	---	---	0
AL	3894.0	B	418763	7035284	1.6	0.1	16.3	35.3	9.4	9.8	---	---	0
AM	3873.7	B?	418771	7035767	4.0	11.8	29.4	69.4	0.6	10.2	---	---	0
AN	3853.1	B	418775	7036172	136.5	48.9	483.8	227.1	149.1	172.9	---	---	5
AO	3843.8	D	418786	7036390	68.0	30.4	499.2	261.5	124.4	173.2	---	---	9
AP	3821.0	B	418818	7036991	5.8	9.3	38.3	198.3	0.0	10.6	0.6	16	0
AQ	3815.2	B	418820	7037148	32.3	41.4	135.0	198.3	6.5	46.3	---	---	0
AR	3802.8	B	418830	7037524	50.3	24.9	226.4	96.8	85.4	83.2	---	---	0
AS	3792.2	B	418827	7037890	3.2	2.5	20.2	5.1	8.2	8.8	---	---	462
AT	3779.6	B	418834	7038253	4.6	5.5	23.1	50.3	7.4	11.1	---	---	0
AU	3686.4	D	418905	7040660	7.5	20.7	52.0	107.2	2.0	19.2	---	---	0
AV	3676.1	D	418918	7040950	51.7	24.9	199.6	88.6	114.0	48.6	---	---	0
AW	3672.1	D	418924	7041053	24.5	4.8	199.6	88.6	136.3	37.2	---	---	0
AX	3659.2	B	418935	7041300	39.4	10.4	266.0	60.3	169.3	84.8	---	---	0
AY	3572.8	B	418940	7041882	33.8	13.1	127.7	48.6	71.6	41.8	---	---	0
AZ	3557.4	B	418946	7042011	2.4	0.2	27.4	1.5	59.0	18.9	---	---	0
BA	3550.7	B	418942	7042074	19.5	8.0	23.5	3.7	13.8	7.2	---	---	0
BB	3538.6	B	418955	7042234	1.6	10.6	3.0	13.7	0.7	2.4	---	---	0
BC	3509.9	B?	418949	7042435	6.7	8.4	24.5	47.7	1.0	9.3	---	---	0
BD	3472.1	S?	418956	7042622	0.9	12.6	12.7	122.9	1.6	16.3	---	---	0
BE	3446.2	B	418964	7042736	4.2	12.7	23.9	112.3	3.9	15.8	---	---	0
BF	3425.1	B	418966	7042790	2.9	0.6	45.0	208.9	8.8	33.4	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30680		FLIGHT	19									
BG	3403.1	B	418967	7042851	4.9	14.8	99.8	243.0	17.1	29.7	---	---	0
BH	3363.5	B	418972	7042976	10.0	20.2	36.4	104.9	11.1	17.4	---	---	0
BI	3340.8	B	418978	7043249	136.8	59.6	969.1	259.1	620.0	283.0	---	---	0
BJ	3335.4	B	418978	7043374	110.6	39.7	969.1	224.4	620.0	283.0	---	---	0
BK	3324.7	B	418977	7043636	20.2	13.8	95.1	26.1	27.2	36.3	---	---	0
BL	3315.1	B	418987	7043751	34.0	33.9	337.1	303.6	70.1	119.6	---	---	29
BM	3304.8	B	418986	7043838	65.7	22.1	776.2	525.2	209.5	279.2	---	---	0
BN	3298.6	B	418992	7043911	150.9	127.4	776.2	500.2	209.5	279.2	---	---	0
BO	3285.3	B	419013	7044072	31.5	59.5	348.0	181.6	96.6	103.4	---	---	0
BP	3247.9	B?	419011	7044316	1.3	6.4	8.1	22.9	3.5	1.8	---	---	8
BQ	3207.7	B	419027	7044555	4.8	11.8	23.5	49.9	2.9	9.9	---	---	6
BR	3194.9	D	419030	7044717	45.2	16.0	134.9	16.2	78.2	47.4	---	---	4
BS	3188.3	D	419034	7044825	41.2	0.0	198.5	44.9	136.7	54.7	---	---	0
BT	3177.7	D	419037	7044997	120.4	46.9	225.9	137.9	136.7	81.8	---	---	111
BU	3164.1	D	418975	7045292	7.2	9.1	18.9	26.7	0.0	7.8	---	---	0
BV	3155.0	B	419008	7045536	13.4	11.2	239.3	81.6	105.2	90.8	1.7	19	0
BW	3145.7	B	419059	7045693	20.7	11.9	171.8	80.6	95.0	90.8	---	---	0
LINE	30690		FLIGHT	19									
A	5354.8	B?	418703	7018639	13.8	40.3	129.3	222.2	3.1	42.7	---	---	45
B	5376.6	B?	418705	7018771	7.3	10.5	46.1	43.1	1.1	8.0	---	---	16
C	5383.0	B?	418712	7018841	6.7	9.7	19.6	43.1	0.7	7.0	---	---	0
D	5393.0	B?	418714	7018961	3.5	9.3	22.6	57.3	1.1	10.8	---	---	0
E	5405.0	S?	418722	7019091	4.1	5.7	12.2	25.0	2.1	4.8	---	---	0
F	5455.7	S?	418725	7019560	23.2	45.5	138.9	247.4	5.5	39.6	---	---	0
G	5505.0	S	418731	7019880	1.4	5.2	5.3	40.9	1.1	5.5	---	---	0
H	5537.6	S	418750	7020164	1.9	8.1	4.3	40.5	0.9	5.8	---	---	0
I	5563.2	S?	418749	7020404	5.0	13.9	9.2	46.1	1.4	5.3	---	---	2
J	5588.3	S	418773	7020980	1.4	12.2	8.8	40.5	0.8	5.4	---	---	2
K	5633.7	D	418817	7022397	7.8	18.5	33.1	93.2	1.6	14.6	---	---	6
L	5638.8	B?	418819	7022498	5.4	12.7	33.1	93.2	1.4	14.6	---	---	3
M	5656.5	D	418822	7022753	9.7	20.8	25.3	48.7	1.6	7.2	---	---	0
N	5687.2	B?	418817	7023021	4.4	19.1	11.6	57.5	6.9	7.0	0.3	13	0
O	5703.5	B?	418827	7023149	3.8	14.7	7.6	59.6	3.3	6.2	---	---	0
P	5735.6	D	418839	7023508	2.3	22.4	5.3	97.2	5.0	12.6	---	---	5
Q	5825.0	S	418899	7025213	1.5	19.0	15.5	112.9	2.2	16.9	---	---	0
R	5840.5	B?	418900	7025421	14.1	43.0	124.8	253.4	7.3	50.9	---	---	0
S	5842.7	B?	418903	7025460	14.1	43.0	124.8	253.4	6.2	50.9	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30690		FLIGHT	19									
T	5849.6	B?	418900	7025598	13.9	13.9	109.8	172.7	6.2	36.7	---	---	2
U	5858.7	B?	418917	7025809	5.2	9.8	27.9	66.3	0.9	10.0	---	---	0
V	5862.5	S?	418913	7025919	3.4	11.9	32.3	64.9	0.6	10.9	---	---	0
W	5873.2	B	418915	7026243	6.2	11.7	27.1	47.0	10.6	6.8	---	---	7
X	5882.0	B	418922	7026492	9.3	2.1	61.3	107.5	22.3	23.4	---	---	0
Y	5910.1	B	418954	7027574	3.6	15.5	42.1	112.5	4.0	17.2	---	---	0
Z	5917.6	B	418954	7027879	9.3	11.5	22.1	62.4	6.6	7.7	---	---	14
AA	5929.6	B	418971	7028385	8.3	19.1	35.0	77.7	4.3	13.6	---	---	5
AB	5938.6	B	418980	7028786	2.1	5.7	0.0	10.1	0.4	1.1	---	---	3
AC	5944.4	B	418993	7029040	10.4	16.4	39.6	62.3	4.7	12.7	---	---	0
AD	5958.8	B	419006	7029650	15.2	18.7	48.6	108.0	8.3	17.1	---	---	0
AE	5968.3	B	419016	7030040	23.0	36.5	105.1	177.9	9.3	34.8	---	---	39
AF	5982.5	B	419033	7030637	5.4	11.9	17.3	62.1	14.9	5.4	0.5	6	27
AG	5986.3	B	419036	7030792	8.5	14.8	17.3	62.1	7.3	5.4	---	---	0
AH	5997.5	S?	419050	7031216	5.1	21.0	54.8	153.8	3.0	21.3	---	---	47
AI	6008.3	B?	419058	7031621	7.2	16.1	12.2	13.8	3.6	2.5	---	---	31
AJ	6021.7	S	419076	7032142	3.8	6.0	51.6	85.4	1.4	16.6	---	---	2
AK	6060.0	S?	419097	7033103	2.5	5.2	20.8	40.4	2.4	5.6	---	---	0
AL	6076.8	B?	419111	7033376	6.9	19.1	16.5	79.6	0.6	11.1	---	---	0
AM	6086.8	S	419107	7033592	1.9	9.5	17.4	52.1	1.0	7.0	---	---	5
AN	6105.0	B?	419133	7034125	6.7	17.2	42.7	82.3	0.8	13.5	---	---	12
AO	6108.0	B?	419138	7034220	9.3	20.1	42.7	82.3	0.7	13.5	---	---	12
AP	6133.5	B?	419144	7034796	2.3	6.8	13.6	21.5	5.1	4.7	---	---	64
AQ	6141.2	B?	419156	7034945	3.2	8.5	45.9	49.7	10.3	15.9	---	---	0
AR	6147.5	B	419163	7035093	76.1	50.7	358.1	187.6	73.7	131.9	---	---	0
AS	6151.3	B	419164	7035202	63.5	13.3	358.1	187.6	73.7	131.9	---	---	0
AT	6154.0	B	419163	7035281	31.1	9.6	358.1	50.0	73.7	131.9	---	---	25
AU	6158.1	B	419167	7035402	19.9	15.3	144.6	50.0	32.6	50.3	---	---	0
AV	6166.9	D	419172	7035627	12.2	21.0	62.2	83.5	7.1	21.6	---	---	0
AW	6177.4	B?	419169	7035807	2.0	10.4	45.2	67.0	1.8	17.1	---	---	0
AX	6211.4	D	419183	7036269	96.9	53.3	200.4	197.4	86.1	74.3	---	---	2
AY	6218.1	B	419193	7036416	35.4	42.5	178.7	197.4	59.1	59.6	---	---	0
AZ	6220.9	B	419200	7036491	44.7	30.0	184.4	167.4	19.4	59.6	---	---	0
BA	6224.2	B	419207	7036586	5.8	8.1	184.4	167.4	17.8	25.8	---	---	0
BB	6231.4	D	419214	7036801	14.5	24.4	15.1	31.9	0.0	6.1	---	---	24
BC	6239.5	B	419210	7037066	6.4	12.2	30.9	39.9	3.4	11.8	0.5	17	5
BD	6245.8	D	419212	7037262	19.3	22.3	30.8	76.6	11.0	11.8	---	---	0
BE	6280.0	D	419228	7038030	14.8	29.5	66.1	72.8	0.0	17.5	0.7	2	1017

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30690		FLIGHT	19									
BF	6560.7	B	419302	7040970	0.9	0.0	38.2	25.4	15.5	18.2	---	---	0
BG	6575.9	D	419307	7041074	75.0	32.3	113.0	84.3	40.7	31.4	---	---	0
BH	6581.1	D	419312	7041114	36.0	21.3	365.4	93.6	236.7	119.8	---	---	0
BI	6587.8	B	419321	7041183	34.4	23.7	365.4	93.6	236.7	119.8	---	---	0
BJ	6606.0	B	419326	7041398	63.1	33.4	631.7	245.3	790.3	180.9	---	---	0
BK	6615.3	B	419327	7041474	205.9	37.4	1276.0	394.1	790.3	389.0	---	---	0
BL	6681.0	D	419385	7042015	71.1	19.8	261.6	75.3	169.7	70.8	---	---	1
BM	6688.0	D	419375	7042058	27.0	8.2	261.6	75.3	169.7	66.9	---	---	0
BN	6698.0	B	419363	7042123	12.5	8.9	255.9	107.8	101.2	98.8	---	---	0
BO	6708.1	D	419357	7042187	87.7	35.7	14.3	107.8	6.8	7.0	---	---	0
BP	6744.1	B	419336	7042391	7.0	40.9	20.7	170.8	2.8	19.4	---	---	0
BQ	6767.0	D	419349	7042610	33.0	55.3	280.2	293.6	23.9	66.1	---	---	0
BR	6768.8	D	419350	7042638	33.0	55.4	96.2	87.8	23.9	66.1	---	---	0
BS	6774.0	D	419346	7042721	3.7	2.7	29.4	9.9	12.8	12.3	---	---	3
BT	6779.5	D	419344	7042807	33.9	15.6	29.4	9.9	12.8	12.3	---	---	0
BU	6794.8	B	419389	7043141	430.6	97.2	2111.8	364.9	1389.7	635.3	---	---	32
BV	6803.3	B	419374	7043344	150.2	27.7	618.4	61.1	539.9	161.8	---	---	0
BW	6809.2	B	419364	7043471	19.0	22.2	52.5	140.7	1.7	28.1	---	---	21
BX	6825.4	B	419379	7043647	625.4	446.3	3415.9	2302.1	811.5	1206.0	---	---	0
BY	6844.7	D	419394	7043797	91.3	81.6	411.5	207.6	139.3	146.3	---	---	88
BZ	6854.4	B	419402	7043903	64.5	88.6	475.4	600.9	108.9	152.8	---	---	0
CA	6866.0	B	419403	7044022	31.1	56.4	101.3	116.2	15.6	27.3	---	---	0
CB	6890.8	B	419421	7044327	106.3	199.5	532.5	825.2	58.5	174.8	---	---	0
CC	6932.9	B	419446	7044641	9.6	8.6	23.1	25.8	5.9	9.0	---	---	49
CD	6948.2	B	419351	7044992	166.0	75.1	385.6	259.1	132.9	140.4	---	---	0
CE	6964.2	B	419446	7045180	8.7	8.8	100.3	81.1	34.4	35.7	---	---	6
LINE	30700		FLIGHT	20									
A	640.2	S	419132	7018557	3.1	17.5	19.0	81.6	0.7	11.0	---	---	0
B	666.9	S?	419100	7018941	2.3	9.6	26.4	60.1	1.1	10.2	---	---	0
C	771.9	S	419119	7019517	5.0	11.7	24.0	75.2	1.5	11.0	---	---	0
D	838.1	S	419143	7020095	1.7	9.4	10.4	36.1	1.9	5.8	---	---	0
E	869.0	S?	419163	7020421	1.8	7.6	6.8	29.7	1.5	5.1	---	---	0
F	884.9	B?	419141	7020746	12.4	25.9	24.8	74.6	1.4	9.5	---	---	0
G	975.8	B?	419222	7022646	8.1	13.2	33.5	70.5	1.3	11.4	---	---	2
H	998.9	B?	419222	7023005	1.6	4.4	0.0	46.4	1.0	0.2	---	---	0
I	1050.7	B?	419268	7024365	2.6	8.9	1.7	14.7	0.5	2.5	---	---	0
J	1086.3	S	419273	7024889	0.8	6.4	2.5	54.1	1.0	6.7	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30700		FLIGHT	20									
K	1120.8	B?	419286	7025632	30.6	86.9	190.0	413.2	9.2	73.1	---	---	14
L	1129.4	B	419294	7025987	6.9	36.2	49.7	172.3	4.3	23.1	---	---	7
M	1131.3	B	419301	7026070	16.1	53.7	49.7	172.3	4.7	23.1	---	---	0
N	1144.0	B	419318	7026589	30.8	8.0	119.5	98.2	64.6	50.1	10.5	19	0
O	1150.0	B	419308	7026836	4.5	4.4	26.4	23.2	7.1	10.1	1.0	40	43
P	1171.7	B	419360	7027764	7.5	23.3	60.9	152.4	9.4	20.8	---	---	7
Q	1182.2	B	419364	7028197	3.7	15.7	0.0	62.2	0.0	2.4	---	---	5
R	1189.9	B	419371	7028509	5.2	9.4	31.2	63.0	5.2	9.6	---	---	7
S	1211.4	B	419403	7029420	5.0	13.1	51.0	39.3	5.4	15.6	---	---	0
T	1219.1	B	419402	7029748	7.3	11.5	50.7	60.5	6.0	7.8	---	---	0
U	1227.1	B	419420	7030077	7.9	14.8	52.6	164.1	1.1	17.2	---	---	5
V	1257.7	S?	419455	7031300	5.9	11.7	50.6	39.6	3.1	15.6	---	---	0
W	1262.5	S?	419458	7031476	7.0	16.4	50.6	66.8	4.3	15.6	---	---	1
X	1270.3	S?	419460	7031757	5.2	15.8	57.5	89.6	3.9	18.1	---	---	5
Y	1280.3	S?	419479	7032090	0.0	6.5	10.4	80.8	3.4	11.0	---	---	0
Z	1284.3	S	419476	7032224	6.0	14.3	21.5	80.8	3.4	11.0	---	---	5
AA	1296.7	S	419491	7032642	3.5	15.9	9.2	63.0	2.6	9.5	---	---	7
AB	1302.7	S	419491	7032843	1.3	10.8	33.0	120.7	0.4	17.9	-0.1	0	0
AC	1356.5	D	419532	7034097	26.2	33.0	96.1	108.6	3.2	25.7	---	---	0
AD	1360.9	B	419532	7034240	12.0	20.0	96.1	115.7	4.0	25.7	---	---	0
AE	1363.9	B	419536	7034343	9.2	13.8	96.1	115.7	0.5	21.9	0.8	16	0
AF	1369.2	D	419546	7034526	4.3	14.9	16.8	38.6	2.6	5.7	0.3	7	32
AG	1377.5	S?	419557	7034812	28.6	35.2	174.6	157.9	56.7	28.1	---	---	0
AH	1384.0	M	419566	7035006	0.0	4.9	0.0	4.4	0.0	3.0	---	---	204
AI	1386.1	M	419566	7035066	4.5	3.4	21.9	4.4	27.3	1.7	---	---	203
AJ	1388.2	M	419565	7035126	4.5	0.4	44.9	24.9	51.5	0.6	---	---	60
AK	1398.7	M	419562	7035426	0.9	4.0	24.7	16.3	23.0	2.4	---	---	0
AL	1404.1	M	419569	7035591	0.2	1.4	24.7	27.1	23.0	5.6	---	---	299
AM	1430.1	B	419592	7036116	10.5	16.0	73.2	89.2	21.8	23.6	---	---	0
AN	1445.0	D	419586	7036254	21.7	19.2	70.2	134.6	9.1	23.9	---	---	1
AO	1466.5	D	419595	7036459	123.1	55.1	326.6	215.0	118.1	127.0	---	---	7
AP	1474.4	D	419595	7036660	61.8	42.6	191.9	167.1	118.1	79.3	---	---	5
AQ	1479.8	D	419602	7036807	54.0	67.9	222.8	231.8	29.5	70.6	---	---	15
AR	1493.9	B	419614	7037192	8.0	12.4	9.2	34.7	4.1	6.5	---	---	4
AS	1500.7	B	419619	7037361	21.1	40.3	94.1	193.3	9.3	36.6	---	---	8
AT	1511.8	D	419636	7037583	14.8	14.8	84.6	67.9	14.3	28.6	---	---	0
AU	1535.0	B?	419640	7038078	0.9	6.5	17.5	16.2	1.8	6.7	---	---	167
AV	1750.1	D	419730	7041385	4.5	9.8	23.4	65.7	4.0	9.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30700		FLIGHT	20									
AW	1754.8	D	419737	7041455	4.6	14.9	40.3	23.7	1.1	5.3	---	---	0
AX	1760.0	B?	419736	7041528	6.5	5.1	40.3	54.1	1.3	12.4	1.4	39	0
AY	1767.2	B?	419734	7041620	5.2	10.4	41.0	60.1	0.7	12.2	---	---	0
AZ	1801.6	B?	419740	7041893	2.9	16.6	7.0	79.6	1.8	6.1	---	---	0
BA	1843.0	S?	419787	7042775	0.4	22.9	10.2	128.8	1.0	15.2	-0.1	17	27
BB	1849.0	B?	419794	7042906	1.3	18.8	13.0	78.2	7.9	10.5	---	---	0
BC	1859.0	B	419775	7043128	56.5	20.7	317.1	88.0	96.9	112.3	7.8	14	0
BD	1869.6	B	419763	7043287	19.2	12.5	244.4	141.4	37.4	96.9	---	---	0
BE	1888.4	B	419769	7043401	25.5	14.7	143.4	39.1	69.3	60.3	---	---	0
BF	1904.8	B	419786	7043504	46.0	44.7	477.8	361.6	135.4	176.2	---	---	41
BG	1924.6	B	419787	7043617	7.8	15.7	207.3	472.9	42.7	66.7	---	---	0
BH	1960.8	B	419801	7043891	93.9	74.1	444.1	212.3	184.1	114.9	---	---	50
BI	1967.7	B	419793	7044013	51.5	16.4	325.7	152.0	245.2	127.8	---	---	0
BJ	1973.5	B	419797	7044151	77.8	29.9	457.6	159.6	214.6	157.5	8.2	0	0
BK	1990.9	D	419828	7044565	19.6	7.6	114.7	132.3	45.9	36.2	---	---	0
BL	2064.1	D	419827	7045039	32.2	40.0	45.8	68.8	3.3	15.4	---	---	0
BM	2070.2	D	419834	7045159	9.4	8.8	172.0	61.4	45.3	54.9	---	---	0
BN	2073.9	D	419836	7045248	54.7	11.6	172.0	66.3	62.7	54.9	---	---	39
BO	2075.6	D	419836	7045290	46.3	12.9	172.0	66.3	62.7	54.9	---	---	39
BP	2078.5	D	419835	7045365	23.2	10.2	172.0	66.3	62.7	54.9	---	---	12
BQ	2084.7	D	419838	7045506	30.4	17.8	112.9	62.4	48.4	38.6	---	---	0
LINE	30710		FLIGHT	20									
A	4110.4	S?	419513	7018722	5.0	15.9	26.6	122.9	1.0	15.0	---	---	0
B	4102.9	S	419512	7018893	6.5	17.0	33.6	90.8	1.5	15.1	---	---	0
C	4085.7	S?	419506	7019187	1.1	6.1	4.4	20.7	0.6	3.6	---	---	6
D	4064.1	B?	419514	7019407	1.6	2.5	1.3	0.0	1.1	5.5	---	---	0
E	4054.3	B?	419525	7019530	6.4	8.8	16.1	49.1	2.1	7.2	---	---	0
F	3960.2	S	419545	7020155	0.9	5.4	0.4	24.3	0.6	4.1	---	---	3
G	3923.0	B?	419529	7020463	4.9	15.7	41.2	100.7	0.3	15.5	---	---	1
H	3918.4	B?	419546	7020521	3.5	5.2	41.2	100.7	2.5	15.5	---	---	0
I	3911.0	B?	419552	7020618	3.3	12.0	11.7	42.1	2.1	7.3	---	---	1
J	3881.4	S?	419572	7020930	0.1	10.1	4.1	35.2	1.1	5.4	---	---	0
K	3860.4	S?	419578	7021076	2.4	35.6	34.2	190.8	8.1	20.0	---	---	0
L	3851.3	B?	419574	7021168	2.8	32.5	24.2	149.1	4.4	18.6	-0.1	3	0
M	3833.6	S?	419577	7021287	1.2	8.8	3.5	106.5	4.6	12.8	---	---	0
N	3794.5	S?	419580	7021739	0.9	14.9	10.0	67.3	2.5	9.4	---	---	0
O	3764.0	S?	419615	7022074	1.4	5.4	1.5	31.0	0.9	3.2	---	---	12

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30710		FLIGHT	20									
P	3681.0	B?	419624	7022797	6.3	31.8	41.5	138.0	1.0	20.5	---	---	0
Q	3673.4	B?	419627	7022857	8.4	2.3	23.7	118.8	1.3	17.6	---	---	0
R	3659.3	B?	419634	7022952	5.3	23.4	53.7	163.5	1.3	22.7	---	---	0
S	3637.6	D	419635	7023055	1.0	44.6	72.5	361.1	1.3	42.7	---	---	0
T	3626.2	D	419637	7023116	3.3	9.9	46.3	174.4	2.3	22.4	---	---	0
U	3619.2	B?	419636	7023150	4.3	12.8	34.4	115.0	2.4	18.0	---	---	1
V	3479.3	D?	419690	7025047	1.0	10.8	0.5	28.7	3.1	4.3	---	---	1
W	3433.4	B	419696	7025581	10.7	18.8	84.8	120.5	4.1	26.3	---	---	9
X	3425.4	B	419705	7025793	36.4	63.9	137.0	320.4	4.9	50.0	---	---	12
Y	3390.1	S?	419714	7026524	2.4	13.4	92.5	89.1	15.4	4.2	---	---	31
Z	3377.0	B	419731	7026784	40.9	38.7	312.5	159.9	133.5	107.3	2.1	11	0
AA	3373.5	B	419732	7026873	45.2	33.6	312.5	159.9	133.5	107.3	2.9	7	75
AB	3367.5	B	419735	7027068	25.6	1.5	135.6	68.0	95.2	50.0	---	---	92
AC	3361.3	B	419744	7027310	9.1	8.5	134.3	32.1	21.6	50.0	---	---	0
AD	3351.6	B	419754	7027706	3.7	23.6	67.8	150.8	8.5	31.6	---	---	0
AE	3324.4	B	419793	7028798	10.1	11.4	69.3	80.2	9.1	24.3	---	---	12
AF	3316.7	B	419798	7029103	6.8	12.5	12.0	37.7	2.1	3.6	---	---	0
AG	3300.3	B	419805	7029754	12.0	27.8	68.4	92.5	6.2	44.4	---	---	5
AH	3295.7	B	419820	7029937	10.8	13.5	111.1	172.6	11.8	44.4	---	---	11
AI	3282.5	B	419852	7030453	4.5	12.4	46.1	86.0	3.3	13.8	---	---	0
AJ	3270.4	B?	419857	7030893	9.2	18.6	69.6	102.2	9.6	25.4	---	---	0
AK	3243.7	S?	419866	7031731	5.0	8.2	35.4	77.1	8.0	11.1	---	---	0
AL	3227.5	S	419902	7032205	6.7	13.7	43.4	66.6	4.6	14.8	---	---	0
AM	3209.0	S	419896	7032738	2.6	8.5	1.5	31.7	2.2	3.6	-0.3	13	4
AN	3195.0	B?	419912	7032999	3.9	13.2	18.6	54.1	2.8	8.3	---	---	4
AO	3165.2	B?	419931	7033696	6.7	22.1	21.3	87.1	3.6	12.0	0.4	2	77
AP	3154.4	B?	419938	7034151	11.0	18.0	60.9	98.7	3.7	15.6	0.8	15	18
AQ	3152.6	B?	419939	7034228	11.3	20.8	60.9	98.7	3.7	15.6	0.7	13	32
AR	3150.0	D	419942	7034335	34.9	42.4	109.1	105.4	5.3	30.1	1.5	5	51
AS	3146.9	B?	419945	7034460	6.2	13.5	109.1	105.4	5.3	30.1	0.5	16	9
AT	3142.0	B?	419952	7034653	5.6	10.2	24.8	26.1	5.4	9.6	0.5	20	18
AU	3131.9	S	419954	7035040	6.2	9.0	37.0	45.1	33.2	6.4	0.7	27	0
AV	3125.1	M	419961	7035290	3.0	0.2	37.0	13.7	88.9	3.4	---	---	232
AW	3116.6	M	419973	7035579	14.2	1.3	88.0	0.1	88.9	0.2	---	---	0
AX	3112.6	M	419977	7035701	10.8	0.1	48.2	1.1	50.3	2.1	---	---	368
AY	3109.6	M	419980	7035786	7.2	2.1	0.0	24.3	0.0	3.4	---	---	435
AZ	3083.8	B	419996	7036387	21.1	23.6	164.1	161.8	36.5	49.3	---	---	0
BA	3079.5	D	419997	7036466	31.8	26.1	164.1	161.8	36.5	49.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30710		FLIGHT	20									
BB	3066.4	D	419991	7036672	148.2	70.1	499.4	266.9	145.2	150.7	---	---	5
BC	3057.7	D	419993	7036864	96.1	67.6	346.0	265.9	13.1	118.3	---	---	11
BD	3039.9	D	420023	7037343	30.8	43.0	85.6	127.3	9.4	17.9	---	---	9
BE	3034.5	B?	420035	7037483	0.8	5.8	85.6	99.7	8.3	17.9	---	---	6
BF	3028.6	B	420043	7037617	12.7	14.3	88.5	87.1	16.0	32.0	---	---	0
BG	2877.3	B	420137	7041796	18.8	50.8	128.2	307.6	1.7	40.0	---	---	1
BH	2867.6	B	420132	7041879	5.4	18.2	6.8	55.1	0.6	6.4	---	---	1
BI	2664.3	S	420159	7043277	2.9	21.8	20.1	212.3	2.5	27.5	---	---	0
BJ	2656.1	S	420161	7043324	1.9	30.1	8.3	243.5	0.3	30.8	---	---	0
BK	2633.2	S?	420175	7043432	3.8	50.5	62.7	297.6	0.7	38.3	---	---	0
BL	2625.2	S?	420182	7043482	4.1	57.5	45.5	280.5	1.8	33.3	---	---	0
BM	2610.8	S?	420200	7043603	1.7	36.8	9.1	104.6	1.1	13.3	---	---	0
BN	2598.2	B?	420206	7043753	9.8	10.7	20.5	0.0	8.9	5.7	---	---	0
BO	2583.9	D	420215	7043925	108.0	98.3	355.1	547.9	27.0	102.0	---	---	0
BP	2573.1	B?	420207	7044049	41.8	79.0	268.6	344.9	105.9	116.6	---	---	0
BQ	2568.3	B?	420196	7044138	48.5	16.6	269.5	344.9	84.9	116.6	---	---	2
BR	2557.2	B	420183	7044478	14.0	12.3	191.2	67.3	158.8	53.8	---	---	0
BS	2553.5	B	420199	7044601	24.4	12.3	190.7	67.3	87.1	64.3	---	---	0
BT	2526.9	B	420213	7045150	15.5	8.8	22.5	4.6	27.0	16.4	---	---	0
BU	2520.7	B	420217	7045261	21.7	15.3	173.1	75.2	89.5	29.0	---	---	0
BV	2512.3	D	420230	7045402	76.8	24.5	173.1	60.7	89.5	57.7	---	---	0
BW	2503.4	D	420238	7045540	41.9	32.1	119.0	63.6	43.3	40.5	---	---	5
BX	2484.0	B	420245	7045707	6.2	6.3	14.6	20.7	5.1	6.7	1.0	36	0
BY	2439.0	B	420249	7045882	5.0	3.7	26.9	5.4	20.7	10.5	---	---	0
BZ	2376.3	B?	420249	7046349	4.8	10.0	28.7	50.6	0.4	10.2	---	---	0
LINE	30720		FLIGHT	20									
A	4399.3	S	419934	7019541	12.2	5.0	57.8	179.6	5.0	25.7	---	---	0
B	4413.5	S	419926	7019676	2.8	9.3	31.9	63.7	2.7	13.7	---	---	0
C	4457.4	S	419942	7020088	8.4	16.3	72.0	126.9	7.6	21.5	---	---	0
D	4465.9	S?	419953	7020214	5.3	14.2	71.0	120.3	3.6	21.4	---	---	0
E	4491.2	S?	419954	7020417	0.2	9.6	13.5	110.3	1.5	13.5	---	---	1
F	4540.0	S	419978	7020871	1.4	3.4	7.2	41.9	1.6	4.5	---	---	0
G	4573.2	B?	419987	7021197	17.4	37.5	86.4	158.4	3.1	26.3	---	---	0
H	4594.8	S	419976	7021613	2.1	8.0	40.6	81.0	2.1	11.1	---	---	0
I	4598.2	B?	419979	7021698	8.3	15.4	40.6	81.0	1.6	9.1	---	---	0
J	4617.5	S?	420002	7022024	0.8	13.6	5.5	53.9	5.1	5.6	-0.1	15	0
K	4636.5	S	420005	7022234	0.5	7.8	6.9	72.0	1.3	8.1	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30720		FLIGHT	20									
L	4663.4	S?	420017	7022612	1.3	13.8	27.8	100.5	0.9	13.1	---	---	1
M	4676.3	S?	420025	7022795	0.8	4.0	15.7	59.0	1.8	6.6	---	---	0
N	4703.2	S?	420034	7022961	2.3	7.7	17.1	76.0	2.1	9.3	---	---	0
O	4810.0	S?	420085	7025043	3.1	33.4	6.9	212.4	0.0	24.0	0.1	0	72
P	4845.8	B?	420112	7025631	18.9	41.7	81.0	242.6	2.9	36.4	---	---	8
Q	4854.7	B?	420104	7025758	3.3	15.4	35.3	172.3	0.5	22.5	---	---	0
R	4858.6	B?	420107	7025816	1.2	28.4	35.3	172.3	2.1	22.5	---	---	0
S	4893.9	B	420138	7026859	451.0	174.2	2293.9	645.0	909.7	891.7	---	---	82
T	4897.8	B	420137	7027012	24.9	33.6	2293.9	645.0	909.7	891.7	---	---	38
U	4908.0	B	420140	7027452	13.6	0.2	84.1	45.5	40.8	34.9	---	---	38
V	4914.6	B	420146	7027730	4.0	20.7	49.7	97.3	6.6	14.3	---	---	0
W	4939.5	B	420190	7028795	8.4	7.3	58.5	76.2	9.9	17.2	---	---	0
X	4958.7	H	420212	7029634	5.1	12.3	34.5	65.9	4.7	15.3	---	---	10
Y	4973.1	H	420230	7030251	1.1	5.8	14.0	80.5	0.8	5.2	---	---	0
Z	5005.6	S	420264	7031552	6.4	13.3	42.0	97.7	4.0	16.6	---	---	22
AA	5029.5	S	420286	7032177	5.8	15.4	42.8	104.7	4.5	17.2	---	---	0
AB	5063.0	D	420311	7033005	5.4	10.2	20.8	67.1	1.9	8.6	---	---	0
AC	5071.1	B	420313	7033187	6.1	0.0	57.2	61.7	1.4	0.0	---	---	0
AD	5076.1	D	420309	7033317	14.0	21.5	57.2	79.2	1.7	11.2	---	---	22
AE	5144.8	D	420368	7034960	6.0	21.4	23.2	56.8	1.9	7.6	---	---	22
AF	5156.8	S	420364	7035378	0.8	6.4	18.0	35.7	54.3	2.8	-0.1	16	0
AG	5165.4	M	420369	7035687	1.1	2.2	0.8	9.4	0.6	2.8	---	---	303
AH	5179.7	M	420388	7036019	0.0	0.4	76.5	10.3	78.7	4.1	---	---	94
AI	5188.0	M	420392	7036111	0.0	16.1	69.1	119.3	69.8	14.1	---	---	39
AJ	5189.3	S?	420393	7036125	1.3	16.1	22.7	119.3	14.7	14.1	-0.1	0	26
AK	5199.3	S?	420402	7036217	1.8	9.1	29.9	28.8	11.0	5.4	-0.2	8	0
AL	5206.4	M	420395	7036274	0.8	3.1	0.0	37.9	10.1	4.5	---	---	0
AM	5214.4	B?	420394	7036368	7.0	11.4	11.7	49.1	7.8	8.8	---	---	0
AN	5227.6	D	420412	7036692	20.6	25.2	122.4	77.8	23.9	36.2	---	---	12
AO	5233.3	D	420411	7036863	37.4	26.6	122.4	78.1	23.9	36.2	---	---	0
AP	5239.2	D	420417	7037048	14.9	34.0	64.5	120.6	6.1	20.0	---	---	12
AQ	5244.2	B?	420424	7037203	0.9	5.2	0.0	0.0	1.8	0.0	---	---	0
AR	5251.6	D	420432	7037430	22.5	24.3	59.9	92.1	7.6	17.6	---	---	5
AS	5257.1	D	420439	7037592	9.1	14.8	68.0	102.9	6.9	21.4	---	---	4
AT	5260.1	B?	420438	7037678	15.4	22.0	68.0	102.9	6.9	21.4	---	---	0
AU	5283.7	S	420438	7038249	1.7	3.9	12.6	59.2	1.7	6.9	---	---	0
AV	5414.0	S	420517	7041206	1.2	2.0	3.3	29.0	3.3	4.0	---	---	0
AW	5449.2	S	420538	7041479	3.4	10.1	11.5	85.7	1.2	10.0	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30720 FLIGHT 20													
AX	5546.2	B?	420559	7043535	4.2	11.8	13.3	36.4	1.3	4.0	---	---	0
AY	5560.9	M	420593	7043742	1.3	0.7	10.3	4.7	0.0	0.5	---	---	10
AZ	5591.4	B	420622	7044397	158.2	53.5	1248.4	334.9	685.7	389.0	---	---	0
BA	5597.5	B	420637	7044626	127.6	11.1	795.1	295.6	685.7	215.8	---	---	0
BB	5604.7	B	420649	7044854	37.5	12.0	292.3	60.3	163.8	83.7	---	---	0
BC	5607.3	B	420647	7044921	26.2	9.4	292.3	70.4	162.1	83.7	---	---	95
BD	5639.2	D	420643	7045345	49.3	75.3	232.8	224.6	115.9	76.8	---	---	0
BE	5650.0	D	420647	7045447	110.5	59.1	307.2	225.5	76.2	111.9	---	---	0
BF	5671.9	D	420648	7045641	30.2	11.5	117.4	18.9	58.3	45.9	---	---	3
BG	5682.3	B	420648	7045725	229.9	83.0	1282.8	21.2	729.3	552.6	---	---	0
BH	5693.5	D	420661	7045890	31.3	21.3	113.4	75.3	31.4	40.2	---	---	1
LINE 30730 FLIGHT 20													
A	6458.8	S?	420945	7041569	0.8	6.0	7.0	29.5	3.2	4.0	---	---	0
B	6320.4	S	420980	7042808	0.2	2.8	1.0	24.7	1.6	3.8	-0.1	28	23
C	6185.3	B	420998	7044653	409.5	153.3	1790.4	560.4	626.3	591.1	---	---	0
D	6181.0	B	421002	7044754	320.2	172.6	1525.8	983.5	626.3	591.1	---	---	0
E	6173.2	B	421024	7044929	68.2	51.8	1525.8	983.5	132.3	481.6	---	---	0
F	6165.6	B	421030	7045112	143.2	106.6	623.3	450.1	151.9	222.0	---	---	165
G	6143.0	D	421056	7045557	40.5	45.2	74.6	71.8	8.8	20.9	---	---	0
H	6099.5	B	421038	7045986	6.0	15.9	10.3	43.8	1.0	6.0	---	---	2
I	6028.0	B?	421051	7046533	3.3	4.4	8.1	16.8	2.1	3.1	0.6	43	0
LINE 30731 FLIGHT 20													
A	7091.3	B	420661	7030647	7.2	18.3	66.7	154.7	5.9	24.1	---	---	7
B	7074.8	B?	420661	7031116	4.9	19.0	41.3	88.7	6.2	17.5	---	---	0
C	7044.2	B?	420679	7032030	6.6	13.6	54.5	45.6	6.3	16.5	---	---	6
D	7027.7	B?	420700	7032578	4.5	4.5	27.4	97.6	4.1	7.9	---	---	0
E	7014.6	B?	420709	7032929	8.8	6.1	88.3	66.3	12.8	27.1	---	---	3
F	7004.5	B?	420724	7033294	12.3	9.9	85.1	83.6	9.3	24.0	---	---	16
G	6999.0	B?	420724	7033512	10.6	11.6	71.3	69.4	4.4	22.8	1.1	6	28
H	6974.5	S?	420725	7034165	2.7	5.1	6.0	62.2	3.5	9.0	---	---	11
I	6837.4	S	420803	7036602	2.4	12.4	22.5	75.1	2.5	11.3	---	---	8
J	6823.0	B	420794	7037043	12.8	24.2	66.4	161.2	4.0	22.4	---	---	3
K	6817.2	D	420797	7037199	5.0	18.7	38.3	83.1	0.4	11.5	---	---	1
L	6804.9	D	420833	7037508	26.1	38.8	86.7	135.1	5.8	23.3	---	---	2
M	6799.3	B	420843	7037650	7.7	15.3	86.7	122.3	7.8	26.6	---	---	2
N	6796.3	B	420842	7037733	16.6	17.9	75.4	122.3	9.3	26.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30731		FLIGHT	20									
O	6705.0	S	420900	7039804	0.9	2.8	0.9	33.2	1.2	3.5	---	---	1
P	6693.0	S	420892	7040017	0.7	5.9	0.0	37.3	0.7	4.1	---	---	1
Q	6661.2	D	420917	7040657	9.9	13.8	39.1	60.0	12.1	17.0	---	---	0
R	6657.8	D	420923	7040730	4.8	9.0	39.1	60.0	12.4	17.0	---	---	0
S	6639.2	D	420908	7041030	6.1	25.0	5.4	77.9	0.5	10.2	---	---	1
T	6628.8	B	420920	7041170	155.3	107.3	628.5	463.7	266.6	228.0	---	---	0
U	6597.2	D	420936	7041374	0.2	52.2	2.6	239.2	1.3	26.1	---	---	0
LINE	30732		FLIGHT	21									
A	1539.6	M	420306	7019241	4.5	23.4	18.1	106.4	3.7	13.8	---	---	0
B	1531.6	S?	420310	7019319	2.1	17.9	14.3	107.2	5.1	15.7	-0.1	5	32
C	1528.8	M	420315	7019342	0.4	17.9	14.3	107.2	9.3	15.7	---	---	29
D	1499.8	S?	420356	7019584	2.1	14.2	40.5	172.6	3.1	23.8	---	---	18
E	1478.5	B?	420333	7019688	13.2	53.4	132.2	443.2	3.0	62.3	---	---	0
F	1455.1	B?	420352	7019814	17.5	11.7	140.0	225.6	4.8	41.4	---	---	0
G	1437.4	B?	420352	7019962	7.7	21.7	13.3	36.0	1.2	5.8	---	---	57
H	1420.3	S?	420335	7020071	1.9	13.8	18.7	65.8	2.5	13.1	---	---	0
I	1384.0	S?	420362	7020263	2.3	13.5	45.1	252.2	2.6	38.7	---	---	4
J	1369.1	B?	420362	7020340	19.8	55.3	91.2	230.0	5.8	39.7	---	---	0
K	1359.6	B?	420354	7020415	5.0	31.2	90.4	229.4	3.6	36.6	---	---	3
L	1349.0	B?	420355	7020481	5.0	22.2	8.0	69.4	2.9	8.6	0.3	2	0
M	1241.1	B?	420377	7021146	3.6	15.1	19.7	64.9	1.8	8.8	---	---	0
N	1231.4	S?	420369	7021245	4.4	18.4	19.7	84.7	1.2	10.8	---	---	13
O	1147.4	S	420417	7021888	1.2	6.3	3.6	46.7	0.3	6.0	---	---	0
P	1099.2	S?	420412	7022050	2.3	6.8	0.3	22.9	1.3	3.1	-0.3	25	0
Q	1038.2	B?	420413	7022690	6.6	29.9	28.0	97.4	1.0	14.8	---	---	0
R	1021.9	B	420421	7022941	14.1	49.8	95.4	289.7	2.5	40.1	---	---	0
S	978.7	B	420439	7023160	9.7	21.0	37.6	200.9	11.7	24.1	0.6	27	0
T	968.3	B	420440	7023187	2.9	43.2	22.5	414.9	6.2	43.9	-0.1	9	11
U	953.1	B	420429	7023232	0.5	28.1	30.3	195.9	4.2	23.6	-0.1	19	0
V	934.5	B	420432	7023290	1.4	14.9	16.4	52.9	4.2	8.5	---	---	0
W	881.5	B?	420466	7023779	2.2	12.9	0.6	37.5	1.9	4.7	---	---	11
X	780.1	B?	420462	7024709	4.1	53.2	30.6	261.7	7.1	32.4	---	---	0
Y	610.3	B?	420508	7025721	13.6	27.7	85.2	141.1	3.9	29.7	---	---	0
Z	600.2	B?	420514	7025951	3.7	8.4	85.2	103.5	2.3	25.8	---	---	25
AA	566.7	B	420539	7026737	40.6	51.7	222.8	237.9	22.2	68.5	---	---	60
AB	562.8	D	420540	7026841	20.5	17.8	145.4	119.7	77.0	53.1	---	---	50
AC	554.0	B	420552	7027099	17.3	27.5	135.5	74.5	77.0	47.5	0.9	5	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30732		FLIGHT	21									
AD	548.0	B	420566	7027299	70.4	16.0	272.5	74.5	227.8	75.0	---	---	0
AE	537.4	B	420571	7027665	2.4	67.2	46.0	365.1	21.4	34.9	---	---	0
AF	532.4	B	420575	7027830	16.2	48.6	79.7	365.1	19.4	32.2	---	---	0
AG	513.9	B	420588	7028435	7.9	8.4	37.6	19.7	5.3	10.9	---	---	0
AH	495.3	B	420609	7029112	15.3	12.9	73.4	46.5	16.6	18.6	---	---	0
AI	480.4	B	420622	7029686	14.2	20.5	59.3	73.8	4.7	16.0	---	---	0
AJ	456.8	H	420638	7030509	8.8	19.1	63.1	121.8	9.8	17.5	---	---	0
LINE	30740		FLIGHT	21									
A	1686.5	S?	420730	7019283	7.6	28.7	24.3	113.6	1.8	16.3	---	---	0
B	1708.4	S?	420744	7019360	10.8	20.5	17.2	96.0	0.6	12.4	0.6	18	4
C	1777.6	S?	420755	7019788	19.9	43.8	105.1	212.5	3.3	35.5	---	---	0
D	1807.5	B?	420762	7020090	10.3	37.2	72.2	229.3	6.5	34.4	---	---	0
E	1812.9	B?	420771	7020144	8.4	26.5	72.2	229.3	6.0	34.4	---	---	0
F	1821.9	B?	420776	7020201	8.3	31.4	65.0	178.4	6.5	29.2	---	---	18
G	1927.9	B	420780	7020690	52.9	79.9	405.6	395.2	60.9	149.1	---	---	0
H	1936.6	B?	420795	7020825	20.4	63.7	405.6	395.2	60.9	149.1	---	---	0
I	1995.0	S?	420796	7021084	2.8	11.0	6.2	73.8	1.2	8.4	---	---	17
J	2002.5	S?	420800	7021123	1.9	14.0	6.2	52.9	13.1	4.6	---	---	17
K	2032.7	M	420786	7021379	0.1	78.8	65.2	302.3	1.4	33.6	---	---	0
L	2039.9	S?	420779	7021441	16.6	38.2	65.2	227.3	12.2	28.9	0.6	1	1
M	2065.7	S?	420796	7021675	4.8	19.7	64.1	112.1	5.8	16.9	---	---	0
N	2164.4	B?	420826	7022729	5.7	24.1	6.4	104.2	1.4	13.2	---	---	0
LINE	30743		FLIGHT	21									
A	2337.6	B?	420824	7023191	2.8	23.4	27.9	187.8	0.6	19.8	---	---	1
B	2350.3	M	420824	7023296	0.0	15.0	0.0	179.4	5.5	17.8	---	---	0
C	2379.2	B?	420847	7023518	0.4	2.4	7.5	14.4	1.9	2.0	---	---	3
D	2446.0	B?	420864	7024155	1.1	4.3	2.9	2.4	1.8	0.4	---	---	0
E	2531.9	S	420894	7024846	2.2	5.1	4.6	25.9	1.1	3.9	---	---	0
F	2562.4	D	420884	7025695	7.8	7.1	28.3	59.9	1.6	10.5	---	---	0
G	2572.8	B?	420899	7025920	0.4	6.6	0.3	28.6	0.1	3.5	---	---	1
H	2606.1	B	420918	7026559	24.5	32.1	143.3	136.3	22.4	49.3	---	---	55
I	2608.8	B	420925	7026609	9.7	18.6	143.3	136.3	22.4	49.3	---	---	54
J	2617.2	B	420927	7026861	32.4	42.1	718.6	167.4	507.4	208.8	---	---	0
K	2620.6	B	420909	7026994	154.5	24.8	718.6	159.4	507.4	208.8	---	---	0
L	2627.5	B	420907	7027275	39.3	5.9	214.9	0.1	129.3	61.7	25.6	3	98
M	2633.2	B	420927	7027494	37.9	30.5	204.6	141.1	87.1	58.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30743		FLIGHT	21									
N	2641.3	B	420965	7027789	4.3	31.8	0.1	106.2	0.0	8.9	---	---	76
O	2645.0	B	420982	7027937	11.0	2.0	101.1	106.2	0.1	9.1	---	---	50
P	2647.8	B	420989	7028055	9.1	12.1	101.1	82.9	25.3	21.6	---	---	76
Q	2656.0	B	420999	7028411	4.8	15.0	32.6	84.2	13.7	12.4	---	---	0
R	2682.7	B?	421030	7029561	15.0	11.1	98.7	118.0	13.4	28.5	---	---	2
S	2689.2	B?	421032	7029832	9.3	15.4	64.8	91.5	3.6	11.7	---	---	0
T	2697.8	B?	421041	7030189	1.4	10.6	36.1	155.6	2.6	22.9	---	---	0
U	2703.3	B?	421052	7030411	9.5	33.9	63.8	189.4	3.4	31.0	---	---	0
V	2722.5	B?	421065	7031106	1.6	7.7	22.2	54.0	5.8	8.2	---	---	10
W	2727.9	B?	421054	7031274	3.8	0.0	27.9	136.3	4.0	21.7	---	---	0
X	2732.5	B?	421054	7031401	6.1	27.9	55.4	136.3	3.9	21.7	---	---	0
Y	2750.4	B?	421080	7031868	5.5	10.6	21.2	40.3	5.3	6.1	---	---	22
Z	2758.2	S	421086	7032143	4.6	12.1	19.5	35.1	3.6	5.1	---	---	5
AA	2763.4	S	421085	7032327	4.0	14.6	19.5	58.2	4.2	5.8	---	---	1
AB	2770.3	S?	421086	7032566	4.2	37.4	20.6	190.9	0.4	23.5	0.1	0	5
AC	2793.3	B?	421116	7033455	5.2	12.2	79.0	128.9	4.1	25.2	---	---	15
AD	2806.1	D	421118	7033846	10.2	9.0	38.7	34.3	2.6	10.2	---	---	5
AE	2824.1	S?	421148	7034114	2.1	8.9	15.7	73.2	0.9	10.4	---	---	0
AF	2854.5	B?	421176	7034773	1.9	9.8	5.0	44.8	2.2	5.8	---	---	5
AG	2857.4	S	421178	7034873	0.5	6.5	5.0	44.8	2.2	5.8	---	---	0
AH	2912.5	B?	421207	7036377	2.8	13.7	8.5	48.5	1.2	6.8	---	---	7
AI	2931.3	B?	421227	7036817	5.1	23.8	24.3	118.4	0.0	16.7	0.2	0	0
AJ	2946.0	B	421238	7037304	2.9	6.0	51.9	49.0	5.7	10.2	---	---	2
AK	2954.9	D	421244	7037635	42.9	49.1	182.6	273.9	19.6	60.1	---	---	0
AL	3117.9	S?	421331	7040996	1.1	3.7	2.7	32.7	0.0	3.7	-0.2	44	10
AM	3296.9	B	421429	7044955	135.6	39.6	1851.6	417.4	973.8	651.2	---	---	0
AN	3306.5	B	421442	7045208	246.3	207.2	622.8	666.9	435.4	495.0	---	---	216
AO	3312.2	B	421440	7045324	241.2	148.5	1323.9	645.7	435.4	495.0	---	---	228
AP	3317.5	B	421430	7045430	14.1	19.4	23.2	51.3	1.9	18.0	---	---	0
AQ	3359.0	D	421456	7046273	8.6	10.8	18.4	25.3	2.8	6.2	---	---	0
LINE	30750		FLIGHT	21									
A	5099.6	B	421123	7019437	38.4	63.3	509.7	312.5	147.6	173.7	---	---	0
B	5094.0	B	421125	7019504	78.7	84.3	509.7	515.9	147.6	173.7	---	---	0
C	5077.6	D	421135	7019700	45.1	79.9	262.4	392.2	21.2	78.9	---	---	12
D	5067.1	D	421147	7019804	13.5	26.1	18.0	60.5	4.8	12.4	---	---	0
E	5041.1	B?	421129	7020109	5.4	13.2	38.0	99.6	1.8	15.2	---	---	0
F	5035.9	B?	421121	7020186	1.4	12.5	38.0	100.2	1.8	15.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30750		FLIGHT	21									
G	5015.0	B?	421147	7020466	11.5	1.0	0.0	0.1	2.8	0.0	---	---	13
H	4997.3	B	421186	7020660	0.0	2.9	40.5	62.7	7.1	12.6	---	---	0
I	4964.5	B	421167	7020898	128.7	84.6	639.0	439.1	112.6	219.1	---	---	0
J	4913.4	S	421199	7021376	1.0	5.8	3.6	63.8	1.0	7.2	---	---	0
K	4866.6	S?	421193	7021773	2.2	9.0	3.0	40.3	1.5	5.3	---	---	0
L	4726.2	S	421222	7023467	3.8	10.4	14.3	101.6	4.6	12.5	---	---	0
M	4711.5	S?	421237	7023636	3.7	14.4	14.3	86.2	4.2	10.4	---	---	0
N	4689.7	B?	421280	7023786	0.7	5.3	3.8	38.0	1.8	3.8	---	---	1
O	4679.1	B?	421284	7023813	1.2	6.6	0.4	38.0	2.1	4.5	---	---	0
P	4651.7	B?	421282	7024205	2.1	13.2	13.0	158.7	3.7	19.3	---	---	0
Q	4641.5	S?	421275	7024316	1.2	17.0	0.2	158.7	0.5	18.5	---	---	0
R	4504.7	B	421329	7025757	21.4	26.7	118.6	206.2	9.4	39.8	---	---	5
S	4479.0	B?	421326	7026229	0.1	6.1	14.3	37.8	1.3	7.2	---	---	0
T	4469.6	B	421326	7026349	3.1	25.7	19.1	169.3	1.2	21.6	---	---	2
U	4463.9	B	421328	7026426	6.7	22.5	24.1	169.3	4.8	21.6	---	---	0
V	4455.9	B	421330	7026576	35.4	58.9	186.7	201.1	12.7	38.3	---	---	104
W	4452.1	B	421328	7026661	19.9	35.5	186.7	201.1	12.7	38.3	---	---	104
X	4445.2	B	421336	7026813	37.1	56.7	149.5	191.4	10.7	33.6	---	---	101
Y	4435.9	B	421344	7027059	246.2	56.5	942.7	124.5	697.7	271.3	---	---	0
Z	4431.7	B	421346	7027172	199.9	55.4	686.5	162.3	451.7	333.0	---	---	215
AA	4422.9	B	421351	7027400	898.0	151.9	5125.6	753.1	3724.0	1196.5	---	---	0
AB	4418.4	B	421362	7027521	997.7	177.3	4437.5	690.9	3144.5	1151.1	---	---	0
AC	4394.1	B	421385	7028051	0.0	23.0	15.5	122.5	0.6	16.7	---	---	75
AD	4383.1	B	421389	7028363	34.3	16.2	195.5	92.3	58.7	62.7	---	---	372
AE	4369.5	B	421402	7028838	3.5	6.8	10.1	41.7	0.6	3.9	---	---	0
AF	4362.7	B	421417	7029084	6.9	10.4	30.8	48.1	16.8	13.2	---	---	0
AG	4350.1	B?	421424	7029561	22.4	24.4	88.7	96.4	10.9	23.0	---	---	0
AH	4340.7	H	421434	7029904	4.5	12.5	16.5	54.1	1.4	6.8	---	---	2
AI	4324.2	B	421454	7030417	11.9	28.8	74.5	180.1	3.8	32.7	---	---	0
AJ	4297.8	B?	421456	7031168	9.5	18.4	20.9	66.9	3.1	10.0	---	---	0
AK	4284.1	D	421475	7031492	5.1	11.1	12.2	31.2	6.8	1.8	---	---	0
AL	4267.6	S?	421491	7032030	5.9	24.6	91.9	159.1	6.3	30.2	---	---	0
AM	4251.0	S	421507	7032729	2.2	10.5	2.7	35.1	1.2	2.7	---	---	2
AN	4245.0	S	421508	7032986	0.5	10.5	2.2	47.9	1.3	5.5	---	---	0
AO	4231.5	S	421521	7033533	6.5	21.9	49.8	115.4	4.5	18.1	---	---	8
AP	4217.2	S?	421542	7033860	1.0	7.7	0.7	55.5	3.5	6.8	---	---	10
AQ	4199.0	B?	421544	7034177	12.3	35.7	125.5	269.8	6.5	41.6	0.5	0	0
AR	4194.4	B?	421549	7034275	15.6	43.3	78.1	269.8	2.3	38.3	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30750		FLIGHT	21									
AS	4098.3	S	421612	7036607	1.7	10.8	11.2	43.0	0.5	7.4	---	---	7
AT	4063.9	B	421614	7037467	7.9	32.1	129.4	200.0	12.8	43.9	---	---	5
AU	4057.3	B	421615	7037697	19.6	32.6	144.5	183.9	15.8	48.7	---	---	0
AV	4054.7	B	421621	7037787	22.3	36.0	144.5	183.9	15.8	48.7	---	---	0
AW	4017.9	S?	421688	7038885	0.1	5.0	0.0	30.0	3.9	4.3	---	---	3
AX	3549.6	B	421849	7045096	125.7	39.5	944.3	258.2	519.5	312.0	---	---	0
AY	3545.8	B	421853	7045245	5.3	31.4	944.3	258.2	519.5	156.5	---	---	181
AZ	3540.8	B	421853	7045447	213.4	38.1	903.8	145.0	576.5	267.3	---	---	0
BA	3534.4	B	421853	7045714	29.4	20.8	88.2	55.2	35.9	21.3	---	---	0
BB	3530.2	M	421866	7045887	6.2	7.1	88.2	55.2	35.9	21.3	---	---	378
BC	3518.9	D	421890	7046327	12.9	19.5	69.1	87.8	15.3	22.3	---	---	0
BD	3516.2	D	421896	7046423	28.4	11.8	69.1	87.8	24.0	22.4	---	---	0
BE	3510.4	S?	421910	7046622	1.6	16.0	57.6	66.9	24.0	22.4	---	---	0
LINE	30760		FLIGHT	21									
A	5324.8	B	421524	7019778	201.2	44.1	1194.4	582.4	366.5	453.8	---	---	0
B	5375.1	S?	421575	7020376	4.5	11.5	7.9	68.6	2.2	8.4	---	---	22
C	5380.3	S?	421573	7020500	2.7	4.5	7.9	68.6	1.3	8.4	---	---	0
D	5397.4	B?	421564	7020951	37.7	50.6	146.2	242.2	7.7	43.8	---	---	7
E	5405.0	B?	421577	7021225	14.6	20.7	132.1	177.2	15.0	46.2	---	---	0
F	5407.2	B?	421581	7021313	22.8	32.7	133.7	177.2	13.7	46.2	---	---	48
G	5444.9	B?	421648	7022789	10.3	12.4	6.9	46.7	2.0	6.8	---	---	7
H	5533.1	B?	421669	7024414	3.0	10.2	11.4	62.8	2.2	7.4	---	---	0
I	5617.5	B?	421707	7025765	11.1	25.3	49.0	175.9	0.0	23.4	---	---	12
J	5645.5	S	421744	7026593	5.3	19.7	73.0	214.2	2.6	28.8	---	---	0
K	5655.1	B	421726	7026841	10.6	0.0	143.9	0.0	3.8	64.2	---	---	90
L	5659.7	B	421715	7027018	36.4	64.2	143.9	309.0	27.7	64.2	---	---	0
M	5665.5	B	421709	7027259	4.8	13.2	0.4	0.0	12.9	0.0	---	---	0
N	5678.1	B	421748	7027679	203.4	64.1	1114.4	382.9	485.1	373.9	---	---	73
O	5683.5	B	421772	7027803	18.4	3.6	356.2	237.1	332.3	268.4	13.0	24	0
P	5716.0	B	421770	7028716	17.5	11.6	229.4	112.0	93.4	81.3	2.4	21	345
Q	5731.7	S	421832	7029446	4.0	25.9	31.6	140.7	6.8	15.3	---	---	0
R	5741.5	S	421832	7029888	3.2	8.4	18.7	80.9	2.3	8.8	---	---	0
S	5758.6	B?	421846	7030586	12.3	27.5	88.8	123.1	5.2	26.2	---	---	0
T	5781.0	B	421863	7031449	118.7	99.3	709.3	414.5	187.2	253.4	3.5	0	22
U	5786.0	B	421864	7031619	103.5	44.7	709.3	414.5	187.2	253.4	7.7	3	0
V	5793.3	B?	421864	7031869	2.7	15.1	45.1	129.1	3.0	14.6	---	---	0
W	5799.5	B?	421876	7032100	8.8	9.6	34.4	121.7	4.8	9.1	---	---	6

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30760		FLIGHT	21									
X	5843.8	S	421952	7033697	1.0	9.7	15.4	44.1	1.8	7.9	---	---	0
Y	5857.0	S	421936	7033995	2.4	4.8	13.6	53.3	0.6	7.0	---	---	0
Z	5880.9	S?	421954	7034494	2.5	9.7	12.9	53.2	0.5	8.7	---	---	0
AA	5984.0	S	422025	7037118	2.0	20.4	9.8	108.2	1.6	14.2	---	---	6
AB	5992.4	B?	422046	7037368	15.1	58.8	99.4	240.1	2.1	34.0	---	---	3
AC	5996.0	B?	422045	7037483	10.3	13.3	98.0	240.1	2.4	34.0	---	---	0
AD	6377.1	B	422268	7045264	448.0	169.9	2329.5	843.1	1107.2	721.1	---	---	0
AE	6385.9	B	422261	7045561	148.5	77.7	536.8	248.0	185.3	194.0	---	---	0
AF	6394.5	B	422280	7045926	72.2	28.3	350.8	193.4	276.6	177.9	---	---	21
AG	6400.1	B	422291	7046171	11.4	17.4	0.0	193.4	4.3	0.0	---	---	22
AH	6410.4	S	422284	7046616	7.9	16.4	39.4	144.6	0.7	18.8	0.5	16	0
AI	6418.9	B?	422286	7046981	6.1	6.4	44.6	0.0	19.9	13.0	---	---	0
AJ	6421.0	D	422289	7047074	24.3	4.6	44.6	30.1	19.9	13.0	15.3	34	0
LINE	30770		FLIGHT	22									
A	2280.9	B?	421986	7019944	44.1	42.8	279.5	263.8	35.5	84.7	---	---	0
B	2264.3	B?	422006	7020152	28.0	29.8	183.4	262.1	11.5	47.9	---	---	0
C	2253.7	B?	421993	7020278	20.4	144.7	213.2	725.1	3.7	103.0	0.3	0	1
D	2240.3	B?	421993	7020448	11.4	59.5	101.3	558.0	7.6	77.1	---	---	16
E	2230.7	S?	421984	7020589	1.6	23.7	31.5	178.9	5.3	22.9	---	---	10
F	2215.4	B	421990	7020925	58.2	24.0	217.5	46.0	11.7	81.9	---	---	0
G	2195.3	B	421987	7021130	202.4	153.1	1055.4	608.3	220.2	375.6	---	---	0
H	2167.2	S	422008	7021419	2.1	6.3	25.7	75.7	5.2	11.9	---	---	37
I	2135.6	S?	422010	7021840	2.3	15.5	27.5	164.4	0.9	20.0	---	---	0
J	2094.3	S	422039	7022312	1.2	17.2	23.9	140.1	1.4	13.0	---	---	0
K	2082.0	S?	422036	7022493	1.5	25.0	35.2	151.0	0.1	15.7	---	---	32
L	2068.7	S	422040	7022674	0.7	10.2	21.8	109.0	1.0	13.1	---	---	0
M	2038.0	S?	422058	7023683	4.2	21.2	6.6	57.4	3.3	7.2	0.2	0	5
N	2027.7	S	422066	7024046	1.9	26.8	8.1	67.2	2.8	6.5	-0.1	0	24
O	2015.4	D	422077	7024307	0.0	13.1	1.5	64.2	4.2	8.5	-0.1	39	0
P	2002.1	D	422091	7024496	6.7	12.8	6.6	42.9	6.6	6.1	---	---	7
Q	1940.8	S?	422116	7024931	0.7	5.4	0.1	23.4	0.6	2.8	---	---	0
R	1665.2	D	422160	7026958	34.4	37.2	158.8	166.0	27.3	57.0	---	---	0
S	1662.9	B?	422163	7027027	34.4	21.6	240.3	345.8	27.3	79.2	---	---	0
T	1657.8	D	422162	7027181	63.4	59.2	226.1	345.8	28.5	75.1	---	---	0
U	1655.2	D	422162	7027253	21.5	33.2	226.1	345.8	28.5	75.1	---	---	0
V	1646.5	B	422173	7027433	167.6	244.0	564.0	632.2	27.4	152.5	---	---	111
W	1634.3	D	422189	7027593	172.0	239.1	2170.4	2771.9	50.6	588.5	---	---	7

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30770		FLIGHT	22									
X	1626.6	D	422196	7027693	311.7	501.2	2170.4	2771.9	50.6	588.5	---	---	14
Y	1600.0	B?	422195	7027946	3.3	1.6	14.8	26.0	3.8	5.2	---	---	12
Z	1569.7	S?	422208	7028379	0.7	11.2	16.9	85.7	0.7	11.1	---	---	0
AA	1561.2	S?	422200	7028598	2.5	8.0	16.6	45.3	1.5	6.8	---	---	60
AB	1556.5	S?	422224	7028732	1.6	4.4	10.7	14.3	2.0	2.0	---	---	0
AC	1545.6	B	422241	7029087	68.1	28.6	346.6	134.2	174.5	122.0	---	---	346
AD	1520.3	S?	422259	7030030	10.7	30.6	32.6	89.8	0.2	14.1	---	---	0
AE	1515.0	S	422260	7030209	2.2	14.1	39.9	94.2	2.1	18.6	---	---	0
AF	1505.2	S?	422263	7030519	16.3	26.9	102.2	129.6	6.6	31.9	---	---	0
AG	1494.0	S	422269	7030886	4.4	13.4	17.5	68.8	0.0	7.8	---	---	63
AH	1478.6	B	422270	7031434	122.7	78.5	560.5	297.8	166.2	198.3	---	---	37
AI	1467.8	D	422307	7031825	78.5	81.5	312.7	433.2	36.2	97.1	---	---	16
AJ	1463.7	B	422316	7031979	7.7	20.8	312.7	433.2	11.0	97.1	---	---	0
AK	1459.8	B	422317	7032138	10.9	19.4	65.6	86.1	11.0	20.4	---	---	7
AL	1450.5	B?	422316	7032527	6.7	11.5	43.1	74.2	2.6	16.1	0.6	8	35
AM	1432.6	S	422340	7033223	0.4	7.4	11.4	89.2	2.0	9.1	---	---	2
AN	1400.3	S?	422360	7033975	5.2	10.7	31.0	101.7	3.0	14.8	---	---	0
AO	1353.9	B?	422369	7034748	5.9	13.0	45.2	94.1	2.0	15.1	---	---	63
AP	1325.0	B?	422385	7035470	0.9	2.1	2.1	3.9	1.2	1.6	---	---	0
AQ	1292.1	S	422404	7036381	3.1	5.2	6.9	34.4	0.2	4.8	0.5	34	0
AR	1249.1	B	422437	7037442	33.2	57.3	179.0	282.1	5.4	53.5	---	---	0
AS	1246.5	B	422441	7037512	32.6	40.3	179.0	282.1	12.3	53.5	---	---	11
AT	1003.5	B?	422550	7041469	1.5	6.9	0.0	33.8	0.0	3.4	-0.2	32	0
AU	988.6	B	422549	7041589	5.2	16.6	85.9	165.2	11.1	31.8	---	---	1
AV	983.8	B	422545	7041644	10.4	19.7	85.9	165.2	11.1	31.8	---	---	0
AW	975.0	D	422558	7041743	12.1	13.9	155.3	92.4	30.5	59.5	1.1	11	0
AX	967.9	D	422560	7041825	23.6	14.3	155.3	92.4	30.5	59.5	---	---	0
AY	737.6	B	422645	7045213	12.1	3.8	72.8	120.2	28.1	26.2	---	---	0
AZ	724.2	B	422652	7045368	23.7	13.5	136.0	148.5	48.4	40.9	---	---	0
BA	719.7	B	422651	7045418	21.6	25.4	136.0	148.5	48.4	40.9	---	---	0
BB	702.5	B	422658	7045556	9.6	1.6	67.8	159.0	26.0	21.3	---	---	0
BC	686.8	B	422676	7045665	8.9	8.3	93.2	196.4	0.0	33.4	---	---	14
BD	676.6	D	422690	7045733	49.7	97.8	263.2	370.4	41.7	93.8	---	---	0
BE	667.8	D	422666	7045811	12.3	10.0	0.5	17.0	0.1	0.0	---	---	0
BF	645.5	B	422674	7045965	5.5	4.8	16.7	38.0	0.0	5.0	---	---	0
BG	633.4	B	422683	7046076	26.9	19.0	253.9	135.6	64.7	88.9	---	---	32
BH	624.7	B	422688	7046219	34.0	20.9	172.7	90.7	48.9	60.3	---	---	0
BI	608.2	D	422700	7046581	7.8	12.8	14.1	48.4	2.2	5.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 30770			FLIGHT	22									
BJ	587.9	B	422711	7047212	8.6	13.3	26.0	86.1	2.8	14.6	---	---	0
LINE 30780			FLIGHT	22									
A	2421.8	D	422327	7020079	9.7	17.9	111.7	219.9	0.7	37.7	---	---	0
B	2433.1	D	422354	7020181	17.1	37.3	90.4	258.7	3.1	34.1	---	---	0
C	2443.4	D	422355	7020281	17.5	19.1	13.4	50.5	6.1	18.5	---	---	6
D	2453.6	D	422371	7020396	10.7	18.8	84.4	88.7	5.6	23.6	---	---	0
E	2464.5	B	422387	7020509	9.3	20.0	61.1	158.0	1.9	25.4	---	---	0
F	2473.7	B	422393	7020633	8.2	13.9	64.2	158.0	4.4	25.2	---	---	4
G	2481.7	B?	422393	7020745	0.9	16.2	0.0	62.9	0.6	10.2	---	---	3
H	2498.9	B?	422397	7021017	4.3	8.8	28.0	31.4	6.1	9.5	---	---	0
I	2508.0	B	422396	7021186	1.4	1.5	28.0	0.0	8.7	6.5	---	---	0
J	2521.9	S?	422416	7021483	7.2	35.2	65.4	245.0	7.2	36.9	---	---	67
K	2529.1	B	422421	7021686	0.0	7.1	0.0	0.0	2.8	0.0	---	---	0
L	2534.1	D	422425	7021835	23.7	30.1	38.4	62.5	2.3	12.0	---	---	0
M	2547.5	B	422427	7022083	4.2	8.7	35.2	82.2	1.2	11.0	---	---	0
N	2576.4	S?	422433	7022358	0.0	9.9	0.0	109.9	0.6	12.0	-0.1	50	0
O	2626.8	S?	422452	7022745	3.1	8.2	9.8	69.8	1.9	6.2	---	---	0
P	2661.0	S	422450	7023111	3.3	9.1	6.1	13.5	1.5	1.8	---	---	0
Q	2685.0	B?	422445	7023699	3.5	10.3	10.3	31.0	0.5	4.8	---	---	0
R	2705.7	S	422456	7024003	2.2	6.4	8.9	38.1	1.5	5.6	---	---	7
S	2719.1	B?	422468	7024116	1.2	7.3	15.6	48.4	1.1	5.6	---	---	11
T	2728.1	S?	422481	7024189	2.0	5.6	19.6	43.3	2.4	6.4	---	---	0
U	2749.5	S	422488	7024384	0.7	7.1	15.7	84.0	1.0	10.0	---	---	0
V	2867.2	S	422507	7025387	2.1	12.6	7.7	35.0	2.2	4.2	---	---	8
W	2879.3	B	422520	7025788	40.4	18.5	189.5	69.4	90.7	65.7	---	---	0
X	2890.3	S	422534	7026275	4.2	4.9	0.0	42.0	2.8	5.7	---	---	13
Y	2910.0	B	422559	7026949	33.2	26.2	182.3	184.0	8.0	61.1	---	---	0
Z	2913.0	B	422548	7027038	27.2	43.3	182.3	184.0	25.4	68.9	---	---	47
AA	2917.0	D	422538	7027158	24.0	20.0	251.1	219.4	56.2	88.3	---	---	0
AB	2921.9	D	422546	7027294	42.9	34.7	251.1	219.4	56.2	88.3	---	---	0
AC	2938.7	B	422567	7027582	261.7	169.0	1983.8	1995.6	623.8	662.5	---	---	0
AD	2962.0	B	422571	7027831	32.3	12.0	253.1	152.6	197.7	145.3	6.4	10	0
AE	2972.3	B	422578	7028016	106.7	103.8	541.7	644.9	42.2	148.7	---	---	94
AF	2978.3	B	422593	7028189	35.2	60.4	175.1	644.9	33.8	148.7	---	---	125
AG	2993.7	B?	422599	7028713	4.1	12.2	3.6	34.1	2.3	5.0	---	---	0
AH	3005.0	B	422624	7029131	63.7	34.0	349.8	216.1	128.8	111.2	---	---	0
AI	3018.2	B	422635	7029686	5.0	14.7	12.7	69.5	8.9	4.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30780		FLIGHT 22										
AJ	3030.1	B	422645	7030186	4.4	10.5	39.5	90.5	2.5	17.0	---	---	0
AK	3045.9	B	422654	7030827	4.8	12.7	4.2	81.2	0.7	1.9	---	---	86
AL	3064.0	D	422668	7031410	48.5	43.6	209.0	192.8	35.8	69.4	---	---	4
AM	3071.1	B	422685	7031629	125.1	43.0	553.1	198.4	163.5	196.5	---	---	0
AN	3078.1	D	422689	7031853	23.0	34.1	73.0	204.8	12.5	26.5	---	---	3
AO	3101.0	S	422717	7032660	2.7	3.9	19.4	73.5	1.4	10.5	---	---	0
AP	3223.4	B?	422769	7034711	6.1	13.6	21.3	65.1	13.1	7.9	0.5	19	0
AQ	3235.9	B?	422776	7035027	5.8	9.0	35.7	60.3	1.7	11.6	---	---	11
AR	3239.5	B?	422780	7035131	5.7	10.9	35.7	60.3	1.5	11.6	---	---	0
AS	3280.9	S	422807	7036231	1.4	6.6	4.9	34.9	1.9	4.9	---	---	1
AT	3328.7	S	422842	7037250	6.6	11.8	35.8	135.2	0.8	17.0	---	---	5
AU	3342.9	B	422851	7037654	39.5	50.0	206.4	269.7	12.4	55.2	---	---	2
AV	3797.5	B	423038	7045099	46.0	34.5	178.6	161.4	39.4	66.2	---	---	0
AW	3807.0	B	423101	7045386	59.7	25.2	289.3	124.6	164.7	79.2	6.6	2	0
AX	3816.8	B	423071	7045629	15.1	35.2	0.0	207.3	0.0	11.8	---	---	0
AY	3822.3	B	423060	7045753	55.2	96.3	185.5	415.6	8.9	57.0	---	---	60
AZ	3829.6	B	423067	7046016	83.2	73.8	243.6	275.3	84.9	111.4	---	---	72
BA	3832.0	B	423073	7046119	51.4	0.0	243.6	70.1	84.9	111.4	---	---	27
BB	3834.5	B	423084	7046233	70.8	44.4	242.9	152.1	73.5	78.0	---	---	26
BC	3837.0	B	423092	7046348	88.5	53.9	242.9	152.1	73.5	78.0	4.6	2	26
BD	3840.8	B?	423097	7046522	0.0	1.4	242.9	306.5	0.0	78.0	---	---	0
BE	3845.4	D	423098	7046722	89.0	80.1	357.1	306.5	154.5	128.3	---	---	0
BF	3848.4	B	423104	7046846	16.3	53.2	357.1	306.5	154.5	128.3	---	---	0
BG	3855.4	S	423099	7047138	1.7	8.6	10.3	99.9	2.9	13.0	---	---	0
BH	3863.1	S	423102	7047443	2.4	29.5	14.8	158.7	1.9	20.2	---	---	0
LINE	30791		FLIGHT 31										
A	1322.0	S?	422744	7020175	7.0	12.9	20.8	59.2	1.6	10.6	---	---	0
B	1337.7	S?	422768	7020364	15.1	31.0	55.3	132.0	3.2	21.4	---	---	0
C	1356.5	S?	422792	7020591	8.6	19.7	60.5	92.4	5.3	20.4	---	---	0
D	1365.8	B?	422791	7020732	14.3	25.5	53.1	153.8	2.8	22.3	---	---	5
E	1377.0	B?	422788	7020879	9.3	28.8	62.8	224.5	7.0	33.4	---	---	0
F	1389.5	B?	422785	7020960	2.7	24.8	36.7	177.4	0.8	24.1	---	---	1
G	1504.8	B?	422816	7021680	4.7	26.5	26.9	83.6	4.2	10.1	---	---	30
H	1526.7	B	422844	7022325	14.7	12.8	68.4	73.3	4.1	17.5	---	---	0
I	1599.1	B?	422862	7022997	10.5	92.6	67.8	280.7	0.5	38.8	---	---	0
J	1640.6	B	422873	7023859	17.9	16.2	74.8	134.2	2.6	24.2	---	---	0
K	1650.0	B?	422875	7023964	8.5	2.8	58.4	74.7	2.9	14.0	---	---	2

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30791		FLIGHT	31									
L	1672.0	D	422880	7024158	73.4	181.2	491.8	844.9	16.0	149.0	---	---	38
M	1682.2	B	422887	7024204	32.3	0.0	491.8	945.8	6.0	149.0	---	---	0
N	1741.0	B	422906	7024450	29.8	70.4	45.3	94.4	4.0	18.9	---	---	7
O	1762.7	B	422911	7024566	4.5	11.7	11.9	57.2	0.7	7.4	---	---	0
P	1811.6	S	422905	7025166	3.3	8.4	4.5	37.5	2.1	4.8	---	---	0
Q	1839.6	B?	422906	7025553	2.8	13.7	20.7	76.0	0.2	12.4	---	---	1
R	1841.5	B?	422907	7025591	3.5	19.3	20.7	76.0	3.6	12.4	---	---	0
S	1849.3	B	422910	7025779	24.8	18.4	114.4	58.3	37.6	35.6	---	---	0
T	1862.5	S	422934	7026152	1.1	11.8	0.7	53.6	1.2	4.2	---	---	9
U	1882.0	B?	422952	7026572	1.3	6.9	2.4	29.2	1.5	3.9	---	---	0
V	1891.7	B?	422953	7026707	3.3	10.1	4.2	17.2	2.7	2.0	---	---	25
W	1902.4	B	422950	7026982	25.2	27.3	41.4	104.9	8.3	12.7	---	---	0
X	1909.2	B	422960	7027220	1257.8	444.6	5091.1	1517.0	2458.5	1661.9	---	---	238
Y	1920.2	B	422980	7027519	180.5	148.3	769.7	597.1	159.4	241.9	4.1	0	183
Z	1923.6	B	422980	7027585	149.9	148.3	769.7	597.1	159.4	241.9	---	---	2
AA	1940.6	D	422979	7027808	146.3	124.9	472.8	647.4	7.6	117.4	---	---	0
AB	1963.7	B	422974	7028137	36.4	9.4	1849.5	8.8	1104.1	926.6	---	---	30
AC	1968.4	B	422973	7028236	636.5	286.4	1849.5	422.7	1104.1	926.6	---	---	0
AD	1980.3	B	422993	7028587	280.1	126.6	1335.9	296.2	484.2	547.3	---	---	0
AE	1985.2	B	422995	7028789	47.8	31.5	1335.9	296.2	116.9	121.6	---	---	0
AF	1996.0	B	423030	7029273	12.9	7.3	45.9	38.0	9.1	16.0	2.7	19	0
AG	2021.7	B	423051	7030353	23.3	26.3	119.9	109.6	7.0	33.9	---	---	7
AH	2035.2	B	423063	7030859	7.7	28.8	31.2	177.8	3.0	19.7	---	---	43
AI	2050.0	B	423076	7031282	22.0	14.0	79.8	66.1	14.0	26.6	---	---	0
AJ	2060.0	B	423087	7031638	24.7	15.8	184.5	148.6	73.2	68.5	2.8	9	0
AK	2062.7	B	423090	7031733	50.7	28.5	184.5	148.6	73.2	68.5	---	---	0
AL	2072.9	D	423099	7032074	52.0	44.2	127.5	159.2	12.6	39.1	---	---	29
AM	2094.4	S	423116	7032793	7.8	35.8	47.4	210.1	1.6	27.3	---	---	0
AN	2201.9	S?	423172	7034429	1.4	23.5	5.1	99.1	1.2	11.5	---	---	0
AO	2203.8	S?	423175	7034457	1.4	13.0	6.0	99.1	1.8	11.5	---	---	0
AP	2245.6	S	423190	7035584	2.2	14.6	5.9	93.7	3.0	10.8	---	---	13
AQ	2271.7	B?	423206	7036163	5.8	19.0	9.4	52.9	2.5	6.4	---	---	0
AR	2294.1	S	423227	7036607	2.1	6.9	6.4	21.4	1.3	3.3	---	---	4
AS	2317.8	S	423231	7036986	4.8	13.8	30.8	82.7	2.2	11.7	---	---	3
AT	2327.3	S	423247	7037239	2.9	10.1	25.7	66.1	1.2	8.8	---	---	5
AU	2339.3	S	423246	7037603	3.5	8.1	21.1	58.9	2.7	5.2	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30795		FLIGHT	31									
A	3060.2	B	423469	7045272	128.0	134.3	982.4	712.4	26.3	290.8	---	---	3
B	3065.7	B	423461	7045454	281.8	72.6	2273.6	800.7	1079.2	712.5	---	---	0
C	3072.7	B	423458	7045686	555.8	273.2	2813.0	1612.1	1415.7	920.2	---	---	0
D	3078.4	B	423465	7045875	97.3	143.1	774.5	409.2	230.1	350.6	---	---	27
E	3079.6	B	423467	7045913	225.8	140.3	774.5	409.2	230.1	350.6	---	---	20
F	3084.7	B	423467	7046083	67.7	71.7	140.8	214.8	119.6	168.1	---	---	35
G	3089.1	B	423469	7046226	56.1	21.8	410.6	121.8	119.6	139.0	---	---	107
H	3091.4	B	423472	7046303	55.5	28.4	376.1	4.6	13.1	132.7	---	---	0
I	3095.2	B	423480	7046431	29.7	13.7	283.0	238.0	23.0	91.0	---	---	0
J	3100.2	D	423499	7046589	67.0	59.0	283.0	238.0	36.5	91.0	---	---	0
K	3103.6	B	423511	7046690	14.3	19.9	34.6	0.0	5.6	9.1	---	---	0
L	3110.2	B	423508	7046897	47.0	33.7	166.9	96.2	57.9	53.1	---	---	0
M	3112.6	D	423501	7046980	53.4	24.8	166.9	96.2	57.9	53.1	---	---	0
N	3122.2	B	423504	7047336	41.2	45.5	127.0	176.8	7.2	38.2	---	---	0
O	3123.9	D	423506	7047393	56.4	68.1	127.0	176.8	6.9	38.2	---	---	0
LINE	30800		FLIGHT	29									
A	3941.0	S	423200	7020539	6.5	28.3	99.4	231.9	2.3	37.2	---	---	8
B	3910.1	S?	423197	7021058	0.5	12.5	8.4	96.5	4.1	12.2	---	---	0
C	3897.7	S?	423207	7021196	2.7	25.0	1.3	128.7	4.0	14.6	---	---	0
D	3885.8	B?	423211	7021345	6.2	35.7	20.0	175.0	18.4	19.8	---	---	19
E	3882.7	M	423210	7021386	4.1	66.9	25.7	175.0	1.9	19.8	---	---	31
F	3834.7	S	423226	7021920	4.4	18.6	16.3	80.6	1.1	9.9	---	---	0
G	3786.6	S	423249	7022330	6.9	17.9	43.6	113.5	2.9	12.8	---	---	0
H	3771.0	B?	423247	7022552	10.7	13.3	52.0	68.1	3.3	11.0	---	---	0
I	3748.3	S?	423251	7022815	1.2	25.7	8.7	115.0	0.0	14.1	---	---	0
J	3661.6	B?	423255	7023228	5.7	14.3	42.7	91.8	0.7	12.6	---	---	0
K	3650.0	B?	423273	7023421	5.4	20.0	11.2	111.5	2.4	11.7	---	---	0
L	3636.0	B	423262	7023670	121.2	157.0	239.8	169.5	9.4	55.8	---	---	0
M	3630.5	B	423271	7023745	14.0	35.8	210.8	305.8	8.4	63.3	---	---	0
N	3624.0	B	423288	7023852	173.1	129.9	719.1	551.5	230.6	274.7	---	---	46
O	3615.8	B	423280	7024032	127.5	74.3	626.4	347.3	194.4	224.6	---	---	0
P	3614.0	B	423275	7024072	127.5	74.3	626.4	347.3	194.4	224.6	---	---	0
Q	3607.5	B	423274	7024207	30.8	29.5	97.4	173.5	19.1	34.5	---	---	0
R	3582.1	B	423284	7024416	2.1	9.4	119.4	125.1	3.8	25.9	---	---	1
S	3567.8	B	423298	7024540	4.0	8.1	123.8	39.4	8.8	15.4	---	---	0
T	3537.3	S	423310	7025158	1.8	26.1	9.9	91.7	5.5	10.5	-0.1	5	21

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30800		FLIGHT	29									
U	3498.2	S?	423324	7025759	6.2	9.1	25.9	42.8	6.7	7.1	---	---	12
V	3489.5	S	423328	7025878	1.6	23.5	31.1	90.9	0.8	11.5	-0.1	2	0
W	3454.0	M	423347	7026343	2.9	27.8	49.4	254.3	0.0	22.2	---	---	0
X	3438.4	S?	423342	7026412	3.1	4.0	26.5	121.6	2.5	12.0	0.6	65	4
Y	3400.7	S?	423351	7026573	0.0	23.1	0.2	152.6	0.7	14.9	-0.1	48	0
Z	3354.0	B	423397	7027055	21.7	31.6	36.4	94.3	5.7	16.4	---	---	0
AA	3345.3	B	423413	7027308	1294.1	354.4	6409.4	2640.0	2509.6	2307.6	---	---	0
AB	3327.3	B	423379	7027667	342.0	201.7	270.4	310.8	44.6	131.9	---	---	0
AC	3324.0	B	423383	7027703	53.2	12.2	270.4	310.8	87.1	131.9	---	---	0
AD	3317.1	B	423385	7027760	170.0	318.7	445.8	646.8	87.1	184.1	---	---	0
AE	3309.4	B	423385	7027817	34.0	28.9	279.1	21.5	0.0	0.8	---	---	0
AF	3299.5	B	423398	7027959	75.7	69.8	319.3	435.3	104.3	108.9	---	---	55
AG	3292.7	B	423400	7028096	34.0	16.6	293.9	60.4	116.4	101.0	---	---	0
AH	3276.0	B	423409	7028397	10.8	9.4	13.0	60.8	38.3	0.2	1.5	36	99
AI	3263.5	B	423410	7028725	53.1	67.3	310.7	366.1	49.3	110.6	---	---	0
AJ	3258.8	B	423408	7028868	26.5	21.8	310.7	159.7	49.3	110.6	---	---	0
AK	3249.2	B?	423420	7029216	2.9	3.7	42.2	26.4	25.3	15.7	---	---	0
AL	3229.6	B	423452	7029960	2.9	24.6	31.9	202.7	2.8	26.7	---	---	15
AM	3220.8	B	423459	7030266	9.1	20.9	55.1	118.6	3.2	21.8	---	---	0
AN	3192.7	D	423478	7031315	56.8	70.7	217.1	263.6	40.8	69.8	---	---	0
AO	3190.4	B	423476	7031410	50.0	55.3	217.1	279.5	23.0	69.8	---	---	0
AP	3187.5	B	423477	7031529	23.7	14.0	217.1	279.5	14.4	69.8	---	---	0
AQ	3180.5	B	423492	7031820	22.9	11.3	175.4	204.3	41.8	60.3	3.9	23	14
AR	3175.7	B	423499	7032024	21.1	25.9	175.4	204.3	42.1	60.3	---	---	0
AS	3172.2	B	423501	7032179	3.6	14.8	71.4	204.3	6.5	60.7	---	---	34
AT	3168.5	B	423503	7032350	9.4	16.0	26.1	142.3	4.5	11.7	0.7	7	16
AU	3158.0	S	423523	7032856	6.0	22.4	29.4	148.3	2.9	12.9	---	---	0
AV	3153.8	S	423542	7033051	5.9	22.3	29.4	148.3	2.4	18.3	---	---	0
AW	3016.5	S?	423617	7036419	1.7	9.9	7.4	37.3	1.0	4.7	---	---	1
AX	2985.5	S	423627	7036903	4.6	5.8	27.4	73.1	0.2	10.2	---	---	2
AY	2956.5	S	423659	7037982	2.8	7.3	26.2	70.4	4.5	15.6	---	---	11
AZ	2470.5	B	423867	7045432	67.0	69.1	309.2	343.2	48.3	92.7	---	---	0
BA	2465.7	B	423870	7045555	20.3	0.0	91.8	26.7	137.1	35.8	---	---	0
BB	2462.4	B	423871	7045646	35.1	12.6	91.8	26.7	137.1	35.8	---	---	3
BC	2453.0	B	423881	7045938	204.6	103.5	935.0	436.0	383.4	322.4	---	---	0
BD	2442.3	B	423891	7046237	19.9	32.8	237.7	264.5	18.6	77.9	---	---	315
BE	2440.2	B	423892	7046289	44.6	47.3	237.7	264.5	18.6	77.9	---	---	315
BF	2437.7	B	423894	7046345	58.5	56.8	237.7	264.5	21.0	77.9	---	---	287

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30800		FLIGHT	29									
BG	2432.8	B	423896	7046442	13.2	33.7	150.6	149.0	19.5	49.0	---	---	0
BH	2428.3	D	423903	7046530	21.2	31.0	20.6	62.9	1.2	5.4	---	---	0
BI	2416.6	D	423906	7046812	43.5	28.5	130.3	138.0	24.6	48.9	---	---	0
BJ	2412.0	B	423898	7046985	23.6	18.6	130.3	191.3	24.6	48.9	---	---	1
BK	2408.0	S	423901	7047148	7.9	37.8	62.2	191.3	4.6	27.1	---	---	0
BL	2402.5	B	423914	7047375	30.0	17.6	42.2	50.0	4.5	10.5	---	---	4
BM	2400.9	B	423918	7047444	31.4	17.6	42.2	50.0	4.5	10.5	---	---	4
BN	2398.4	B	423923	7047550	0.0	0.0	170.8	141.1	25.9	54.4	---	---	1
BO	2394.0	D	423927	7047719	66.5	48.8	170.8	141.1	34.2	54.4	---	---	0
BP	2390.4	D	423927	7047830	54.0	61.0	253.9	212.7	34.2	84.2	---	---	0
BQ	2380.0	D	423913	7048039	15.2	15.1	55.4	53.2	12.6	19.2	---	---	0
LINE	30810		FLIGHT	29									
A	329.9	S?	423572	7020161	8.3	21.3	11.4	91.4	3.0	11.5	---	---	0
B	361.3	S?	423588	7020445	2.2	14.3	29.1	176.0	0.5	21.0	-0.1	16	7
C	387.9	S?	423582	7020595	2.2	7.3	2.5	27.0	0.2	3.9	---	---	9
D	424.7	S?	423600	7021144	1.9	9.7	4.9	35.3	1.5	4.5	---	---	5
E	448.2	S?	423605	7021354	0.8	15.4	7.4	88.9	2.1	3.2	---	---	0
F	469.0	S?	423610	7021468	0.2	9.9	1.8	89.8	1.1	10.2	-0.1	43	0
G	498.1	S?	423615	7021573	2.7	3.0	5.3	170.0	3.4	21.2	---	---	0
H	619.1	B?	423626	7022059	1.9	37.1	19.3	381.7	9.3	47.8	-0.1	7	6
I	626.4	B?	423627	7022120	8.3	64.8	25.3	225.2	8.4	27.6	---	---	0
J	645.0	S?	423629	7022302	3.4	13.6	39.5	56.3	3.5	9.7	---	---	0
K	662.2	S?	423637	7022606	11.5	26.0	47.6	134.8	5.8	19.9	---	---	0
L	695.1	S	423664	7023089	1.1	10.0	0.0	27.6	0.2	2.5	---	---	0
M	746.0	S?	423640	7023536	3.4	21.6	58.7	174.6	3.9	27.1	---	---	0
N	770.5	B	423657	7023761	112.4	183.6	415.9	507.0	23.3	114.0	---	---	0
O	789.6	B	423661	7024132	116.0	83.9	814.9	468.2	232.5	280.4	---	---	33
P	793.7	B	423671	7024227	139.9	126.6	814.9	468.2	232.5	280.4	---	---	0
Q	805.5	B	423682	7024474	19.2	57.8	157.8	264.4	35.8	61.3	---	---	0
R	817.9	B	423686	7024578	2.1	0.0	2.0	0.0	0.1	1.5	---	---	38
S	829.2	B	423685	7024642	177.1	281.6	698.2	829.5	81.8	259.3	---	---	0
T	864.8	S	423709	7025144	15.4	59.1	123.3	420.4	0.6	55.1	---	---	16
U	885.6	D	423718	7025660	12.4	10.1	25.1	35.5	3.1	7.2	---	---	0
V	909.6	B?	423720	7025946	3.9	20.0	24.1	83.8	15.5	8.7	---	---	0
W	917.4	M	423726	7026010	12.5	0.4	7.3	13.6	0.0	2.8	---	---	6
X	934.1	B?	423754	7026203	0.1	57.8	38.0	232.3	8.7	23.9	-0.1	44	5
Y	953.9	S?	423748	7026466	2.4	10.8	3.1	44.0	2.7	4.1	-0.2	17	3

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30810		FLIGHT 29										
Z	994.5	B	423772	7027140	9.8	16.0	2652.9	1426.6	36.0	943.5	---	---	0
AA	1000.3	B	423764	7027234	601.1	302.9	2652.9	1426.6	860.4	943.5	---	---	244
AB	1008.1	B	423770	7027384	148.9	79.8	815.7	259.3	520.4	173.5	---	---	0
AC	1021.1	B	423790	7027736	248.8	70.3	843.5	286.5	511.9	320.7	---	---	88
AD	1024.2	B	423791	7027824	57.6	32.1	843.5	263.5	511.9	320.7	---	---	93
AE	1028.9	B	423793	7027958	122.8	63.5	353.2	263.5	187.0	154.5	---	---	0
AF	1039.8	D	423798	7028284	35.9	27.0	108.0	92.1	29.4	39.2	---	---	4
AG	1045.3	D	423806	7028442	59.3	55.2	238.3	279.6	15.3	73.9	---	---	6
AH	1056.6	B	423816	7028820	22.5	39.5	151.5	150.9	18.5	45.0	---	---	0
AI	1059.3	B	423822	7028922	21.5	11.7	151.5	150.9	18.5	45.0	---	---	101
AJ	1066.2	B	423827	7029187	28.2	27.8	191.9	112.0	39.6	61.2	---	---	68
AK	1075.0	B	423823	7029525	3.5	8.7	15.4	81.5	24.2	6.4	0.4	7	35
AL	1086.1	B	423849	7029945	10.7	21.4	131.0	152.2	11.7	36.3	---	---	0
AM	1109.4	S	423870	7030852	5.5	11.2	21.2	42.6	7.5	7.7	---	---	0
AN	1119.0	B	423875	7031174	52.5	83.7	441.7	252.8	70.0	144.8	---	---	2
AO	1124.3	B	423883	7031322	105.7	61.4	441.7	279.2	70.0	144.8	---	---	2
AP	1140.5	B	423883	7031733	9.1	13.2	33.4	61.3	52.4	13.9	---	---	0
AQ	1146.0	B	423897	7031916	3.1	1.1	97.0	68.1	52.4	39.3	---	---	14
AR	1153.4	B	423916	7032195	17.3	13.9	97.0	68.1	20.5	39.3	---	---	0
AS	1156.9	D	423924	7032336	16.9	12.1	84.4	70.3	3.1	13.1	---	---	0
AT	1176.0	S	423933	7033037	4.3	39.8	23.7	198.8	1.1	26.3	0.1	0	1
AU	1248.0	S	423961	7034466	1.1	2.0	0.7	29.0	0.5	4.3	---	---	0
AV	1324.3	S	424018	7036083	3.6	10.1	5.8	36.5	0.9	3.9	---	---	2
AW	1348.8	S	424030	7036661	2.2	7.3	7.5	31.2	0.8	3.5	---	---	0
AX	1372.2	S	424044	7037053	2.3	5.1	12.2	43.3	1.6	4.0	---	---	5
LINE	30811		FLIGHT 29										
A	2069.3	B?	424278	7045575	1.6	9.8	23.2	32.7	3.2	7.9	---	---	0
B	2079.7	B	424284	7045730	8.2	8.9	35.7	33.1	10.9	11.9	---	---	0
C	2091.8	B	424284	7045925	22.2	30.7	105.8	105.9	27.5	38.5	---	---	0
D	2097.3	B	424277	7046017	14.1	8.6	50.0	1.6	26.9	5.3	---	---	0
E	2114.3	B	424285	7046217	7.8	24.9	26.0	64.3	2.7	7.2	---	---	64
F	2128.1	D	424306	7046394	51.2	55.9	216.8	207.1	24.8	74.0	---	---	0
G	2134.5	D	424308	7046512	63.5	69.4	114.2	176.4	22.8	36.2	---	---	137
H	2138.6	B	424316	7046617	36.9	38.2	148.1	176.4	22.8	50.4	---	---	0
I	2142.7	D	424318	7046755	9.5	13.6	151.7	164.3	22.8	52.4	---	---	0
J	2145.3	B	424321	7046856	9.2	24.6	151.7	164.3	26.4	52.4	---	---	0
K	2147.6	D	424323	7046949	41.6	21.8	152.4	164.3	33.5	50.2	---	---	8

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30811		FLIGHT	29									
L	2150.6	B	424321	7047075	30.7	7.4	152.4	164.3	33.5	50.2	---	---	8
M	2160.1	D	424316	7047467	11.6	17.0	5.8	56.1	6.9	6.6	---	---	5
N	2167.5	D	424319	7047710	15.1	25.4	71.6	59.5	6.8	16.4	---	---	0
O	2177.6	B	424326	7047938	17.4	24.0	97.8	65.4	33.4	17.3	---	---	0
P	2188.4	B	424340	7048106	16.6	16.5	143.8	153.7	52.7	55.3	---	---	0
Q	2204.0	D	424360	7048310	10.3	21.6	20.9	14.8	1.2	5.4	---	---	0
LINE	30820		FLIGHT	28									
A	422.8	S?	423975	7020280	2.7	3.8	8.4	94.5	2.2	10.8	---	---	0
B	498.1	S	424010	7021140	1.4	4.8	14.6	46.1	1.0	6.9	---	---	0
C	539.1	S	424023	7021763	5.1	22.1	35.1	99.8	1.2	15.9	---	---	17
D	560.5	S?	424022	7022149	3.0	7.7	26.0	20.2	1.4	1.3	---	---	0
E	586.1	B	424032	7022450	3.9	7.9	29.4	94.2	6.3	10.9	---	---	13
F	600.4	B	424036	7022711	13.1	13.3	105.1	100.1	12.2	32.3	---	---	0
G	613.4	B	424051	7022990	12.1	43.4	78.2	185.8	10.0	37.0	---	---	67
H	660.0	B	424061	7023739	9.1	37.5	289.4	406.8	15.9	94.3	---	---	61
I	673.2	B	424049	7023899	82.3	50.3	435.1	335.3	49.3	142.2	---	---	0
J	679.4	B	424058	7024000	14.7	11.0	35.4	201.4	24.4	13.8	---	---	0
K	695.6	D	424087	7024392	40.3	12.7	66.8	61.3	26.4	33.4	---	---	0
L	706.0	B	424098	7024545	17.9	22.5	7.1	102.1	4.3	2.0	---	---	0
M	714.1	B	424100	7024617	28.2	53.1	182.9	241.8	12.6	57.9	---	---	12
N	741.1	D	424091	7024831	6.9	14.5	0.8	1.2	0.0	0.2	---	---	12
O	743.6	B	424092	7024849	3.2	29.7	491.6	706.9	0.0	140.2	---	---	12
P	760.6	B	424103	7025007	37.4	57.6	74.7	109.1	12.6	29.4	---	---	0
Q	775.1	B	424129	7025182	1.9	24.9	15.9	50.3	2.7	10.8	---	---	0
R	802.5	B?	424133	7025723	31.3	26.5	143.9	126.7	7.8	36.7	---	---	0
S	828.5	S?	424137	7026059	22.7	20.1	107.5	226.1	7.4	33.8	---	---	0
T	852.1	D	424142	7026582	6.0	15.9	22.6	58.1	1.2	8.7	---	---	33
U	873.4	D	424171	7027146	31.8	21.8	137.1	69.5	7.0	43.2	---	---	0
V	876.6	B	424185	7027248	49.2	12.3	261.6	69.5	114.5	84.8	---	---	0
W	881.6	B	424192	7027397	37.2	28.2	261.9	184.5	114.5	87.3	---	---	165
X	883.5	B	424190	7027448	47.3	28.2	261.9	184.5	114.5	87.3	---	---	0
Y	898.0	B	424184	7027853	36.9	11.5	200.6	8.5	145.1	57.6	---	---	0
Z	904.1	D	424187	7028033	23.3	29.9	46.6	60.8	19.9	10.7	---	---	0
AA	910.5	D	424196	7028225	29.0	65.9	32.8	171.1	1.8	13.8	---	---	94
AB	913.4	D	424201	7028314	8.2	25.5	4.7	171.1	0.0	13.8	---	---	86
AC	919.3	D	424212	7028494	6.7	46.9	19.3	171.4	0.0	20.0	---	---	16
AD	931.7	B	424227	7028865	168.6	119.1	948.9	422.4	290.3	345.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30820		FLIGHT	28									
AE	955.6	B	424256	7029773	6.0	11.1	51.9	135.7	4.1	17.9	---	---	0
AF	967.1	B?	424264	7030177	23.1	46.9	97.6	92.4	8.3	31.4	---	---	0
AG	977.3	S?	424285	7030458	9.2	35.6	56.8	174.7	0.5	25.2	---	---	0
AH	989.8	B	424275	7030833	2.0	8.1	24.6	30.5	27.8	13.8	---	---	10
AI	996.0	B	424270	7031031	31.7	26.5	125.1	159.7	27.8	44.4	2.2	9	0
AJ	999.9	B	424268	7031144	2.3	27.3	125.1	159.7	23.1	44.4	---	---	0
AK	1004.8	D	424267	7031293	27.7	13.6	138.6	171.0	17.7	47.8	---	---	0
AL	1012.0	B	424267	7031538	10.0	29.5	138.6	170.5	17.7	47.8	0.4	0	16
AM	1023.0	B	424302	7031882	16.6	14.4	137.1	151.0	33.6	50.0	---	---	0
AN	1026.7	B	424311	7031981	19.4	38.2	137.1	151.0	33.6	50.0	---	---	0
AO	1043.2	B	424322	7032470	15.2	9.3	78.8	52.8	13.1	22.5	---	---	0
AP	1063.3	S	424347	7033197	3.4	12.4	30.9	142.7	0.4	18.6	---	---	0
AQ	1238.2	B?	424417	7036287	2.7	11.3	4.5	41.7	1.2	5.0	---	---	1
AR	1812.0	B	424688	7045887	9.8	25.0	38.1	75.4	6.6	13.4	---	---	0
AS	1826.4	B	424704	7046086	51.8	45.0	171.5	170.9	18.1	46.8	---	---	0
AT	1842.7	B	424695	7046271	16.0	20.3	92.9	46.6	16.0	17.1	---	---	24
AU	1851.5	B	424677	7046404	6.7	0.0	234.8	203.8	28.5	71.5	---	---	0
AV	1854.7	B	424673	7046459	22.2	25.5	234.8	203.8	28.5	71.5	---	---	0
AW	1857.9	B	424677	7046528	51.4	45.1	234.8	203.8	28.5	71.5	---	---	0
AX	1867.0	D	424709	7046785	14.9	8.3	87.0	62.3	4.4	0.1	---	---	0
AY	1871.8	D	424724	7046937	12.9	22.5	95.2	80.5	21.6	31.1	---	---	7
AZ	1875.6	D	424727	7047063	34.2	16.0	95.2	80.5	21.6	31.1	---	---	0
BA	1888.0	B	424721	7047476	9.0	15.2	12.8	99.7	1.0	7.5	---	---	0
BB	1890.5	D	424721	7047547	9.0	30.1	12.8	99.7	4.7	7.5	---	---	3
BC	1917.2	B	424737	7047932	61.7	62.7	450.6	384.4	75.3	161.1	---	---	0
BD	1927.5	D	424753	7048042	7.4	3.4	211.0	126.0	30.6	56.1	---	---	0
BE	1933.6	D	424752	7048101	17.7	17.3	96.5	80.6	25.6	24.2	---	---	0
BF	1952.3	B	424752	7048225	4.5	5.0	37.2	36.2	4.9	15.2	---	---	0
BG	1962.6	B	424751	7048279	2.3	5.7	0.0	40.9	4.2	4.8	-0.3	45	6
LINE	30830		FLIGHT	34									
A	456.7	B?	424378	7020260	4.4	8.1	35.2	70.5	3.3	7.5	---	---	0
B	505.7	B?	424391	7020515	2.9	4.9	11.8	34.9	1.4	4.7	---	---	26
C	519.0	B?	424391	7020628	4.0	7.0	0.0	0.0	0.9	3.9	---	---	0
D	529.3	S?	424396	7020748	2.3	6.4	9.0	40.6	1.0	0.4	---	---	0
E	547.0	S	424403	7020958	3.9	13.9	13.8	88.1	0.0	12.1	0.3	4	0
F	585.3	S	424427	7021491	3.6	6.7	51.7	100.4	3.9	15.5	---	---	0
G	615.5	M	424426	7021715	2.0	13.1	8.6	109.9	0.2	13.1	---	---	54

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30830		FLIGHT	34									
H	674.1	B	424427	7022190	26.0	14.3	92.4	87.2	10.3	27.0	---	---	0
I	707.6	S	424447	7022669	4.3	20.4	21.2	115.4	2.9	17.3	---	---	0
J	728.1	B?	424459	7022937	11.7	12.6	94.7	105.1	13.9	33.4	---	---	0
K	736.6	S?	424454	7023093	14.5	49.3	140.0	330.6	9.3	52.1	---	---	76
L	742.5	B?	424463	7023230	9.7	7.1	194.9	330.6	24.8	63.5	---	---	73
M	748.1	B?	424466	7023359	21.5	36.8	194.9	194.6	24.8	63.5	---	---	0
N	765.1	B?	424478	7023670	5.8	12.5	0.0	12.7	2.0	0.0	---	---	0
O	781.5	B	424484	7023855	25.7	68.7	67.8	154.8	2.0	19.4	---	---	196
P	801.2	B	424488	7024167	6.2	10.3	22.8	55.0	6.4	5.3	---	---	0
Q	811.8	B	424492	7024279	27.1	61.2	207.4	287.3	36.1	76.0	---	---	0
R	831.0	B	424500	7024505	94.8	16.3	729.1	102.4	327.7	309.7	27.9	0	0
S	838.9	B	424509	7024594	112.1	49.3	729.1	224.9	327.7	309.7	---	---	0
T	866.2	B	424516	7024742	35.4	40.1	158.7	157.0	23.4	60.1	---	---	0
U	901.1	B	424512	7024943	14.8	65.7	82.9	885.7	1.2	94.1	---	---	8
V	919.2	B	424519	7025136	11.8	38.6	194.9	204.7	22.4	55.8	---	---	0
W	925.8	B	424523	7025245	53.8	57.7	277.5	253.2	19.2	77.5	---	---	35
X	963.2	S	424556	7026410	5.4	17.2	10.6	99.1	2.3	10.8	0.3	2	2
Y	979.9	B	424572	7026973	48.5	61.1	194.8	235.7	10.7	50.1	1.6	0	99
Z	982.5	B	424577	7027058	43.5	42.7	194.8	235.7	10.7	50.1	---	---	97
AA	987.1	B	424583	7027209	24.6	23.0	248.1	256.2	91.7	50.7	---	---	145
AB	992.2	D	424588	7027373	102.1	55.5	248.1	135.7	91.7	86.4	---	---	144
AC	1000.4	B	424597	7027605	15.7	30.9	190.3	151.8	0.0	57.2	---	---	0
AD	1001.8	B	424597	7027642	9.3	30.9	190.3	151.8	12.5	57.2	---	---	0
AE	1014.1	B	424602	7027939	50.1	76.4	615.2	592.9	50.5	185.8	---	---	15
AF	1019.4	B	424612	7028051	67.3	76.4	637.9	528.8	50.7	163.5	---	---	0
AG	1021.8	B	424615	7028099	144.7	127.0	637.9	528.8	50.7	163.5	---	---	0
AH	1031.5	D	424615	7028309	70.2	94.8	182.3	339.6	30.5	73.7	---	---	43
AI	1035.9	D	424617	7028415	28.0	53.5	197.1	339.6	30.6	73.7	---	---	25
AJ	1040.0	D	424617	7028511	70.3	49.7	388.0	322.7	81.3	131.5	---	---	0
AK	1046.5	B	424621	7028675	139.5	68.7	560.0	290.8	101.8	199.9	---	---	0
AL	1052.9	B	424634	7028902	5.0	22.5	560.0	55.4	101.8	199.9	---	---	45
AM	1081.8	S	424654	7029983	9.9	29.5	55.0	121.0	8.8	20.9	---	---	14
AN	1092.7	S	424652	7030383	12.0	47.0	92.7	225.1	5.6	34.6	---	---	25
AO	1111.4	B	424676	7031040	19.7	17.0	32.1	6.7	9.0	8.1	---	---	1
AP	1117.2	B	424679	7031216	17.2	71.7	187.4	364.9	18.7	65.9	---	---	0
AQ	1119.6	D	424681	7031290	33.1	71.7	188.9	401.9	37.7	90.0	---	---	0
AR	1122.4	D	424686	7031376	29.3	80.8	263.1	401.9	37.7	90.0	---	---	5
AS	1126.0	B	424690	7031489	47.6	45.3	263.1	379.9	37.7	90.0	2.2	5	7

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30830		FLIGHT	34									
AT	1138.9	S	424700	7031912	3.8	7.4	0.0	102.3	0.1	8.1	---	---	22
AU	1151.1	B	424708	7032320	26.9	13.4	103.7	54.3	21.2	31.0	---	---	0
AV	1155.4	B	424713	7032469	18.7	10.4	103.7	54.3	46.0	79.7	---	---	0
AW	1160.2	B	424719	7032634	44.7	25.0	229.8	115.0	46.0	79.7	---	---	12
AX	1167.7	S?	424734	7032898	6.1	7.9	13.2	36.0	0.6	8.1	0.8	16	0
AY	1186.1	B?	424742	7033356	4.1	17.1	27.4	75.5	0.8	10.7	0.3	0	16
AZ	1214.8	S?	424764	7033805	1.2	13.3	2.1	59.9	2.4	7.3	-0.1	6	0
BA	1345.5	B?	424828	7036495	3.2	7.1	12.5	41.7	0.5	5.5	0.4	16	0
BB	1370.5	S?	424838	7037068	1.8	9.5	7.1	51.9	0.8	6.3	-0.2	21	1
BC	1386.6	B?	424838	7037242	1.0	19.2	2.7	65.2	1.1	7.4	-0.1	13	8
BD	1494.0	S	424941	7040634	0.7	5.2	1.9	24.2	1.8	2.9	---	---	0
BE	1988.6	D	425094	7045429	9.9	24.9	44.8	84.5	4.0	14.8	---	---	6
BF	2003.5	B	425086	7045765	7.4	19.1	7.8	112.1	6.7	17.3	---	---	0
BG	2015.0	D	425086	7045971	56.7	60.6	334.7	348.9	46.5	103.3	---	---	5
BH	2019.3	D	425091	7046052	14.1	29.4	259.0	266.1	46.5	85.8	---	---	0
BI	2023.8	D	425103	7046138	2.4	17.3	102.0	61.6	20.9	25.3	---	---	42
BJ	2030.3	D	425116	7046311	20.0	24.5	75.5	59.5	33.8	30.8	---	---	90
BK	2034.0	D	425113	7046443	33.8	11.9	59.1	74.2	33.8	20.9	---	---	185
BL	2036.9	D	425110	7046556	34.8	14.9	59.1	39.6	21.9	20.9	---	---	160
BM	2039.7	B	425110	7046668	7.8	14.3	139.9	67.8	30.0	42.0	0.6	7	0
BN	2042.1	B	425113	7046766	2.2	0.3	139.9	67.8	30.0	42.0	---	---	0
BO	2046.5	B	425118	7046949	53.7	26.5	125.2	77.2	30.1	45.4	---	---	0
BP	2049.9	D	425121	7047086	44.9	34.6	65.5	85.3	30.1	45.4	---	---	0
BQ	2059.8	D	425135	7047443	17.7	20.0	21.8	30.3	2.3	7.0	---	---	0
BR	2074.1	B	425142	7047753	28.6	53.5	123.7	186.0	19.6	43.6	---	---	42
BS	2082.6	B	425145	7047889	15.2	28.9	181.1	233.6	14.1	58.2	---	---	0
BT	2097.2	B	425155	7048035	3.4	7.6	0.0	27.0	6.0	0.0	---	---	0
BU	2148.3	D	425156	7048360	5.4	12.4	24.3	42.9	3.7	8.9	---	---	0
LINE	30840		FLIGHT	34									
A	3834.5	S?	424789	7020596	54.1	131.5	465.9	850.1	13.8	141.4	---	---	164
B	3820.8	B?	424793	7020878	11.4	17.3	31.1	78.9	2.5	12.5	---	---	53
C	3810.5	S	424802	7021169	6.3	22.7	22.3	123.5	0.8	15.6	---	---	0
D	3805.5	B?	424806	7021342	1.2	6.4	1.0	88.8	1.0	14.8	---	---	0
E	3794.5	B	424829	7021738	23.3	34.5	53.4	119.1	3.1	17.4	---	---	39
F	3791.5	B	424837	7021848	1.9	12.4	53.4	119.1	3.1	17.4	---	---	0
G	3783.6	B	424844	7022135	46.9	76.7	266.4	370.9	18.2	76.8	---	---	0
H	3781.7	B	424847	7022203	44.8	76.7	266.4	370.9	18.2	76.8	---	---	42

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30840		FLIGHT	34									
I	3775.4	B	424853	7022443	60.5	75.9	85.0	146.5	14.7	35.3	---	---	26
J	3768.8	B	424858	7022702	72.3	56.2	410.6	311.8	26.2	123.5	---	---	0
K	3764.4	B	424868	7022871	130.4	23.8	707.1	414.8	98.4	235.5	---	---	0
L	3761.5	B	424871	7022982	170.2	117.2	707.1	414.8	98.4	235.5	---	---	0
M	3754.7	B	424872	7023234	49.6	35.0	438.6	262.6	55.4	141.5	---	---	0
N	3750.4	B	424878	7023384	64.4	42.4	438.6	371.9	55.4	141.5	---	---	51
O	3746.8	B	424881	7023506	63.3	93.9	438.6	383.9	55.4	141.5	---	---	0
P	3723.0	B	424902	7024322	23.0	41.8	248.8	328.9	22.9	72.2	---	---	0
Q	3712.1	B	424915	7024692	104.0	63.7	455.6	142.3	124.8	159.4	---	---	0
R	3708.9	B	424917	7024805	77.1	10.4	455.6	205.5	124.8	159.4	---	---	0
S	3704.8	B	424919	7024947	36.1	48.3	274.0	205.5	48.7	81.8	---	---	13
T	3695.4	B	424919	7025265	37.5	59.0	141.0	279.7	5.0	44.5	1.2	7	0
U	3686.9	B	424921	7025548	6.1	23.2	5.4	86.3	1.1	6.4	0.3	7	1
V	3660.8	B	424970	7026342	36.4	43.9	439.3	285.8	26.7	14.9	1.5	8	0
W	3654.5	B	424972	7026510	90.2	210.8	829.8	1039.1	43.4	202.6	---	---	80
X	3648.5	D	424977	7026661	217.3	254.1	829.8	1373.5	31.7	265.2	---	---	25
Y	3638.1	D	424987	7026923	94.0	91.0	285.6	322.4	23.1	82.1	2.7	0	0
Z	3620.2	B	424987	7027325	88.5	29.5	401.6	119.6	197.4	125.0	---	---	112
AA	3617.3	B	424985	7027400	79.7	22.2	401.6	119.6	197.4	125.0	---	---	0
AB	3606.9	B	424984	7027696	20.7	29.2	240.7	330.7	2.9	68.5	1.1	4	89
AC	3602.2	B	424981	7027820	40.9	95.5	240.7	330.7	5.0	68.5	---	---	59
AD	3593.0	B	424997	7028063	43.8	72.7	540.4	329.6	51.3	163.0	1.2	0	0
AE	3587.4	B	425011	7028215	48.1	20.6	540.4	329.6	51.3	163.0	---	---	0
AF	3582.9	B	425016	7028331	22.5	61.1	267.9	347.3	24.0	87.9	---	---	42
AG	3579.6	B	425015	7028412	50.3	52.2	271.3	347.3	24.0	83.0	---	---	42
AH	3571.8	D	425026	7028602	11.0	19.4	0.9	31.6	0.0	0.1	---	---	0
AI	3563.0	B	425044	7028840	73.3	47.8	433.7	195.6	169.9	143.5	---	---	0
AJ	3548.1	B?	425053	7029423	7.1	12.9	64.8	161.2	5.7	21.8	---	---	0
AK	3523.1	B	425078	7030303	12.5	14.2	100.6	98.7	19.2	33.6	---	---	17
AL	3495.5	B	425070	7031165	8.8	8.0	40.3	54.9	5.9	14.9	1.3	25	12
AM	3488.6	B	425070	7031398	27.4	16.4	56.2	39.3	18.6	14.2	---	---	0
AN	3486.0	B	425076	7031496	16.5	9.3	56.2	39.3	18.6	25.0	---	---	0
AO	3480.7	B	425101	7031702	21.7	23.0	88.5	127.2	12.6	30.5	---	---	0
AP	3475.4	D	425117	7031913	27.6	15.8	0.0	0.7	11.3	1.7	3.4	15	0
AQ	3456.5	B	425133	7032630	35.5	18.4	234.7	75.0	70.7	83.5	---	---	0
AR	3453.0	B	425136	7032775	35.5	25.4	169.9	86.6	70.7	83.5	---	---	6
AS	3443.6	D	425145	7033183	24.5	23.0	76.6	64.6	7.9	21.6	1.8	3	16
AT	3437.3	B	425151	7033430	12.7	28.7	54.4	108.4	1.4	16.9	0.6	4	20

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30840		FLIGHT	34									
AU	3416.0	S?	425159	7033830	0.0	2.8	9.8	44.8	0.0	6.1	-0.1	39	5
AV	3369.3	S?	425187	7034488	3.3	12.3	9.0	59.5	1.7	6.9	0.3	10	0
AW	3278.6	S?	425238	7036488	1.6	6.8	6.2	9.4	1.3	0.8	-0.2	17	0
AX	3269.1	S?	425236	7036673	2.0	5.3	4.7	31.3	1.3	3.4	-0.3	38	4
AY	3249.6	S	425256	7036916	1.1	9.5	4.4	38.7	0.0	4.5	-0.1	12	2
AZ	3202.1	S	425275	7038162	3.5	19.5	21.0	96.4	4.3	14.2	---	---	0
BA	2692.0	B	425480	7045648	5.2	2.6	78.1	50.5	0.0	7.9	---	---	4
BB	2676.3	B	425495	7045738	14.0	15.4	65.1	83.6	14.6	24.1	---	---	0
BC	2666.1	D	425499	7045792	33.9	25.7	144.8	162.3	30.1	44.8	---	---	0
BD	2655.5	B	425515	7045927	35.7	11.9	142.1	13.4	75.6	53.6	7.6	6	0
BE	2648.3	B	425522	7046129	78.0	76.9	231.8	331.6	73.1	71.5	---	---	0
BF	2644.0	B	425517	7046283	174.6	107.0	815.7	686.0	120.5	268.0	---	---	122
BG	2638.7	B	425518	7046493	110.9	82.5	481.1	377.9	72.4	154.7	---	---	44
BH	2634.3	B	425520	7046677	52.0	35.5	481.1	377.9	26.8	154.7	---	---	0
BI	2628.0	B	425520	7046947	61.4	35.9	182.7	77.1	43.9	65.5	---	---	1
BJ	2624.0	B	425520	7047116	2.7	4.2	184.1	97.5	43.9	65.5	---	---	0
BK	2621.5	B	425523	7047215	30.7	19.6	184.1	94.1	49.0	61.7	---	---	0
BL	2615.7	B	425522	7047406	13.9	14.1	185.3	11.3	1.2	61.9	---	---	0
BM	2575.0	B	425544	7047930	3.9	9.2	62.6	42.2	8.3	9.8	0.4	13	0
BN	2565.3	B	425549	7048070	9.5	43.2	78.6	172.7	8.6	9.0	---	---	0
BO	2558.4	B	425547	7048142	2.0	40.7	0.0	46.3	0.0	2.6	---	---	4
BP	2521.3	B	425551	7048363	116.3	61.3	583.6	524.2	121.8	206.8	---	---	0
BQ	2502.3	D	425553	7048643	61.6	27.7	188.1	140.9	30.8	57.3	---	---	25
LINE	30850		FLIGHT	34									
A	4097.1	S?	425168	7020099	9.0	24.6	57.3	111.8	3.8	20.8	---	---	0
B	4105.0	B?	425182	7020277	6.8	17.2	35.3	77.7	3.9	10.1	---	---	6
C	4152.6	B	425210	7021068	57.7	110.4	818.6	903.7	46.6	233.6	---	---	0
D	4160.9	B	425216	7021259	83.8	118.3	462.9	694.4	55.8	156.0	---	---	0
E	4175.5	B	425214	7021521	45.9	85.0	361.6	453.4	26.1	112.4	---	---	0
F	4187.7	B	425228	7021720	24.1	35.0	251.2	195.8	37.9	75.7	---	---	0
G	4192.0	B	425234	7021828	35.7	14.2	251.2	195.8	37.9	75.7	---	---	0
H	4195.7	B	425245	7021931	34.5	30.7	257.2	139.2	13.0	83.5	---	---	21
I	4203.0	B	425256	7022169	39.3	33.1	246.6	126.0	48.7	80.2	---	---	17
J	4211.5	B	425256	7022490	21.2	32.8	70.7	151.1	0.9	22.6	---	---	14
K	4217.3	B	425257	7022725	9.4	33.1	30.3	136.7	2.5	15.5	---	---	0
L	4220.2	B	425255	7022848	43.4	100.0	155.3	353.3	8.6	52.1	---	---	15
M	4224.3	B	425258	7023020	92.1	87.9	454.0	388.0	40.8	129.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30850		FLIGHT	34									
N	4227.6	B	425261	7023157	77.5	75.3	454.0	388.0	40.8	129.6	---	---	0
O	4238.5	B	425272	7023559	9.8	20.6	93.5	208.6	3.9	31.0	---	---	0
P	4244.2	B	425279	7023705	9.6	20.0	65.7	153.5	1.0	19.3	---	---	86
Q	4258.3	B	425312	7024069	14.6	17.4	75.9	120.8	9.2	13.9	---	---	0
R	4266.0	B	425300	7024394	68.7	44.3	339.9	191.6	6.7	105.5	---	---	0
S	4272.6	B	425302	7024698	69.5	34.7	463.1	290.4	60.1	139.6	---	---	0
T	4279.5	B	425302	7025024	31.1	20.4	231.3	178.2	50.8	84.0	---	---	9
U	4281.0	B	425302	7025094	35.4	18.6	231.3	178.2	50.8	84.0	---	---	10
V	4286.0	B	425304	7025328	28.7	14.2	205.5	84.2	36.2	29.9	4.2	20	0
W	4295.3	S?	425322	7025689	7.0	15.1	36.0	66.9	0.5	11.0	---	---	0
X	4330.2	S?	425348	7026336	2.0	15.3	26.2	157.0	5.8	21.0	-0.1	6	45
Y	4353.3	B	425370	7026731	44.5	49.5	1134.1	466.6	393.2	403.0	---	---	0
Z	4372.1	D	425385	7027027	16.6	15.3	12.2	194.3	3.0	52.6	---	---	0
AA	4374.2	B	425387	7027064	34.8	55.5	139.2	194.3	42.0	52.6	---	---	0
AB	4396.7	B	425394	7027451	113.1	78.4	562.7	334.5	205.7	175.7	---	---	173
AC	4398.5	B	425390	7027486	113.1	72.7	562.7	334.5	205.7	175.7	---	---	0
AD	4418.9	B	425415	7027879	70.3	105.2	346.1	435.5	10.8	88.5	---	---	123
AE	4435.7	B	425414	7028142	134.0	90.4	636.8	400.2	169.7	227.0	---	---	0
AF	4449.5	B	425437	7028515	469.8	156.0	2478.9	759.0	1303.2	821.7	---	---	0
AG	4454.6	B	425434	7028680	390.5	207.7	2052.9	712.8	1090.1	550.1	---	---	0
AH	4472.6	H	425432	7029352	1.2	11.2	51.8	116.3	2.1	16.1	---	---	0
AI	4480.8	H	425448	7029663	5.9	19.5	13.5	79.4	1.2	9.0	---	---	10
AJ	4492.0	B	425467	7030011	12.3	13.7	30.1	108.4	2.7	19.7	---	---	0
AK	4503.3	B	425469	7030281	46.9	20.6	302.5	196.6	67.1	98.4	---	---	0
AL	4506.9	B	425474	7030376	39.0	34.6	302.5	196.6	67.1	98.4	---	---	0
AM	4512.9	B	425480	7030525	42.5	71.1	539.9	439.8	111.9	166.7	---	---	0
AN	4531.3	B	425492	7030969	5.2	16.1	34.7	59.4	1.9	8.0	---	---	0
AO	4539.2	B	425502	7031136	2.0	9.4	31.3	30.1	1.5	6.3	---	---	1
AP	4549.0	D	425501	7031353	28.4	30.2	117.6	139.6	6.4	26.2	---	---	4
AQ	4553.1	D	425507	7031483	11.7	14.0	89.4	16.3	6.4	16.1	---	---	0
AR	4555.6	D	425507	7031571	13.4	8.2	51.2	59.1	13.0	16.1	---	---	5
AS	4564.7	B	425523	7031907	1.5	10.4	52.2	124.6	5.0	11.4	---	---	0
AT	4567.6	D	425537	7032011	18.8	17.5	52.2	124.6	3.9	11.4	---	---	0
AU	4573.2	D	425555	7032211	31.8	48.9	19.6	125.8	0.1	8.8	---	---	15
AV	4579.2	B	425559	7032424	35.9	26.0	86.7	169.4	4.8	29.9	---	---	5
AW	4583.4	B	425558	7032571	6.7	40.6	86.7	287.8	12.5	30.5	---	---	7
AX	4594.6	B	425557	7032951	60.2	23.2	346.0	134.8	112.9	124.5	---	---	0
AY	4606.5	B	425550	7033288	24.5	42.7	108.2	228.4	8.1	31.9	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30850		FLIGHT	34									
AZ	4624.8	S?	425561	7033672	1.7	6.1	8.3	37.5	5.0	3.3	-0.2	31	0
BA	4647.1	B?	425584	7034087	1.9	11.4	10.5	16.6	3.9	2.3	-0.1	7	0
BB	4654.8	S	425601	7034294	1.3	11.9	10.5	41.0	3.1	5.4	-0.1	2	9
BC	4671.5	B?	425600	7034781	2.8	10.2	8.1	38.9	2.1	4.3	-0.2	13	0
BD	4756.3	S	425640	7036815	1.0	6.8	3.8	62.6	1.0	7.1	---	---	0
BE	4775.0	S	425655	7037230	0.5	13.1	0.0	95.8	2.2	9.6	-0.1	19	0
BF	4823.5	S	425697	7038951	0.7	3.6	7.1	24.5	1.9	3.5	---	---	0
BG	5149.0	B	425867	7045303	29.4	18.7	213.4	171.0	4.2	72.3	---	---	5
BH	5156.1	B	425873	7045582	60.8	47.5	313.2	294.8	58.7	93.5	---	---	0
BI	5162.9	B	425867	7045865	47.5	33.9	138.6	142.1	24.7	40.5	---	---	1
BJ	5167.6	B	425868	7046076	79.5	30.9	317.9	144.9	80.2	105.4	---	---	58
BK	5170.8	B	425869	7046220	116.2	48.5	317.9	144.9	80.2	105.4	---	---	48
BL	5176.5	B	425885	7046462	61.3	32.7	123.2	121.2	49.7	41.1	---	---	32
BM	5179.0	D	425899	7046558	93.1	45.5	65.3	275.2	57.6	108.4	---	---	26
BN	5183.6	B	425923	7046691	32.1	43.8	451.6	386.6	82.6	141.0	---	---	0
BO	5201.2	D	425930	7047012	25.5	19.0	120.6	56.2	41.7	43.2	---	---	0
BP	5207.4	B	425928	7047141	47.2	0.0	120.6	56.2	41.7	43.2	---	---	0
BQ	5212.5	B	425931	7047246	15.6	32.4	101.8	88.5	21.5	33.0	---	---	0
BR	5220.8	B	425940	7047403	8.6	12.5	11.0	88.3	0.7	23.6	---	---	0
BS	5263.9	B	425958	7047888	26.0	74.1	179.4	434.6	34.5	59.5	---	---	2
BT	5271.6	B	425968	7047968	156.2	57.5	317.8	71.4	70.3	84.4	---	---	0
BU	5281.9	B	425954	7048081	62.9	54.2	22.6	53.8	117.2	11.7	---	---	0
BV	5286.0	B	425952	7048137	74.1	20.1	470.6	152.8	117.2	166.9	---	---	0
BW	5335.8	B	425951	7048522	47.1	70.2	458.9	674.7	51.9	155.2	---	---	0
BX	5349.7	B	425971	7048640	135.4	119.3	484.4	410.8	107.8	153.2	---	---	30
BY	5358.6	B	425979	7048750	267.7	144.8	955.1	590.2	194.4	331.9	---	---	0
BZ	5369.5	B	425958	7048929	14.9	55.6	218.5	228.9	33.4	77.4	---	---	10
CA	5374.3	D	425964	7049055	99.1	97.8	218.5	268.0	33.4	77.4	---	---	0
LINE	30860		FLIGHT	35									
A	400.6	B?	425578	7020106	12.8	18.2	29.1	38.1	6.6	8.5	---	---	0
B	406.5	B?	425579	7020211	10.1	33.8	63.3	194.0	7.3	27.5	---	---	0
C	414.6	B?	425586	7020338	2.5	4.0	42.2	0.0	0.0	0.0	---	---	0
D	420.2	S?	425597	7020465	2.8	16.0	42.3	88.4	4.8	20.6	---	---	22
E	435.7	S?	425596	7020838	0.0	17.7	36.0	150.6	7.9	12.9	---	---	0
F	438.4	S	425593	7020902	8.2	30.5	36.0	150.6	7.9	12.9	---	---	6
G	450.6	S?	425613	7021237	3.5	20.5	70.3	205.2	4.1	25.5	---	---	0
H	478.2	B?	425630	7021866	11.9	43.6	141.7	223.4	7.8	42.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30860		FLIGHT	35									
I	481.9	B	425632	7021946	11.6	34.1	141.7	223.4	7.8	42.4	---	---	0
J	508.7	S?	425647	7022485	1.8	13.4	5.6	74.7	2.7	6.3	---	---	0
K	523.7	B?	425672	7022930	6.8	18.3	27.7	89.3	5.4	13.1	---	---	0
L	529.1	B?	425670	7023079	5.7	6.9	42.5	24.9	7.3	12.1	---	---	5
M	535.2	B?	425672	7023220	5.0	16.2	42.5	103.6	7.3	18.1	---	---	0
N	565.4	B	425708	7023661	11.7	30.0	109.3	172.0	21.7	38.5	---	---	0
O	572.1	B	425709	7023786	8.5	19.2	83.1	113.7	21.2	28.3	---	---	0
P	580.4	B	425694	7024003	21.8	17.0	42.6	0.0	26.7	23.3	---	---	0
Q	588.8	B	425692	7024239	33.1	35.7	91.3	85.9	0.0	18.6	---	---	0
R	591.8	B	425690	7024310	11.6	12.0	91.3	85.9	1.3	18.6	---	---	0
S	599.4	B?	425690	7024469	3.0	16.2	0.1	26.9	7.8	7.5	---	---	0
T	619.5	B	425711	7024882	52.4	52.4	346.8	247.1	68.8	120.6	---	---	0
U	630.4	B	425719	7025137	5.1	14.6	73.0	71.7	20.0	23.0	---	---	0
V	649.6	B?	425733	7025413	16.2	20.9	101.1	145.7	11.0	35.4	---	---	0
W	686.2	B?	425724	7025787	13.1	24.0	38.2	76.2	1.8	12.2	---	---	0
X	739.0	B?	425755	7026180	3.4	16.1	4.2	129.1	2.3	6.8	---	---	0
Y	787.7	B	425785	7026547	24.3	43.2	307.5	418.4	32.8	83.5	---	---	16
Z	799.8	B	425749	7026703	52.8	16.1	317.1	259.1	109.8	106.7	---	---	0
AA	822.3	B	425773	7026872	7.8	4.4	25.2	75.1	8.6	10.3	---	---	1
AB	875.7	B	425775	7027328	19.9	21.9	57.5	415.6	2.0	18.6	---	---	14
AC	884.0	B	425782	7027443	123.7	90.1	648.4	415.6	153.0	217.9	4.1	0	0
AD	894.8	B	425796	7027673	379.9	261.3	1430.4	1133.9	213.1	461.2	---	---	0
AE	910.1	D	425805	7027989	2.8	34.3	10.6	52.4	0.6	6.1	---	---	209
AF	922.3	B	425809	7028174	274.6	190.1	1773.8	1258.0	294.0	618.0	---	---	0
AG	926.9	B	425811	7028269	40.7	8.3	1773.8	1258.0	294.0	618.0	---	---	123
AH	936.7	B	425822	7028482	192.5	22.0	1085.8	516.7	455.8	416.6	---	---	51
AI	941.1	B	425821	7028566	2.3	39.0	0.0	305.2	32.3	0.0	---	---	156
AJ	945.8	B	425821	7028651	39.4	46.8	458.4	305.2	67.9	152.5	---	---	0
AK	948.2	B	425822	7028692	28.5	35.2	458.4	305.2	67.9	152.5	---	---	0
AL	954.1	B	425824	7028798	67.3	59.8	232.6	138.9	38.4	62.8	---	---	111
AM	971.2	H	425842	7029264	5.8	13.4	35.5	96.8	0.3	8.9	---	---	6
AN	979.2	H	425859	7029533	2.3	17.5	22.0	112.0	5.5	5.3	---	---	1
AO	991.8	B	425872	7029892	29.3	23.5	246.2	247.7	30.3	72.9	---	---	0
AP	995.2	B	425871	7029971	31.0	42.0	246.2	247.7	30.3	72.9	---	---	2
AQ	1004.6	B	425875	7030186	3.9	8.5	0.0	37.0	0.0	1.1	---	---	0
AR	1008.1	B	425875	7030272	8.8	19.5	19.2	43.0	11.0	7.5	---	---	0
AS	1017.6	B	425876	7030529	57.2	65.5	213.0	287.3	47.6	75.8	---	---	1
AT	1026.9	B	425893	7030766	57.7	35.0	384.4	299.2	64.8	127.7	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30860		FLIGHT	35									
AU	1049.1	B	425900	7031395	9.8	24.0	38.1	68.8	0.1	7.0	---	---	1
AV	1061.5	B	425925	7031830	26.1	48.9	199.3	251.1	17.9	60.3	---	---	0
AW	1064.6	B	425931	7031950	14.1	42.8	190.4	251.1	17.9	60.3	---	---	1
AX	1069.1	B	425939	7032125	33.0	28.5	190.4	251.1	17.9	60.3	---	---	0
AY	1073.4	B	425948	7032301	2.9	10.4	0.0	15.1	1.7	1.6	---	---	15
AZ	1075.5	B	425953	7032389	4.4	8.2	81.8	27.6	4.5	21.9	---	---	15
BA	1077.4	B	425956	7032468	25.9	7.3	81.8	27.6	4.5	22.0	---	---	15
BB	1091.5	B	425959	7033002	17.1	18.8	87.5	119.1	26.3	41.3	1.3	10	0
BC	1097.5	D	425957	7033196	24.2	19.8	46.9	43.9	7.6	16.8	---	---	0
BD	1101.1	B	425956	7033313	13.1	13.4	37.9	43.9	6.8	8.5	---	---	0
BE	1107.3	B	425959	7033523	8.0	19.5	51.5	68.8	3.1	13.5	0.5	9	27
BF	1110.7	B	425965	7033643	11.7	33.4	48.8	98.9	2.1	14.7	0.5	1	0
BG	1123.1	S?	425984	7034062	2.7	27.2	9.0	97.4	1.9	11.8	-0.1	0	0
BH	1148.8	S	425999	7034960	2.7	11.4	9.1	38.9	1.2	5.4	-0.2	3	0
BI	1201.2	S	426019	7036069	1.0	10.3	4.1	47.7	0.5	5.3	---	---	0
BJ	1229.8	S?	426029	7036571	2.0	6.6	2.6	15.4	1.5	2.0	---	---	1
BK	1255.0	S	426050	7036984	2.0	5.6	6.0	27.3	0.8	3.6	---	---	2
BL	1278.5	S	426055	7037314	0.3	14.8	4.7	82.9	0.1	10.0	-0.1	19	19
BM	1689.0	B	426226	7045547	127.0	84.9	803.9	602.2	159.8	259.0	4.6	0	0
BN	1694.4	B	426273	7045724	36.9	28.6	360.6	292.0	85.4	125.5	---	---	21
BO	1696.9	B	426297	7045793	77.1	56.5	360.6	292.0	85.4	125.5	---	---	26
BP	1700.7	B	426320	7045896	21.3	13.4	360.6	292.0	23.4	125.5	---	---	0
BQ	1705.0	D	426302	7046003	26.9	13.0	76.7	35.1	39.6	25.3	---	---	0
BR	1712.9	B	426254	7046197	16.1	22.0	148.0	225.6	21.8	55.0	---	---	15
BS	1722.8	D	426300	7046363	20.3	5.7	193.0	229.4	66.4	55.0	---	---	0
BT	1728.8	D	426308	7046453	38.2	19.2	232.5	114.0	66.4	82.6	---	---	189
BU	1734.0	D	426309	7046546	9.4	14.7	217.9	134.8	56.3	78.8	---	---	0
BV	1738.8	D	426310	7046630	54.2	38.8	127.7	137.3	29.7	37.4	---	---	0
BW	1748.3	D	426319	7046801	40.4	36.1	148.3	133.9	24.8	48.0	---	---	0
BX	1770.5	B	426329	7047048	14.1	13.8	51.9	61.7	9.3	17.2	---	---	0
BY	1786.9	B	426328	7047275	8.2	17.2	31.7	73.9	5.5	11.4	---	---	0
BZ	1809.4	S?	426334	7047476	0.3	20.1	1.5	209.9	1.6	24.4	---	---	0
CA	1842.7	B	426370	7047720	50.1	44.3	283.6	179.4	35.2	79.7	---	---	0
CB	1852.2	D	426361	7047818	84.2	103.7	89.9	314.9	4.8	40.2	---	---	5
CC	1865.7	B	426372	7047950	28.9	2.0	538.5	516.1	72.4	168.2	---	---	0
CD	1869.6	B	426365	7047990	75.8	73.9	538.5	516.1	72.4	168.2	---	---	0
CE	1877.5	B	426367	7048095	41.0	66.2	185.9	83.9	19.3	53.0	---	---	5
CF	1894.3	D	426359	7048586	33.8	5.5	121.4	116.3	42.3	45.1	---	---	53

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30860		FLIGHT	35									
CG	1899.0	D	426375	7048782	16.4	11.0	128.6	84.5	42.3	45.1	---	---	0
CH	1902.8	B	426382	7048947	13.3	5.7	128.6	64.1	16.0	45.1	---	---	0
CI	1907.0	B	426389	7049135	23.2	13.9	102.8	64.1	32.1	32.8	3.0	17	0
CJ	1910.0	B	426394	7049266	14.3	13.9	105.7	64.1	40.7	31.9	1.4	18	0
LINE	30870		FLIGHT	30									
A	4015.6	B?	426001	7020144	16.0	50.3	63.6	247.9	2.6	34.3	---	---	0
B	4003.2	S	426010	7020535	5.6	20.1	51.2	71.6	7.1	17.7	---	---	6
C	3996.6	S	426026	7020773	3.4	14.6	69.2	129.5	3.5	23.6	---	---	10
D	3973.2	S?	426022	7021444	7.3	12.3	32.2	83.4	3.9	12.3	---	---	11
E	3957.8	B?	426033	7021798	8.3	45.0	31.3	170.6	5.1	24.8	---	---	3
F	3946.5	B?	426041	7021992	4.6	19.3	0.3	30.7	3.3	8.4	---	---	0
G	3939.3	S?	426046	7022124	3.6	23.4	77.0	197.9	4.8	31.8	---	---	9
H	3863.1	S?	426066	7023002	7.0	28.0	81.5	204.5	5.2	32.4	---	---	5
I	3835.4	S	426093	7023426	2.1	15.1	24.2	98.4	3.6	12.0	---	---	0
J	3819.7	S	426114	7023748	3.4	10.8	43.2	132.2	4.4	16.5	---	---	0
K	3812.2	S?	426115	7023938	3.8	6.7	57.1	166.5	5.8	24.5	---	---	0
L	3766.5	B	426114	7025132	165.2	261.2	876.4	920.8	56.9	273.8	---	---	0
M	3757.2	B	426119	7025287	70.5	142.4	295.2	480.5	20.9	90.7	---	---	4
N	3750.1	B	426127	7025378	7.8	60.1	56.9	164.7	4.7	20.7	---	---	7
O	3743.6	B	426128	7025448	6.1	18.3	3.8	284.7	1.3	32.0	---	---	0
P	3733.0	B	426132	7025539	3.6	4.2	61.5	138.6	3.5	17.1	---	---	0
Q	3701.3	B	426165	7025813	5.6	20.9	49.2	112.3	5.9	16.7	---	---	6
R	3693.6	B	426149	7025947	14.7	39.6	70.5	182.1	0.8	26.9	---	---	0
S	3659.4	B	426144	7026368	21.7	101.9	35.4	561.3	3.5	62.9	0.4	7	18
T	3644.1	S?	426153	7026466	0.0	0.0	18.2	0.0	15.7	0.0	---	---	0
U	3619.5	B	426165	7026645	3.5	15.3	64.0	133.5	8.9	16.5	---	---	0
V	3593.4	B	426163	7027112	621.5	240.4	3170.9	937.8	1501.1	1034.1	---	---	0
W	3566.9	B	426194	7027391	27.8	36.0	245.5	361.2	134.7	116.0	---	---	25
X	3552.6	B	426200	7027492	33.5	17.4	118.8	81.9	20.5	30.5	---	---	0
Y	3544.9	B	426203	7027594	0.9	24.0	0.0	27.6	2.6	0.0	---	---	48
Z	3535.0	B	426201	7027818	49.8	25.7	423.3	298.7	145.4	147.2	4.7	14	62
AA	3529.9	B	426205	7027957	55.5	68.7	423.3	366.5	145.4	146.4	---	---	75
AB	3521.0	D	426197	7028175	16.8	46.4	53.4	132.4	0.0	19.7	---	---	0
AC	3517.2	B	426196	7028263	0.0	7.5	570.1	325.0	228.0	190.7	---	---	19
AD	3515.1	D	426196	7028320	145.7	65.7	570.1	325.0	228.0	190.7	---	---	8
AE	3502.6	D	426213	7028672	54.2	70.4	99.1	233.1	12.2	38.9	---	---	31
AF	3484.5	H	426235	7029307	7.0	27.8	66.6	197.3	1.2	25.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	5500 HZ Quad ppm	CP 7200 HZ Real ppm	7200 HZ Quad ppm	CP 900 HZ Real ppm	900 HZ Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	30870		FLIGHT	30									
AG	3464.8	B	426259	7029969	13.0	24.6	166.7	119.7	16.3	50.2	---	---	8
AH	3460.1	B	426260	7030093	21.0	19.4	166.7	168.4	22.9	45.7	---	---	10
AI	3457.2	B	426259	7030166	15.8	20.3	104.9	168.4	23.1	43.3	---	---	10
AJ	3450.4	D	426261	7030334	36.6	24.9	185.2	159.5	34.9	52.8	---	---	0
AK	3437.8	B	426275	7030682	28.4	44.0	184.6	229.1	17.6	53.8	---	---	0
AL	3432.1	B	426286	7030860	21.1	33.0	72.1	130.3	17.1	31.4	---	---	0
AM	3419.0	B	426295	7031266	4.6	15.8	34.6	74.7	3.0	11.6	---	---	0
AN	3399.7	B	426321	7031820	15.9	20.3	51.6	64.2	6.4	16.6	---	---	1
AO	3393.9	B	426323	7032007	34.1	51.2	191.2	258.6	8.1	51.7	---	---	1
AP	3392.0	B	426322	7032075	36.9	56.3	191.2	258.6	8.1	51.7	---	---	0
AQ	3384.7	B	426321	7032367	0.0	3.7	33.2	13.5	0.0	0.0	---	---	2
AR	3382.3	D	426324	7032467	26.4	23.5	33.2	310.3	10.3	67.6	---	---	9
AS	3379.2	B	426331	7032598	27.3	57.4	181.2	310.3	26.3	67.6	---	---	8
AT	3377.2	B	426336	7032680	27.3	58.1	181.2	310.3	26.3	67.6	---	---	0
AU	3368.0	B	426342	7033059	17.9	16.1	85.1	179.9	24.7	36.8	1.7	17	2
AV	3359.9	D	426355	7033408	27.7	33.0	114.8	116.5	14.1	30.2	---	---	0
AW	3355.6	D	426360	7033595	23.1	27.0	75.3	85.7	10.0	26.6	1.4	12	18
AX	3352.3	B	426360	7033739	7.9	11.9	54.6	89.5	0.7	16.3	0.7	27	16
AY	3348.0	S	426361	7033928	2.6	14.8	15.2	88.9	2.1	12.8	-0.2	4	26
AZ	3177.0	S?	426494	7037925	2.7	7.5	30.8	52.9	1.3	8.1	---	---	0
BA	3168.5	B?	426479	7038272	6.1	13.9	33.1	79.4	2.8	11.7	---	---	5
BB	2840.7	B	426690	7045379	17.2	12.3	98.8	54.5	16.0	31.0	---	---	0
BC	2831.4	B	426679	7045693	84.6	41.2	436.2	197.5	149.8	146.3	---	---	0
BD	2824.7	B	426704	7045903	19.6	87.9	278.6	424.3	54.0	99.5	---	---	0
BE	2822.1	B	426705	7045979	66.4	72.8	273.9	424.3	54.0	99.5	---	---	26
BF	2810.9	B	426694	7046229	12.3	26.9	114.6	95.7	23.4	36.7	---	---	76
BG	2806.6	B	426700	7046289	24.4	33.3	114.6	95.7	23.4	36.7	---	---	0
BH	2785.0	B	426723	7046554	9.7	7.7	53.3	46.5	13.6	17.7	---	---	0
BI	2751.6	B?	426717	7047041	2.2	5.0	0.0	0.4	1.4	0.5	---	---	0
BJ	2736.1	B?	426722	7047135	5.6	18.6	48.1	154.9	1.6	21.5	---	---	0
BK	2724.3	B?	426719	7047228	5.9	23.8	16.4	36.5	1.8	2.0	---	---	0
BL	2702.1	D	426722	7047377	14.8	18.9	78.6	80.5	20.2	29.0	---	---	0
BM	2685.1	B	426713	7047510	5.3	9.9	0.0	207.2	0.1	0.0	---	---	0
BN	2671.7	B	426723	7047614	47.8	60.3	300.0	337.6	28.9	88.2	---	---	15
BO	2661.7	B	426745	7047727	9.5	8.1	35.1	10.9	10.1	10.0	---	---	0
BP	2655.1	B	426749	7047815	23.1	17.1	185.9	137.3	20.8	55.2	---	---	0
BQ	2646.5	B	426752	7048019	15.9	6.8	131.1	5.2	51.4	45.0	4.1	26	0
BR	2637.0	B	426774	7048351	8.4	36.6	0.0	293.0	0.3	0.0	---	---	70

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30870		FLIGHT	30									
BS	2627.7	B	426778	7048721	102.8	88.1	388.9	354.2	59.4	128.1	---	---	0
BT	2625.9	B	426774	7048791	67.8	66.5	388.9	354.2	59.4	128.1	---	---	0
BU	2617.1	D	426770	7049088	46.7	30.9	55.8	75.7	13.5	20.8	---	---	0
BV	2605.9	B	426813	7049373	57.3	52.3	192.2	168.5	36.8	59.3	---	---	0
LINE	30880		FLIGHT	30									
A	1312.4	B	426600	7027333	12.4	86.6	330.6	421.2	1152.7	390.5	---	---	0
B	1331.2	B	426594	7027798	12.7	26.0	70.2	148.1	7.6	24.3	---	---	0
C	1341.1	B	426610	7028031	296.4	120.3	1158.1	407.0	570.4	372.8	---	---	0
D	1347.9	B	426610	7028168	648.6	311.6	2255.4	795.8	1033.7	676.8	---	---	21
E	1358.5	D	426618	7028426	72.6	41.6	313.3	125.3	125.6	130.1	---	---	0
F	1360.8	B	426622	7028483	90.6	68.3	406.8	208.3	125.6	158.6	---	---	0
G	1363.2	B	426625	7028544	54.8	30.7	406.8	208.3	119.7	158.6	---	---	0
H	1368.1	D	426627	7028663	176.7	169.1	840.2	674.4	135.1	270.5	---	---	73
I	1378.1	B	426628	7028940	21.3	9.2	26.0	35.5	15.9	11.6	---	---	0
J	1394.7	B	426639	7029539	4.2	28.5	22.4	129.5	1.6	14.9	---	---	0
K	1411.8	B	426636	7030012	19.0	28.7	147.1	240.0	8.1	45.8	---	---	0
L	1429.5	D	426655	7030478	33.7	41.5	217.3	213.8	25.1	68.2	---	---	0
M	1432.6	D	426660	7030569	36.5	39.9	277.0	300.6	69.7	89.3	---	---	0
N	1437.9	B	426672	7030733	55.2	52.3	420.5	427.2	69.7	131.1	---	---	2
O	1441.0	B	426683	7030838	46.8	50.2	420.5	427.2	69.7	131.1	---	---	0
P	1445.8	D	426698	7031011	38.0	36.3	74.4	233.0	13.2	36.8	---	---	79
Q	1468.8	B	426710	7031798	22.3	26.6	95.5	86.8	6.9	19.5	---	---	0
R	1477.3	B	426716	7032055	16.5	21.0	36.0	75.1	5.5	4.3	---	---	0
S	1484.6	D	426730	7032313	13.5	2.4	23.2	103.3	2.2	9.4	---	---	7
T	1487.3	D	426731	7032415	11.2	25.6	34.3	103.3	2.5	15.7	---	---	7
U	1490.0	D	426731	7032518	10.2	27.8	43.5	103.3	7.0	16.2	---	---	1
V	1500.7	B	426749	7032949	7.5	15.1	50.2	78.6	17.7	13.1	---	---	0
W	1503.6	B	426755	7033072	7.2	12.1	50.2	78.6	7.7	13.1	---	---	0
X	1509.0	D	426761	7033310	32.5	0.0	142.2	26.2	39.0	43.3	---	---	4
Y	1516.1	B	426763	7033621	42.1	42.6	77.6	152.8	5.0	26.8	---	---	0
Z	1523.9	D	426761	7033944	26.2	27.0	75.9	160.9	3.6	26.8	1.6	16	29
AA	1568.3	S	426815	7035408	1.7	6.1	2.5	27.0	0.7	3.3	-0.2	15	1
AB	1621.6	S	426853	7036149	1.5	5.8	1.8	20.0	0.8	2.4	-0.2	14	0
AC	1671.6	S	426823	7037159	1.8	7.8	5.0	33.2	1.4	4.1	-0.2	16	9
AD	1709.9	S?	426893	7038156	1.9	9.4	30.6	78.2	2.5	13.2	---	---	12
AE	1750.0	B?	426897	7038918	2.2	1.0	30.1	11.5	7.8	10.2	---	---	17
AF	2207.6	B	427081	7045320	5.6	19.4	31.7	118.5	4.0	15.2	---	---	16

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	30880		FLIGHT	30									
AG	2212.0	B	427086	7045383	3.1	7.9	31.7	118.5	3.1	15.2	0.3	18	0
AH	2236.4	B	427102	7045673	272.3	217.8	833.6	440.3	230.9	280.6	---	---	23
AI	2252.6	B	427079	7045934	38.7	80.1	119.5	339.1	15.1	54.5	---	---	40
AJ	2267.9	B	427103	7046155	3.1	5.1	7.3	0.0	0.9	0.3	---	---	0
AK	2282.2	S?	427116	7046392	3.2	11.8	26.2	70.8	1.8	9.0	---	---	0
AL	2301.3	B?	427131	7046568	3.5	17.6	32.9	53.6	3.7	10.6	---	---	0
AM	2312.6	B?	427114	7046681	19.3	44.8	181.3	322.6	5.1	53.1	---	---	0
AN	2392.2	D	427119	7047333	69.2	72.9	397.5	496.5	49.5	121.6	---	---	111
AO	2396.5	B	427134	7047421	36.3	93.3	397.5	496.5	49.5	121.6	---	---	93
AP	2402.0	B	427167	7047580	19.9	20.5	232.8	174.8	50.6	74.6	1.5	17	90
AQ	2408.0	B	427177	7047798	13.4	19.9	87.4	157.0	71.4	24.1	---	---	0
AR	2414.3	B	427171	7048032	17.1	9.7	253.1	188.4	71.4	88.6	---	---	47
AS	2416.4	B	427170	7048112	17.7	13.8	253.1	103.1	71.4	88.6	---	---	0
AT	2420.7	B	427169	7048268	42.9	35.2	78.1	103.1	0.0	72.7	---	---	0
AU	2428.7	D	427176	7048545	67.2	32.6	211.2	119.5	33.4	52.6	---	---	0
AV	2434.3	D	427177	7048691	35.2	15.4	183.0	133.7	35.1	59.7	---	---	0
AW	2437.8	B?	427174	7048766	25.8	29.5	183.0	133.7	22.6	59.7	---	---	0
AX	2443.8	D	427175	7048867	49.4	19.7	120.4	91.5	2.2	41.4	---	---	0
AY	2470.8	D	427200	7049196	22.5	19.3	39.5	105.3	3.7	15.5	---	---	0
LINE	30881		FLIGHT	33									
A	4238.3	S	426396	7020519	3.1	11.1	25.0	65.3	2.9	9.1	---	---	0
B	4262.8	S?	426419	7021056	11.8	40.4	97.7	256.2	5.8	41.2	---	---	6
C	4269.5	S	426415	7021201	13.4	37.1	92.6	170.7	4.2	33.4	---	---	0
D	4287.6	B?	426445	7021734	2.8	5.5	1.1	0.0	2.3	0.2	---	---	0
E	4293.6	H	426450	7021862	7.1	27.8	65.6	174.1	4.5	28.3	---	---	0
F	4324.3	S	426451	7022438	3.0	8.5	23.8	47.1	1.0	7.7	---	---	0
G	4396.4	S	426479	7023249	1.6	5.3	25.4	72.4	1.5	12.1	---	---	1
H	4419.1	S	426487	7023594	4.8	12.9	44.8	82.2	2.4	15.1	---	---	4
I	4479.4	S?	426510	7024195	1.8	13.8	13.0	41.4	1.7	7.0	---	---	15
J	4510.9	S	426513	7024704	0.8	14.9	52.9	100.2	4.5	15.5	---	---	0
K	4533.8	B	426537	7024999	15.9	27.8	65.7	120.6	3.4	17.0	---	---	0
L	4554.2	B	426538	7025207	97.2	289.1	934.0	1900.4	71.6	325.3	---	---	0
M	4571.7	B	426543	7025463	87.3	94.8	592.6	540.1	97.5	218.8	---	---	0
N	4592.0	B	426550	7025854	4.6	4.2	43.3	41.5	4.6	13.2	1.1	38	0
O	4607.1	B	426558	7026008	3.6	7.1	31.9	64.3	3.3	10.7	---	---	3
P	4628.5	S?	426564	7026287	1.1	7.5	1.5	36.1	1.6	3.6	---	---	10
Q	4659.8	B?	426565	7026541	10.7	45.3	88.2	272.9	3.0	41.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE 30881			FLIGHT 33										
R	4673.5	B	426571	7026683	3.1	48.6	71.4	416.7	2.3	52.5	---	---	0
S	4681.8	B	426576	7026801	10.9	32.9	11.8	83.6	3.5	6.2	---	---	23
T	4688.5	B	426590	7026924	17.3	44.0	24.2	77.4	5.5	12.0	---	---	55
U	4701.3	B	426590	7027217	171.3	61.2	1420.5	452.0	648.6	462.7	---	---	0
V	4705.5	B	426593	7027306	107.9	64.0	1420.5	504.2	648.6	462.7	---	---	0
W	4709.9	B	426595	7027381	265.8	111.4	924.5	504.2	426.0	304.0	---	---	67
X	4723.1	B	426601	7027624	10.1	20.0	69.6	158.3	3.0	17.1	---	---	0
Y	4737.7	B	426599	7027942	106.8	12.8	442.8	21.0	257.2	140.9	---	---	178
Z	4742.9	B	426596	7028032	36.1	18.1	490.7	140.9	331.3	140.0	---	---	0
AA	4748.3	B	426603	7028120	23.8	38.2	1105.7	435.0	331.3	365.5	---	---	0
AB	4753.2	B	426611	7028203	273.5	121.1	1105.7	435.0	599.0	365.5	---	---	0
AC	4765.1	D	426625	7028431	64.6	27.3	218.0	88.1	84.8	97.5	---	---	0
AD	4767.6	B	426624	7028486	45.6	34.1	238.2	111.8	84.8	97.5	---	---	0
LINE 39010			FLIGHT 23										
A	1220.0	S	423161	7047444	0.5	10.3	2.4	90.8	0.8	6.9	---	---	14
B	1212.0	B	423476	7047428	7.2	6.8	53.2	47.4	3.3	10.8	---	---	0
C	1202.8	B	423851	7047423	15.1	13.5	172.8	139.1	63.7	56.1	---	---	0
D	1199.4	B	423982	7047418	9.1	11.0	171.7	139.1	63.7	55.0	---	---	1
E	1157.6	B	425728	7047358	5.6	7.1	45.5	22.1	9.6	14.9	---	---	0
F	1134.6	B?	426270	7047358	2.9	6.5	16.1	11.8	2.7	4.3	---	---	0
G	1077.4	B?	426604	7047341	8.3	6.1	9.0	37.5	0.1	0.0	---	---	0
H	1054.9	B	426747	7047338	4.9	3.7	5.2	0.0	1.1	2.8	---	---	0
LINE 39020			FLIGHT 10										
A	3003.7	D	413158	7042855	21.9	18.3	74.7	63.2	11.3	26.2	---	---	0
B	3058.7	B	413520	7042861	8.7	1.7	57.9	15.5	53.5	3.7	---	---	0
C	3081.7	B	413581	7042866	4.8	2.5	20.7	7.0	19.9	1.3	---	---	0
D	3119.7	B	413662	7042855	3.4	10.9	9.1	20.0	3.6	6.2	---	---	0
E	3126.0	B	413677	7042854	3.4	4.2	11.2	25.6	4.0	7.8	0.7	25	0
F	3152.0	B	413782	7042859	3.5	1.9	11.0	10.6	7.8	3.8	---	---	0
G	3290.3	B	414559	7042816	7.1	13.0	50.2	70.6	9.5	20.5	---	---	0
H	3307.9	B	414939	7042836	16.5	19.6	96.9	121.1	11.8	28.6	---	---	1
I	3320.9	B	415216	7042828	14.5	11.7	74.9	25.4	22.8	28.1	---	---	0
J	3328.3	B	415344	7042825	37.7	29.6	69.0	60.5	11.6	16.3	---	---	0
K	3353.1	B	415929	7042805	5.9	16.2	125.4	241.9	1.3	42.2	---	---	0
L	3357.7	B	416058	7042801	8.6	32.5	159.4	241.9	11.5	54.4	---	---	0
M	3364.7	B	416255	7042793	12.0	26.9	159.4	243.6	15.5	54.4	---	---	247

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39020		FLIGHT	10									
N	3371.2	B	416428	7042800	7.2	13.0	159.4	243.6	15.5	54.4	---	---	251
O	3380.2	B	416609	7042799	15.0	27.0	104.0	150.8	9.8	36.1	---	---	159
P	3447.7	B	416969	7042778	3.9	8.2	9.1	2.8	5.5	3.8	---	---	11
Q	3521.2	B	417319	7042763	17.0	30.6	262.8	330.3	21.0	87.6	---	---	0
R	3529.6	B	417418	7042767	10.7	29.6	262.8	330.3	21.0	87.6	---	---	141
S	3560.0	B	418146	7042748	14.0	12.3	98.6	42.2	24.5	36.6	---	---	8
T	3580.7	B	418507	7042736	10.2	7.5	28.7	28.0	23.7	23.3	---	---	0
U	3591.3	B	418565	7042731	5.4	1.4	100.1	98.1	15.1	34.0	---	---	3
V	3600.0	B	418605	7042731	14.4	23.4	100.1	98.1	15.1	34.0	---	---	2
W	3611.4	B	418648	7042728	14.4	24.9	120.3	130.0	15.2	40.0	---	---	2
X	3625.6	B	418702	7042729	13.3	21.3	49.9	88.6	13.2	18.1	---	---	4
Y	3648.8	B?	418808	7042723	7.8	9.3	103.5	166.7	11.9	33.8	---	---	0
Z	3659.8	B	418852	7042722	1.6	13.4	67.4	161.1	7.7	27.4	---	---	0
AA	3727.9	B	419246	7042692	46.4	79.5	421.6	487.2	46.6	133.7	---	---	0
AB	3744.3	B	419431	7042697	4.3	5.4	88.2	56.0	7.4	24.9	---	---	0
LINE	39030		FLIGHT	10									
A	2575.7	B	411825	7038083	5.7	7.9	68.2	125.9	1.3	23.8	---	---	0
B	2570.1	B	411968	7038084	10.2	25.9	36.4	87.9	1.9	13.5	---	---	2
C	2544.2	D	412622	7038062	9.7	11.9	65.1	68.3	3.3	17.2	---	---	1
D	2522.3	B	413231	7038057	9.2	6.3	103.4	111.6	26.9	39.2	---	---	2
E	2517.5	D	413369	7038042	31.2	29.4	281.5	250.7	28.6	94.2	---	---	0
F	2509.9	D	413564	7038020	105.1	75.0	344.3	394.6	89.5	129.7	---	---	2
G	2501.0	B	413770	7037998	6.5	13.4	85.3	193.2	32.3	33.7	0.5	12	0
H	2475.0	B	414365	7037991	11.1	9.7	44.6	66.4	3.1	11.6	1.5	15	0
I	2462.2	B	414695	7037979	20.8	16.4	172.6	52.2	137.9	78.1	---	---	0
J	2454.5	B	414860	7037981	15.9	17.3	165.6	103.1	82.1	52.9	---	---	0
K	2439.4	B	415203	7037978	11.3	17.8	142.1	93.2	47.7	54.1	---	---	0
L	2434.4	B	415342	7037982	36.1	29.4	164.6	84.7	46.5	70.4	---	---	0
M	2430.0	B	415472	7037984	17.1	9.2	131.0	84.7	45.9	52.9	---	---	0
N	2410.8	B	415962	7037967	47.4	10.7	396.0	49.1	355.3	73.3	---	---	0
O	2407.1	B	416059	7037972	14.5	0.0	0.0	5.1	261.3	0.0	---	---	0
P	2403.1	B	416157	7037970	14.0	35.2	72.4	272.4	56.6	20.2	---	---	0
Q	2392.8	B	416400	7037965	50.0	4.6	315.0	0.0	294.2	123.5	---	---	0
R	2383.0	B	416656	7037956	31.2	30.6	291.6	303.1	127.8	81.3	---	---	0
S	2365.2	B	417232	7037939	23.5	24.1	258.9	347.6	11.8	77.7	---	---	0
T	2362.0	B	417344	7037935	7.4	40.4	258.9	334.2	11.8	77.7	0.2	0	0
U	2355.4	B	417562	7037932	40.5	23.3	216.2	41.7	59.5	75.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	39030		FLIGHT	10									
V	2347.4	B	417782	7037925	24.1	15.1	72.7	96.9	2.9	7.8	---	---	0
W	2342.0	B	417900	7037929	1.9	11.9	302.4	197.5	38.9	92.3	---	---	0
X	2338.5	B	417968	7037930	47.5	19.8	302.4	166.1	38.9	92.3	---	---	0
Y	2321.4	B	418268	7037912	9.7	16.1	114.5	229.4	20.7	43.5	---	---	0
Z	2273.8	B	419582	7037871	2.2	10.0	16.2	56.6	4.0	9.4	---	---	0
AA	2174.0	B	422767	7037777	6.1	10.7	92.3	121.5	6.6	29.8	---	---	0
AB	2126.0	S	424578	7037730	0.9	2.0	7.8	33.9	1.9	5.8	---	---	1
AC	2076.0	S	426385	7037663	0.6	0.0	6.7	37.3	2.0	5.5	---	---	0
LINE	39040		FLIGHT	10									
A	5902.2	S	401828	7033531	2.5	11.7	30.1	135.5	3.2	17.5	---	---	1
B	5862.0	S	403288	7033501	3.7	10.6	2.8	32.0	0.0	3.3	---	---	3
C	5855.7	S	403533	7033491	2.1	12.8	21.1	43.1	1.3	8.0	---	---	0
D	5838.2	S	404179	7033473	2.6	10.7	21.3	76.2	1.7	12.9	---	---	1
E	5801.9	L	405174	7033469	33.9	17.0	78.9	58.0	19.7	25.9	---	---	0
F	5771.6	S	406153	7033379	9.2	40.0	56.3	275.1	111.1	84.7	---	---	0
G	5762.4	L	406370	7033378	28.5	19.6	11.0	68.1	70.0	5.3	---	---	0
H	5747.9	S	406639	7033383	2.2	12.6	70.4	259.4	23.5	55.4	---	---	0
I	5708.7	S	407153	7033393	1.9	9.8	16.2	60.1	5.1	13.4	---	---	0
J	5679.5	S	407602	7033369	1.1	6.0	12.1	51.0	2.2	6.0	---	---	0
K	5652.9	S	408169	7033338	1.8	6.8	29.0	68.4	11.8	14.0	---	---	0
L	5636.9	L	408489	7033357	2.7	1.5	106.6	82.2	46.0	47.8	---	---	0
M	5550.0	S	410185	7033302	0.6	3.9	2.5	14.5	0.2	2.2	---	---	3
N	5509.8	M	411062	7033284	0.5	3.0	0.2	14.4	0.2	3.7	---	---	135
O	5410.0	S	412753	7033246	1.1	3.5	4.9	23.5	1.3	3.4	---	---	2
P	5380.0	S	413181	7033225	2.1	3.6	20.1	32.8	2.4	8.5	---	---	0
Q	5327.1	B	414156	7033199	16.3	12.4	130.4	86.4	26.8	41.1	---	---	0
R	5305.7	B	414723	7033187	7.3	4.7	23.8	16.4	5.2	12.1	---	---	0
S	5293.9	B	415007	7033182	4.3	17.9	76.6	104.5	0.0	23.0	---	---	0
T	5288.3	B	415129	7033167	8.9	18.8	17.8	104.5	21.0	5.2	---	---	0
U	5278.1	B	415333	7033155	41.9	49.9	221.0	148.3	90.1	83.6	---	---	12
V	5270.9	B	415496	7033141	42.5	38.6	353.3	268.6	16.5	103.1	---	---	11
W	5266.5	B	415608	7033137	20.1	22.3	420.6	412.7	64.8	129.6	---	---	0
X	5263.6	B	415685	7033146	17.4	15.2	420.6	412.7	64.8	129.6	---	---	0
Y	5259.9	B	415777	7033160	22.2	21.0	77.8	412.7	14.1	23.6	---	---	6
Z	5201.3	S	416516	7033130	0.7	4.3	7.9	49.9	0.6	5.9	---	---	0
AA	5166.0	B	417140	7033102	9.4	8.1	74.9	63.5	40.3	28.0	1.4	19	0
AB	5159.4	B	417362	7033099	5.3	12.5	84.6	94.5	38.4	19.6	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39040		FLIGHT	10									
AC	5157.1	B	417442	7033097	11.5	19.5	84.6	94.5	35.5	19.6	---	---	0
AD	5150.1	B	417687	7033088	6.1	10.8	0.0	13.8	5.7	1.4	---	---	36
AE	5143.6	B	417914	7033090	18.6	40.7	86.7	227.4	4.1	34.4	---	---	0
AF	5140.8	B	418005	7033090	15.8	41.8	86.7	227.4	1.6	34.4	---	---	0
AG	5132.2	S?	418249	7033075	5.9	8.5	17.4	53.8	1.3	7.1	---	---	0
AH	5114.8	S	418662	7033072	3.3	10.4	31.2	58.3	0.7	8.8	---	---	3
AI	5106.6	S	418838	7033057	4.0	14.1	36.2	79.9	3.1	12.3	---	---	0
AJ	5064.4	S?	419484	7033050	2.1	15.0	17.1	84.0	1.0	12.4	---	---	5
AK	5050.1	B?	419737	7033039	2.7	8.9	1.5	21.5	0.6	3.1	---	---	0
AL	5038.1	B?	420034	7033033	3.9	8.6	11.2	24.6	0.3	2.8	---	---	0
AM	5012.6	B?	420811	7033020	16.4	10.1	103.5	79.9	10.0	32.8	---	---	0
AN	4981.7	S	422068	7032980	2.0	9.8	9.7	69.4	1.4	8.7	-0.2	3	0
AO	4962.3	S	422840	7032949	2.6	13.0	18.6	42.2	1.6	6.4	-0.2	8	2
AP	4946.7	S	423447	7032938	4.5	16.9	21.3	105.4	0.5	14.0	0.3	4	2
AQ	4931.3	S	424028	7032918	5.7	16.7	4.4	36.6	1.3	3.4	0.4	5	16
AR	4899.4	D	425113	7032872	16.0	18.3	64.8	38.8	3.9	12.7	---	---	7
AS	4889.5	B?	425445	7032875	25.9	16.5	162.4	51.7	53.1	65.6	2.9	0	0
AT	4849.6	S?	426764	7032892	4.0	14.2	52.5	175.8	5.1	29.4	---	---	0
LINE	39050		FLIGHT	10									
A	551.4	S?	396487	7028803	2.3	5.8	24.3	110.3	2.3	15.8	---	---	29
B	625.3	H	397279	7028850	3.8	6.7	56.3	122.1	3.4	25.8	---	---	0
C	643.1	H	397871	7028829	9.7	12.2	66.7	97.0	5.6	22.5	---	---	0
D	676.0	L	399107	7028784	27.5	25.8	61.1	129.8	12.0	26.7	---	---	0
E	684.9	S	399476	7028770	2.9	11.0	30.0	110.6	3.1	13.0	---	---	11
F	696.8	S	399975	7028764	3.9	18.8	43.0	151.1	3.4	21.9	---	---	0
G	739.5	S	401786	7028753	0.0	5.5	9.2	69.9	0.0	9.3	---	---	9
H	750.7	S	402278	7028685	4.5	33.1	33.9	222.3	2.8	26.2	---	---	6
I	763.2	S?	402817	7028681	3.0	18.4	23.1	108.1	6.0	13.9	---	---	0
J	779.2	S	403516	7028679	9.3	18.9	66.6	74.8	5.2	17.6	---	---	8
K	815.8	S	405145	7028619	2.2	11.4	20.2	109.0	2.6	14.7	---	---	5
L	832.3	L	405787	7028584	0.0	0.8	37.6	71.4	16.9	12.5	-0.1	0	0
M	872.3	L?	407224	7028661	6.1	4.1	35.1	20.8	18.3	13.2	---	---	0
N	875.8	L?	407362	7028681	26.5	8.3	35.1	23.2	18.3	7.4	---	---	0
O	889.8	L	407916	7028737	1.5	0.1	7.6	28.7	54.4	12.5	---	---	0
P	915.8	B	408825	7028471	4.8	10.3	44.2	87.2	5.6	14.7	---	---	0
Q	934.7	B	409434	7028484	4.6	8.8	16.6	35.9	7.0	7.6	---	---	0
R	947.5	B	409881	7028484	4.2	7.9	26.9	114.1	1.5	18.1	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39050		FLIGHT	10									
S	956.7	B	410221	7028474	12.3	13.6	89.8	112.1	5.5	40.4	---	---	30
T	982.8	S	411271	7028451	0.9	7.9	9.3	62.6	0.5	9.0	---	---	3
U	1020.0	H	412908	7028401	1.8	4.4	42.4	46.1	7.6	16.2	---	---	1
V	1038.5	H	413715	7028381	4.4	3.5	32.9	105.4	0.1	11.8	---	---	0
W	1078.3	B	415390	7028337	1.8	5.8	34.1	68.9	4.3	17.0	---	---	0
X	1097.8	B	416207	7028310	2.1	9.3	53.7	78.8	4.9	18.4	---	---	2
Y	1109.6	S	416699	7028296	8.3	33.7	30.2	157.8	6.4	17.7	---	---	2
Z	1118.8	B	417080	7028285	3.7	16.7	53.1	134.9	6.4	24.9	---	---	1
AA	1141.0	B	418004	7028263	4.9	12.6	57.0	121.6	5.1	19.0	---	---	1
AB	1150.6	B	418408	7028246	4.3	13.6	31.7	79.0	4.7	14.9	---	---	0
AC	1175.5	B	419494	7028231	4.2	13.4	16.9	80.6	0.4	9.0	---	---	2
AD	1208.6	B	420895	7028181	9.6	12.1	60.4	55.9	8.6	20.1	---	---	0
AE	1211.5	B	421011	7028180	1.7	6.3	60.4	48.4	23.6	20.1	---	---	0
AF	1218.2	B	421273	7028181	22.7	16.8	145.4	106.4	51.0	62.4	---	---	0
AG	1238.9	B	421889	7028148	2.3	6.6	8.8	48.2	1.7	7.5	---	---	0
AH	1312.5	B	422834	7028120	71.8	29.2	20.0	82.8	0.0	3.1	---	---	46
AI	1332.4	B	423085	7028109	145.5	133.2	1927.1	691.8	845.1	749.4	---	---	0
AJ	1357.9	B	423401	7028109	16.7	7.1	121.7	23.0	85.3	37.8	---	---	0
AK	1380.8	B	423755	7028102	4.6	8.0	20.4	25.1	16.6	7.1	---	---	0
AL	1438.0	B	424305	7028094	12.3	48.6	411.0	513.4	13.3	125.9	---	---	5
AM	1458.4	B	424411	7028088	7.1	16.0	0.4	0.0	1.3	0.0	---	---	0
AN	1468.5	B	424508	7028082	11.9	28.7	0.0	118.3	10.9	8.3	---	---	0
AO	1481.5	D	424683	7028070	209.7	172.0	359.4	566.6	52.8	231.0	---	---	0
AP	1493.3	D	424932	7028070	45.7	38.8	273.2	315.0	25.4	82.6	---	---	2
AQ	1562.4	B	426442	7028038	1.6	11.6	129.2	27.6	57.9	43.2	---	---	0
AR	1578.1	B	426663	7028024	242.7	82.7	1914.6	941.6	686.0	888.2	---	---	140
LINE	39060		FLIGHT	26									
A	3535.3	H	396331	7024014	34.9	45.1	247.3	293.8	29.9	71.5	---	---	0
B	3499.9	B	397742	7023984	12.6	28.6	196.1	283.7	121.6	62.0	---	---	0
C	3496.6	B	397870	7023978	9.4	26.6	196.1	286.2	121.6	62.0	---	---	0
D	3481.6	M	398426	7023972	2.7	20.6	106.1	398.8	143.7	128.8	---	---	1104
E	3465.5	L	398864	7023975	2.3	2.2	47.0	30.1	74.2	28.7	---	---	0
F	3459.6	L	399024	7023962	10.5	0.0	72.0	0.2	26.0	11.8	---	---	0
G	3435.7	H	399831	7023923	15.7	27.9	119.4	229.1	7.9	40.2	---	---	0
H	3401.2	B	401187	7023890	9.7	4.1	53.5	16.5	12.8	9.1	---	---	113
I	3388.5	B	401760	7023868	7.5	6.5	45.3	44.1	37.7	16.2	---	---	0
J	3377.6	B	402238	7023848	97.5	34.2	487.4	108.6	288.7	150.8	---	---	5

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39060		FLIGHT	26									
K	3343.2	B	403660	7023809	6.8	6.5	59.4	57.0	7.8	18.4	---	---	0
L	3327.7	B	404308	7023797	5.9	16.5	28.0	73.4	3.5	11.6	---	---	0
M	3290.5	B	405074	7023779	10.6	33.5	82.1	226.6	7.4	36.3	---	---	0
N	3272.7	B	405272	7023780	5.3	13.3	17.9	2.2	1.1	5.3	---	---	0
O	3234.4	B	405629	7023767	27.5	53.0	77.6	165.0	8.6	26.3	---	---	0
P	3209.8	B?	405838	7023753	12.1	29.8	77.7	135.3	8.4	27.5	---	---	0
Q	3138.9	B	406469	7023758	3.5	44.4	31.2	107.4	8.0	11.5	---	---	0
R	3129.2	B	406564	7023743	14.1	21.6	35.1	117.1	4.2	17.0	---	---	0
S	3114.5	B	406712	7023728	12.7	26.6	29.7	80.1	4.0	12.7	---	---	0
T	3086.0	B	406968	7023727	4.3	60.5	41.4	303.5	4.1	37.2	---	---	0
U	3047.9	B	407243	7023713	6.3	17.5	74.9	162.7	9.2	30.6	---	---	0
V	3020.5	B	407571	7023734	3.2	9.1	24.5	45.4	2.1	7.0	---	---	0
W	2995.1	B	407872	7023734	3.6	7.4	11.0	29.6	0.8	0.4	---	---	0
X	2985.5	B	407965	7023720	3.6	8.0	13.1	29.6	1.4	4.9	---	---	10
Y	2903.9	B	408471	7023690	12.6	24.9	181.5	260.1	15.4	52.7	---	---	43
Z	2890.1	B	408633	7023689	25.5	37.7	187.2	234.2	15.9	58.3	---	---	0
AA	2768.0	B	409776	7023660	4.6	9.1	54.5	66.9	12.8	18.2	0.5	27	39
AB	2756.0	B	410016	7023643	4.6	7.3	43.0	48.6	10.5	18.4	0.6	31	0
AC	2742.2	B	410272	7023643	10.9	15.5	42.6	35.6	13.5	10.9	---	---	0
AD	2723.6	B	410599	7023630	16.8	21.8	199.2	184.2	16.8	53.2	---	---	0
AE	2720.0	B	410653	7023626	6.0	13.6	199.2	184.2	16.8	53.2	---	---	0
AF	2713.4	B	410747	7023621	14.2	47.5	154.3	243.8	20.3	37.3	---	---	43
AG	2705.8	B	410834	7023619	12.3	22.3	154.3	365.6	20.3	37.3	---	---	0
AH	2694.5	B	410939	7023613	28.6	64.8	251.1	355.2	29.7	79.0	---	---	0
AI	2663.2	B	411489	7023605	45.7	48.8	188.7	229.3	18.3	53.1	---	---	23
AJ	2647.6	B	411683	7023604	8.8	25.6	45.5	153.4	4.7	26.9	---	---	0
AK	2631.7	B	411805	7023592	11.2	21.4	85.8	247.9	0.0	34.1	---	---	0
AL	2596.3	B	412119	7023577	13.3	30.3	175.5	302.4	8.1	52.7	---	---	59
AM	2592.6	B	412162	7023581	28.1	46.3	175.5	302.4	8.1	52.7	---	---	59
AN	2556.3	B	412574	7023578	89.2	43.4	409.8	149.2	176.7	113.9	---	---	0
AO	2536.3	B	412919	7023554	21.1	23.0	15.4	41.6	18.9	34.8	---	---	0
AP	2528.0	B	413108	7023545	38.6	30.9	229.0	185.1	30.8	65.5	---	---	0
AQ	2522.5	B	413230	7023537	15.4	17.9	235.1	300.0	32.3	77.5	---	---	0
AR	2517.1	B	413328	7023534	42.3	63.9	235.1	300.0	32.3	77.5	---	---	0
AS	2504.9	B	413510	7023550	16.3	29.3	39.9	64.7	6.0	14.3	---	---	0
AT	2494.0	B	413666	7023533	3.7	0.0	17.9	42.2	0.7	5.0	---	---	0
AU	2484.7	B	413791	7023540	31.6	50.8	68.3	117.8	4.7	20.3	---	---	51
AV	2472.1	B	413942	7023540	15.6	31.9	63.9	134.5	6.6	22.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39060		FLIGHT	26									
AW	2462.5	B	414038	7023540	13.3	26.0	64.1	134.5	4.3	22.2	---	---	10
AX	2438.4	B	414277	7023516	15.8	76.7	118.9	383.8	14.1	61.7	---	---	0
AY	2385.7	B	414789	7023510	17.4	44.4	129.2	231.7	14.5	44.6	---	---	0
AZ	2379.6	B	414863	7023512	32.4	56.5	128.7	161.2	14.5	44.6	---	---	38
BA	2347.1	S?	415318	7023499	4.1	11.7	16.2	46.3	2.1	8.4	---	---	0
BB	2270.1	S	416523	7023460	2.1	9.1	38.8	79.9	2.6	12.0	---	---	2
BC	2219.3	S	417559	7023431	3.4	9.7	10.3	44.6	1.0	6.1	---	---	0
BD	2141.8	S	418329	7023401	4.0	22.5	20.4	106.6	1.5	13.5	---	---	0
BE	2113.8	S	418637	7023401	1.4	9.3	4.2	40.4	0.9	5.4	---	---	2
BF	2089.5	S	418890	7023398	0.7	8.4	7.4	62.8	2.3	8.0	---	---	0
BG	2012.4	S?	419693	7023375	1.9	8.3	5.6	45.4	1.5	7.1	---	---	0
BH	1928.5	S	420721	7023374	3.3	5.4	11.3	24.7	1.7	4.3	---	---	0
BI	1899.2	S	420900	7023348	1.5	6.7	4.4	36.3	0.5	3.7	---	---	0
BJ	1851.3	S	421189	7023340	1.2	5.1	6.9	80.0	0.5	7.5	---	---	0
BK	1763.7	S	422707	7023281	1.0	12.1	10.8	77.2	0.7	10.1	---	---	0
BL	1753.9	B?	422848	7023297	6.3	10.7	10.7	24.4	2.8	1.8	---	---	7
BM	1726.5	S	423271	7023290	1.8	14.6	46.2	62.1	4.1	11.4	---	---	0
BN	1529.1	B	424382	7023240	40.4	68.7	298.0	333.3	51.7	90.9	---	---	58
BO	1523.9	B	424531	7023229	9.9	22.3	281.4	342.2	51.4	100.8	---	---	20
BP	1517.7	B	424709	7023228	46.0	57.0	281.4	345.1	51.4	86.9	---	---	44
BQ	1496.5	B	425416	7023239	98.0	83.5	418.0	342.8	137.6	122.9	3.2	0	13
BR	1480.8	S?	425813	7023217	4.6	31.3	48.1	153.3	6.9	24.6	---	---	6
LINE	39070		FLIGHT	32									
A	1737.5	S	415694	7018657	2.8	6.1	52.7	98.8	3.3	19.0	---	---	0
B	1718.1	B?	416312	7018643	3.5	7.0	27.4	44.2	4.1	8.6	---	---	0
C	1695.7	B?	416953	7018629	10.7	13.4	68.3	51.7	9.1	19.7	---	---	0
D	1681.8	B	417387	7018651	10.5	34.2	227.6	142.6	7.6	63.8	---	---	5
E	1676.8	B	417525	7018644	60.4	79.3	227.6	430.1	6.2	63.8	---	---	0
F	1661.4	B	417879	7018642	1.5	24.2	18.5	130.0	1.4	15.7	---	---	0
G	1648.8	B	418150	7018598	3.4	23.3	14.1	70.0	1.8	8.8	---	---	0
H	1636.0	B	418432	7018561	12.7	31.6	89.4	104.8	8.4	30.1	---	---	31
I	1627.1	B	418643	7018567	22.9	12.4	117.8	136.9	7.3	31.0	---	---	8
J	1618.6	B	418849	7018576	13.1	30.6	99.9	161.5	2.4	29.3	---	---	0
K	1610.1	S?	419032	7018570	1.9	15.2	2.2	52.4	2.3	6.3	---	---	16
L	1600.3	S?	419262	7018563	1.3	13.2	6.9	65.7	0.5	7.7	---	---	22

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39071		FLIGHT	32									
A	2988.9	B	401934	7019024	8.0	10.3	40.0	50.8	5.0	13.9	---	---	0
B	2972.7	B	402057	7019048	11.6	11.7	24.3	38.1	9.0	7.2	---	---	0
C	2962.9	B	402207	7019052	9.3	9.7	62.7	116.7	9.0	16.7	---	---	0
D	2952.7	B	402333	7019031	21.8	46.5	70.5	222.4	4.5	28.2	---	---	4
E	2931.5	B	402492	7019016	20.3	31.2	147.0	259.1	17.7	49.2	---	---	0
F	2923.2	B	402557	7019013	10.9	9.0	190.9	259.1	42.3	59.2	---	---	0
G	2916.6	B	402626	7019014	48.8	50.4	190.9	206.8	42.3	59.2	---	---	0
H	2902.0	B	402846	7019018	38.5	28.6	199.1	153.4	39.5	63.0	---	---	2
I	2853.3	B	403395	7018989	3.5	10.1	36.8	99.0	3.7	15.7	---	---	0
J	2829.5	B	403635	7018999	10.9	30.2	79.8	156.3	7.5	29.3	---	---	0
K	2808.9	B	404050	7018966	6.1	15.5	61.1	75.7	2.6	19.4	---	---	9
L	2802.6	B	404256	7018961	12.2	12.8	119.9	146.0	5.3	32.8	---	---	0
M	2798.2	B	404412	7018960	13.7	20.2	119.9	146.0	4.5	32.8	---	---	11
N	2785.0	B	404888	7018957	6.1	16.9	30.1	71.6	2.3	10.0	---	---	1
O	2779.7	B	405086	7018954	8.4	19.5	52.4	37.9	5.5	11.6	---	---	0
P	2773.5	B	405331	7018948	10.4	14.2	52.4	61.5	5.3	11.6	---	---	0
Q	2763.7	B	405709	7018933	5.1	6.1	22.7	45.4	2.0	6.4	---	---	0
R	2760.1	B	405830	7018935	10.7	10.9	22.7	85.4	1.9	16.3	---	---	7
S	2745.4	B	406279	7018918	6.9	13.0	56.6	114.6	3.9	21.3	---	---	7
T	2720.3	S?	406807	7018891	9.1	15.5	36.3	13.1	3.3	4.8	---	---	2
U	2704.9	S	407103	7018884	4.3	12.4	55.3	95.7	5.1	19.3	---	---	4
V	2682.4	S	407534	7018902	6.0	32.5	43.4	157.6	2.0	22.1	---	---	0
W	2662.1	B?	407778	7018887	6.0	7.5	50.6	73.4	0.0	14.4	---	---	0
X	2654.5	B?	407852	7018887	3.6	12.6	50.6	73.4	2.7	14.4	---	---	3
Y	2621.1	B?	408135	7018853	10.1	9.5	54.3	98.2	9.1	22.0	---	---	0
Z	2606.0	B?	408194	7018824	12.0	26.7	127.0	198.6	11.7	43.2	---	---	0
AA	2583.5	B?	408345	7018851	6.7	6.8	50.8	90.2	7.6	14.7	---	---	0
AB	2571.6	B?	408495	7018873	9.9	19.5	55.7	82.9	7.9	18.6	---	---	2
AC	2545.1	S?	408925	7018856	2.6	23.5	37.2	99.9	0.9	14.5	---	---	0
AD	2526.5	B?	409183	7018840	9.6	16.5	33.7	105.8	5.7	11.4	---	---	0
AE	2512.2	S?	409403	7018852	4.8	11.2	21.3	175.7	4.7	15.2	---	---	3
AF	2494.5	S?	409519	7018837	4.9	19.1	56.4	84.5	6.8	16.3	---	---	0
AG	2478.6	S?	409642	7018815	3.5	18.1	43.5	141.6	2.3	20.8	---	---	0
AH	2451.0	S	410011	7018832	2.8	8.3	21.2	65.0	2.0	9.5	---	---	0
AI	2433.1	S	410277	7018823	1.7	10.5	9.0	57.8	0.8	7.5	---	---	0
AJ	2199.7	S?	412762	7018716	0.9	9.1	2.5	48.7	1.5	4.2	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

## EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	39072		FLIGHT 32										
A	3599.8	L	392561	7019299	1.2	2.0	111.8	159.2	118.9	199.3	-0.3	0	0
B	3547.1	B	394508	7019237	20.9	46.4	131.4	329.3	24.4	66.5	---	---	0
C	3543.8	B	394634	7019226	19.6	36.6	131.4	329.3	24.4	66.5	---	---	0
D	3538.4	B	394844	7019214	11.8	20.0	12.6	75.4	0.0	5.1	---	---	0
E	3533.1	B	395052	7019203	115.1	26.4	593.3	301.2	121.0	200.1	---	---	0
F	3502.0	B	396438	7019190	5.2	0.8	18.5	33.5	13.3	1.5	---	---	2
G	3488.6	B	397017	7019179	36.8	34.6	212.0	191.1	21.4	63.9	---	---	0
H	3486.0	B	397110	7019170	36.6	27.5	212.0	191.1	21.4	63.9	---	---	0
I	3443.1	S	397779	7019139	0.3	6.7	0.3	54.1	1.2	5.2	---	---	0
J	3375.2	B	398871	7019103	27.6	104.4	34.6	305.5	7.2	40.6	---	---	0
K	3366.2	B	398965	7019114	73.5	159.7	212.3	600.0	11.4	85.1	---	---	0
L	3357.4	B	399017	7019110	76.3	251.7	229.9	606.9	16.1	86.6	---	---	0
M	3346.1	B	399075	7019119	18.4	31.2	72.4	250.4	2.3	34.5	---	---	0
N	3321.5	B	399281	7019109	6.0	13.5	16.6	42.7	1.6	6.3	---	---	0
O	3278.2	B	399819	7019115	7.2	5.7	89.2	79.4	7.9	27.3	---	---	0
P	3258.0	B	400307	7019080	14.7	14.3	64.6	65.7	16.8	25.2	1.4	13	0
Q	3248.9	B	400556	7019065	13.7	5.6	66.6	62.9	13.1	12.0	---	---	0
LINE	39080		FLIGHT 11										
A	2644.5	B	391845	7020831	19.2	17.9	62.9	68.2	10.2	14.3	---	---	0
B	2630.0	B	392346	7020964	28.9	33.2	221.0	287.8	198.1	75.0	---	---	0
C	2626.9	B	392453	7020986	9.2	12.2	221.0	6.4	198.1	75.0	---	---	0
D	2616.6	M	392812	7021081	13.7	33.3	70.0	273.2	0.0	38.9	---	---	1359
E	2605.6	S?	393202	7021178	16.0	20.3	109.7	125.7	38.6	35.1	---	---	0
F	2579.2	S	394089	7021406	1.0	12.4	29.8	147.0	10.5	20.6	---	---	0
G	2561.9	B	394659	7021555	8.6	26.1	3.4	151.0	8.7	17.5	---	---	0
H	2556.2	B	394850	7021616	24.2	10.5	146.1	6.1	41.9	61.9	---	---	1065
I	2550.6	B	395041	7021677	11.1	11.3	199.0	83.5	41.9	86.0	---	---	0
J	2501.5	L	396414	7021974	0.2	1.1	51.4	62.0	21.1	41.9	-0.1	0	0
LINE	39090		FLIGHT 11										
A	2213.8	S?	396484	7028715	11.4	33.7	64.0	215.9	45.4	32.6	0.5	7	0
B	2209.6	M	396527	7028735	0.0	10.9	64.0	215.9	45.4	32.6	---	---	38
C	2190.0	M	396725	7028847	0.7	3.1	0.0	16.1	0.0	2.6	---	---	145
D	2173.1	M	396811	7028898	1.1	1.2	8.7	20.8	8.7	4.5	---	---	0
E	2154.1	S	396987	7028990	2.5	10.6	47.6	135.2	7.0	24.0	---	---	12
F	2145.6	B?	397166	7029082	4.7	17.0	29.0	72.3	7.3	11.7	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE 39090			FLIGHT	11									
G	2137.1	B?	397349	7029188	3.4	11.5	22.1	77.1	1.4	11.8	---	---	0
H	2121.2	B	397666	7029367	11.4	27.8	27.7	55.8	2.1	7.6	---	---	0
I	2110.3	B	397819	7029448	2.7	21.3	14.7	121.9	0.0	15.6	---	---	0
J	2079.8	B	398018	7029557	5.2	12.9	73.8	128.9	8.3	26.8	---	---	0
K	2053.8	S?	398288	7029694	3.1	15.9	7.6	73.6	2.4	9.1	---	---	17
L	2039.7	S?	398506	7029811	4.3	18.3	14.9	92.8	2.9	12.6	---	---	0
M	2002.1	S?	399254	7030245	7.3	30.4	36.8	100.3	7.5	13.9	---	---	2
N	1983.2	S	399664	7030479	6.9	20.4	30.9	84.7	13.4	13.9	---	---	38
O	1974.9	S	399824	7030570	1.2	15.6	20.3	68.8	13.4	9.7	-0.1	10	0
LINE 39100			FLIGHT	11									
A	1716.5	B?	401629	7034174	5.0	10.8	52.7	105.0	6.7	20.3	---	---	1
B	1707.3	B?	401876	7034259	4.0	16.4	25.1	93.4	3.8	15.5	---	---	0
C	1694.3	B?	402211	7034399	7.8	5.3	60.2	74.1	6.4	7.8	---	---	0
D	1687.0	S?	402378	7034476	0.9	11.4	25.2	96.3	5.9	16.2	---	---	9
E	1672.2	S	402661	7034608	5.8	17.5	40.6	90.3	2.7	15.9	---	---	0
LINE 39110			FLIGHT	11									
A	1522.5	H	401875	7034429	14.0	19.4	123.9	167.9	7.7	40.6	---	---	0
B	1486.9	S	402725	7034463	1.1	8.7	7.3	58.3	2.5	8.5	---	---	3
C	1477.2	S	402994	7034462	1.1	16.4	12.5	158.1	5.8	20.6	-0.1	8	11
D	1462.8	H	403312	7034494	4.1	16.5	56.5	137.9	5.5	23.9	---	---	0
E	1450.1	H	403698	7034493	2.8	5.6	43.4	79.0	3.2	18.5	---	---	0
F	1415.2	L	404810	7034529	38.5	19.3	55.1	67.5	17.5	17.0	---	---	0
LINE 39120			FLIGHT	11									
A	1140.3	L	404823	7034457	22.1	11.2	58.8	69.6	13.5	19.4	---	---	0
B	1094.5	B	406276	7035303	3.7	8.9	64.5	93.6	10.5	26.3	---	---	0
C	1055.7	L?	407450	7036021	7.3	8.8	8.4	15.1	25.5	23.4	---	---	13
D	1043.6	L?	407795	7036231	30.8	12.9	45.3	17.7	29.3	75.7	5.3	4	0
LINE 39130			FLIGHT	11									
A	703.8	L	409897	7036282	2.5	7.3	39.4	186.4	46.1	242.6	-0.3	0	0
LINE 39140			FLIGHT	11									
A	559.3	S	410648	7036332	2.8	9.6	43.1	68.1	5.6	13.3	---	---	7
B	532.1	H	411327	7037094	13.4	10.7	158.4	156.4	21.9	62.9	---	---	0
C	505.9	S	411876	7037701	3.6	14.0	45.4	149.9	3.7	24.5	---	---	3

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	39150		FLIGHT	22									
A	4484.9	S	422049	7046905	5.9	21.1	42.1	163.7	0.8	21.4	---	---	3
B	4474.0	B	422434	7047085	4.2	3.7	38.2	18.9	20.0	11.5	1.1	47	0
C	4466.7	S	422687	7047207	2.7	8.4	8.7	11.3	1.6	2.7	---	---	0
D	4454.0	S	423129	7047421	2.0	14.4	5.4	98.7	0.9	10.9	---	---	0
E	4433.6	B	423823	7047738	18.8	22.6	118.7	129.5	13.9	38.1	---	---	0
F	4428.0	D	423989	7047812	56.2	47.6	240.4	132.9	40.0	81.4	---	---	0
G	4414.3	B	424276	7047952	44.1	25.1	188.3	104.7	76.8	62.5	---	---	0
H	4400.1	B	424452	7048034	2.3	9.0	0.0	64.3	18.4	21.8	---	---	0
I	4395.8	B	424507	7048060	11.4	17.2	78.3	68.9	18.4	22.4	---	---	0
J	4382.0	B	424679	7048144	2.8	7.5	1.2	33.6	0.3	0.2	---	---	0
K	4363.4	B	424880	7048226	2.6	6.1	21.4	19.4	11.8	9.2	---	---	0
L	4318.1	B	425249	7048391	8.7	19.1	70.6	102.5	9.2	23.7	---	---	0
M	4281.7	D	425560	7048550	48.5	29.0	249.1	153.9	42.6	87.1	---	---	0
N	4261.5	D	425842	7048694	34.4	30.4	112.5	140.1	9.3	45.4	---	---	34
O	4250.9	D	425951	7048746	171.8	40.9	414.4	207.7	103.7	143.2	---	---	0
P	4236.4	D	426197	7048865	5.3	9.9	24.4	23.5	5.1	8.6	---	---	0
Q	4227.6	S	426450	7048976	12.3	26.2	43.0	107.0	6.6	18.9	---	---	0
R	4215.9	B	426797	7049138	6.9	7.4	76.9	68.9	21.8	31.0	---	---	0
LINE	39151		FLIGHT	22									
A	5812.5	S	411793	7042090	5.8	19.1	27.6	107.2	2.8	16.6	---	---	0
B	5789.2	S?	412070	7042215	2.1	7.3	7.9	44.8	1.7	5.8	---	---	0
C	5738.0	D	412862	7042592	27.6	21.4	272.3	105.4	113.5	99.7	---	---	0
D	5732.8	D	412907	7042608	74.6	38.5	272.3	105.4	113.5	99.7	---	---	0
E	5725.1	B	412956	7042635	20.0	11.0	173.1	119.9	54.7	64.2	---	---	0
F	5716.0	B	413013	7042663	40.5	86.8	132.3	152.2	37.4	30.2	---	---	0
G	5660.0	B?	413208	7042758	4.2	2.6	22.4	13.1	13.2	9.2	---	---	0
H	5627.0	B?	413304	7042796	2.0	1.2	0.2	3.9	2.5	0.8	---	---	2
I	5594.3	D	413493	7042847	146.4	24.6	218.6	52.3	186.3	31.9	---	---	2
J	5514.7	D	413979	7043127	7.2	7.1	20.4	27.3	2.7	9.6	---	---	1
K	5494.0	B	414360	7043289	17.6	13.4	95.8	31.9	47.5	39.1	---	---	2
L	5490.3	B	414435	7043322	21.5	13.4	95.8	31.9	47.5	39.1	---	---	0
M	5473.4	B	414698	7043457	5.6	14.2	18.2	104.1	0.0	7.6	---	---	2
N	5467.5	B	414750	7043483	11.8	29.1	18.2	104.1	32.9	7.6	---	---	2
O	5447.3	B	415088	7043634	0.6	1.4	16.0	32.1	25.6	3.7	---	---	23
P	5441.8	B	415218	7043699	4.3	17.4	16.0	32.1	161.1	4.9	---	---	30
Q	5431.4	D	415467	7043823	92.1	53.6	305.2	316.9	161.1	112.4	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note: EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects



EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ		CP 7200 HZ		CP 900 HZ		Vertical Dike		Mag. Corr NT
					Real ppm	Quad ppm	Real ppm	Quad ppm	Real ppm	Quad ppm	COND siemens	DEPTH* m	
LINE	39151		FLIGHT	22									
R	5419.0	B	415670	7043920	17.6	33.0	339.2	361.9	58.0	119.2	---	---	0
S	5413.5	B	415737	7043948	9.1	16.0	339.2	361.9	58.0	119.2	---	---	0
T	5407.4	B	415803	7043979	33.6	49.2	216.5	197.0	36.2	74.8	---	---	0
U	5190.0	S	417329	7044668	0.9	4.7	3.2	25.4	1.4	3.6	---	---	0
V	5057.8	S?	417836	7044934	1.1	5.6	4.2	54.9	0.7	6.2	---	---	14
W	4917.3	B	418285	7045148	3.5	0.2	27.2	10.2	21.1	6.4	---	---	0
X	4895.7	B	418452	7045216	16.8	7.7	100.8	59.4	97.1	26.7	---	---	1
Y	4884.1	B	418704	7045342	14.0	25.5	258.9	236.2	75.8	98.7	---	---	32
Z	4874.5	B	418971	7045455	11.7	3.1	258.9	236.2	75.8	98.7	---	---	14
AA	4866.6	B	419158	7045552	11.7	7.2	158.6	98.5	60.3	52.5	---	---	0
AB	4856.7	B	419333	7045627	8.8	14.9	112.9	72.7	39.8	41.7	---	---	0
LINE	39160		FLIGHT	32									
A	1336.6	S	417909	7018124	8.2	31.2	56.9	168.0	2.9	22.4	---	---	0
B	1316.3	S	418262	7018321	8.2	13.5	47.5	132.8	1.1	22.3	---	---	0
C	1307.9	S	418487	7018408	8.5	11.5	79.4	71.0	4.7	24.0	---	---	0
D	1302.0	S	418630	7018481	16.7	27.7	109.1	149.5	5.6	33.6	---	---	23
E	1287.9	S?	418929	7018639	6.0	6.1	64.0	60.3	6.2	16.2	---	---	30
F	1266.9	S?	419401	7018920	20.1	20.5	26.3	48.0	2.8	9.1	---	---	3
G	1233.9	S	420164	7019283	3.5	9.8	13.9	66.5	1.4	7.4	---	---	0
H	1191.0	S?	420555	7019466	6.8	8.4	29.0	62.9	3.0	10.2	---	---	0
I	1174.5	S	420717	7019563	3.4	13.2	17.6	38.6	2.5	6.9	---	---	0
J	1124.9	B?	421029	7019709	6.4	7.8	20.9	10.6	2.8	4.9	---	---	0
K	1094.4	B	421243	7019813	36.0	55.6	189.2	293.1	30.3	43.6	---	---	0
L	1084.3	B	421359	7019880	30.6	28.5	189.2	174.8	30.3	61.1	---	---	0
M	1065.8	S?	421668	7020034	1.5	8.9	11.1	41.5	2.8	5.6	---	---	8
N	1036.8	B	422093	7020250	19.9	64.4	246.1	345.3	6.1	70.5	---	---	0
O	1031.5	B	422155	7020279	14.6	28.0	246.1	345.3	6.5	70.5	---	---	7
P	1009.0	B	422372	7020379	11.7	16.5	78.8	71.3	8.1	20.3	---	---	1
LINE	39170		FLIGHT	11									
A	4896.0	B	400169	7016193	5.5	5.2	19.0	26.5	6.7	5.7	---	---	0
B	4916.2	B	400556	7016497	13.9	16.3	93.5	138.1	5.6	20.9	---	---	3
C	4926.8	B	400851	7016700	15.7	25.6	109.7	246.7	2.4	32.3	---	---	0
D	4931.6	B	400988	7016801	7.4	11.8	109.7	47.1	3.3	24.3	---	---	0
E	4934.8	B	401081	7016871	25.5	38.6	153.1	183.1	5.7	37.5	---	---	0
F	4940.1	B	401237	7016993	7.3	9.8	29.7	0.0	0.0	0.0	---	---	4
G	4946.9	B	401447	7017152	14.4	14.5	153.4	129.5	23.2	47.1	---	---	1

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	Quad ppm	CP 7200 HZ Real ppm	Quad ppm	CP 900 HZ Real ppm	Quad ppm	Vertical Dike COND siemens	DEPTH* m	Mag. Corr NT
LINE	39170		FLIGHT	11									
H	4949.3	B	401521	7017207	16.4	23.7	153.4	129.5	23.2	47.1	---	---	0
I	4959.5	B	401844	7017438	17.2	45.6	268.7	423.8	16.5	89.8	---	---	0
J	4965.6	B	402044	7017584	11.6	22.1	38.0	107.3	6.6	10.8	---	---	0
K	4972.7	B	402285	7017749	13.5	13.4	230.5	270.7	44.7	90.4	---	---	0
L	4975.4	B	402376	7017812	14.0	17.2	230.5	270.7	44.7	90.4	---	---	0
M	4992.5	B	402935	7018243	76.5	67.3	759.3	391.4	142.6	261.3	---	---	0
LINE	39180		FLIGHT	11									
A	4631.6	B	395523	7017642	8.1	17.3	45.1	147.0	3.7	21.7	---	---	0
B	4650.5	B	396184	7017458	55.8	17.8	329.2	98.5	121.6	113.5	---	---	59
C	4662.8	B	396595	7017335	7.5	11.9	13.3	110.0	0.0	7.7	---	---	0
D	4679.1	B	396965	7017221	8.1	15.4	105.4	159.0	5.9	33.0	---	---	21
E	4693.6	B	397302	7017125	0.3	0.0	0.0	0.0	0.1	0.0	---	---	0
F	4704.1	B	397608	7017033	0.0	10.2	59.7	61.0	4.6	16.8	---	---	3
G	4706.2	B	397674	7017013	18.1	39.7	185.2	324.2	12.9	65.1	---	---	1
H	4709.4	B	397778	7016983	6.9	19.9	181.9	324.2	13.0	64.0	---	---	3
I	4712.0	B	397864	7016961	16.1	27.5	181.9	324.2	14.0	64.0	---	---	6
J	4735.9	B	398720	7016712	3.8	8.1	42.6	55.0	0.6	12.4	---	---	0
K	4742.8	B	398986	7016640	13.1	14.6	57.7	76.5	2.7	20.1	---	---	3
L	4746.5	B	399131	7016604	7.8	6.2	57.7	79.9	5.5	20.1	---	---	2
M	4751.0	B	399299	7016554	11.3	16.9	124.7	240.7	9.6	47.9	---	---	0
N	4789.3	B	400400	7016247	11.3	16.5	131.6	100.3	21.8	47.7	---	---	0
LINE	39190		FLIGHT	11									
A	4459.6	B	393817	7016515	4.9	9.6	117.4	87.4	16.5	34.4	---	---	0
B	4484.0	D	394571	7017040	22.6	6.9	58.4	18.6	3.5	14.8	7.5	31	0
C	4493.5	B	394871	7017252	13.1	20.1	172.9	196.1	6.3	41.6	---	---	0
D	4501.5	B	395137	7017439	9.6	12.7	115.3	126.6	24.3	37.2	0.9	17	0
LINE	39200		FLIGHT	11									
A	3094.8	B	393835	7016193	18.6	6.7	48.4	12.5	17.6	18.1	---	---	0
B	3090.0	B	393778	7016305	11.1	11.6	138.7	92.7	44.4	54.6	1.2	12	12
C	3073.7	S	393540	7016803	4.8	17.5	51.7	155.2	3.5	21.7	---	---	2
D	3065.3	S	393408	7017078	7.8	12.7	10.3	73.7	2.7	10.2	---	---	0
E	3046.2	S	393081	7017741	4.5	5.9	33.0	43.3	3.8	11.5	---	---	0
F	3020.6	S	392659	7018601	21.4	10.3	329.9	297.9	33.3	100.5	---	---	4
G	3001.1	L	392383	7019130	4.4	0.0	48.1	47.3	27.7	14.2	---	---	0
H	2984.6	B?	392140	7019610	17.2	2.7	209.1	221.7	23.6	59.5	---	---	0

CX = COAXIAL  
CP = COPLANAR

Note:EM values shown above  
are local amplitudes

\*Estimated Depth may be unreliable because the  
stronger part of the conductor may be deeper or  
to one side of the flight line, or because of a  
shallow dip or magnetite/overburden effects

EM Anomaly List

Label	Fid	Interp	XUTM m	YUTM m	CX 5500 HZ Real ppm	5500 HZ Quad ppm	CP 7200 HZ Real ppm	7200 HZ Quad ppm	CP 900 HZ Real ppm	900 HZ Quad ppm	Vertical Dike COND siemens	Dike DEPTH* m	Mag. Corr NT
LINE	39200		FLIGHT 11										
I	2960.4	B?	391784	7020415	37.9	68.5	848.2	898.3	69.4	238.0	---	---	0
J	2952.1	B?	391672	7020661	45.5	37.5	152.7	203.5	6.9	19.3	---	---	0

CX = COAXIAL  
 CP = COPLANAR  
 GPR2002\_12

Note: EM values shown above  
 are local amplitudes

\*Estimated Depth may be unreliable because the  
 stronger part of the conductor may be deeper or  
 to one side of the flight line, or because of a  
 shallow dip or magnetite/overburden effects