
Survey orthophoto map prepared from 1:76,000-

Approximate mean

scale aerial photographs taken August 21, 1974.

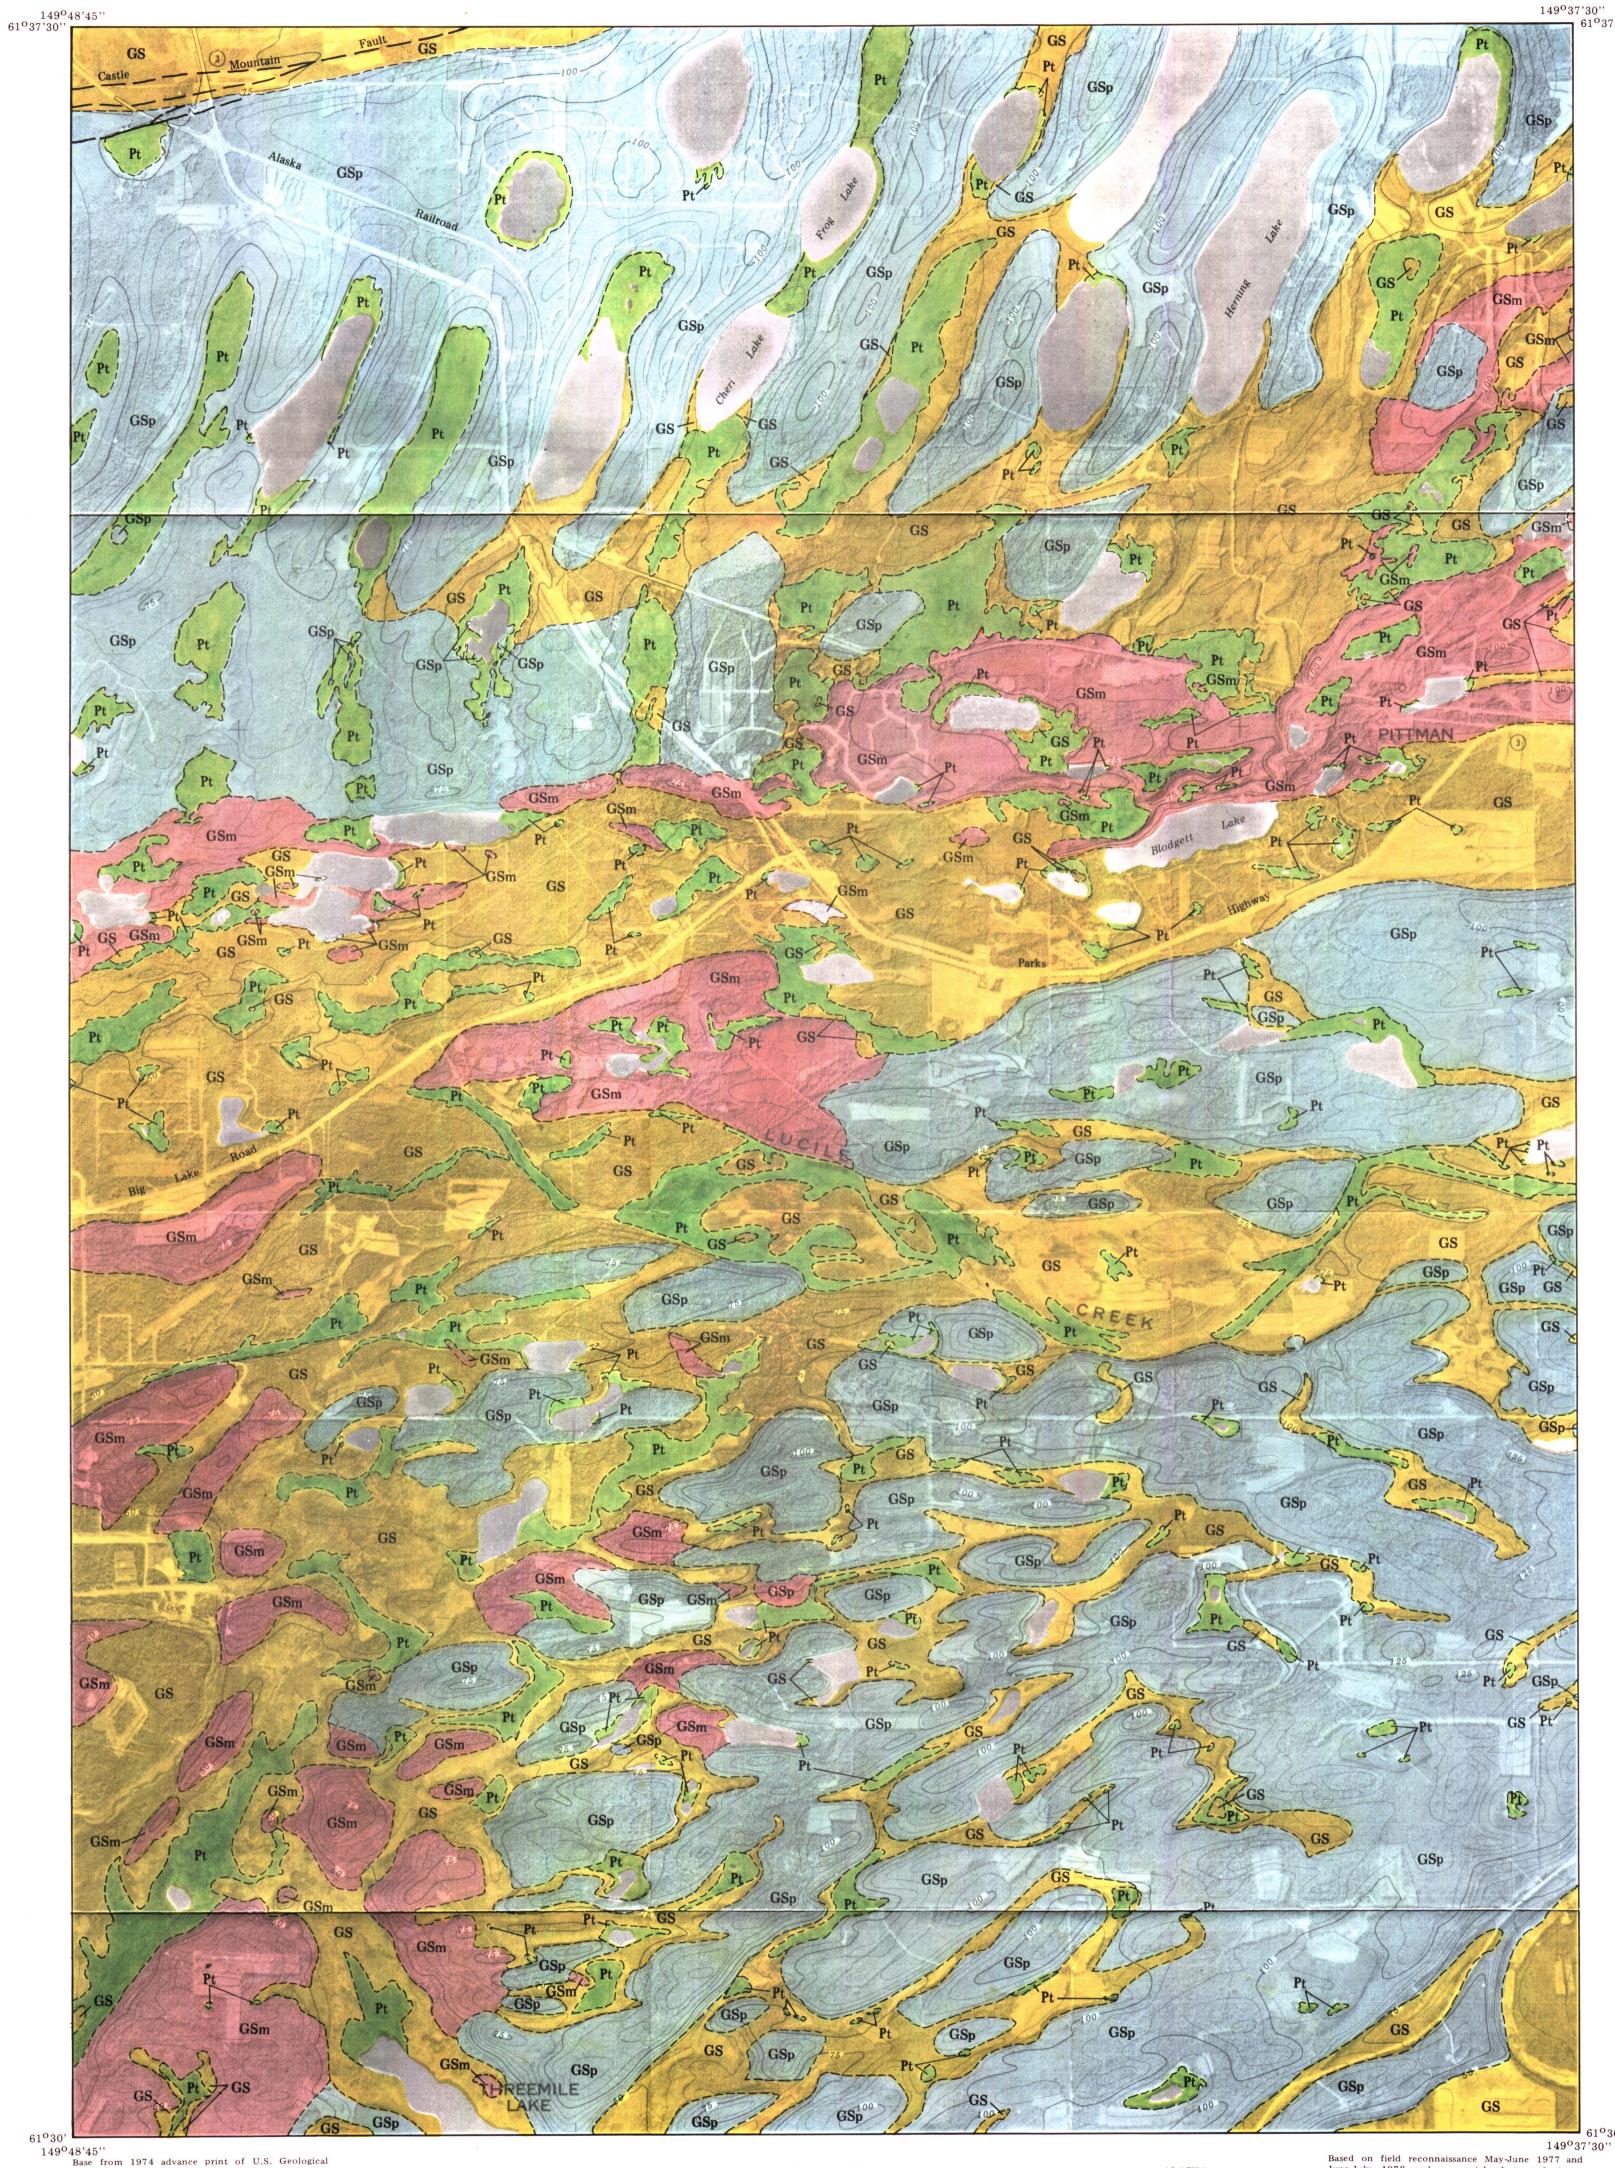

EXPLANATION

This map illustrates potential sources of various geologic materials useful for construction. Field observations indicate that each geologic unit, e.g., stream alluvium, has a definite composition or range of composition wherever that unit is found. Therefore, the presence of the materials is interpreted from the distribution of geologic units on plate 1, the geologic map of this quadrangle.

This map is generalized; it does not attempt to show exact locations of specific materials. The intent is to indicate general areas that deserve consideration for certain materials and to eliminate other general areas from consideration for these materials. Local variations frequently occur, especially near unit boundaries. Potential uses of map units are qualitatively summarized in the table below, which shows potential availability of various construction materials in each geologicmaterials map unit. Precise economic evaluations of specific deposits as sources of construction materials will require detailed examination of each deposit, including areal extent, volume, grain-size variation, thickness of overburden, thermal state of the ground, and depth to the water table as well as logistical factors, demand, and land ownership.

DESCRIPTION OF MAP UNITS



GRAVEL AND SAND-Channel fillings of former glacial meltwater streams and alluvium beneath the flood plain of Fish Creek. Composed of pebble-cobble gravel and gravelly medium to coarse sand with rare to occasional boulders; well sorted; medium to thick bedded; thickness ranges from less than 1 m to more than 3 m; thawed, except in active layer subject to seasonal freezing; locally cemented by iron and manganese oxides; high permeability, except where cemented; depth to water table moderate to shallow; overburden is surface vegetative mat less than 0.5 m thick and eolian silt 9 to 30 cm thick, although local depressions contain peat 3 m or more thick.

GSn

CHIEFLY GRAVEL AND SAND-Complex mixtures of kame-esker deposits and undifferentiated ice-contact deposits. Composed of pebble-cobble gravel with some* medium to coarse sand, trace to some silt, and occasional boulders; locally contains layers and lenses of clean, medium to coarse sand; well to poorly sorted; thinly to massively bedded; thickness greater than 4 m; thawed, except in active layer of seasonal freezing; uncemented, except locally well cemented by iron and manganese oxides deposited by ground water in well-sorted sand or gravel layers; surface drainage excellent to moderate; depth to water table moderate to deep; overburden is surface retative mat less than 0.5 m thick and eolian silt 9 to 30 cm thick.



CHIEFLY MIXED COARSE- AND FINE-GRAINED MATERIAL-Till and alluvial fan deposits. Composed of all grain sizes from large blocks to clay-sized material, most commonly consists of pebble-cobble gravel with some sand and silt and occasional to numerous boulders; sorting poor, although locally well sorted where reworked by meltwater streams or where readvances incorporated outwash or kame-esker alluvium; thickness ranges from 2 m to more than 6 m; very dense in drumlin field south of Lucille Creek and in belt of Rogen moraines in the northern third of the quadrangle; thawed, except in active layer of seasonal freezing; uncemented, but lodgement till commonly semiconsolidated because of weight of overriding glacier, enabling molds to remain on free faces when clasts are removed; very low to moderate permeability; surface drainage moderate to poor; depth to water table moderate to deep; overburden is surface vegetative mat less than 0.5 m thick and 9 to 30 cm of eolian silt, except in kettle depressions where there may be several m of peat.



CHIEFLY PEAT—Swamp deposits. Composed of interlayered woody *Sphagnum* and sedge peat, organic silt, and sand, locally marly; thin to thick bedded; thickness ranges from less than 1 m to more than 6 m; commonly frozen at depths greater than 0.7 m with high ice content; uncemented, except where well cemented by ice; permeability good except very poor where frozen; surface drainage poor; shallow water table; no overburden.

SYMBOLS



June-July 1978 and on aerial photograph inter-

pretation, November 1977 through January 1978.

Field assistance by Cheri L. Daniels. Reviewed by Jeffrey T. Kline, James R. Riehle, and Randall G.

Updike. Cartography by Gregory M. Laird.

ALASKA

Quadrangle location

2 KILOMETERS

Surface trace of fault, dashed where approximate, queried where inferred.

Approximate geologic contact.

POTENTIAL AVAILABILITY OF VARIOUS CONSTRUCTION MATERIALS IN GEOLOGIC-MATERIALS MAP UNITS, ANCHORAGE C-8SE QUADRANGLE, ALASKA

Probability of locating good sources of ___

Map unit	Composition	Gravel and sand	Sand	Mixed coarse- and fine-grained material	Clay	Crushed aggregate	Riprap armor rock	Building stone
GS	Gravel and sand	Good	Good	Poor	Nil	Good	Nil	Nil
GSm	Chiefly gravel and sand	Moderate	Moderate	Poor	Nil	Moderate	Nil	Nil
GSp	Chiefly mixed coarse- and fine-grained	Poor	Poor	Good	Poor	Poor	Nil	Nil
Pt	material Chiefly peat	Nil	Nil	Nil	Poor	Nil	Nil	Nil

The imprecise terms 'good,' 'moderate,' 'poor,' and 'nil' are purposely used to indicate the relative probability of locating good deposits of each construction material in the various map units. No definite values are assigned to each term, but they may indicate a probability of 80 percent or more for 'good,' 30 percent to 80 percent for 'moderate,' less than 30 percent for 'poor,' and essentially zero change for 'nil'.

*Estimated percentages of sand and silt, based on field observations, are indicated by the terms "some" and "trace." 'Some' implies a general composition of 12% to 30%. 'Trace' implies a general composition of 4% to 12%. Estimated percentages less than 4% were not recorded in the field

GEOLOGIC MATERIALS MAP OF THE ANCHORAGE C-8 SE QUADRANGLE, ALASKA

5,000 FEET

Scale 1:25,000

Contour interval 5 meters

Datum is mean sea level