

BY TROY L. PÉ**WÉ** AND JOHN W. BELL

SOURCES OF CONSTRUCTION MATERIALS This map is based on data presented on the Geologic map of the Fairbanks D-2 NE quadrangle (Map I-950, Péwé and others, in press), the Map showing distribution of permafrost in the Fairbanks D-2 NE quadrangle (Map MF-670A, Péwé and Bell, 1975a), the Map showing foundation conditions in the Fairbanks D-2 NE quadrangle (Map MF-670D, Péwé and Bell, 1975c), and the Map showing ground-water conditions in the Fairbanks D-2 NE quadrangle (Map MF-670B, Péwé and Bell, 1975b). Additional information, especially detailed subsurface data, can be obtained from these maps. This map provides basic information on where construction materials may be obtained near the surface. The map units are defined on the basis of type of material and distribution of permafrost.

The upland hills are bedrock with a cover of as much as 200 feet of windblown silt (loess). The suitability of the bedrock for use in construction is variable, and the bedrock generally is not as good a source of gravel as the flood plain. Recently, the bedrock has been widely used as a decorative rock rather than as a source of gravel. The best sources of coarse material in the upland areas are the placer mine dredge tailings, which are excellent for founds. best sources of coarse material in the upland areas are the placer-mine dredge tailings, which are excellent for foundation material and pervious fill, especially when processed. The upland hills are generally free of permafrost and present no major excavation problems. The silt mantle is generally well drained, dry, and easily removed unless frozen. The bedrock may contain an upper weathered zone about 3-10 feet thick that is easily removed compared with the fresh bedrock, which in some instances has to be blasted.

The valley bottoms of the upland contain thick silt accumulations that are perennially frozen with here ice content. The silt also contains much organic material, and, as a result, these deposits generally are undesirable as sources of material. Silt is the only easily accessible material, and, if it is frozen, blasting is required. Creek gravel (exposed as tailings) is buried 30-300 feet beneath the silt, making it usually inaccessible. It should be noted that the map units are generalized and local variations may occur, especially near contacts between units. Detailed mechanical analyses, soil properties, and moisture contents are given on the foundation-conditions map.

SELECTED BIBLIOGRAPHY

Burton, Wayne, 1971, Alaska's agriculture, an analysis of developmental problems, Fairbanks, Alaska: University of Alaska, Institute of Social, Economic, and Government Research, ISEGR Rept. No. 30. Ferrians, O. J., Jr., Kachadoorian, R., and Greene, G. W., 1969, Permafrost and related engineering problems in Alaska: U.S. Geol. Survey Prof. Paper 678, 37 p. Péwé, T. L., 1954, Effect of permafrost on cultivated fields, Fairbanks area, Alaska: U.S. Geol. Survey Bull. 989-F, p. 315-351.


_____, 1958, Geologic map of the Fairbanks D-2 quadrangle, Alaska: U.S. Geol. Survey Geol. Quad. Map GQ-110, scale

_____, 1966, Permafrost and its effect on life in the north: Corvallis, Ore., Oregon State Univ. Press, 40 p. Pèwè, T. L., and Bell, J. W., 1975a, Map showing distribution of permafrost in the Fairbanks D-2 NE quadrangle, Alaska: U.S. Geol. Survey Misc. Field Studies Map MF-670A, scale 1:24,000.

_____, 1975b, Map showing ground-water conditions in the Fairbanks D-2 NE quadrangle, Alaska: U.S. Geol. Survey Misc. Field Studies Map MF-670B, scale 1:24,000. , 1975c, Map showing foundation conditions in the Fairbanks D-2 NE quadrangle, Alaska: U.S. Geol. Survey Misc. Field Studies Map MF-670D, scale 1:24,000.

Péwé, T. L., Bell, J. W., Forbes, R. B., and Weber, F. R., 197_, Geologic map of the Fairbanks D-2 NE quadrangle, Alaska: U.S. Geol. Survey Misc. Inv. Ser. Map I-950, scale 1:24,000. (in press) Rieger, S., Dement, J. A., and Dupree, S., 1963, Soil survey, Fairbanks area, Alaska: U.S. Dept. Agriculture, Soil Conserv. Service, series 1959, no. 25, 41 p., 14 pl.

EXPLANATION

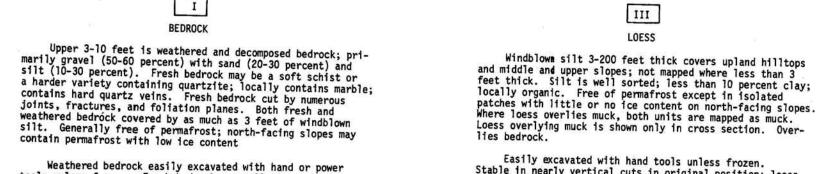

Weathered bedrock easily excavated with hand or power tools unless frozen. Fresh bedrock generally is easily excavated with little to moderate blasting even where containing permafrost; some varieties, especially those high in quartzite or vein quartz, may require additional blasting. Resistant layers more easily excavated where interbedded with schistose rocks; excavation easier where joints, fractures and foliation planes abundant. Schist varieties good for unclassified embankment fill but only poor to fair for selected use as base course when processed; breaks down to silt with repeated traffic and frost action. Harder varieties good for rip rap and ballast, and coarse aggregate; if processed, good for base course and road metal. Many varieties, especially the marble, are good as decorative

Placer-mine dredge tailings exposed as steep imbricate gravel piles; locally leveled; 3 to more than 50 feet thick. Primarily gravel (95 percent) with fragments 1-6 inches in diameter and some cobbles 10 inches or larger; sand (3 percent) and silt (2 percent). Well sorted as result of dredging process; undisturbed gravel may contain as much as 50 percent sand and is less well sorted. Only locally perennially frozen; well drained except in some depressions.

Material is loose and porous and easily excavated by power tools unless frozen. Good source for subgrade, ballast, rip rap, pervious fill, and, if processed, good for base course and aggregate. Water table generally lies at base of tailings

Easily excavated with hand tools unless frozen.


Stable in nearly vertical cuts in original position; loses much of vertical stability upon reworking. Good source of fine-grained tediment and possible course. fine-grained sediment and possible source of impervious fill. Loess is powdery when dry, plastic and sticky when wet. Generally above water table and well drained. Good agricultural soil if fertilized


Valley-bottom accumulations of reworked silt 30 to more than 300 feet thick; perennially frozen with high ice content. Well sorted, less than 10 percent clay; locally contains layers and lenses of sand and gravel. Contains abundant organic matter. Poorly drained and marshy in summer; land clearing produces quagmire. Overlies old creek gravel more than 100 feet thick. Where loess overlies muck, both units are mapped as muck.

Very difficult to excavate unless thawed; blasting moderately successful. When thawed, viscous sediment slides into excavation, except near contact with the loess. Thawed and dry muck easily excavated; can maintain fair vertical stability. Possible source of fine-grained sediment and impervious fill where organic content relatively low. Water table locally high where perched on permafrost. Poor to fair for agriculture if fertilized and drained

Contact
Generally indefinite or gradational

Gravel pit

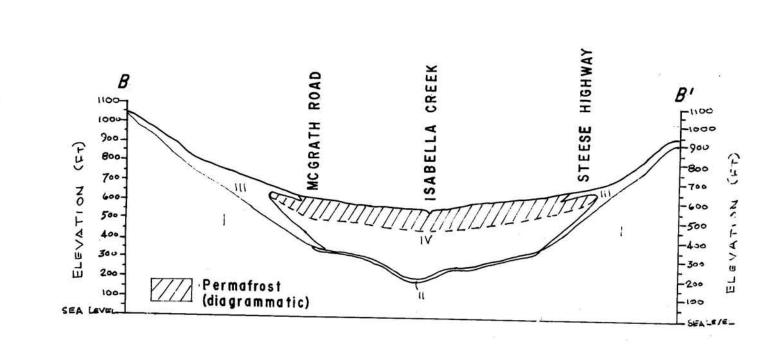

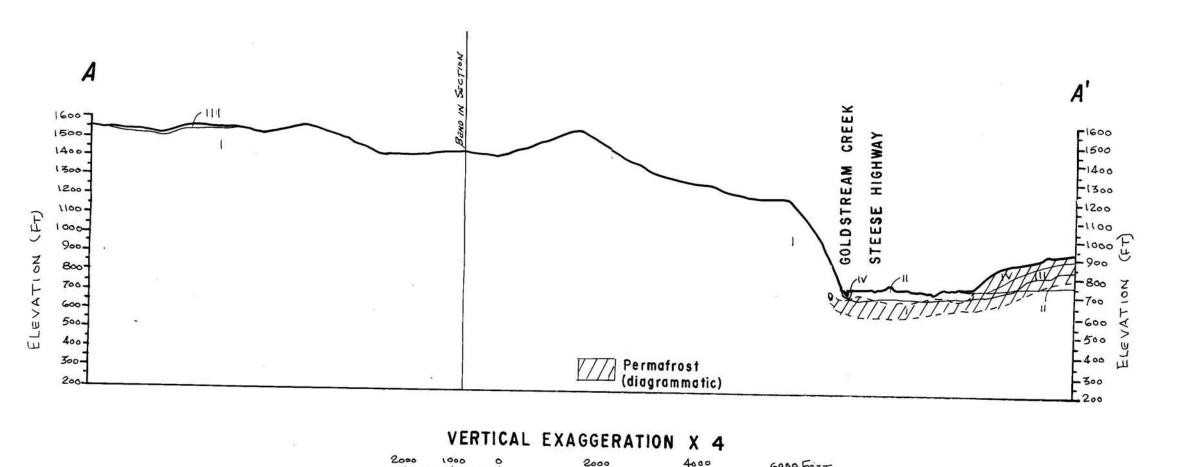

GENERALIZED CROSS SECTIONS