



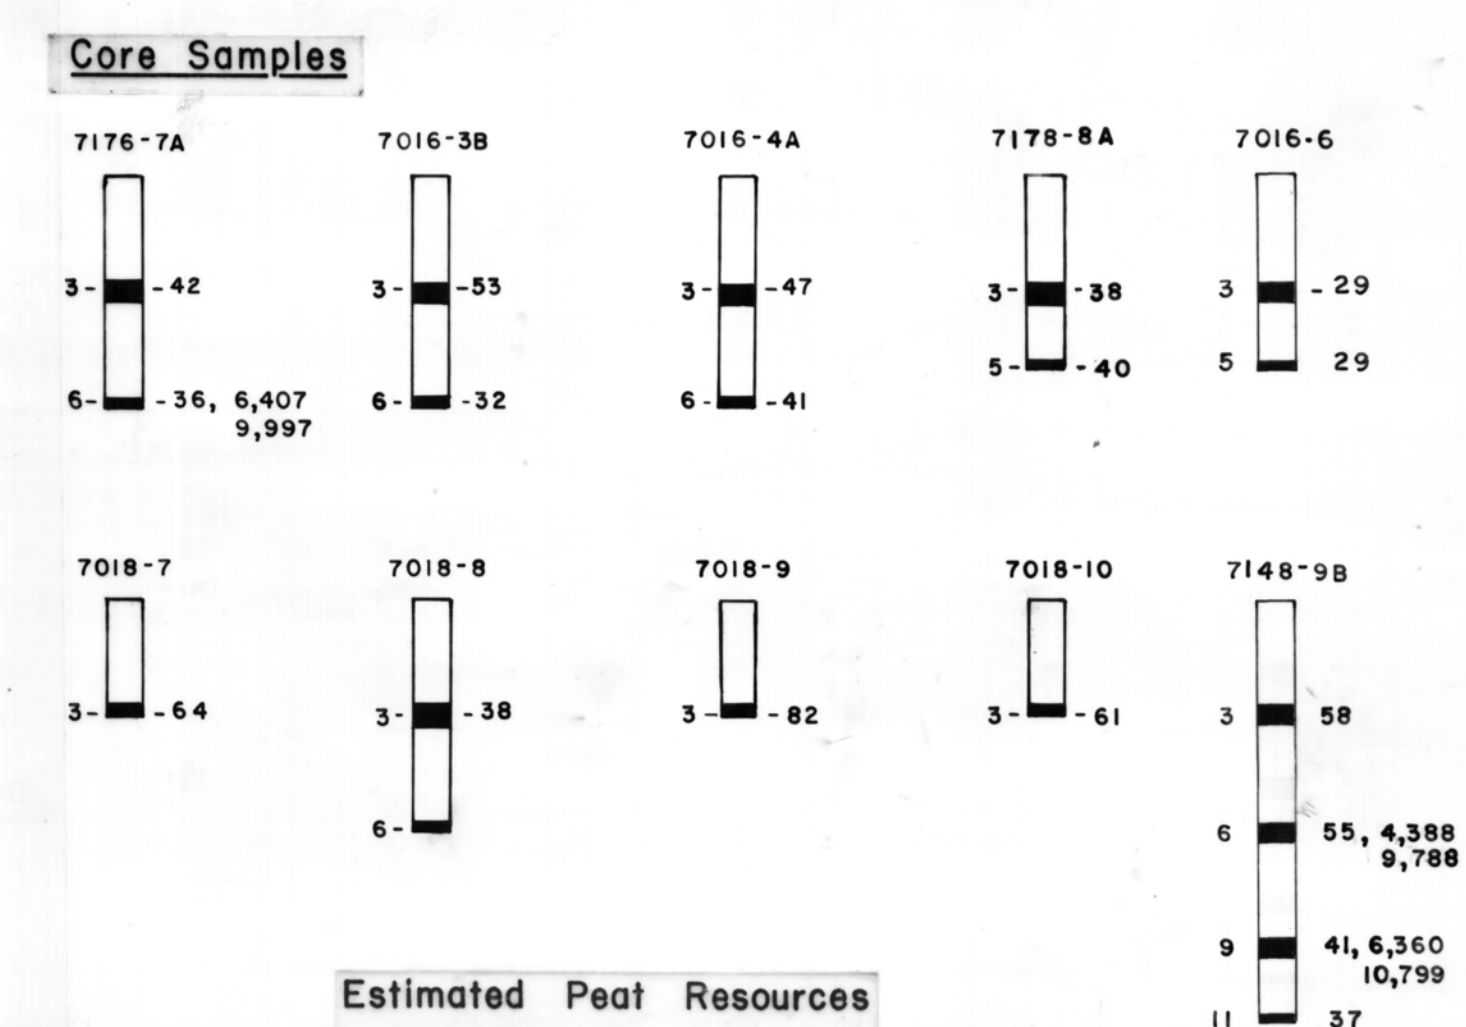

Prepared by:  
 Alaska Department of Natural Resources  
 Division of Geological and Geophysical Surveys  
 3001 Forcupine Drive, Anchorage, Alaska 99501  
 P.O. Box 80007, College, Alaska 99708  
 and  
 Northern Technical Services  
 750 West 2nd Avenue, Anchorage, Alaska 99501  
 Under Contract to:  
 Alaska Department of Commerce and Economic Development  
 Division of Energy and Power Development  
 Mr. Donald R. Markle, Energy Projects Manager  
 338 Denali Street, Anchorage, Alaska 99501  
 Prepared for:  
 U.S. Department of Energy  
 Division of Fossil Energy  
 Grant No. DE-FC18-81FC05112

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, make any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any apparatus, product, or process disclosed or represents that its use would not infringe privately-owned rights.

**EXPLANATION**

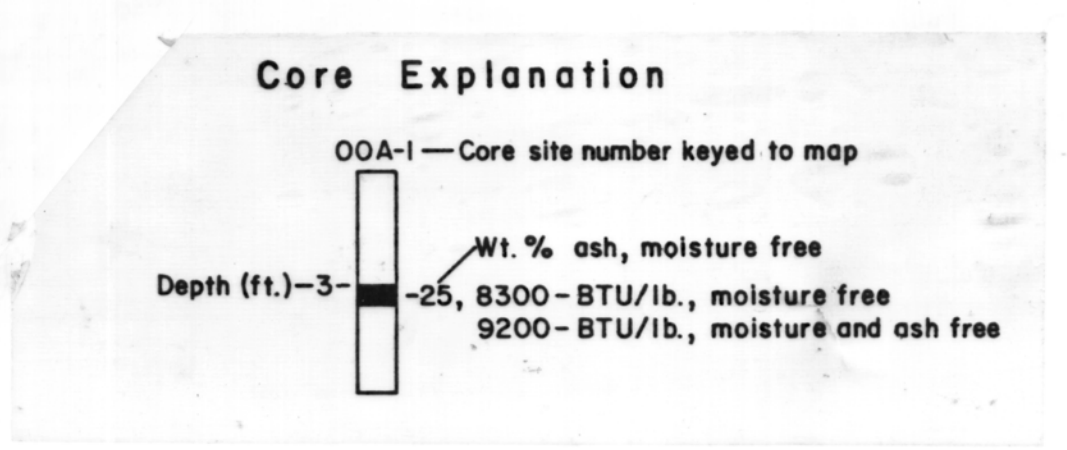

**Estimated Peat Resources**

**Bases**

- 7 lb. peat/ft<sup>3</sup> moisture and ash free (MAF)
- 9,732 BTU/lb., mean moisture and ash free BTU determined from analyzed cores of this study
- 6.1 ft. mean peat depth determined from cores on Alaska Open-File Reports 150J-M.


	R6W		R5W		R4W	
	Acres	Tons x 10 <sup>3</sup>	Acres	Tons x 10 <sup>3</sup>	Acres	Tons x 10 <sup>3</sup>
T.16N	5,012	4,661.2	3,369	3,384.3	890	827.7
T.15N	5,711	5,311.3	5,626	5,232.2	71	66.0
T.14N	1,065	990.5	5,778	5,373.6	1,721	1600.5
T.13N						

**Total Acres Peat** 29,513  
**Total Tons Peat, MAF** 27,447.3 x 10<sup>3</sup>  
**Total Quads<sup>\*</sup>, MAF** 0.534




\*1 Quad = 10<sup>15</sup> BTU

In this report, total tons and total Btu values are for moisture- and ash-free peat. U.S. Department of Energy fuel-grade-peat criteria include a minimum of 8,300 Btu/lb (dry) and a maximum of 25 percent ash. However, 8,300 Btu/lb corresponds to an ash content of about 17 percent, which is considered critical for fuel-grade peat. Twenty-seven percent of all samples analyzed for ash has less than 25 percent ash and 11 percent has less than 17 percent ash. Thus, values for total tons and total Btu's of in-situ fuel-grade peat are approximately 11 percent of those values shown, of 3,019 x 10<sup>3</sup> and 5.9 x 10<sup>13</sup>, respectively; total quads is 0.059.

If peat processing reduces the ash content by 50 percent, the maximum allowable in-situ ash content is 34 percent. Forty-three percent of all samples analyzed for ash has less than 34 percent ash; 43 percent of the total tons and total Btu's is 11,802 x 10<sup>3</sup> and 23.0 x 10<sup>13</sup>, respectively; total quads is 0.230.

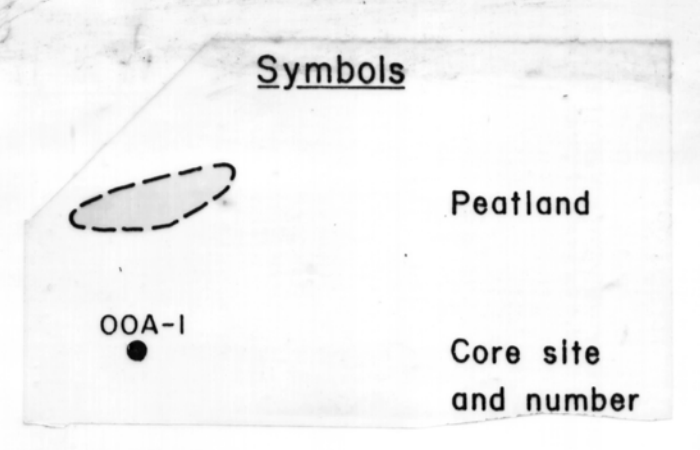

Based on aerial photograph interpretation (1978 NASA D-2, lines 105-107) September 1981 through November 1981. Coring by Northern Technical Services (NORTS), Anchorage, Alaska, July 1981 through September 1981. Analysis for NORTS by Dr. Kouse Farham, consultant, Hibbing, Minnesota, and Mineral Industry Research Laboratory, University of Alaska, Fairbanks, Alaska.

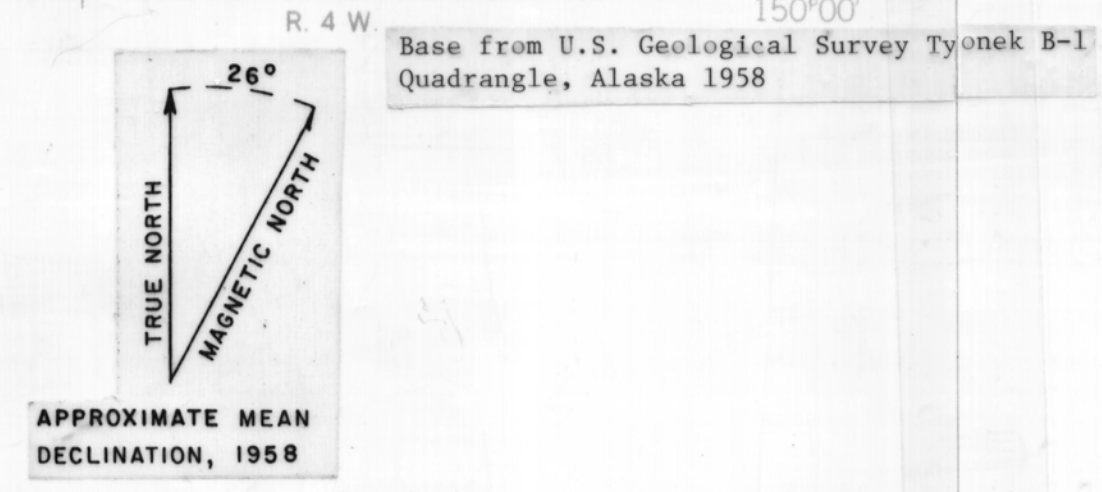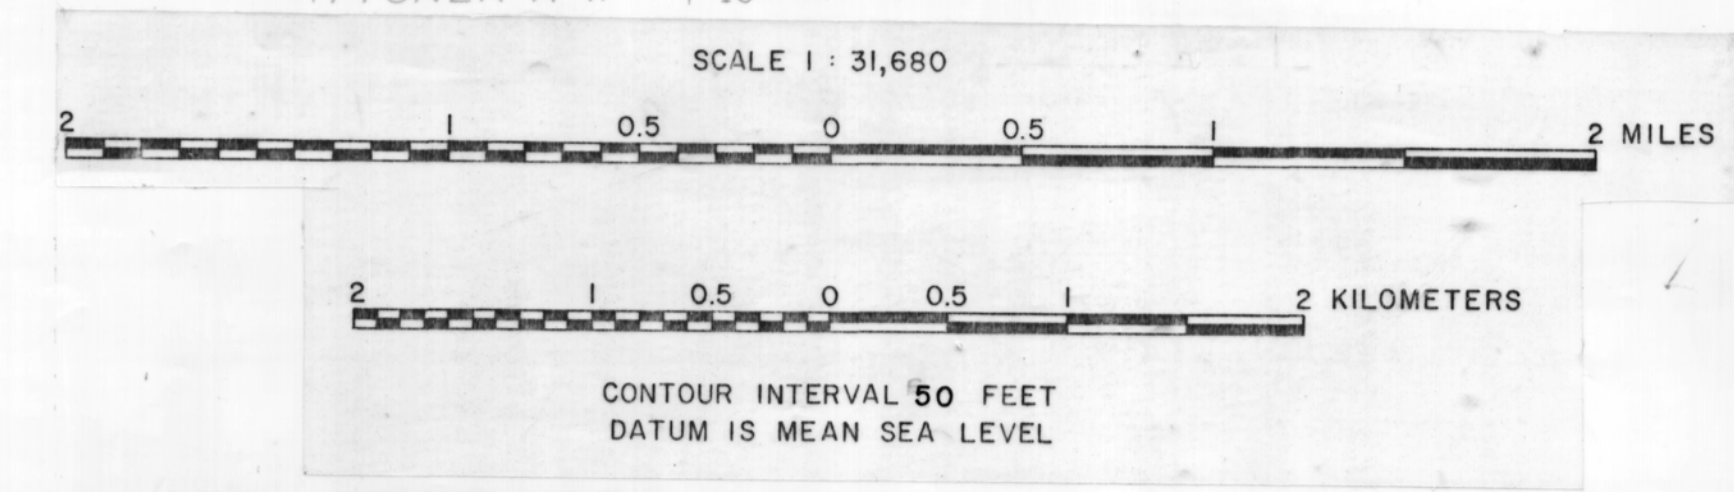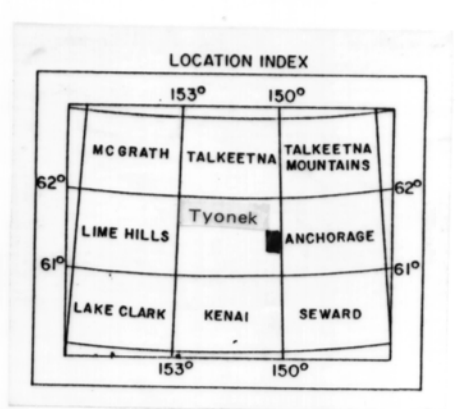

**PEAT RESOURCE MAP, TYONEK B-I QUADRANGLE, ALASKA**

by  
 Rawlinson, S.E., Huck, R.W., and Hardy, S.B.  
 1982