

Division of Geological & Geophysical Surveys

PUBLIC-DATA FILE 96-6

**PROJECT REPORT OF THE AIRBORNE GEOPHYSICAL SURVEY
FOR THE RAMPART-MANLEY MINING DISTRICT, ALASKA 1996**

by

Ruth Pritchard
Dighem

April 1996

THIS REPORT HAS NOT BEEN REVIEWED FOR
TECHNICAL CONTENT (EXCEPT AS NOTED IN TEXT) OR FOR
CONFORMITY TO THE EDITORIAL STANDARDS OF DGGS.

Released by

STATE OF ALASKA
DEPARTMENT OF NATURAL RESOURCES
Division of Geological & Geophysical Surveys
794 University Avenue, Suite 200
Fairbanks, Alaska 99709-3645

WGM INC., DIGHEM SURVEY
OF
RAMPART-MANLEY MINING DISTRICTS, ALASKA
FOR
STATE OF ALASKA
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF GEOLOGICAL AND GEOPHYSICAL SURVEYS

Quadrangles: Livengood A-6/B-6/C-6;
 Tanana A-1/A-2/A-3/B-1/B-2/B-3/C-1;
 Kantishna River D-1/D-2/D-3;
 Fairbanks D-6

Dighem, A division of CGG Canada Ltd.
Mississauga, Ontario
February 20, 1996

Ruth A. Pritchard
Geophysicist

A0621FEB.96R

SUMMARY

This report describes the logistics and results of a DIGHEM^V airborne geophysical survey carried out under contract to WGM Inc., Mining and Geological Consultants, for the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys, over a property located in the Rampart-Manley area, Alaska. Total coverage of the survey block amounted to 3124 miles (5027 km). The survey was flown from September 26 to October 19, 1995.

The purpose of the survey was to detect zones of conductive mineralization and to provide information that could be used to map the geology and structure of the survey area. This was accomplished by using a DIGHEM^V multi-coil, multi-frequency electromagnetic system, supplemented by a high sensitivity Cesium magnetometer and a four-channel VLF receiver. The information from these sensors was processed to produce maps which display the magnetic and conductive properties of the survey area. A GPS electronic navigation system, utilizing a UHF link, ensured accurate positioning of the geophysical data with respect to the base maps. Visual flight path recovery techniques were used to confirm the location of the helicopter where visible topographic features could be identified on the ground.

The survey property contains many anomalous features, some of which may be considered as exploration targets. Most of the inferred bedrock conductors appear to warrant further investigation using appropriate surface exploration techniques. Areas of

interest may be assigned priorities on the basis of supporting geophysical, geochemical and/or geological information. After initial investigations have been carried out, it may be necessary to re-evaluate the remaining anomalies based on information acquired from the follow-up program.

CONTENTS

1.	INTRODUCTION	1-1
2.	SURVEY EQUIPMENT	2-1
	Electromagnetic System	2-1
	Magnetometer	2-3
	Magnetic Base Station	2-3
	VLF System	2-4
	Radar Altimeter	2-4
	Analog Recorder	2-5
	Digital Data Acquisition System	2-8
	Tracking Camera	2-8
	Navigation System (RT-DGPS)	2-9
	Field Workstation	2-10
3.	PRODUCTS AND PROCESSING TECHNIQUES	3-1
	Base Maps	3-1
	Electromagnetic Anomalies	3-1
	Resistivity	3-3
	EM Magnetite	3-3
	Total Field Magnetics	3-3
	VLF	3-4
	Multi-channel Stacked Profiles	3-4
	Contour, Color and Shadow Map Displays	3-5
	Conductivity-depth Sections	3-6
4.	SURVEY RESULTS	4-1
	GENERAL DISCUSSION	4-1
	GEOLOGY	4-6
	DESCRIPTION OF SURVEY RESULTS	4-9
5.	BACKGROUND INFORMATION	5-1
	ELECTROMAGNETICS	5-1
	MAGNETICS	5-21
	VLF	5-23
6.	CONCLUSIONS AND RECOMMENDATIONS	6-1

APPENDIX A
LIST OF PERSONNEL

APPENDIX B
EM ANOMALY LIST

LIST OF TABLES

Table 2-1. The Analog Profiles	2-6
Table 2-2. The Digital Profiles	2-7
Table 3-1. Products which Accompany this Report	3-2
Table 4-1. EM Anomaly Statistics	4-2
Table 5-1. EM Anomaly Grades	5-4

LIST OF FIGURES

Figure 1-1. Location Map of the Survey Area	1-2
Figure 4-1. Interpretation Map of the Area (sheet 1)	map pocket
Figure 4-2. Interpretation Map of the Area (sheet 2)	map pocket
Figure 5-1. Typical Dighem Anomaly Shapes	5-3

INTRODUCTION

A DIGHEM^V electromagnetic/resistivity/magnetic/VLF survey was flown under contract to WGM Inc., Mining and Geological Consultants, for the State of Alaska, Department of Natural Resources, Division of Geological and Geophysical surveys, over a survey block located in the Rampart-Manley Mining Districts, Alaska. The survey was flown from September 26 to October 19, 1995. The survey area is located in quadrangles: Livengood A-6/B-6/C-6; Tanana A-1/A-2/A-3/B-1/B-2/B-3/C-1; Kantishna River D-1/D-2/D-3; Fairbanks D-6 (see Figure 1-1).

Survey coverage consisted of approximately 3124 line-miles (5027 line-km), including 250 line-miles (403 line-km) of tie lines. Flight lines were flown in an azimuthal direction of 0°/180° with a line separation of 1/4-mile (400 metres). Tie lines were flown perpendicular to the flight line direction with a separation of 3 miles.

The survey employed the DIGHEM^V electromagnetic system. Ancillary equipment consisted of a magnetometer, radar altimeter, video camera, analog and digital recorders, a VLF receiver and an electronic navigation system. Details on the survey equipment are given in Section 2.

SURVEY EQUIPMENT

The instrumentation was installed in an Aerospatiale AS350B2 turbine helicopter (Registration N165EH) which was provided by Era Aviation Inc. The helicopter flew at an average airspeed of 66 mph (106 km/hr) with an EM bird height of approximately 30 m.

Electromagnetic System

Model: DIGHEM^V

Type: Towed bird, symmetric dipole configuration operated at a nominal survey altitude of 30 metres. Coil separation is 8 metres for 900 Hz, 5500 Hz and 7200 Hz, and 6.3 metres for the 56,000 Hz coil-pair.

Coil orientations/frequencies:	coaxial	/	900 Hz
	coplanar	/	900 Hz
	coaxial	/	5,500 Hz
	coplanar	/	7,200 Hz
	coplanar	/	56,000 Hz

Channels recorded:	5 inphase channels
	5 quadrature channels
	2 monitor channels

Sensitivity:	0.06 ppm at	900 Hz
	0.10 ppm at	5,500 Hz
	0.10 ppm at	7,200 Hz
	0.30 ppm at	56,000 Hz

Sample rate:	10 per second
--------------	---------------

The electromagnetic system utilizes a multi-coil coaxial/coplanar technique to energize conductors in different directions. The coaxial coils are vertical with their axes in the flight direction. The coplanar coils are horizontal. The secondary fields are sensed simultaneously by means of receiver coils which are maximum coupled to their respective transmitter coils. The system yields an inphase and a quadrature channel from each transmitter-receiver coil-pair.

The EM system was calibrated for phase at the beginning of each day of operation. Gain calibrations were made at the start of flying. They were checked periodically throughout the survey and at the end of the flying of the survey block. Additional gain calibrations were made after any maintenance to the EM system.

The gain calibration was performed by inducing a 100 ppm signal into the system for each frequency using a calibrated coil, which was held externally to the EM bird. A corresponding reading in ppm was then obtained from the EM data acquisition system.

The phase calibration used a ferrite rod, which was held externally to the EM bird, that produced a negative deflection on the inphase electromagnetic parameter, but no deflection on the quadrature parameter. The phase was adjusted until no deflection was apparent on the quadrature EM parameter.

Magnetometer

Model:	Picodas 3340
Type:	Optically pumped Cesium vapour
Sensitivity:	0.01 nT
Sample rate:	10 per second

The magnetometer sensor is towed in a bird 20 m below the helicopter.

Magnetic Base Station

Model:	GSM-19T
Type:	Digital recording proton precession
Sensitivity:	0.20 nT
Sample rate:	3 seconds

A digital recorder is operated in conjunction with the base station magnetometer to record the diurnal variations of the earth's magnetic field. The clock of the base station is synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

VLF System

Manufacturer:	Herz Industries Ltd.
Type:	Totem-2A
Sensitivity:	0.1 %
Stations:	Seattle, Washington; NLK, 24.8 kHz Annapolis, Maryland; NSS, 21.4 kHz Cutler, Maine; NAA, 24.0 kHz Lualualei, Hawaii; NPM, 23.4 kHz

The VLF receiver measures the total field and vertical quadrature components of the secondary VLF field. Signals from two separate transmitters can be measured simultaneously. The VLF sensor is housed in the same bird as the magnetic sensor, and is towed 20 m below the helicopter.

Radar Altimeter

Manufacturer:	Honeywell/Sperry
Type:	AA 220
Sensitivity:	0.3 m

The radar altimeter measures the vertical distance between the helicopter and the ground. This information is used in the processing algorithm which determines conductor depth.

Analog Recorder

Manufacturer:	RMS Instruments
Type:	DGR33 dot-matrix graphics recorder
Resolution:	4x4 dots/mm
Speed:	1.5 mm/sec

The analog profiles are recorded on chart paper in the aircraft during the survey. Table 2-1 lists the geophysical data channels and the vertical scale of each profile.

Table 2-1. The Analog Profiles

Channel Name	Parameter	Scale units/mm	Designation on digital profile
1X9I	coaxial inphase (900 Hz)	2.5 ppm	CXI (900 Hz)
1X9Q	coaxial quad (900 Hz)	2.5 ppm	CXQ (900 Hz)
3P4I	coplanar inphase (900 Hz)	2.5 ppm	CPI (900 Hz)
3P4Q	coplanar quad (900 Hz)	2.5 ppm	CPQ (900 Hz)
2P7I	coplanar inphase (7200 Hz)	5 ppm	CPI (7200 Hz)
2P7Q	coplanar quad (7200 Hz)	5 ppm	CPQ (7200 Hz)
4X7I	coaxial inphase (5500 Hz)	5 ppm	CXI (5500 Hz)
4X7Q	coaxial quad (5500 Hz)	5 ppm	CXQ (5500 Hz)
5P5I	coplanar inphase(56000 Hz)	10 ppm	CPI (56 kHz)
5P5Q	coplanar quad (56000 Hz)	10 ppm	CPQ (56 kHz)
ALTR	altimeter	3 m	ALT
MAGC	magnetics, coarse	20 nT	MAG
MAGF	magnetics, fine	2.0 nT	
VF1T	VLF-total: primary stn.	2%	
VF1Q	VLF-quad: primary stn.	2%	
VF2T	VLF-total: secondary stn.	2%	
VF2Q	VLF-quad: secondary stn.	2%	
CXSP	coaxial spherics monitor		
CPSP	coplanar spherics monitor		CPS
CXPL	coaxial powerline monitor		CXP
CPPL	coplanar powerline monitor		
4XSP	coaxial spherics monitor		

Table 2-2. The Digital Profiles

<u>Channel Name (Freq)</u>	<u>Observed parameters</u>	<u>Scale units/mm</u>
MAG	magnetics - fine	5 nT
MAG	magnetics - coarse	50 nT
TOP	height above mean sea level	60 m
ALT	bird height	6 m
CXI (900 Hz)	vertical coaxial coil-pair inphase	2 ppm
CXQ (900 Hz)	vertical coaxial coil-pair quadrature	2 ppm
CPI (900 Hz)	horizontal coplanar coil-pair inphase	2 ppm
CPQ (900 Hz)	horizontal coplanar coil-pair quadrature	2 ppm
CXI (5500 Hz)	vertical coaxial coil-pair inphase	4 ppm
CXQ (5500 Hz)	vertical coaxial coil-pair quadrature	4 ppm
CPI (7200 Hz)	horizontal coplanar coil-pair inphase	4 ppm
CPQ (7200 Hz)	horizontal coplanar coil-pair quadrature	4 ppm
CPI (56 kHz)	horizontal coplanar coil-pair inphase	10 ppm
CPQ (56 kHz)	horizontal coplanar coil-pair quadrature	10 ppm
CXP	coaxial powerline monitor	
CPS	coplanar spherics monitor	
<u>Computed Parameters</u>		
DFI (900 Hz)	difference function inphase from CXI and CPI	2 ppm
DFQ (900 Hz)	difference function quadrature from CXQ and CPQ	2 ppm
RES (900 Hz)	log resistivity	.06 decade
RES (7200 Hz)	log resistivity	.06 decade
RES (56 kHz)	log resistivity	.06 decade
DP (900 Hz)	apparent depth	6 m
DP (7200 Hz)	apparent depth	6 m
DP (56 kHz)	apparent depth	6 m
CDT	conductance	1 grade

Digital Data Acquisition System

Manufacturer: RMS Instruments
Model: DGR 33
Recorder: RMS TCR-12, 6400 bpi, tape cartridge recorder

The digital data are used to generate several computed parameters. Both measured and computed parameters are plotted as "multi-channel stacked profiles" during data processing. These parameters are shown in Table 2-2. In Table 2-2, the log resistivity scale of 0.06 decade/mm means that the resistivity changes by an order of magnitude in 16.6 mm. The resistivities at 0, 33 and 67 mm up from the bottom of the digital profile are respectively 1, 100 and 10,000 ohm-m.

Tracking Camera

Type: Panasonic Video
Model: AG 2400/WVCD132

Fiducial numbers are recorded continuously and are displayed on the margin of each image. This procedure ensures accurate correlation of analog and digital data with respect to visible features on the ground.

Navigation System (RT-DGPS)

Model:	Sercel NR106, Real-time differential positioning
Type:	SPS (L1 band), 10-channel, C/A code, 1575.42 MHz.
Sensitivity:	-132 dBm, 0.5 second update
Accuracy:	< 5 metres in differential mode, ± 50 metres in S/A (non differential) mode

The Global Positioning System (GPS) is a line of sight, satellite navigation system which utilizes time-coded signals from at least four of the twenty-four NAVSTAR satellites. In the differential mode, two GPS receivers are used. The base station unit is used as a reference which transmits real-time corrections to the mobile unit in the aircraft, via a UHF radio datalink. The on-board system calculates the flight path of the helicopter while providing real-time guidance. The raw XYZ data are recorded for both receivers, thereby permitting post-survey processing for accuracies of approximately 5 metres.

Although the base station receiver is able to calculate its own latitude and longitude, a higher degree of accuracy can be obtained if the reference unit is established on a known benchmark or triangulation point. The GPS records data relative to the WGS84 ellipsoid, which is the basis of the revised North American Datum (NAD83).

Conversion software is used to transform the WGS84 coordinates to the system displayed on the base maps.

Field Workstation

Manufacturer: Dighem
Model: FWS: V2.65
Type: 80486 based P.C.

A portable PC-based field workstation is used at the survey base to verify data quality and completeness. Flight tapes are dumped to a hard drive to permit the creation of a database. This process allows the field operators to display both the positional (flight path) and geophysical data on a screen or printer.

PRODUCTS AND PROCESSING TECHNIQUES

The following products are available from the survey data. Those which are not part of the survey contract may be acquired later from WGM, Dighem or through the State of Alaska. Refer to Table 3-1 for a summary of the products which accompany this report.

Base Maps

Base maps of the survey area have been produced from published topographic maps. The maps used were quadrangles: Livengood A-6/B-6/C-6; Tanana A-1/A-2/A-3/B-1/B-2/B-3/C-1; Kantishna River D-1/D-2/D-3; Fairbanks D-6.

Electromagnetic Anomalies

Anomalous electromagnetic responses were selected and analysed by computer to provide preliminary electromagnetic anomaly maps. These preliminary maps were used, by the geophysicist, in conjunction with the computer-generated digital profiles, to produce the final interpreted EM anomalies which appear on the "Total Field Magnetism and EM Anomalies" maps. These maps include bedrock, surficial and cultural conductors.

Table 3-1 Products which Accompany this Report

Map Product	Map Index Number
Total field magnetics and EM anomalies (3-color offset prints)	RI 96-1
Flight lines	PDF96-1
Total field magnetics and EM anomalies (transparencies)	PDF96-2
900 Hz coplanar resistivity (transparencies)	PDF96-3
7200 Hz coplanar resistivity (transparencies)	PDF96-4
Filtered VLF (transparencies)	NR
Total field magnetics and detailed EM anomalies (transparencies) @ 1:31,680	PDF96-8
CD-ROM archive	PDF96-5
Stacked Profiles (transparencies)	*

* - No number

NR - Not requested, but can be produced on request

RI - Report of Investigations

PDF - Public Data File

All map products and profiles are at a scale of 1:63,360, unless otherwise specified.

Also provided to the State of Alaska:

Color shadow total field magnetics (4 sets)

Color 7200 Hz coplanar resistivity (4 sets)

Color 900 Hz coplanar resistivity (4 sets)

Color total field magnetics (4 sets)

CD-ROM ASCII Archive (4 copies)

Sengpiel resistivity pseudo-depth sections of selected lines

All original materials; flight logs, flight path videos, analog records and calibration records.

Resistivity

The apparent resistivity in ohm-m was generated from the inphase and quadrature EM components for the 900 Hz, 7200 Hz and 56,000 Hz coplanar data, using a pseudo-layer halfspace model. The 56,000 Hz resistivity was not a deliverable under the terms of the survey agreement. The maximum resistivity values, which are calculated for each frequency, are 1000, 8000 and 20,000 ohm-metres respectively. These cutoffs eliminate the meaningless higher resistivities which would result from very small EM amplitudes.

EM Magnetite

The apparent percent magnetite by weight can be computed wherever magnetite produces a negative inphase EM response. This calculation is more meaningful in resistive areas.

Total Field Magnetics

The aeromagnetic data were corrected for diurnal variation using the magnetic base station data and by making manual corrections on the basis of tie line intercepts and visual analysis on the I-POWER VISION Imaging Workstation. The IGRF gradient has been removed. The total field magnetic data have been presented as contours on the base

maps using a contour interval of 5 nT where gradients permit at a scale of 1:63,360, and at 2 nT for the magnetic maps plotted at 1:31,680.

VLF

VLF results were obtained from the transmitting stations at Cutler, Maine (NAA - 24.0 kHz), Seattle, Washington (NLK - 24.8 kHz), Annapolis, Maryland (NSS - 21.4 kHz), and Lualualei, Hawaii (NPM - 23.4 kHz). The VLF data was not required as a deliverable under the terms of the survey agreement.

The VLF data can be digitally filtered to remove long wavelengths such as those caused by variations in the transmitted field strength.

Multi-channel Stacked Profiles

Distance-based profiles of the digitally recorded geophysical data were generated and plotted by computer. These profiles also contain the calculated parameters which are used in the interpretation process. These were produced as worksheets prior to interpretation, and have been presented in the final corrected form after interpretation. The profiles display electromagnetic anomalies with their respective interpretive symbols.

The profiles are presented on transparent medium, from which prints can be made, at a scale of 1:63,360.

Contour, Colour and Shadow Map Displays

The geophysical data are interpolated onto a regular grid using a modified Akima spline technique. The resulting grid is suitable for generating contour maps of excellent quality. The grid cell size is usually 25 % of the line interval.

Colour maps are produced by interpolating the grid down to the pixel size. The parameter is then incremented with respect to specific amplitude ranges to provide colour "contour" maps. Colour maps of the total magnetic field are particularly useful in defining the lithology of the survey area.

Shadow maps are generated by employing an artificial sun to cast shadows on a surface defined by the geophysical grid. Shadow maps of the total field magnetic data were combined with the colour magnetic grids to produce colour shadowed total field magnetic maps.

Conductivity-depth Sections

Sengpiel resistivity pseudo-depth sections for selected lines were delivered to the State of Alaska. The apparent resistivities for all coplanar frequencies are displayed simultaneously as coloured conductivity-depth sections, which portray a smoothed approximation of the true resistivity distribution with depth.

The resistivity data are derived from the pseudo-layer halfspace model. The apparent resistivity is plotted at the centroid depth¹. Conductivity-depth sections are most useful in conductive layered situations, but may be unreliable in areas of moderate to high resistivity where signal amplitudes are weak. In areas where inphase responses have been suppressed by the effects of magnetite, the computed resistivities shown on the sections may be unreliable.

¹ Approximate Inversion of Airborne EM Data from Multilayered Ground: Sengpiel, K.P., Geophysical Prospecting 36, 446-459, 1988.

SURVEY RESULTS

GENERAL DISCUSSION

The survey results are presented on two map sheets for each parameter at a scale of 1:63,360. The total field magnetics and detailed electromagnetic anomalies are presented on six map sheets at a scale of 1:31,680. Table 4-1 summarizes the EM responses in the survey area, with respect to conductance grade and interpretation.

The anomalies shown on the "Total Field Magnetics and Electromagnetic Anomalies" maps are based on a near-vertical, half plane model. This model best reflects "discrete" bedrock conductors. Wide bedrock conductors or flat-lying conductive units, whether from surficial or bedrock sources, may give rise to very broad anomalous responses on the EM profiles. These may not appear as anomalies on the maps if they have a regional character rather than a locally anomalous character. These broad conductors, which more closely approximate a half space model, will be maximum coupled to the horizontal (coplanar) coil-pair and should be more evident on the resistivity parameter. Resistivity maps, therefore, may be more valuable than the electromagnetic anomaly maps, in areas where broad or flat-lying conductors are considered to be of importance. Contoured resistivity maps, based on the 900 Hz and 7200 Hz coplanar data are included with this report.

TABLE 4-1
EM ANOMALY STATISTICS
RAMPART-MANLEY MINING DISTRICTS, ALASKA

CONDUCTOR GRADE	CONDUCTANCE RANGE SIEMENS (MHOS)	NUMBER OF RESPONSES
7	>100	92
6	50 - 100	92
5	20 - 50	493
4	10 - 20	1369
3	5 - 10	2492
2	1 - 5	3262
1	<1	541
*	INDETERMINATE	1923
TOTAL		10264

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	3014
B	DISCRETE BEDROCK CONDUCTOR	4824
S	CONDUCTIVE COVER	645
H	ROCK UNIT OR THICK COVER	1582
E	EDGE OF WIDE CONDUCTOR	44
M	MAGNETITE	147
L	CULTURE	8
TOTAL		10264

(SEE EM MAP LEGEND FOR EXPLANATIONS)

Excellent resolution and discrimination of conductors was accomplished by using a fast sampling rate of 0.1 sec and by employing a common frequency (900 Hz) on two orthogonal coil-pairs (coaxial and coplanar). The resulting "difference channel" parameters often permit differentiation of bedrock and surficial conductors, even though they may exhibit similar conductance values.

Anomalies which occur near the ends of the survey lines (i.e., outside the survey area), should be viewed with caution. Some of the weaker anomalies could be due to aerodynamic noise, i.e., bird bending, which is created by abnormal stresses to which the bird is subjected during the climb and turn of the aircraft between lines. Such aerodynamic noise is usually manifested by an anomaly on the coaxial inphase channel only, although severe stresses can affect the coplanar inphase channels as well.

In some portions of the survey area, the steep topography forced the pilot to exceed normal terrain clearance for reasons of safety. It is possible that some weak conductors may have escaped detection in areas where the bird height exceeded 120 m. In difficult areas where near-vertical climbs were necessary, the forward speed of the helicopter was reduced to a level which permitted excessive bird swinging. This problem, combined with the severe stresses to which the bird was subjected, gave rise to aerodynamic noise levels which are slightly higher than normal. Where warranted, reflights were carried out to minimize these adverse effects.

The EM anomalies resulting from this survey appear to fall within one of four general categories. The first type consists of discrete, well-defined anomalies which yield marked inflections on the difference channels. These anomalies are usually attributed to conductive sulphides or graphite and are generally given a "B", "T" or "D" interpretive symbol, denoting a bedrock source.

The second class of anomalies comprises moderately broad responses which exhibit the characteristics of a half space and do not yield well-defined inflections on the difference channels. Anomalies in this category are usually given an "S" or "H" interpretive symbol. The lack of a difference channel response usually implies a broad or flat-lying conductive source such as overburden. Some of these anomalies may reflect conductive rock units or zones of deep weathering. In this area, many of these anomalies may reflect flat-lying conductive rock units, or water saturated material beneath permafrost.

The effects of conductive overburden are evident over portions of the survey area. Although the difference channels (DFI and DFQ) are extremely valuable in detecting bedrock conductors which are partially masked by conductive overburden, sharp undulations in the bedrock/overburden interface can yield anomalies in the difference channels which may be interpreted as possible bedrock conductors. Such anomalies usually fall into the "S?" or "B?" classification but may also be given an "E" interpretive symbol, denoting a resistivity contrast at the edge of a conductive unit.

The third class consists of cultural anomalies which are usually given the symbol "L" or "L?". Any interpreted conductors which occur in close proximity to cultural sources, should be confirmed prior to drilling.

The fourth class of anomalies consist of negative inphase responses which are indicative of magnetite. These are represented by triangles on the total field magnetics and EM anomaly maps.

In areas where EM responses are evident primarily on the quadrature components, zones of poor conductivity are indicated. Where these responses are coincident with magnetic anomalies, it is possible that the inphase component amplitudes have been suppressed by the effects of magnetite. Most of these poorly-conductive magnetic features give rise to resistivity anomalies which are only slightly below background. If it is expected that poorly-conductive economic mineralization may be associated with magnetite-rich units, most of these weakly anomalous features will be of interest. In areas where magnetite causes the inphase components to become negative, the apparent conductance and depth of EM anomalies may be unreliable.

It is difficult to assess the relative merits of EM anomalies on the basis of conductance. It is recommended that an attempt be made to compile a suite of geophysical "signatures" over areas of interest. Anomaly characteristics are clearly

defined on the computer-processed geophysical data profiles which are supplied as one of the survey products.

The "Total Field Magnetism and Detailed Electromagnetic Anomalies" maps show the anomaly locations with the interpreted conductor type, dip, conductance and depth being indicated by symbols. Direct magnetic correlation is also shown if it exists.

This report is intended only as a general overview. A complete assessment of the survey data should be undertaken, compiling all geophysical, geological and geochemical data available in areas which are selected for follow-up.

GEOLOGY²

The study area is comprised of several mountainous ridges in the Western Yukon-Tanana Upland of interior Alaska. These include the Wolverine-Roughtop Mountain, Serpentine Ridge, and Eureka Dome areas. The northern boundary is flanked by the Yukon River near the village of Rampart, and the southwestern boundary is flanked by the Tanana River near the village of Manley.

²

Most of this information is taken directly from the Appendix to the Survey Agreement, which was written by ADGGS personnel.

Most of the southwestern half of the survey block consists largely of the Juro-Cretaceous Wilbur Creek flysch. Several mafic and ultramafic plutons are present in the flysch. The largest body (reported to be serpentinite) trends to the east and crops out on Serpentine Ridge. Smaller bodies (noted as mafic rocks) crop out around Eureka Dome. Near Eureka Dome the belts of mafic bodies trends east-northeast.

Two other plutonic suites intrude the Wilbur Creek flysch. The oldest plutons (85-100 Ma) are generally granodiorite to granite, but a few mafic plutons are reported to be present. These rocks intrude generally in the northern part of the flysch unit. The largest bodies are present at Elephant Mountain and Roughtop Mountain. The younger intrusions (65-75 Ma) are centered around the Hot Springs Dome area.

Northeast-trending, layered rocks crop out north of the flysch in the northern portion of the block. The layered rock sequences consist of: (1) a structurally complex package of meta-chert and low grade schists of Lower and Middle Paleozoic age (the Baldy Mountain terrane); and (2) upper Paleozoic flysch and chert-pebble conglomerate; (the Minook terrane) and to the north (3) the Tozitna stratigraphic belt, which includes the mafic-volcanic-dominated Rampart Group. Small amounts of Middle-to-Late Tertiary volcanic rocks overlie the Tozitna stratigraphic belt and the Rampart Group.

The study area is highly deformed and experienced several periods of metamorphism and fold and fault deformation. Many of the sequences of rocks are fault

bounded and the Paleozoic-Mesozoic sequences are structurally compressed by thrust faults. The most obvious structural feature is the west-northwest trending Stevens Creek fault. It is thought to offset the layered rock sequences about 6 miles in a right lateral direction.

The region has been a well-known placer gold mining area comprising part of the Rampart and Hot Springs mining districts. Cumulative past production, all from placer operations, exceeds 747,593 ounces of gold and about 800,000 pounds of byproduct tin. Several styles of mineralization have been identified. Stockwork gold-copper mineralization has been identified in 90 Ma old plutons exposed on Wolverine and Roughtop Mountains; these intrusives are similar in age and chemistry to the Fort Knox pluton in the Fairbanks district. Gold veins have been also found in association with the 62 Ma pluton underlying Hot Springs Dome. Although this latter suite of intrusions is not generally thought to be auriferous near Fairbanks, it is of the same age as the gold-polymetallic-bearing Kuskokwim intrusive suite. The Kuskokwim suite crops out to the southwest of the study area and strikes to the northeast.

Industry exploration in the area has identified possibly important epithermal gold silver mineralization hosted in Tertiary volcanic rocks in two areas immediately west of Rampart village.

The sources of tin and niobium mineralization near Tofty are controversial. Rock units have been described as magnetite-apatite bearing 'limestone' in several localities in the Tofty area, others examined one of the localities and suggested it was an altered carbonatite intrusion. This Idaho Gulch prospect is estimated to contain about 340,000 pounds of niobium resources. Tin mineralization has never been identified as positively belonging to either the 85-100 Ma or 65-75 Ma intrusive suites. Cassiterite cobbles attached to schist wallrock have been identified in placer concentrates.

Massive sulphide occurrences have been briefly described in the Tozitna and Baldy Mountain terranes; however, no drillable prospects have been identified.

Placer deposits have been the principal economic resource of past years. Many of the placers are part of an extensive ancestral river system of probable Late Tertiary age that links the Tofty-Sullivan Bench system with the placers of the Rhode Island-New York Creek system.

DESCRIPTION OF SURVEY RESULTS

The following is a brief overview of geophysical responses in the survey area, with reference to geological mapping. Figures 4-1 and 4-2 in the map pockets of this report show sketches which identify features that are discussed in this report.

A large, highly resistive zone, Zone A on the interpretation map, is coincident with the topographic high known as Roughtop Mountain. The geology defines this zone as a granitic pluton consisting of quartz monzonite, granite, monzonite and possibly some granodiorite. The magnetic features coincident with this zone are quite complex, generally consisting of moderately magnetic features surrounding a less-magnetic centre core. The edge of Zone A is evident on the magnetic map. The northern edge of the zone is associated with a magnetic contrast. The southern boundary is less distinct. It is defined by a thin magnetic low coincident with the resistivity contrast. The magnetic contrast is less distinct at the southern edge as rock units to the south display similar magnetic values to the rocks within Zone A.

Two prominent structural features, F1 and F2 on the interpretation map, extend west-northwest/east-southeast immediately northeast of Roughtop Mountain. These are part of the Steven's Creek fault system. These structural breaks are evident on both the magnetic and resistivity parameters. F2 is more prominent on the resistivity parameters, although still visible in the magnetics. A moderately thin band of conductivity is associated with F1. Some anomalies within this trend display well-defined anomaly shapes indicative of thin bedrock sources. The EM characteristics change dramatically in the vicinity of the southeast portion of F2, as F2 truncates many highly conductive units containing possible bedrock anomalies.

Several other, smaller possible structural features, F3, F4 and F5, intersect the rock units associated with Roughtop Mountain. F3 is also evident on the resistivity maps as a weakly conductive trend. Conductivity may be due to bedrock sources such as disseminated pyrite or graphite, or clay in the fault gouge.

Another highly resistive zone, Zone B, is situated near the southern edge of the survey area. It is associated with the topographic high known as the Manley Hot Springs Dome and the related Bean Ridge. The geology of the area indicates that this zone represents a granite pluton consisting of biotite granite and small areas of tourmaline-rich granite in the border zone. This resistive zone is generally coincident with a non-magnetic zone. A sharp resistivity contrast is evident along most of the limit of the zone, probably defining the contact of the granite pluton and the surrounding, conductive clastic sedimentary rocks and shales. The clastic sedimentary rocks and shales are probably conductive due to graphitic layers. At least two possible structural linears inferred from the magnetic data, F6 and F7, trend northwest/southeast and intersect Zone B.

A northeast trending magnetic low is situated immediately north of the resistivity contrast associated with the edge of the pluton. Its southern edge is coincident with the resistivity contrast. Many thin bedrock conductors are associated with this thin magnetic low. The magnetic low could reflect a remanently magnetized rock unit. The northern edge of the non-magnetic unit displays a sharp contact, C1, with a magnetic unit to the

north. This magnetic contact seems to extend in an arcuate manner to the east. The northern edge of the non-magnetic unit is coincident with the southern limit of highly conductive zone, R1. Anomalies within R1 generally reflect strong, broad bedrock responses which may reflect shallow dipping graphite-rich layers. A highly conductive zone extends east/west immediately east of Zone R1. It is coincident with the eastern portion of C1. This zone consists of anomalies which reflect strong, broad conductive sources at depth.

The highest magnetic values on Sheet 1 are situated near the western edge of the area. They are contained within two trends, M1 and M2, which extend westward immediately west of a possible structural break, F8. The northernmost trend, M1, extends approximately east/west and is associated with a topographic feature known as Serpentine Ridge. This rock unit is mapped as serpentinite and mafic rocks on the geological map. They apparently intrude the surrounding clastic sedimentary rocks. This highly magnetic trend is magnetite-rich, as evidenced by the negative inphase responses which are indicated by a triangular anomaly symbol on the magnetic maps. This trend displays a sharp contact, C2, with relatively non-magnetic units to the north. The magnetic contact displays a general correlation with a resistivity contrast. The mafic rocks are generally not as conductive as the surrounding rock units, and give rise to a resistivity high. EM anomalies which reflect probable bedrock sources are associated with the highly magnetic units, although they are not directly coincident with the

magnetic peaks. They are usually associated with the relative magnetic lows between individual peaks.

The conductors may be caused by clay associated with weathered contacts or faulted contacts, or non-magnetic mineralization such as graphite. Clay is a suspected source because ultramafic rocks tend to weather to conductive clays. The anomaly shapes may resemble discrete bedrock conductors if the clay accumulates in near vertical cracks or where sharp overburden/bedrock interfaces are formed at contacts with rock units that are more resistant to weathering.

The southernmost trend, M2, displays similar geophysical characteristics to the east/west trending northern arm, although it is not associated with a topographic high. It is quite segmented in appearance. Both units are intersected by several possible structural features, the most prominent are indicated as F9 and F10.

Possible fault F8 seems to coincide with the eastern extent of the serpentinite and mafic rock unit. Both the magnetic and conductive properties change immediately east of this break, as units to the east are generally more conductive and exhibit significantly lower magnetic intensities. This suggests that the units to the east are rocks classified as clastic (graphite-rich) sediments and shale.

A highly conductive zone, R2, is situated immediately south of the southernmost possible mafic rock unit, M2. It comprises anomalies indicative of closely-spaced, strong bedrock sources. Some anomalies reflect broader sources, or shallowly dipping layers. Resistivities of less than 3 ohm-metres are displayed within this zone, and the approximate limit of this zone seems to be defined by the 10 ohm-metre contour. Resistivities and anomaly characteristics are similar to those of the other highly conductive zone, R1. Magnetic correlation varies within this conductive zone, although it is generally associated with a magnetic unit. The southern limit of R2 is coincident with the northern edge of a relatively non-magnetic zone.

Resistivity patterns immediately south of R2 display alternating thin bands of moderately conductive and less conductive material which trend approximately northeast/southwest. Many possible bedrock responses have been interpreted associated with these units. The source of the conductivity in R2 and the area between R2 and R1 is likely graphite-rich layers. Direct correlation of an EM anomaly and a magnetic anomaly may indicate pyrrhotite, which could possibly be of interest.

Little magnetic correlation is evident for most of these features, although a string of isolated magnetic highs, noted as M3 on the interpretation map, also trends northeast/southwest through the middle of the zone. Some of these magnetic features contain moderate percentages of magnetite, as evidenced by the associated negative inphase responses. Magnetic trend M3 is intersected by several structural features.

Possible faults F6 and F9 offset this trend in the vicinity of Miller Gulch and Sullivan Creek. Some work has been done in this area to try to discover lode sources of placer minerals which are well-known in this area, informally known as the Toffy tin belt³. In 1956, trenching on upper Idaho Gulch identified two bodies of iron-rich regolith. These coincide with the magnetic highs situated between F6 and F9. Drilling of the regolith indicated that it forms conformable lenses within the N60°E trending wall rock units. Studies show that the regolith is derived from chemical weathering of the underlying dolomitic marble. Both the marble and the regolith may represent a carbonatite and its residual weathering product. The magnetic trend, M3, may indicate an extension to known limits of this unit. Magnetic intensity due to increased concentrations of magnetite increases to the east within M3.

Three moderately conductive zones, R3, R4, and R5, are situated near the north-central edge of the area. They contain moderately strong anomalies which are indicative of thin bedrock sources. These zones differ from highly conductive zones R1 and R2 as many of the anomalies within these zones have well-defined anomaly shapes, which are indicative of near vertical, sheet-like, conductive bedrock units. Magnetic correlation varies for these three zones, although the magnetic patterns display the same general trend as the resistivity data. Anomalies within R3 display some correlation with several

³ J. Dean Warner, C.L. Mardock and D.C. Dahlin, A Columbium-Bearing Regolith on Upper Idaho Gulch, Near Toffy, AK, Bureau of Mines Information Circular, 1986.

thin magnetic trends. Some display direct magnetic correlation and may reflect massive sulphides. Several possible structural breaks, inferred from the magnetic data, intersect Zone R3 (F11, F12 and F13). R4 displays a general association with a non-magnetic unit. R5 is associated with a moderately magnetic unit situated on the northern flank of the highly magnetic trend, M4. It is separated from M4 by a possible linear structural feature, F14. The conductive/magnetic relationships may help to map lithology in this area, particularly if the geologic classifications are related to the concentrations of magnetite.

Magnetic trends, M4 and M5, are the dominant magnetic features in the central region of the area. These arcuate trends strike east/west to east-northeast/west-southwest. Magnetic unit M4 is situated immediately south of zones R4 and R5. It is coincident with a resistive zone. No anomalies are directly coincident with the magnetic unit, but are located on its north and south flanks. Magnetite is evident in higher percentages near the eastern end of this trend.

The western portion of magnetic trend M5 is also associated with a resistivity high. East of line 11260, some conductivity is associated with this magnetic unit. This magnetic trend coincides with a string of outcropping mafic rocks, consisting mostly of gabbro but which may include some diorite. Several of these mafic units outcrop in the vicinity of Eureka Dome, and give rise to resistivity highs. M5 is intersected by F15 and F16 near its eastern limit, and is possibly truncated by F17 at its eastern end.

The eastern limit of M5 is situated immediately south of Zone C, a large, highly resistive zone associated with Elephant Mountain. The geology indicates that this zone is a granitic pluton consisting of quartz monzonite, granite, monzonite and possibly some granodiorite. It is possibly surrounded by a zone of hornfelsic rocks. Magnetic correlation is varied within Zone C, although a magnetic low is generally associated with the central portion of the zone. The magnetic data are quite complex in the vicinity of Elephant Mountain. Zone C is intersected by possible structural breaks F17, F18, F19 and F20. Trend F20 cuts across the northeast tip of Elephant Mountain. A moderately magnetic unit trends north-northeast/south-southwest at the southwestern edge of Zone C. It is associated with a portion of a highly conductive trend which extends north-northeast/south-southwest along the western edge of the pluton. Conductances and anomaly definition within this trend are similar to Zones R1 and R2.

Two other resistive zones, D and E, are situated to the northeast of Elephant Mountain. They are also associated with topographic highs. Zone D is coincident with Wolverine Mountain. They are situated within the complex highly magnetic unit which trends northeast from the northeast end of Elephant Mountain. Zones D and E may reflect rocks of similar composition to the more magnetite-rich parts of Zone C. Many possible structural breaks can be inferred from the magnetic data in the vicinity of Zones D and E which may have influenced the deposition of economic mineralization in this vicinity.

Zone F is located immediately north of possible structural feature F25. Similar to Zones D and E, it is also a highly resistive zone associated with complex magnetic features. The magnetic character of Zone F consists of higher magnetic intensities than surrounding rock units. One well-defined conductive trend, indicative of a thin bedrock source, is situated within Block F. It is associated with a thin magnetic low which parallels F25 100 metres to the north.

The northeast trending magnetic unit which contains Zones C, D, E and F displays a moderately well-defined contact, C3, with a relatively non-magnetic zone to the north. Contact C4, and the southern contact of M4 parallel C3 to mark the northern limit of the non-magnetic zone. These northeast trending contacts or faulted contacts may be related to the northeast/southwest regional faulting.

Magnetic trend M7 trends northeast/southwest at the northern limit of a non-magnetic zone. This trend is quite segmented in appearance, suggesting it has undergone some degree of deformation. Several of the magnetic features within M7 have moderate percentages of magnetite as evidenced by the associated negative inphase responses. Several moderately well-defined bedrock responses are associated with this magnetic trend. If it is thought that economic mineralization may be related to the northeast/southwest fault system, these magnetic/conductive anomalies may be of interest as they are typical of sulphide mineralization.

Magnetic trend M6 is situated approximately two miles south of trend M5, paralleling Pioneer and Deadwood Creeks. It is situated within a region southeast of M5 and the units associated with Elephant/Wolverine Mountains where the resistivity parameters display alternating thin trends of conductive and less conductive material. These thin bands trend approximately northeast/southwest. Many bedrock anomalies are associated with these trends, but few have well-defined anomaly shapes. Placer mining has been undertaken along many north-northwest/south-southeast trending creeks which empty into Pioneer Creek/Deadwood Creek. The western end of this magnetic trend seems to be truncated by fault F2, part of the Steven's Creek fault system.

The northern portion of the survey block, immediately southeast of the Yukon River, displays very complex magnetics. Magnetic features generally display east/west to east-northeast/west-southwest strike directions, although the area seems to be highly deformed. Many of the magnetic units are offset or truncated by possible structural features. Two conductive zones, R6 and R7, are situated within this complex magnetic zone. Neither zone displays direct magnetic correlation. They consist of anomalies indicative of moderately strong bedrock sources which are closely-spaced. Graphite is the most likely source of the conductivity in these rocks.

BACKGROUND INFORMATION

This section provides background information on parameters which are available from the survey data. Those which have not been supplied as survey products may be generated later from raw data on the digital archive tape.

ELECTROMAGNETICS

DIGHEM electromagnetic responses fall into two general classes, discrete and broad. The discrete class consists of sharp, well-defined anomalies from discrete conductors such as sulfide lenses and steeply dipping sheets of graphite and sulfides. The broad class consists of wide anomalies from conductors having a large horizontal surface such as flatly dipping graphite or sulfide sheets, saline water-saturated sedimentary formations, conductive overburden and rock, and geothermal zones. A vertical conductive slab with a width of 200 m would straddle these two classes.

The vertical sheet (half plane) is the most common model used for the analysis of discrete conductors. All anomalies plotted on the electromagnetic map are analyzed according to this model. The following section entitled **Discrete Conductor Analysis** describes this model in detail, including the effect of using it on anomalies caused by broad conductors such as conductive overburden.

The conductive earth (half space) model is suitable for broad conductors. Resistivity contour maps result from the use of this model. A later section entitled **Resistivity Mapping** describes the method further, including the effect of using it on anomalies caused by discrete conductors such as sulfide bodies.

Geometric interpretation

The geophysical interpreter attempts to determine the geometric shape and dip of the conductor. Figure 5-1 shows typical DIGHEM anomaly shapes which are used to guide the geometric interpretation.

Discrete conductor analysis

The EM anomalies appearing on the electromagnetic map are analyzed by computer to give the conductance (i.e., conductivity-thickness product) in Siemens (mhos) of a vertical sheet model. This is done regardless of the interpreted geometric shape of the conductor. This is not an unreasonable procedure, because the computed conductance increases as the electrical quality of the conductor increases, regardless of its true shape. DIGHEM anomalies are divided into seven grades of conductance, as shown in Table 5-1 below. The conductance in Siemens (mhos) is the reciprocal of resistance in ohms.

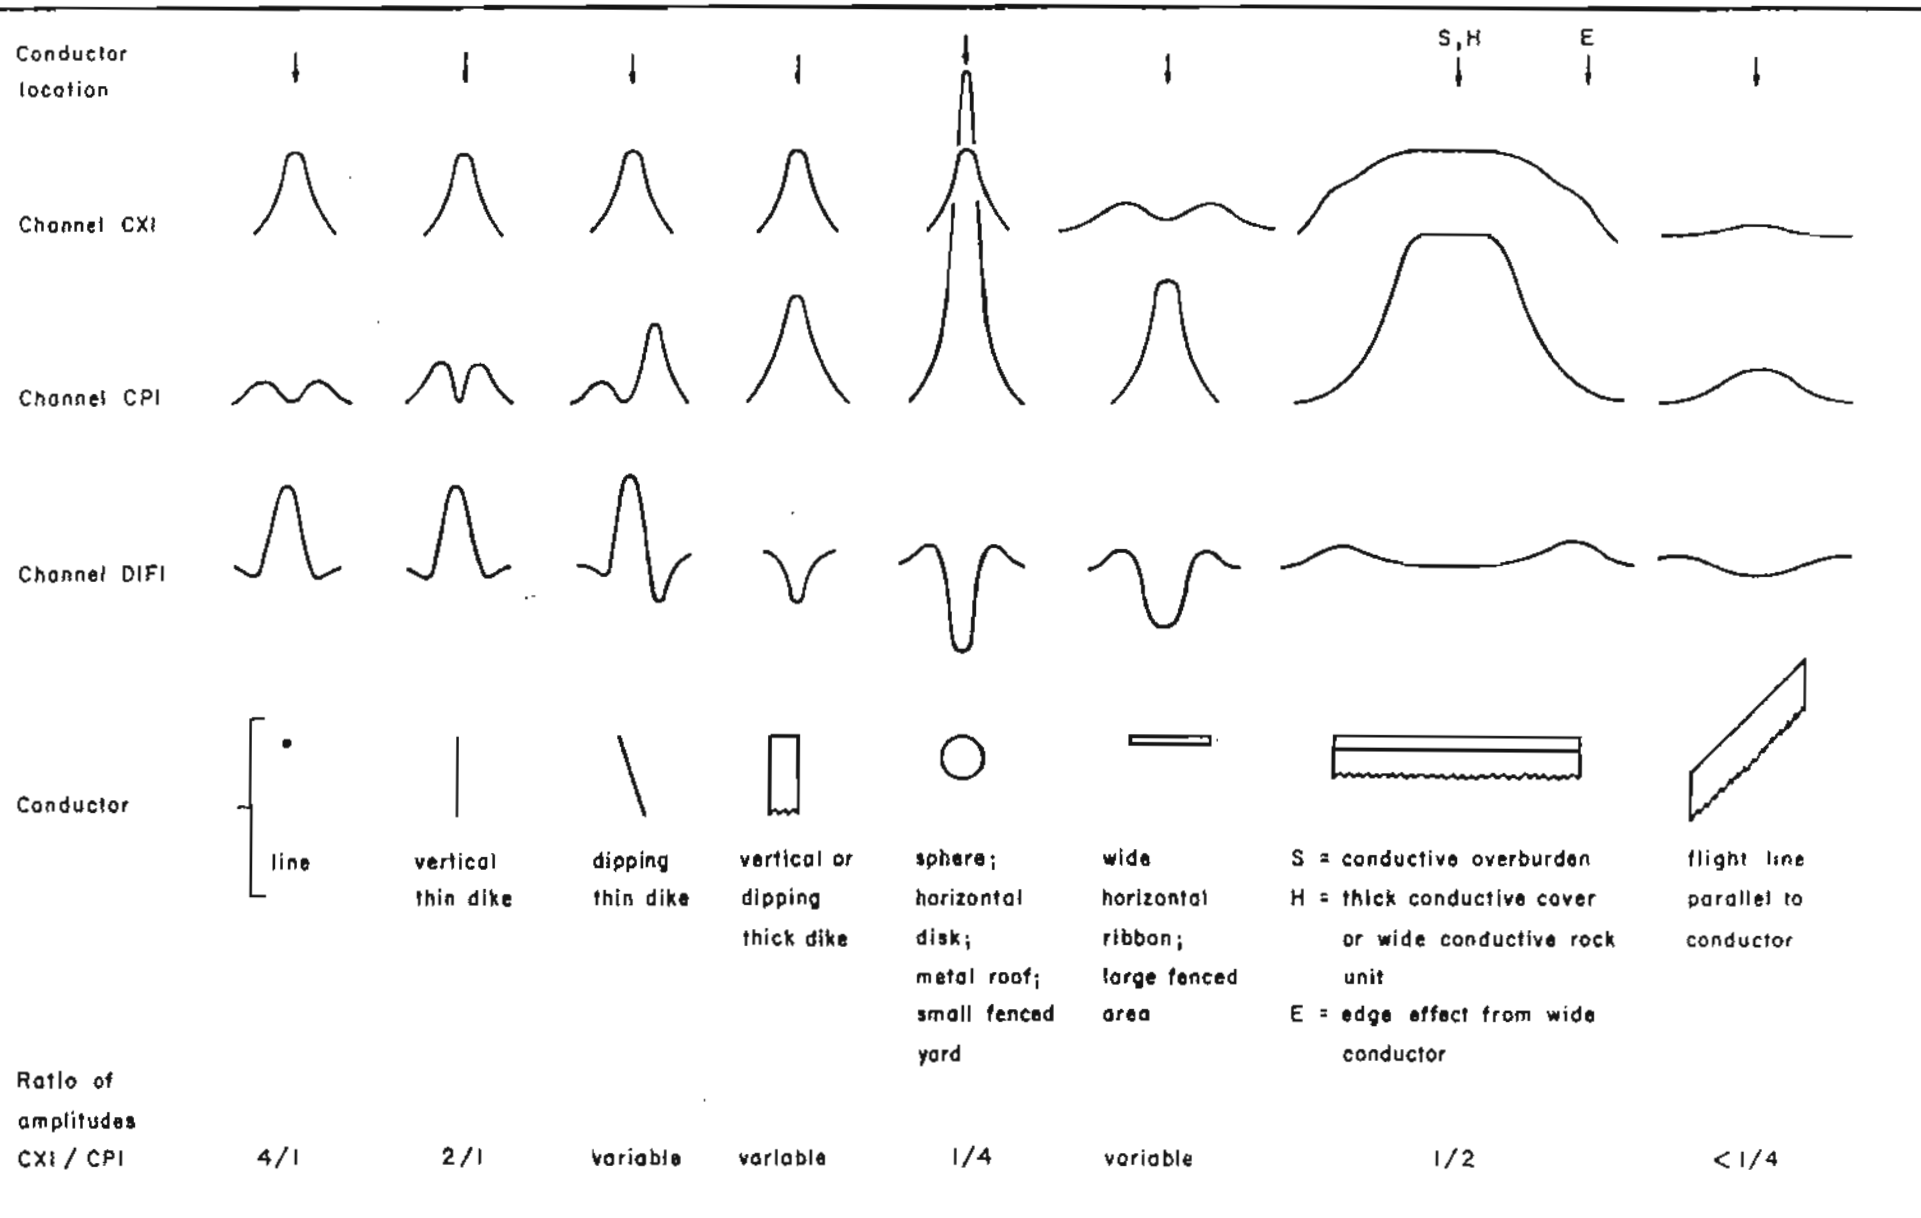


Fig 5-1 Typical DIGHEM anomaly shapes

Table 5-1. EM Anomaly Grades

<u>Anomaly Grade</u>	<u>Siemens</u>
7	> 100
6	50 - 100
5	20 - 50
4	10 - 20
3	5 - 10
2	1 - 5
1	< 1

The conductance value is a geological parameter because it is a characteristic of the conductor alone. It generally is independent of frequency, flying height or depth of burial, apart from the averaging over a greater portion of the conductor as height increases. Small anomalies from deeply buried strong conductors are not confused with small anomalies from shallow weak conductors because the former will have larger conductance values.

Conductive overburden generally produces broad EM responses which may not be shown as anomalies on the EM maps. However, patchy conductive overburden in otherwise resistive areas can yield discrete anomalies with a conductance grade (cf. Table 5-1) of 1, 2 or even 3 for conducting clays which have resistivities as low as 50 ohm-m. In areas where ground resistivities are below 10 ohm-m, anomalies caused by weathering variations and similar causes can have any conductance grade. The anomaly shapes from the multiple coils often allow such conductors to be recognized, and these are indicated

by the letters S, H, and sometimes E on the electromagnetic anomaly map (see EM map legend).

For bedrock conductors, the higher anomaly grades indicate increasingly higher conductances. Examples: DIGHEM's New Inco copper discovery (Noranda, Canada) yielded a grade 5 anomaly, as did the neighbouring copper-zinc Magusi River ore body; Mattabi (copper-zinc, Sturgeon Lake, Canada) and Whistle (nickel, Sudbury, Canada) gave grade 6; and DIGHEM's Montcalm nickel-copper discovery (Timmins, Canada) yielded a grade 7 anomaly. Graphite and sulfides can span all grades but, in any particular survey area, field work may show that the different grades indicate different types of conductors.

Strong conductors (i.e., grades 6 and 7) are characteristic of massive sulfides or graphite. Moderate conductors (grades 4 and 5) typically reflect graphite or sulfides of a less massive character, while weak bedrock conductors (grades 1 to 3) can signify poorly connected graphite or heavily disseminated sulfides. Grades 1 and 2 conductors may not respond to ground EM equipment using frequencies less than 2000 Hz.

The presence of sphalerite or gangue can result in ore deposits having weak to moderate conductances. As an example, the three million ton lead-zinc deposit of Restigouche Mining Corporation near Bathurst, Canada, yielded a well-defined grade 2

conductor. The 10 percent by volume of sphalerite occurs as a coating around the fine grained massive pyrite, thereby inhibiting electrical conduction.

Faults, fractures and shear zones may produce anomalies which typically have low conductances (e.g., grades 1 to 3). Conductive rock formations can yield anomalies of any conductance grade. The conductive materials in such rock formations can be salt water, weathered products such as clays, original depositional clays, and carbonaceous material.

On the interpreted electromagnetic map, a letter identifier and an interpretive symbol are plotted beside the EM grade symbol. The horizontal rows of dots, under the interpretive symbol, indicate the anomaly amplitude on the flight record. The vertical column of dots, under the anomaly letter, gives the estimated depth. In areas where anomalies are crowded, the letter identifiers, interpretive symbols and dots may be obliterated. The EM grade symbols, however, will always be discernible, and the obliterated information can be obtained from the anomaly listing appended to this report.

The purpose of indicating the anomaly amplitude by dots is to provide an estimate of the reliability of the conductance calculation. Thus, a conductance value obtained from a large ppm anomaly (3 or 4 dots) will tend to be accurate whereas one obtained from a small ppm anomaly (no dots) could be quite inaccurate. The absence of amplitude dots indicates that the anomaly from the coaxial coil-pair is 5 ppm or less on

both the inphase and quadrature channels. Such small anomalies could reflect a weak conductor at the surface or a stronger conductor at depth. The conductance grade and depth estimate illustrates which of these possibilities fits the recorded data best.

Flight line deviations occasionally yield cases where two anomalies, having similar conductance values but dramatically different depth estimates, occur close together on the same conductor. Such examples illustrate the reliability of the conductance measurement while showing that the depth estimate can be unreliable. There are a number of factors which can produce an error in the depth estimate, including the averaging of topographic variations by the altimeter, overlying conductive overburden, and the location and attitude of the conductor relative to the flight line. Conductor location and attitude can provide an erroneous depth estimate because the stronger part of the conductor may be deeper or to one side of the flight line, or because it has a shallow dip. A heavy tree cover can also produce errors in depth estimates. This is because the depth estimate is computed as the distance of bird from conductor, minus the altimeter reading. The altimeter can lock onto the top of a dense forest canopy. This situation yields an erroneously large depth estimate but does not affect the conductance estimate.

Dip symbols are used to indicate the direction of dip of conductors. These symbols are used only when the anomaly shapes are unambiguous, which usually requires a fairly resistive environment.

A further interpretation is presented on the EM map by means of the line-to-line correlation of anomalies, which is based on a comparison of anomaly shapes on adjacent lines. This provides conductor axes which may define the geological structure over portions of the survey area. The absence of conductor axes in an area implies that anomalies could not be correlated from line to line with reasonable confidence.

DIGHEM electromagnetic maps are designed to provide a correct impression of conductor quality by means of the conductance grade symbols. The symbols can stand alone with geology when planning a follow-up program. The actual conductance values are printed in the attached anomaly list for those who wish quantitative data. The anomaly ppm and depth are indicated by inconspicuous dots which should not distract from the conductor patterns, while being helpful to those who wish this information. The map provides an interpretation of conductors in terms of length, strike and dip, geometric shape, conductance, depth, and thickness. The accuracy is comparable to an interpretation from a high quality ground EM survey having the same line spacing.

The attached EM anomaly list provides a tabulation of anomalies in ppm, conductance, and depth for the vertical sheet model. The EM anomaly list also shows the conductance and depth for a thin horizontal sheet (whole plane) model, but only the vertical sheet parameters appear on the EM map. The horizontal sheet model is suitable for a flatly dipping thin bedrock conductor such as a sulfide sheet having a thickness less than 10 m. The list also shows the resistivity and depth for a conductive earth (half

space) model, which is suitable for thicker slabs such as thick conductive overburden. In the EM anomaly list, a depth value of zero for the conductive earth model, in an area of thick cover, warns that the anomaly may be caused by conductive overburden.

Since discrete bodies normally are the targets of EM surveys, local base (or zero) levels are used to compute local anomaly amplitudes. This contrasts with the use of true zero levels which are used to compute true EM amplitudes. Local anomaly amplitudes are shown in the EM anomaly list and these are used to compute the vertical sheet parameters of conductance and depth. Not shown in the EM anomaly list are the true amplitudes which are used to compute the horizontal sheet and conductive earth parameters.

Questionable Anomalies

DIGHEM maps may contain EM responses which are displayed as asterisks (*). These responses denote weak anomalies of indeterminate conductance, which may reflect one of the following: a weak conductor near the surface, a strong conductor at depth (e.g., 100 to 120 m below surface) or to one side of the flight line, or aerodynamic noise. Those responses that have the appearance of valid bedrock anomalies on the flight profiles are indicated by appropriate interpretive symbols (see EM map legend). The others probably do not warrant further investigation unless their locations are of considerable geological interest.

The thickness parameter

DIGHEM can provide an indication of the thickness of a steeply dipping conductor. The amplitude of the coplanar anomaly (e.g., CPI channel on the digital profile) increases relative to the coaxial anomaly (e.g., CXT) as the apparent thickness increases, i.e., the thickness in the horizontal plane. (The thickness is equal to the conductor width if the conductor dips at 90 degrees and strikes at right angles to the flight line.) This report refers to a conductor as thin when the thickness is likely to be less than 3 m, and thick when in excess of 10 m. Thick conductors are indicated on the EM map by parentheses "()". For base metal exploration in steeply dipping geology, thick conductors can be high priority targets because many massive sulfide ore bodies are thick, whereas non-economic bedrock conductors are often thin. The system cannot sense the thickness when the strike of the conductor is subparallel to the flight line, when the conductor has a shallow dip, when the anomaly amplitudes are small, or when the resistivity of the environment is below 100 ohm-m.

Resistivity mapping

Areas of widespread conductivity are commonly encountered during surveys. In such areas, anomalies can be generated by decreases of only 5 m in survey altitude as well as by increases in conductivity. The typical flight record in conductive areas is

characterized by inphase and quadrature channels which are continuously active. Local EM peaks reflect either increases in conductivity of the earth or decreases in survey altitude. For such conductive areas, apparent resistivity profiles and contour maps are necessary for the correct interpretation of the airborne data. The advantage of the resistivity parameter is that anomalies caused by altitude changes are virtually eliminated, so the resistivity data reflect only those anomalies caused by conductivity changes. The resistivity analysis also helps the interpreter to differentiate between conductive trends in the bedrock and those patterns typical of conductive overburden. For example, discrete conductors will generally appear as narrow lows on the contour map and broad conductors (e.g., overburden) will appear as wide lows.

The resistivity profiles and the resistivity contour maps present the apparent resistivity using the so-called pseudo-layer (or buried) half space model defined by Fraser (1978)⁴. This model consists of a resistive layer overlying a conductive half space. The depth channels give the apparent depth below surface of the conductive material. The apparent depth is simply the apparent thickness of the overlying resistive layer. The apparent depth (or thickness) parameter will be positive when the upper layer is more resistive than the underlying material, in which case the apparent depth may be quite close to the true depth.

⁴ Resistivity mapping with an airborne multicoil electromagnetic system: Geophysics, v. 43, p.144-172

The apparent depth will be negative when the upper layer is more conductive than the underlying material, and will be zero when a homogeneous half space exists. The apparent depth parameter must be interpreted cautiously because it will contain any errors which may exist in the measured altitude of the EM bird (e.g., as caused by a dense tree cover). The inputs to the resistivity algorithm are the inphase and quadrature components of the coplanar coil-pair. The outputs are the apparent resistivity of the conductive half space (the source) and the sensor-source distance. The flying height is not an input variable, and the output resistivity and sensor-source distance are independent of the flying height. The apparent depth, discussed above, is simply the sensor-source distance minus the measured altitude or flying height. Consequently, errors in the measured altitude will affect the apparent depth parameter but not the apparent resistivity parameter.

The apparent depth parameter is a useful indicator of simple layering in areas lacking a heavy tree cover. The DIGHEM system has been flown for purposes of permafrost mapping, where positive apparent depths were used as a measure of permafrost thickness. However, little quantitative use has been made of negative apparent depths because the absolute value of the negative depth is not a measure of the thickness of the conductive upper layer and, therefore, is not meaningful physically. Qualitatively, a negative apparent depth estimate usually shows that the EM anomaly is caused by conductive overburden. Consequently, the apparent depth channel can be of significant help in distinguishing between overburden and bedrock conductors.

The resistivity map often yields more useful information on conductivity distributions than the EM map. In comparing the EM and resistivity maps, keep in mind the following:

- (a) The resistivity map portrays the apparent value of the earth's resistivity, where $\text{resistivity} = 1/\text{conductivity}$.
- (b) The EM map portrays anomalies in the earth's resistivity. An anomaly by definition is a change from the norm and so the EM map displays anomalies, (i) over narrow, conductive bodies and (ii) over the boundary zone between two wide formations of differing conductivity.

The resistivity map might be likened to a total field map and the EM map to a horizontal gradient in the direction of flight⁵. Because gradient maps are usually more sensitive than total field maps, the EM map therefore is to be preferred in resistive areas. However, in conductive areas, the absolute character of the resistivity map usually causes it to be more useful than the EM map.

⁵ The gradient analogy is only valid with regard to the identification of anomalous locations.

Interpretation in conductive environments

Environments having background resistivities below 30 ohm-m cause all airborne EM systems to yield very large responses from the conductive ground. This usually prohibits the recognition of discrete bedrock conductors. However, DIGHEM data processing techniques produce three parameters which contribute significantly to the recognition of bedrock conductors. These are the inphase and quadrature difference channels (DFI and DFQ), and the resistivity and depth channels (RES and DP) for each coplanar frequency.

The EM difference channels (DFI and DFQ) eliminate most of the responses from conductive ground, leaving responses from bedrock conductors, cultural features (e.g., telephone lines, fences, etc.) and edge effects. Edge effects often occur near the perimeter of broad conductive zones. This can be a source of geologic noise. While edge effects yield anomalies on the EM difference channels, they do not produce resistivity anomalies. Consequently, the resistivity channel aids in eliminating anomalies due to edge effects. On the other hand, resistivity anomalies will coincide with the most highly conductive sections of conductive ground, and this is another source of geologic noise. The recognition of a bedrock conductor in a conductive environment therefore is based on the anomalous responses of the two difference channels (DFI and DFQ) and the resistivity channels (RES). The most favourable situation is where anomalies coincide on all channels.

The DP channels, which give the apparent depth to the conductive material, also help to determine whether a conductive response arises from surficial material or from a conductive zone in the bedrock. When these channels ride above the zero level on the digital profiles (i.e., depth is negative), it implies that the EM and resistivity profiles are responding primarily to a conductive upper layer, i.e., conductive overburden. If the DP channels are below the zero level, it indicates that a resistive upper layer exists, and this usually implies the existence of a bedrock conductor. If the low frequency DP channel is below the zero level and the high frequency DP is above, this suggests that a bedrock conductor occurs beneath conductive cover.

The conductance channel CDT identifies discrete conductors which have been selected by computer for appraisal by the geophysicist. Some of these automatically selected anomalies on channel CDT are discarded by the geophysicist. The automatic selection algorithm is intentionally oversensitive to assure that no meaningful responses are missed. The interpreter then classifies the anomalies according to their source and eliminates those that are not substantiated by the data, such as those arising from geologic or aerodynamic noise.

Reduction of geologic noise

Geologic noise refers to unwanted geophysical responses. For purposes of airborne EM surveying, geologic noise refers to EM responses caused by conductive

overburden and magnetic permeability. It was mentioned previously that the EM difference channels (i.e., channel DFI for inphase and DFQ for quadrature) tend to eliminate the response of conductive overburden. This marked a unique development in airborne EM technology, as DIGHEM is the only EM system which yields channels having an exceptionally high degree of immunity to conductive overburden.

Magnetite produces a form of geological noise on the inphase channels of all EM systems. Rocks containing less than 1 % magnetite can yield negative inphase anomalies caused by magnetic permeability. When magnetite is widely distributed throughout a survey area, the inphase EM channels may continuously rise and fall, reflecting variations in the magnetite percentage, flying height, and overburden thickness. This can lead to difficulties in recognizing deeply buried bedrock conductors, particularly if conductive overburden also exists. However, the response of broadly distributed magnetite generally vanishes on the inphase difference channel DFI. This feature can be a significant aid in the recognition of conductors which occur in rocks containing accessory magnetite.

EM magnetite mapping

The information content of DIGHEM data consists of a combination of conductive eddy current responses and magnetic permeability responses. The secondary field resulting from conductive eddy current flow is frequency-dependent and consists of both

inphase and quadrature components, which are positive in sign. On the other hand, the secondary field resulting from magnetic permeability is independent of frequency and consists of only an inphase component which is negative in sign. When magnetic permeability manifests itself by decreasing the measured amount of positive inphase, its presence may be difficult to recognize. However, when it manifests itself by yielding a negative inphase anomaly (e.g., in the absence of eddy current flow), its presence is assured. In this latter case, the negative component can be used to estimate the percent magnetite content.

A magnetite mapping technique was developed for the coplanar coil-pair of DIGHEM. The technique yields a channel (designated FEO) which displays apparent weight percent magnetite according to a homogeneous half space model.⁶ The method can be complementary to magnetometer mapping in certain cases. Compared to magnetometry, it is far less sensitive but is more able to resolve closely spaced magnetite zones, as well as providing an estimate of the amount of magnetite in the rock. The method is sensitive to 1/4% magnetite by weight when the EM sensor is at a height of 30 m above a magnetitic half space. It can individually resolve steep dipping narrow magnetite-rich bands which are separated by 60 m. Unlike magnetometry, the EM magnetite method is unaffected by remanent magnetism or magnetic latitude.

⁶ Refer to Fraser, 1981, Magnetite mapping with a multi-coil airborne electromagnetic system: *Geophysics*, v. 46, p. 1579-1594.

The EM magnetite mapping technique provides estimates of magnetite content which are usually correct within a factor of 2 when the magnetite is fairly uniformly distributed. EM magnetite maps can be generated when magnetic permeability is evident as negative inphase responses on the data profiles.

Like magnetometry, the EM magnetite method maps only bedrock features, provided that the overburden is characterized by a general lack of magnetite. This contrasts with resistivity mapping which portrays the combined effect of bedrock and overburden.

Recognition of culture

Cultural responses include all EM anomalies caused by man-made metallic objects. Such anomalies may be caused by inductive coupling or current gathering. The concern of the interpreter is to recognize when an EM response is due to culture. Points of consideration used by the interpreter, when coaxial and coplanar coil-pairs are operated at a common frequency, are as follows:

1. Channels CXP and CPP monitor 60 Hz radiation. An anomaly on these channels shows that the conductor is radiating power. Such an indication is normally a guarantee that the conductor is cultural. However, care must be taken to ensure

that the conductor is not a geologic body which strikes across a power line, carrying leakage currents.

2. A flight which crosses a "line" (e.g., fence, telephone line, etc.) yields a center-peaked coaxial anomaly and an m-shaped coplanar anomaly.⁷ When the flight crosses the cultural line at a high angle of intersection, the amplitude ratio of coaxial/coplanar response is 4. Such an EM anomaly can only be caused by a line. The geologic body which yields anomalies most closely resembling a line is the vertically dipping thin dike. Such a body, however, yields an amplitude ratio of 2 rather than 4. Consequently, an m-shaped coplanar anomaly with a CXI/CPI amplitude ratio of 4 is virtually a guarantee that the source is a cultural line.
3. A flight which crosses a sphere or horizontal disk yields center-peaked coaxial and coplanar anomalies with a CXI/CPI amplitude ratio (i.e., coaxial/coplanar) of 1/4. In the absence of geologic bodies of this geometry, the most likely conductor is a metal roof or small fenced yard.⁸ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.

⁷ See Figure 5-1 presented earlier.

⁸ It is a characteristic of EM that geometrically similar anomalies are obtained from: (1) a planar conductor, and (2) a wire which forms a loop having dimensions identical to the perimeter of the equivalent planar conductor.

4. A flight which crosses a horizontal rectangular body or wide ribbon yields an m-shaped coaxial anomaly and a center-peaked coplanar anomaly. In the absence of geologic bodies of this geometry, the most likely conductor is a large fenced area.⁵ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
5. EM anomalies which coincide with culture, as seen on the camera film or video display, are usually caused by culture. However, care is taken with such coincidences because a geologic conductor could occur beneath a fence, for example. In this example, the fence would be expected to yield an m-shaped coplanar anomaly as in case #2 above. If, instead, a center-peaked coplanar anomaly occurred, there would be concern that a thick geologic conductor coincided with the cultural line.
6. The above description of anomaly shapes is valid when the culture is not conductively coupled to the environment. In this case, the anomalies arise from inductive coupling to the EM transmitter. However, when the environment is quite conductive (e.g., less than 100 ohm-m at 900 Hz), the cultural conductor may be conductively coupled to the environment. In this latter case, the anomaly shapes tend to be governed by current gathering. Current gathering can completely distort the anomaly shapes, thereby complicating the identification of

cultural anomalies. In such circumstances, the interpreter can only rely on the radiation channels and on the camera film or video records.

MAGNETICS

Total field magnetism provides information on the magnetic properties of the earth materials in the survey area. The information can be used to locate magnetic bodies of direct interest for exploration, and for structural and lithological mapping.

The total field magnetic response reflects the abundance of magnetic material, in the source. Magnetite is the most common magnetic mineral. Other minerals such as ilmenite, pyrrhotite, franklinite, chromite, hematite, arsenopyrite, limonite and pyrite are also magnetic, but to a lesser extent than magnetite on average.

In some geological environments, an EM anomaly with magnetic correlation has a greater likelihood of being produced by sulphides than one that is non-magnetic. However, sulphide ore bodies may be non-magnetic (e.g., the Kidd Creek deposit near Timmins, Canada) as well as magnetic (e.g., the Mattabi deposit near Sturgeon Lake, Canada).

Iron ore deposits will be anomalously magnetic in comparison to surrounding rock due to the concentration of iron minerals such as magnetite, ilmenite and hematite.

Changes in magnetic susceptibility often allow rock units to be differentiated based on the total field magnetic response. Geophysical classifications may differ from geological classifications if various magnetite levels exist within one general geological classification. Geometric considerations of the source such as shape, dip and depth, inclination of the earth's field and remanent magnetization will complicate such an analysis.

In general, mafic lithologies contain more magnetite and are therefore more magnetic than many sediments which tend to be weakly magnetic. Metamorphism and alteration can also increase or decrease the magnetization of a rock unit.

Textural differences on a total field magnetic contour, colour or shadow map due to the frequency of activity of the magnetic parameter resulting from inhomogeneities in the distribution of magnetite within the rock, may define certain lithologies. For example, near surface volcanics may display highly complex contour patterns with little line-to-line correlation.

Rock units may be differentiated based on the plan shapes of their total field magnetic responses. Mafic intrusive plugs can appear as isolated "bulls-eye" anomalies. Granitic intrusives appear as sub-circular zones, and may have contrasting rings due to contact metamorphism. Generally, granitic terrain will lack a pronounced strike direction, although granite gneiss may display strike.

Linear north-south units are theoretically not well-defined on total field magnetic maps in equatorial regions due to the low inclination of the earth's magnetic field. However, most stratigraphic units will have variations in composition along strike which will cause the units to appear as a series of alternating magnetic highs and lows.

Faults and shear zones may be characterized by alteration that causes destruction of magnetite (e.g., weathering) which produces a contrast with surrounding rock. Structural breaks may be filled by magnetite-rich, fracture filling material as is the case with diabase dikes, or by non-magnetic felsic material.

Faulting can also be identified by patterns in the magnetic total field contours or colours. Faults and dikes tend to appear as lineaments and often have strike lengths of several kilometres. Offsets in narrow, magnetic, stratigraphic trends also delineate structure. Sharp contrasts in magnetic lithologies may arise due to large displacements along strike-slip or dip-slip faults.

VLF

VLF transmitters produce high frequency uniform electromagnetic fields. However, VLF anomalies are not EM anomalies in the conventional sense. EM anomalies primarily reflect eddy currents flowing in conductors which have been energized inductively by the primary field. In contrast, VLF anomalies primarily reflect

current gathering, which is a non-inductive phenomenon. The primary field sets up currents which flow weakly in rock and overburden, and these tend to collect in low resistivity zones. Such zones may be due to massive sulfides, shears, river valleys and even unconformities.

The VLF field is horizontal. Because of this, the method is quite sensitive to the angle of coupling between the conductor and the transmitted VLF field. Conductors which strike towards the VLF station will usually yield a stronger response than conductors which are nearly orthogonal to it.

The Herz Industries Ltd. Totem VLF-electromagnetometer measures the total field and vertical quadrature components. Both of these components are digitally recorded in the aircraft with a sensitivity of 0.1 percent. The total field yields peaks over VLF current concentrations whereas the quadrature component tends to yield crossovers. Both appear as traces on the profile records. The total field data are filtered digitally and displayed as contours to facilitate the recognition of trends in the rock strata and the interpretation of geologic structure.

The VLF filter removes long wavelengths such as those which reflect regional and wave transmission variations. The filter sharpens short wavelength responses such as those which reflect local geological variations.

CONCLUSIONS AND RECOMMENDATIONS

This report provides a very brief description of the survey results and describes the equipment, procedures and logistics of the survey.

Many bedrock conductors have been interpreted from the survey data. Most are situated within extensive highly conductive zones which consist of closely-spaced bedrock sources. These conductors are most likely due to graphite-rich rocks. Other broad conductive areas have been identified which are indicative of clay derived from the weathering of ultramafic rocks. There are several zones, however, in which anomalies seem to reflect discrete bedrock sources which display direct magnetic correlation and therefore indicate massive sulphides.

The total field magnetic data have successfully mapped the structure and lithology of the survey area. Interpretation sketch maps included with this report identify numerous faults and contacts which have been inferred from the magnetic data. They also outline magnetic trends which may form a distinct geological unit.

The resistivity products provide valuable information for general geological mapping purposes. Contacts, faults and conductive stratigraphic units are all apparent on the resistivity maps.

It is recommended that the survey results be reviewed in detail, in conjunction with all available geophysical, geological and geochemical information. Particular reference should be made to the computer generated data profiles which clearly define the characteristics of the individual anomalies.

It is also recommended that image processing of existing geophysical data be considered, in order to extract the maximum amount of information from the survey results. Current software and imaging techniques often provide valuable information on structure and lithology, which may not be clearly evident on the contour and colour maps. These techniques can yield images which define subtle, but significant, structural details.

Respectfully submitted,

DIGHEM

A handwritten signature in black ink, appearing to read 'R. Pritchard', with a stylized, cursive script.

Ruth A. Pritchard
Geophysicist

RAP/sdp

A0621FEB.96R

APPENDIX A

LIST OF PERSONNEL

The following personnel were involved in the acquisition, processing, interpretation and presentation of data, relating to a DIGHEM^V airborne geophysical survey carried out under contract to WGM Inc. for the State of Alaska, in the Manley-Rampart area, Alaska.

Chris Nind	Manager, Helicopter Geophysics
Greg Paleolog	Manager, Field Operations
John McGuire	Geophysical Operator
Robert Gordon	Field Geophysicist
Bill Droine	Field Geophysicist
Walt Greaves	Pilot (Era Aviation Inc.)
Doug McConnell	Manager, Computer Production
Gordon Smith	Data Processing Supervisor
Michael Clarke	Computer Processor
Ruth Pritchard	Interpretation Geophysicist
Lyn Vanderstarren	Drafting Supervisor
Mike Armstrong	Draftsperson (CAD)
Susan Pothiah	Word Processing Operator
Albina Tonello	Secretary/Expeditor

All personnel are employees of Dighem, except for the pilot who is an employee of Era Aviation Inc.

DIGHEM



Ruth A. Pritchard
Geophysicist

RAP/sdp

A0621FEB.96R

APPENDIX B

EM ANOMALY LIST

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10010	(FLIGHT	1)											
A 1250S	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1260B?	1	2	0	1	2	4	-	-	-	-	-	-	0
C 1271B	10	7	8	12	26	13	11.6	14	1	56	73	20	0
D 1283M	0	1	1	2	2	4	-	-	-	-	-	-	0
E 1290D	5	7	7	8	12	5	4.0	27	1	46	219	5	0
F 1307B?	7	4	12	19	55	36	11.7	23	2	36	25	12	0
G 1312B?	1	2	0	1	2	4	-	-	-	-	-	-	0
H 1320B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10020	(FLIGHT	1)											
A 1457B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1447D	1	2	0	2	2	4	-	-	-	-	-	-	0
C 1439B?	1	2	1	1	2	4	-	-	-	-	-	-	0
D 1431D	9	8	5	9	12	15	7.2	23	1	40	201	0	0
E 1429D	8	5	5	9	12	15	10.9	31	1	46	175	5	0
F 1420D	1	2	1	2	0	4	-	-	-	-	-	-	0
G 1414D	1	1	1	2	2	1	-	-	-	-	-	-	0
H 1408D	28	23	23	33	57	59	12.5	1	1	32	54	4	6
I 1406D	28	16	23	33	57	59	19.0	2	2	51	27	25	0
J 1400D	13	14	25	25	60	21	7.4	6	2	50	38	22	0
K 1399D	15	16	26	25	61	21	7.4	6	3	46	21	23	0
L 1395D	6	4	27	25	61	21	9.4	36	3	45	16	24	0
M 1389D	11	13	22	16	30	35	6.1	10	2	40	40	13	0
N 1385B?	5	4	3	11	30	0	7.8	40	2	53	37	25	0
O 1381D	8	11	3	12	26	49	4.3	16	2	50	39	22	0
P 1379D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 1374D	11	12	16	3	7	25	6.1	10	2	64	52	32	0
R 1354B	5	5	3	2	7	4	6.0	24	1	94	72	54	0
LINE 10030	(FLIGHT	1)											
A 1499B?	0	0	0	2	2	4	-	-	-	-	-	-	0
B 1504B?	0	2	0	0	1	4	-	-	-	-	-	-	30
C 1516D	1	2	1	2	2	4	-	-	-	-	-	-	16
D 1522D	3	6	1	1	7	17	2.1	20	1	38	657	0	0
E 1531D	1	2	1	1	2	4	-	-	-	-	-	-	0
F 1536D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 1541D	25	19	21	23	88	40	12.7	6	2	33	44	7	0
H 1544D	25	20	21	23	88	22	12.4	2	2	40	23	17	0
I 1552B	7	3	12	15	46	20	18.2	39	2	47	34	20	0
J 1555D	11	13	14	15	46	20	6.3	9	2	43	32	17	0
K 1565D	18	17	37	30	60	56	9.2	14	3	50	19	29	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10030	(FLIGHT	1)											
L 1567D	20	17	37	30	60	56	10.5	15	3	47	17	26	0
M 1572D	19	19	23	29	63	40	8.9	6	1	42	57	12	0
N 1598M	2	2	5	1	16	4	6.1	76	1	95	970	0	180
O 1602D	8	5	5	12	2	17	12.2	23	1	79	75	40	0
P 1608D	1	2	1	2	2	4	-	-	-	-	-	-	10
Q 1613D	11	11	19	18	40	24	6.4	10	1	40	67	8	0
LINE 10040	(FLIGHT	1)											
A 1794S	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1769B?	0	1	0	2	4	21	0.8	8	1	50	812	0	0
C 1765B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 1752B	3	4	6	12	32	17	3.3	29	1	44	152	4	0
E 1748B	5	4	7	12	32	17	7.7	37	1	35	223	0	0
F 1741D	1	2	0	2	2	4	-	-	-	-	-	-	0
G 1731D	4	9	8	7	15	48	1.9	0	1	55	114	15	0
H 1727D	22	6	32	18	41	14	50.1	15	2	34	39	8	0
I 1725D	9	5	32	37	41	14	14.8	29	3	35	22	12	0
J 1719D	1	5	19	2	3	16	0.1	0	1	27	54	12	0
K 1716B?	10	4	19	2	3	16	25.1	33	2	51	46	22	0
L 1703B	27	52	58	117	250	220	4.9	0	3	54	15	33	0
M 1699B	37	52	58	117	250	220	7.5	7	3	29	17	12	0
N 1693B	31	29	45	86	220	160	10.9	6	2	25	22	6	0
O 1682B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 1659B?	4	4	2	2	3	6	5.4	32	1	139	645	25	0
LINE 10050	(FLIGHT	1)											
A 1819S	1	16	5	18	40	91	0.4	0	1	10	181	0	0
B 1841D	1	2	0	2	2	4	-	-	-	-	-	-	0
C 1846D	1	4	2	4	10	12	0.9	12	1	38	526	0	0
D 1851D	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1856D	1	3	1	1	6	12	1.4	27	1	47	673	0	0
F 1872D	8	8	4	14	36	37	5.9	21	1	30	200	0	0
G 1887D	11	10	2	8	15	18	7.8	20	1	47	118	11	0
H 1891D	1	10	16	11	14	27	0.4	0	2	40	37	13	0
I 1895D	14	7	16	11	14	23	16.6	16	3	35	19	14	0
J 1900D	1	1	1	2	2	4	-	-	-	-	-	-	0
K 1908M	1	3	9	2	3	13	0.8	3	1	35	766	0	610
L 1919D	14	18	16	37	45	42	6.1	4	3	38	19	16	0
M 1926D	36	35	17	39	94	97	11.3	0	2	29	29	7	0
N 1969B	5	12	9	19	27	9	2.6	0	1	29	59	0	0
LINE 10060	(FLIGHT	1)											
A 2176S	1	5	3	8	21	1	0.5	0	1	19	175	0	20

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10060	(FLIGHT	1)											
B 2154D	2	5	1	8	24	22	2.0	19	1	44	278	0	0
C 2150D	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2136B?	1	2	0	2	2	4	-	-	-	-	-	-	7
E 2129B?	2	4	3	6	17	18	1.6	25	1	50	221	6	0
F 2123B?	3	5	4	7	4	3	2.7	13	1	38	128	0	0
G 2120B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2110D	17	13	24	28	63	31	11.0	0	2	32	35	6	0
I 2106B?	1	2	1	2	2	4	-	-	-	-	-	-	0
J 2100D	4	10	7	18	43	21	1.9	0	2	43	32	15	0
K 2090B?	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2080B?	4	2	0	6	8	15	11.7	39	2	52	37	22	0
M 2071B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 2066B?	6	12	16	22	51	31	2.6	0	2	53	47	22	5
O 2059B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2043B	7	3	10	5	12	2	21.6	8	3	51	23	23	0
Q 2027D	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10070	(FLIGHT	1)											
A 2366S	1	2	1	2	2	2	-	-	-	-	-	-	0
B 2384D	8	11	5	11	5	12	4.9	8	1	39	240	0	0
C 2393B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2416B?	4	6	3	6	15	52	3.0	31	1	48	151	10	0
E 2424D	26	28	24	30	68	61	8.9	7	2	43	32	18	0
F 2429D	23	20	3	17	35	29	10.8	13	1	69	59	36	0
G 2434D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2438D	5	13	1	11	30	2	2.1	9	1	46	135	10	0
I 2445D	6	13	5	9	35	73	2.6	16	1	39	228	3	0
J 2446D	6	12	5	9	35	73	2.7	17	1	29	413	0	0
K 2450M	0	1	0	1	2	4	-	-	-	-	-	-	980
L 2461D	39	16	2	13	128	71	34.4	20	2	43	24	21	0
M 2468D	13	15	23	36	82	112	6.6	20	3	41	13	22	0
N 2471D	14	23	23	36	82	143	4.8	14	3	37	17	18	10
O 2472D	13	23	23	36	82	143	4.2	14	2	36	23	16	10
P 2482D	12	12	13	53	120	15	7.5	15	3	33	14	14	9
Q 2486D	22	32	5	58	126	117	6.1	9	3	30	18	11	0
R 2490D	22	27	5	58	126	117	7.1	7	2	28	30	6	0
S 2497D	20	26	27	37	21	83	6.6	6	2	38	28	15	0
T 2502D	11	13	26	35	78	44	6.3	16	2	45	48	17	0
U 2515D	5	4	1	7	17	14	6.5	32	1	39	82	6	0
V 2517D	5	4	0	4	17	14	8.6	34	1	42	83	8	0
W 2526D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10070	(FLIGHT	1)											
X 2530D	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10080	(FLIGHT	1)											
A 2743D	15	13	10	42	116	7	9.6	8	2	23	45	0	0
B 2739D	11	20	10	42	116	57	3.8	0	1	26	58	0	0
C 2732D	0	7	0	11	7	96	0.4	0	1	20	626	0	1650
D 2731M	3	17	2	11	37	96	1.1	0	1	14	558	0	1650
E 2728D	4	17	2	11	37	96	1.2	0	1	13	544	0	0
F 2701B	6	5	2	5	15	13	6.4	23	1	42	314	0	0
G 2690D	4	7	1	6	17	17	2.6	11	1	37	318	0	0
H 2674B	9	7	22	17	30	23	8.7	27	2	72	51	39	0
I 2663B	23	20	2	23	32	39	10.6	11	2	55	34	28	0
J 2654D	26	28	6	34	87	77	8.8	6	2	37	44	11	0
K 2649D	36	22	35	38	83	89	19.0	16	1	39	56	12	0
L 2646D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 2644D	13	27	35	32	21	132	3.6	6	1	36	108	5	0
N 2618B?	7	6	14	1	15	9	8.6	33	2	72	34	43	0
O 2615M	1	1	1	1	2	4	-	-	-	-	-	-	0
P 2609B	12	5	18	11	19	23	19.9	36	2	58	30	32	0
Q 2599B	8	17	19	29	33	22	3.2	4	3	55	14	34	0
R 2596B	12	1	19	29	33	26	49.0	39	2	39	33	14	0
S 2590D	5	10	9	4	13	14	2.7	7	1	47	58	16	0
T 2581B?	1	2	1	2	2	4	-	-	-	-	-	-	9
U 2576B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 2571B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10090	(FLIGHT	1)											
A 2793B	12	10	16	10	30	11	9.6	7	2	45	50	15	0
B 2801B	4	6	2	6	21	41	3.3	20	1	23	575	0	0
C 2805D	3	6	3	6	21	41	2.2	19	1	21	417	0	0
D 2829B?	3	3	7	7	5	16	5.2	47	1	72	169	27	0
E 2841D	5	8	0	6	16	24	3.3	25	1	48	222	7	0
F 2849D	1	2	1	2	2	4	-	-	-	-	-	-	9
G 2859B	26	29	32	53	148	59	8.6	11	4	44	11	26	0
H 2861B	27	29	32	53	148	59	9.1	10	4	44	11	26	0
I 2873D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 2877D	1	2	1	1	2	4	-	-	-	-	-	-	0
K 2885D	15	22	3	18	31	60	5.2	11	2	67	35	39	0
L 2888D	15	12	3	18	31	60	10.2	21	2	57	33	31	0
M 2890D	1	2	1	2	2	4	-	-	-	-	-	-	0
N 2893D	1	2	1	1	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10090	(FLIGHT 1)												
O 2899B?	1	2	1	2	2	4	-	-	-	-	-	-	50
P 2928B?	1	4	0	4	6	3	0.7	10	1	32	712	0	0
Q 2937M	0	1	0	3	15	6	0.5	0	1	41	742	0	0
R 2943M	0	1	0	2	0	7	0.4	0	1	45	751	0	480
S 2947M	0	2	0	2	2	4	-	-	-	-	-	-	500
T 2956D	13	11	7	1	9	27	9.0	15	2	57	32	30	0
U 2962D	9	7	9	1	22	14	8.6	9	2	55	36	25	0
V 2970B?	1	2	1	2	2	4	-	-	-	-	-	-	30
W 2974B?	1	2	1	2	2	4	-	-	-	-	-	-	0
X 2978B	4	4	0	0	11	6	4.2	19	1	60	62	24	0
Y 2986D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 2993B	2	2	9	16	37	3	7.1	64	2	43	50	13	10
AA 2999D	7	6	18	16	30	18	7.1	24	2	39	27	15	0
AB 3002D	12	6	18	16	30	1	16.5	23	2	42	23	18	0
AC 3005D	7	11	9	11	30	25	4.1	11	2	41	31	16	0
AD 3008D	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10100	(FLIGHT 1)												
A 3215D	8	12	21	16	30	42	4.3	11	1	32	88	1	0
B 3210D	3	12	1	1	2	41	1.3	0	1	15	619	0	390
C 3175D	3	9	3	9	11	17	1.9	3	1	52	276	5	8
D 3168D	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3163B	6	5	13	12	26	29	7.2	29	1	57	61	24	0
F 3158B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3147B?	5	9	6	9	18	39	2.8	23	2	66	40	37	0
H 3146B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3137D	8	11	2	13	38	22	4.4	12	1	51	60	19	0
J 3134B	1	7	4	20	3	45	0.6	0	1	35	63	3	0
K 3130B	7	9	4	20	3	20	4.3	3	1	46	136	5	0
L 3105B?	0	4	0	3	10	33	0.4	0	1	50	821	0	0
M 3097M	0	1	0	2	2	4	-	-	-	-	-	-	900
N 3074D	11	8	11	11	27	15	10.9	1	2	37	29	11	0
O 3069B?	7	2	7	6	14	10	33.9	25	2	54	30	25	0
P 3065B?	5	6	7	6	14	15	4.6	10	1	48	59	14	0
Q 3042D	3	9	6	9	22	21	1.5	0	2	39	45	9	0
LINE 10101	(FLIGHT 1)												
A 3255D	20	9	1	25	63	14	25.5	16	5	35	6	19	0
B 3252D	6	6	3	7	23	2	6.4	28	6	35	4	21	0
C 3251D	23	8	3	21	52	12	36.8	16	6	34	4	20	0
D 3247D	23	12	34	21	52	12	21.0	15	6	35	5	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; SHEET 1

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10101	(FLIGHT	1)											
E 3244D	15	10	32	21	52	28	12.6	20	4	41	8	24	0
F 3241B	11	8	4	8	23	28	11.4	24	5	44	7	27	0
G 3235D	4	7	26	8	28	5	2.8	21	5	45	7	28	0
H 3232D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3228D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 3221D	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10110	(FLIGHT	1)											
A 3305B?	1	8	2	15	33	8	0.7	0	2	35	28	11	0
B 3317B	25	15	10	34	83	36	17.3	6	4	36	8	19	0
C 3320B	1	2	22	34	83	36	1.4	39	5	32	6	17	0
D 3328B	16	11	21	22	47	22	12.5	17	4	30	8	14	0
E 3334D	10	7	8	21	54	49	12.0	28	4	36	9	19	0
F 3339D	8	14	75	94	51	49	3.5	10	4	33	11	15	0
G 3342D	31	41	75	94	214	123	7.6	0	3	24	14	7	0
H 3343D	32	41	75	94	214	123	7.7	1	2	21	32	0	0
I 3349D	2	5	0	20	52	62	1.6	23	1	65	109	27	0
J 3355D	11	7	5	8	24	26	12.5	23	1	49	69	16	0
K 3363D	12	18	7	23	49	74	4.5	3	1	27	81	0	0
L 3368D	5	6	1	18	42	13	5.4	37	1	35	267	0	0
M 3373M	0	1	3	10	22	5	0.7	12	1	28	688	0	630
N 3411D	7	16	10	16	38	38	2.7	11	1	57	106	22	0
O 3418D	5	9	3	14	42	85	3.3	20	1	56	102	19	0
P 3425D	2	1	4	14	42	28	6.6	87	1	9	492	0	600
Q 3428D	5	9	4	5	23	13	2.5	14	1	12	400	0	0
R 3432D	2	3	5	3	23	30	1.9	46	1	36	188	1	0
S 3439B	1	10	0	18	13	90	0.4	0	1	24	268	0	0
T 3448M	0	6	4	4	25	66	0.4	0	1	29	702	0	0
U 3453S?	1	10	4	11	25	66	0.4	0	1	24	351	0	0
V 3458M	6	1	14	3	37	63	99.4	61	1	22	657	0	0
W 3462B	11	10	24	22	69	45	7.4	17	1	44	57	14	0
X 3463B	11	10	24	22	69	45	7.6	12	2	35	38	9	0
Y 3469D	1	16	6	18	4	29	0.4	0	2	39	54	10	0
Z 3471B	8	13	5	18	4	29	4.0	9	1	42	123	6	0
LINE 10111	(FLIGHT	4)											
A 834B?	9	11	18	6	13	39	5.8	9	2	56	58	23	0
B 830D	8	5	3	6	14	21	11.8	21	2	48	40	19	0
C 819B?	12	6	9	4	9	7	17.4	11	1	50	60	16	0
D 813B?	8	7	2	3	9	18	8.4	6	1	50	74	14	0
LINE 10120	(FLIGHT	4)											
A 403B?	4	9	10	15	34	25	2.0	0	3	44	19	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; SHEET 1

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT				
LINE 10120	(FLIGHT	4)											
B 411B?	12	4	6	4	9	6	27.1	13	4	33	10	14	0
C 420B?	6	9	5	13	28	27	3.9	6	4	32	12	13	0
D 427D	22	18	2	3	8	16	10.8	2	2	40	36	14	0
E 436B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 445B	6	7	1	11	22	27	4.5	26	1	63	133	22	0
G 448B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 454D	7	14	10	7	1	34	3.0	4	1	12	610	0	460
I 456M	1	2	1	2	2	4	-	-	-	-	-	-	440
J 457D	6	6	4	7	15	34	5.7	28	1	25	557	0	0
K 462D	6	2	3	1	2	21	26.3	53	1	45	303	1	0
L 470M	0	2	0	2	2	4	-	-	-	-	-	-	980
M 476B?	5	3	1	2	8	14	9.3	45	1	57	771	0	0
N 508D	7	8	5	4	7	4	4.9	20	1	86	98	44	0
O 521D	7	10	3	2	16	14	4.3	20	1	37	106	5	0
P 524D	4	14	3	12	16	14	1.7	3	1	34	261	0	0
Q 534M	0	0	0	2	19	13	1.5	59	1	42	730	0	0
R 557M	0	3	0	2	7	16	0.4	0	1	42	733	0	460
S 560M	0	3	0	2	7	16	0.4	0	1	45	731	0	630
T 567M	0	2	0	2	2	4	-	-	-	-	-	-	0
U 576M	0	5	8	6	19	36	0.4	0	1	39	749	0	0
V 579B?	5	5	8	6	20	36	4.9	33	1	59	162	17	0
W 587B?	5	6	7	10	24	35	4.0	28	1	60	60	27	0
X 594B?	7	7	6	4	3	2	5.8	26	1	49	145	10	16
Y 637B?	1	2	1	1	1	4	-	-	-	-	-	-	20
Z 655D	11	3	3	17	7	7	32.5	16	3	61	19	35	0
AA 660D	13	3	20	19	39	18	64.4	15	3	55	15	32	0
AB 664B	14	8	20	19	39	14	16.5	0	3	49	18	24	0
AC 676D	6	5	5	2	6	10	6.3	17	2	55	33	26	0
AD 685D	9	6	3	5	13	15	10.0	14	2	50	40	20	0
AE 694B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 699B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 710B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 713B?	2	5	6	10	23	27	1.6	13	2	43	29	18	0

Continued on next page...

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10130	(FLIGHT		4)										
A 1230D	12	22	36	28	73	53	3.7	0	4	34	8	18	0
B 1227D	20	22	36	28	73	53	7.5	7	4	32	9	15	0
C 1225D	23	21	36	28	73	65	10.2	7	3	31	14	12	0
D 1217D	7	8	9	9	25	31	5.4	20	3	28	17	8	0
E 1216D	6	8	6	14	42	31	4.7	19	3	31	18	10	0
F 1211D	13	3	23	14	42	20	41.0	25	4	28	11	10	0
G 1208D	16	7	23	8	21	10	21.0	15	4	27	9	10	0
H 1205B	2	3	1	6	30	16	2.9	37	4	29	11	11	0
I 1202D	28	19	2	6	30	19	15.4	0	3	33	14	13	0
J 1197D	12	13	27	2	5	20	7.0	5	1	41	81	7	0
K 1192D	4	9	9	12	16	13	2.3	1	1	53	166	9	0
L 1180B?	5	9	5	8	18	18	2.9	0	1	50	141	7	7
M 1179B?	6	10	4	8	18	18	3.8	0	1	33	242	0	0
N 1175B?	4	4	3	3	16	4	6.2	26	1	43	312	0	0
O 1170M	0	2	1	2	2	4	-	-	-	-	-	-	1280
P 1166B?	2	4	2	1	3	2	2.4	11	1	76	685	0	0
Q 1148B?	2	5	3	3	7	3	1.7	3	1	46	269	0	0
R 1144D	1	7	2	2	2	9	0.4	0	1	52	674	0	0
S 1141B?	0	2	1	2	2	4	-	-	-	-	-	-	0

Continued on next page...

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10130	(FLIGHT 4)												
T 1120D	4	5	2	5	11	23	3.9	20	1	62	344	8	0
U 1110B	5	6	4	8	18	18	4.8	16	1	64	114	22	0
V 1109B	5	8	4	8	18	18	3.2	4	1	60	124	18	0
W 1099B?	3	5	1	2	4	9	2.6	18	1	112	774	3	0
X 1074B	13	8	36	28	59	1	12.4	0	2	64	42	31	0
Y 1068B	14	10	19	41	43	3	12.2	9	3	33	20	11	0
Z 1060D	9	7	6	9	22	2	9.5	22	2	46	23	22	0
AA 1057D	12	11	19	19	41	20	8.1	9	3	48	16	26	0
AB 1054D	16	10	19	19	41	22	13.4	8	2	40	38	13	0
AC 1047B	5	6	6	7	10	19	4.5	8	2	46	43	15	0
AD 1042B	8	7	6	1	15	10	7.9	6	2	45	25	19	0
AE 1029B	9	7	10	7	14	14	8.3	9	3	52	17	28	0
AF 1016B	15	9	11	8	19	12	13.3	2	3	59	16	35	0
LINE 10140	(FLIGHT 4)												
A 1394B	9	7	15	13	27	19	8.3	22	4	32	8	15	0
B 1403B	13	17	17	30	63	40	5.5	3	3	26	13	8	0
C 1416D	10	16	10	18	42	55	4.2	0	4	26	8	10	0
D 1421D	27	4	23	19	17	8	142.6	7	6	23	5	9	0
E 1437B	22	9	6	18	35	44	28.6	7	3	32	15	12	0
F 1460D	19	15	4	13	12	17	11.8	6	2	61	30	33	0
G 1470B	47	33	111	106	213	54	17.6	0	4	18	8	3	120
H 1485M	0	2	1	2	2	4	-	-	-	-	-	-	530
I 1494D	8	10	2	2	4	23	5.1	21	1	59	159	18	0
J 1500D	4	9	2	5	13	23	2.1	15	1	67	136	26	0
K 1511B	5	8	1	5	8	40	3.3	25	1	50	221	8	0
L 1521B	3	6	2	6	14	29	2.5	23	1	38	270	0	0
M 1538D	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1548M	1	4	1	3	22	11	0.6	0	1	34	733	0	0
O 1556M	0	4	0	3	16	9	0.4	0	1	44	758	0	1180
P 1572B?	1	3	2	4	19	26	0.8	0	1	16	653	0	0
Q 1576M	0	2	1	2	2	4	-	-	-	-	-	-	1120
R 1581B?	2	3	0	2	15	2	2.0	30	1	46	821	0	0
S 1585B?	1	2	1	0	2	4	-	-	-	-	-	-	0
T 1594D	11	11	8	3	29	21	7.3	8	2	57	57	24	0
U 1601D	7	12	4	2	7	16	3.5	1	2	54	43	24	0
V 1605D	11	11	2	2	3	3	6.7	6	1	53	96	15	0
W 1620S?	1	2	1	2	2	4	-	-	-	-	-	-	0
X 1635M	1	1	1	2	2	4	-	-	-	-	-	-	0
Y 1641B	26	16	36	6	10	18	17.2	0	3	31	17	9	0
Z 1649B	14	8	7	2	8	10	16.2	11	3	41	18	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10140	(FLIGHT	4)											
AA 1655B	17	7	10	7	14	8	26.9	6	3	33	13	13	0
AB 1672B?	7	8	9	18	42	32	5.0	12	3	45	23	21	0
AC 1680B?	5	5	5	8	18	8	6.8	20	2	55	29	27	0
AD 1703B?	8	6	6	10	20	5	8.5	10	3	36	22	12	0
AE 1730H	7	3	3	5	12	14	15.9	36	3	59	21	34	0
LINE 10150	(FLIGHT	4)											
A 2032H	14	9	27	18	47	26	14.0	11	5	40	6	23	0
B 2023D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2020B	14	17	14	17	33	36	6.2	0	4	30	9	13	0
D 2007B	36	22	58	45	100	46	19.0	0	5	21	5	7	0
E 1999B	21	15	37	26	65	24	14.0	0	6	25	5	11	0
F 1991D	22	19	42	33	76	39	10.7	0	5	32	7	14	0
G 1989D	22	19	42	33	76	39	10.7	0	4	29	12	10	0
H 1987D	22	16	41	34	76	39	13.1	0	2	36	45	7	0
I 1980D	3	5	9	10	27	21	2.3	15	2	61	32	31	0
J 1977D	13	6	9	10	27	26	20.3	9	2	45	39	15	0
K 1971B	21	9	31	23	44	22	25.8	0	4	39	11	18	0
L 1970B	22	12	31	23	44	22	20.1	0	3	32	22	8	0
M 1958D	6	6	9	13	32	14	6.6	9	1	56	76	18	70
N 1955D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 1943B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 1938B?	1	2	0	1	2	4	-	-	-	-	-	-	330
Q 1933S	2	2	3	5	13	21	0.6	0	1	19	323	0	0
R 1911D	13	15	13	19	51	35	6.4	0	1	39	57	8	0
S 1907D	12	4	6	2	43	19	28.3	15	2	46	36	17	0
T 1902D	11	12	20	22	42	6	6.6	0	3	42	23	17	0
U 1899D	14	11	20	22	42	15	11.0	0	2	53	51	20	0
V 1878B	23	9	37	2	44	1	28.6	6	4	53	11	32	0
W 1862B	1	2	1	2	2	4	-	-	-	-	-	-	0
X 1858B	7	6	3	3	17	10	7.0	16	3	62	20	37	0
Y 1849B	7	5	1	7	15	15	9.4	13	2	58	36	28	0
Z 1837B	6	7	8	2	18	22	5.4	5	2	61	41	29	0
AA 1817D	5	5	4	6	10	9	6.4	11	3	60	22	32	0
AB 1810B	11	9	9	8	18	11	8.9	0	3	57	17	32	0
LINE 10160	(FLIGHT	4)											
A 2248B	8	2	18	6	15	4	32.6	40	5	39	5	23	0
B 2259B	10	5	14	10	8	3	17.6	22	5	31	7	14	0
C 2268B	21	19	27	35	74	30	9.6	3	3	22	16	3	0
D 2277D	41	17	101	46	115	13	34.4	1	6	24	5	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT				
LINE 10160	(FLIGHT	4)											
E 2280D	11	21	101	19	39	38	3.8	0	6	27	4	14	0
F 2284D	12	10	59	1	101	38	8.9	19	5	24	5	10	0
G 2287D	41	17	23	30	80	38	34.3	5	7	25	3	13	0
H 2290D	7	8	23	30	80	20	5.7	20	6	25	4	11	0
I 2296D	26	9	23	26	66	29	36.5	12	4	27	9	10	0
J 2302D	1	1	1	2	2	4	-	-	-	-	-	-	0
K 2306B	29	19	9	38	106	44	16.5	5	2	29	25	7	0
L 2323B?	8	5	5	10	28	25	10.8	30	1	52	61	20	0
M 2327D	4	9	29	5	32	35	2.2	10	2	68	40	38	0
N 2334B	16	18	37	27	60	79	6.9	10	2	43	28	18	0
O 2339D	8	14	5	4	10	79	3.4	14	1	39	207	1	390
P 2355D	6	22	21	14	109	69	1.9	0	1	35	124	1	0
Q 2360B	15	15	6	14	26	26	8.1	9	1	24	52	0	0
R 2362B	17	15	6	14	26	26	9.7	6	1	28	127	0	0
S 2371B?	7	3	1	6	11	32	16.5	42	1	43	247	0	0
T 2389B?	5	10	1	5	15	31	2.5	9	1	30	727	0	380
U 2407B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 2413M	1	2	1	2	2	4	-	-	-	-	-	-	160
W 2418D	2	4	2	6	22	35	2.8	46	1	17	566	0	0
X 2426M	1	2	1	2	2	4	-	-	-	-	-	-	550
Y 2429B?	2	9	3	13	36	92	1.1	4	1	18	397	0	0
Z 2447D	32	6	49	21	22	10	94.0	16	2	41	25	18	0
AA 2450D	32	6	49	21	22	10	89.7	18	3	31	15	12	0
AB 2455B?	5	5	3	73	170	107	5.5	38	2	30	30	7	0
AC 2456D	22	27	3	2	21	107	7.2	0	1	30	83	0	0
AD 2496D	10	7	4	6	6	9	10.3	22	3	74	25	46	0
AE 2507B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 2515B	6	5	6	12	36	46	6.4	28	2	62	35	33	0
AG 2536D	14	5	15	23	53	28	28.7	21	2	35	29	11	0
AH 2537D	14	5	16	23	53	28	28.7	19	2	32	29	8	0
AI 2538D	13	10	16	23	53	28	9.5	8	2	34	28	9	0
AJ 2542D	7	12	16	21	31	21	3.7	4	2	45	46	16	0
AK 2552B	4	6	2	10	10	24	3.6	21	1	61	61	27	0
AL 2565B	3	9	6	25	17	38	1.4	0	2	44	34	16	0
AM 2573B	5	5	9	9	20	11	5.5	9	3	35	20	11	0
AN 2584B	9	9	18	12	60	27	6.4	7	2	39	28	14	0
AO 2593D	22	10	11	8	17	8	26.2	9	4	40	12	20	0
AP 2597D	8	3	11	15	31	1	25.1	38	4	46	12	26	0
AQ 2601D	8	0	15	24	31	23	49.0	51	3	41	13	22	0
AR 2606D	22	12	22	24	47	19	20.2	11	3	35	18	15	0
AS 2609D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10160	(FLIGHT	4)											
AT 2615D	10	6	6	11	24	16	13.5	17	3	34	22	11	0
AU 2621B?	7	8	18	22	49	30	5.7	15	3	36	19	14	0
AV 2631D	8	6	2	12	112	102	7.7	25	2	41	27	17	0
LINE 10170	(FLIGHT	4)											
A 2928B	5	15	11	10	34	47	1.9	0	2	34	24	10	0
B 2925D	24	15	14	10	6	47	17.0	2	3	30	13	11	0
C 2921B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2910D	11	13	10	9	13	36	5.6	4	3	32	16	11	0
E 2905B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2899B	20	29	131	77	163	36	6.0	0	7	18	3	6	0
G 2897B	20	29	120	77	163	17	6.0	0	7	14	3	3	0
H 2893B	28	18	120	77	163	2	16.6	0	5	25	6	9	0
I 2890B	21	16	37	19	32	27	12.9	0	4	31	8	14	0
J 2886B	21	5	7	14	42	22	54.3	4	6	35	5	20	0
K 2876D	6	10	13	11	27	33	3.7	2	1	52	86	15	0
L 2867B	21	14	32	29	62	34	14.1	0	4	38	12	18	0
M 2866B	21	13	32	29	62	34	15.6	0	3	39	20	16	0
N 2860B?	14	10	25	18	36	32	11.1	2	4	58	13	35	0
O 2857D	14	12	25	18	36	32	9.9	6	1	61	78	25	0
P 2847B	7	6	10	13	42	31	8.4	13	1	36	104	0	0
Q 2840D	9	12	10	9	34	26	4.7	0	1	13	414	0	40
R 2834M	0	2	0	3	5	28	0.4	0	1	74	970	0	1140
S 2819B	11	4	10	3	7	11	25.2	17	1	39	73	5	0
T 2814D	9	15	18	6	18	17	3.8	0	2	39	40	11	0
U 2812D	5	4	2	5	7	18	6.8	27	2	45	33	18	0
V 2807D	16	5	4	1	6	3	32.2	15	2	46	32	19	0
W 2803B	11	13	16	24	12	34	6.0	3	2	44	39	16	0
X 2772D	5	11	2	4	3	5	2.3	0	3	47	17	24	0
Y 2768B?	3	5	4	3	11	34	2.5	17	4	47	12	26	0
Z 2754D	29	24	31	32	73	63	12.3	8	3	40	19	19	0
AA 2752D	29	30	31	32	73	63	9.4	2	3	32	12	14	0
AB 2745B	14	3	2	6	9	22	51.7	4	2	32	24	7	0
AC 2731B?	8	5	1	3	2	4	11.4	11	1	76	82	35	0
AD 2724B?	7	4	8	8	18	10	11.6	7	2	49	37	18	0
AE 2719B?	1	2	1	2	2	3	-	-	-	-	-	-	0
AF 2708B	10	3	10	7	16	6	30.8	1	2	74	42	39	0
AG 2700B	9	7	5	8	20	5	9.7	2	2	51	26	24	0
AH 2694B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 2686D	13	15	13	17	48	33	6.4	0	2	50	28	23	0
AJ 2683D	20	18	13	17	48	33	10.0	0	2	33	28	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 10170	(FLIGHT 4)													
AK 2677B?	4	1	11	15	35	25	67.7	56	2	33	24	9		0
LINE 10180	(FLIGHT 4)													
A 3014D	8	11	4	3	1	41	4.6	18	2	52	44	24		0
B 3019B?	5	4	6	20	16	41	5.6	41	2	43	28	19		0
C 3025D	22	17	5	20	40	42	12.4	18	3	37	13	19		0
D 3034B	19	9	48	25	55	18	22.7	22	5	33	6	19		0
E 3050D	9	15	11	32	86	92	3.6	15	2	35	23	14		0
F 3054D	6	21	19	29	71	79	1.9	2	3	31	18	12		0
G 3057D	14	11	16	29	71	79	10.1	22	3	33	15	14		0
H 3062D	11	12	34	59	150	32	6.7	19	3	36	14	17		0
I 3067D	23	33	36	60	152	68	6.1	0	3	19	11	3		0
J 3073D	9	15	16	27	62	65	4.1	13	6	30	4	17		0
K 3074D	33	15	35	55	62	67	29.2	14	7	31	4	18		0
L 3077D	23	28	35	55	131	67	7.3	6	6	25	4	13		0
M 3084D	36	11	70	38	76	29	53.3	13	8	23	2	12	30	
N 3094D	9	17	8	16	35	65	3.7	9	1	57	102	21		0
O 3103D	8	8	16	6	13	21	7.1	20	1	69	99	29		0
P 3110D	26	13	29	28	61	28	23.4	3	4	53	10	32		0
Q 3114D	19	14	29	28	61	28	12.1	3	3	40	16	19		0
R 3124D	33	22	54	48	104	44	16.4	6	5	41	7	25		0
S 3126D	28	19	54	48	104	44	15.9	7	4	36	8	19		0
T 3134D	22	11	3	4	5	4	20.0	19	2	56	53	25		0
U 3140B	1	2	1	2	2	4	-	-	-	-	-	-	620	
V 3143D	1	2	1	2	2	4	-	-	-	-	-	-		0
W 3149D	1	2	1	2	2	4	-	-	-	-	-	-		0
X 3153D	1	2	1	2	2	4	-	-	-	-	-	-		0
Y 3158B	7	5	1	16	17	17	8.6	25	1	47	88	12		0
Z 3164B?	3	3	11	1	4	26	0.1	0	1	35	170	14	330	
AA 3172D	0	2	0	2	2	4	-	-	-	-	-	-		0
AB 3174M	0	2	0	1	0	4	-	-	-	-	-	-	1350	
AC 3210D	2	12	4	1	3	44	0.9	0	1	37	201	0		0
AD 3216D	6	9	3	4	3	16	0.1	0	1	28	99	10		0
AE 3224D	7	6	3	7	16	32	7.1	31	1	44	60	14		0
AF 3229B	9	5	10	4	13	28	13.8	31	2	50	29	25		0
AG 3235B	11	5	3	3	13	27	20.9	24	2	47	25	22		0
AH 3240B	11	7	5	16	37	12	12.4	14	2	38	53	8		0
AI 3246D	8	7	2	4	3	12	6.4	21	1	46	254	2		0
AJ 3262H	5	4	1	3	8	15	6.1	32	1	58	611	0	11	
AK 3298M	0	2	9	5	29	2	0.4	0	1	65	821	0	2020	
AL 3305B	20	3	3	63	29	142	100.4	26	2	31	47	5		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10180	(FLIGHT	4)											
AM 3310D	5	8	10	1	1	142	3.7	19	3	29	17	9	0
AN 3315B	25	23	12	32	66	56	10.5	3	4	22	10	6	0
AO 3322D	27	26	35	1	3	51	10.2	2	2	39	43	12	0
AP 3348D	6	7	4	12	24	32	5.4	11	2	73	53	38	0
AQ 3353D	5	3	6	12	24	32	9.1	19	2	56	48	22	0
AR 3360B?	11	4	2	4	10	5	28.6	0	3	62	25	33	0
AS 3365B?	5	3	9	7	17	15	11.1	20	2	56	32	26	0
AT 3380B?	8	2	6	7	14	13	29.4	25	3	51	23	25	0
AU 3405B	7	4	16	6	15	9	14.8	33	3	40	14	19	0
AV 3412D	15	14	20	23	53	35	8.7	10	3	43	19	21	0
AW 3424B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 3427B?	5	9	7	7	19	15	3.4	2	2	38	29	12	0
AY 3439B	9	7	5	5	17	12	8.7	10	2	36	29	10	0
LINE 10190	(FLIGHT	4)											
A 3730D	12	13	9	18	41	27	6.3	3	3	28	16	8	0
B 3728D	12	11	12	18	41	24	7.7	8	3	30	13	11	0
C 3726D	10	10	34	16	37	24	7.2	10	4	31	11	13	0
D 3722D	5	10	15	23	53	45	3.0	8	3	36	18	14	0
E 3720B	14	18	28	53	54	45	5.7	3	3	31	19	10	0
F 3717B	21	30	28	53	116	85	6.1	0	3	24	14	6	0
G 3709B?	9	5	7	11	23	30	12.5	23	3	32	15	12	0
H 3705D	7	7	43	33	72	45	6.1	17	3	34	15	13	0
I 3703D	22	17	44	33	72	45	11.6	1	3	24	14	5	0
J 3700D	28	7	44	32	59	45	54.5	5	5	27	7	11	0
K 3696D	32	4	10	7	13	26	193.0	1	5	37	7	20	0
L 3691D	14	11	37	4	69	13	10.6	4	2	58	53	25	0
M 3684B?	1	2	1	1	2	4	-	-	-	-	-	-	0
N 3678B	8	6	55	30	46	2	9.6	11	2	71	49	36	0
O 3674B	7	2	70	35	58	5	36.8	30	6	31	5	15	0
P 3673B	36	18	70	35	58	17	24.1	0	6	26	4	11	0
Q 3669B	22	18	64	31	79	11	11.1	0	6	32	5	16	0
R 3660D	10	11	20	16	38	18	5.8	0	1	79	88	38	0
S 3658D	11	12	20	16	38	18	6.7	0	2	50	26	23	0
T 3654B	5	5	20	17	37	7	5.9	13	1	64	142	18	0
U 3629S?	0	6	1	3	5	13	0.4	0	1	71	482	0	5
V 3620B	5	7	11	7	17	8	3.6	12	2	76	57	40	0
W 3614B	7	3	10	1	2	2	16.1	27	2	61	27	33	0
X 3611B	8	5	10	11	25	14	9.9	12	2	57	48	24	0
Y 3606D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 3585M	0	1	0	2	28	2	0.4	0	1	88	970	0	640

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10190	(FLIGHT	4)											
AA 3576B	8	3	9	20	15	25	26.1	31	2	37	26	13	0
AB 3574B	9	8	5	20	15	25	7.1	13	2	43	26	18	0
AC 3566D	11	7	15	7	16	28	11.7	2	3	57	24	29	0
AD 3560B?	9	5	3	6	10	9	13.1	1	2	56	57	20	0
AE 3550B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 3544B?	6	6	3	4	7	7	5.1	0	2	65	52	28	0
AG 3533B	9	6	7	7	16	11	11.1	4	2	53	34	22	0
AH 3527B	6	4	6	5	12	10	9.1	11	3	62	24	33	0
LINE 10200	(FLIGHT	4)											
A 3991D	6	13	6	6	81	60	2.8	17	1	55	95	21	0
B 3993D	1	2	1	0	2	4	-	-	-	-	-	-	0
C 4002B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 4013D	2	13	10	4	2	30	0.6	0	2	46	48	18	6
E 4023D	29	6	22	2	4	54	78.3	20	3	27	15	9	0
F 4027D	5	24	17	55	4	64	1.1	0	3	27	15	10	0
G 4030D	16	24	17	55	122	62	5.3	9	2	34	23	13	0
H 4039B?	0	6	3	14	30	30	0.4	0	3	39	21	18	0
I 4045D	16	18	17	30	75	52	7.4	12	2	32	27	10	0
J 4053D	13	12	24	34	76	31	8.2	19	3	37	20	16	0
K 4056D	21	20	24	34	76	30	9.6	9	3	32	18	13	0
L 4071D	47	29	91	52	82	38	20.6	2	5	22	7	7	0
M 4074D	9	11	17	10	23	21	5.7	17	5	20	5	7	0
N 4081D	20	16	12	18	50	41	11.5	13	3	28	15	9	90
O 4089B	26	24	37	46	21	87	10.5	9	2	27	46	3	0
P 4098D	6	10	6	12	27	53	3.0	13	1	30	210	0	0
Q 4103D	3	5	1	5	9	25	2.8	30	1	36	247	0	0
R 4107D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 4113D	1	2	1	2	2	4	-	-	-	-	-	-	0
T 4118D	30	17	34	11	48	38	20.2	3	3	37	20	15	0
U 4122D	11	32	34	11	48	80	2.5	0	2	29	33	5	0
V 4138M	0	2	1	2	2	4	-	-	-	-	-	-	1110
W 4146D	11	27	28	31	27	43	3.0	0	3	32	16	12	0
X 4149D	28	2	28	31	27	44	337.8	13	3	27	14	8	0
Y 4155B?	15	11	33	9	7	17	10.4	17	1	39	135	3	0
Z 4187B?	2	3	0	4	7	23	2.8	44	1	85	935	0	0
AA 4217S	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 4230B?	5	5	3	2	5	14	5.1	29	2	77	52	43	0
AC 4238B?	5	8	3	7	8	17	3.0	8	2	61	38	31	0
AD 4241B	1	2	1	2	2	2	-	-	-	-	-	-	0
AE 4250D	9	10	13	9	21	34	6.1	19	1	43	212	2	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10200	(FLIGHT	4)											
AF 4270S	1	2	0	2	2	4	-	-	-	-	-	-	0
AG 4297B	16	5	2	5	4	22	33.1	10	4	40	9	21	0
AH 4320D	4	7	2	5	21	4	3.0	16	1	42	116	6	0
AI 4345D	12	9	1	3	6	14	11.0	11	2	45	40	16	0
AJ 4351D	4	7	11	5	9	13	2.8	4	2	38	32	11	0
AK 4358B	10	7	12	11	25	0	10.4	10	3	32	20	9	0
AL 4369B	8	6	3	7	15	6	9.3	21	2	41	28	16	0
AM 4378B	5	6	4	3	8	7	4.5	12	3	43	17	20	0
AN 4386B?	9	9	10	10	24	18	5.9	6	3	42	23	17	0
AO 4418D	7	6	7	2	11	8	7.2	19	2	40	36	13	0
AP 4424B?	1	2	1	2	2	2	-	-	-	-	-	-	0
AQ 4436B	11	15	14	24	54	43	4.7	6	2	32	31	8	0
LINE 10210	(FLIGHT	4)											
A 4786D	5	4	11	4	8	19	7.2	33	1	45	69	13	0
B 4780D	14	14	13	17	39	40	7.7	7	2	34	50	6	0
C 4774D	1	2	1	2	2	4	-	-	-	-	-	-	0
D 4770D	1	2	1	2	2	4	-	-	-	-	-	-	0
E 4759B?	3	3	2	6	59	11	6.0	49	2	54	49	23	0
F 4753B	6	8	2	10	27	22	4.6	12	3	35	18	13	0
G 4750B	9	8	9	10	23	18	7.8	10	3	32	16	11	0
H 4748B	6	4	9	10	23	18	9.6	27	3	38	14	17	0
I 4740B	12	12	20	21	49	28	7.0	6	4	33	12	14	0
J 4738D	16	10	20	21	49	17	14.6	10	3	35	16	14	0
K 4735B	9	10	17	16	44	30	6.2	9	4	39	12	19	7
L 4733B	13	8	17	16	44	30	14.9	9	4	30	10	12	0
M 4724D	15	10	48	28	66	18	13.3	9	4	33	11	15	0
N 4722B	24	14	48	28	66	18	17.3	0	5	25	6	10	0
O 4721B	24	11	48	28	66	18	24.4	2	6	24	5	9	0
P 4715B	5	4	7	5	13	13	8.7	29	4	30	9	12	0
Q 4710D	25	14	7	32	13	21	18.6	0	2	35	29	10	0
R 4704B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 4697D	1	2	1	2	2	4	-	-	-	-	-	-	40
T 4695B	24	17	35	27	64	20	14.5	0	3	35	14	14	0
U 4691B	13	9	35	27	64	11	12.5	0	2	45	30	17	0
V 4685B	17	12	16	22	49	26	13.5	0	3	44	19	20	0
W 4678B	8	6	11	14	32	11	8.5	4	2	46	57	11	0
X 4649B	5	7	5	3	18	3	4.1	0	1	89	120	40	0
Y 4646B	8	7	3	4	18	6	7.0	0	2	56	48	20	0
Z 4638B	7	3	2	1	4	1	14.8	11	3	71	17	45	0
AA 4630B	4	3	10	5	13	12	6.4	18	2	62	31	32	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10210	(FLIGHT 4)												
AB 4604B	9	2	14	8	4	5	55.2	28	2	74	58	38	0
AC 4594B	8	6	4	7	16	9	10.3	10	3	58	18	33	0
AD 4585B	7	6	9	11	23	11	7.9	6	2	60	33	30	0
AE 4566B	3	3	9	6	13	2	6.1	10	2	41	32	11	0
AF 4550B	6	8	3	4	6	2	4.7	0	3	46	21	19	0
AG 4538B	8	6	3	4	11	3	9.3	0	3	54	15	28	0
AH 4502B	5	3	7	8	20	13	11.9	16	2	43	36	13	0
AI 4489B?	10	7	14	16	7	6	10.8	8	2	42	26	16	0
LINE 10220	(FLIGHT 4)												
A 4851D	12	25	4	26	67	112	3.6	7	1	34	53	9	0
B 4861B	18	23	8	27	68	61	6.4	11	2	36	40	12	0
C 4866D	6	16	3	13	5	20	2.1	8	2	37	38	13	0
D 4871D	13	35	3	22	28	129	2.8	0	2	32	39	9	0
E 4885D	5	8	10	21	55	71	3.2	22	2	64	42	34	0
F 4891B?	13	18	13	26	3	18	5.7	12	2	43	31	19	0
G 4898D	30	24	26	20	55	55	13.4	5	3	27	17	8	0
H 4907B	30	20	35	51	73	59	16.5	9	4	27	10	10	0
I 4923B	17	13	4	10	20	47	11.5	9	4	29	8	13	0
J 4928B	7	2	13	17	30	5	32.1	42	5	28	6	13	0
K 4934B	12	6	16	12	21	7	16.1	26	5	32	6	17	0
L 4942B	40	22	87	50	100	37	23.6	7	8	25	2	14	0
M 4952B?	6	3	11	12	22	23	12.7	43	4	33	10	16	0
N 4960D	5	8	15	7	27	43	3.3	25	4	41	12	23	0
O 4970B	54	33	36	32	69	101	21.7	7	6	30	4	18	0
P 4973B	11	37	40	42	88	25	2.3	0	7	23	3	12	0
Q 4976B	54	6	40	42	88	44	259.6	16	6	25	4	14	0
R 4978B	49	7	106	77	141	44	159.4	17	6	23	4	11	0
S 4982B	2	3	106	77	141	44	2.9	47	4	30	8	15	0
T 4984B	8	3	8	15	51	7	19.3	44	4	27	8	12	0
U 4989B	35	9	8	6	27	42	62.0	13	4	34	12	16	0
V 4994B?	7	4	27	32	70	40	12.4	34	1	62	79	26	30
W 5004D	12	11	26	7	22	29	8.3	12	1	50	71	17	0
X 5010B	27	26	40	41	101	52	10.4	0	3	29	15	10	0
Y 5012B	28	26	40	37	101	52	10.7	0	4	30	11	12	0
Z 5016B	21	19	40	37	89	38	10.0	4	4	31	10	14	0
AA 5019B	14	9	38	35	85	38	13.9	18	3	50	16	29	0
AB 5026D	47	47	116	117	271	139	11.7	3	4	28	8	13	0
AC 5028D	63	60	116	117	271	139	13.6	0	6	24	5	11	0
AD 5030D	65	52	116	117	271	139	17.0	0	6	25	5	12	0
AE 5042D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FTID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10220	(FLIGHT		4)										
AF 5054M	0	6	0	7	19	34	0.4	0	1	31	710	0	920
AG 5071S	1	2	0	2	2	4	-	-	-	-	-	-	0
AH 5089D	23	13	18	28	95	39	17.6	2	3	31	19	9	0
AI 5091D	16	22	18	28	95	39	5.8	0	3	34	20	11	0
AJ 5098D	9	7	8	12	28	17	7.9	16	3	47	19	23	0
AK 5110B	10	7	11	16	32	5	9.8	21	3	53	19	30	0
AL 5116D	12	13	11	10	41	9	6.9	12	2	44	27	20	0
AM 5124B	9	6	22	24	53	17	11.5	23	3	52	16	29	0
AN 5130B	10	10	22	24	53	15	7.4	8	2	59	30	31	0
AO 5141B	12	8	10	12	1	19	13.7	15	1	45	69	12	0
AP 5176B	1	2	1	2	2	4	-	-	-	-	-	-	140
AQ 5188D	11	28	40	24	48	79	2.9	0	3	28	18	8	0
AR 5195D	10	13	10	13	33	29	5.0	0	4	28	12	9	0
AS 5198D	10	7	10	13	33	29	9.6	9	4	33	12	13	0
AT 5224D	21	22	1	9	7	44	8.5	1	2	30	24	7	0
AU 5233D	11	5	15	15	23	29	22.2	20	2	34	52	5	0
AV 5240D	7	6	0	5	10	40	0.2	0	1	16	97	0	0
AW 5259B	10	4	0	11	1	0	29.0	21	2	41	34	13	0
AX 5265B	7	5	4	11	25	19	9.0	21	3	35	21	12	0
AY 5269B	11	10	2	5	14	25	8.4	15	3	41	21	19	0
AZ 5277B	15	17	16	27	46	47	6.7	10	3	36	22	14	0
BA 5279B	21	21	16	28	46	47	9.0	8	3	32	20	11	0
BB 5283B	10	8	13	28	65	6	9.3	20	3	33	18	12	0
BC 5290B	12	11	20	16	62	26	8.6	9	4	31	10	13	0
BD 5294B	11	11	20	16	62	26	8.0	8	4	29	10	11	0
BE 5299B	17	6	15	25	54	20	29.6	5	4	35	12	14	0
BF 5321B	7	6	10	10	17	11	6.6	15	2	44	27	18	0
BG 5325B	9	2	3	4	11	21	49.0	27	2	46	33	18	0
BH 5344B	6	4	9	11	24	17	9.4	25	3	55	23	29	0
BI 5378B	7	7	5	1	23	25	1.0	0	1	31	51	15	0
LINE 10230	(FLIGHT		4)										
A 5749D	8	12	5	12	31	49	4.5	4	1	39	71	6	0
B 5744B?	4	5	3	3	6	24	4.2	23	2	47	54	15	0
C 5739B	5	1	4	7	15	8	25.0	47	2	46	38	18	0
D 5731B	16	12	15	17	37	18	11.6	1	3	37	23	13	0
E 5728B	14	9	17	19	39	11	12.2	4	2	35	27	10	0
F 5722B	9	8	4	9	19	26	7.2	15	2	52	41	23	0
G 5709B	29	15	14	34	81	17	21.7	0	5	25	6	9	0
H 5699B	9	5	8	9	19	13	16.2	13	4	32	9	13	0
I 5689B	16	11	18	19	44	30	12.5	0	5	27	5	11	10

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN M	COND DEPTH .SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 10230	(FLIGHT 4)												
J 5682B	7	4	19	10	23	8	11.1	15	7	29	4	15	0
K 5673B	7	2	22	4	12	7	32.3	29	8	39	3	25	0
L 5661B	14	4	29	29	65	35	39.7	16	4	37	8	19	0
M 5657B	2	18	29	35	79	7	0.7	0	5	28	7	12	0
N 5651D	34	18	41	41	59	29	21.8	0	3	34	13	15	0
O 5644B	6	7	2	5	11	23	4.6	10	1	57	70	21	0
P 5642B	4	6	10	5	11	23	3.6	14	1	71	64	35	0
Q 5635B	25	23	45	42	98	44	10.2	0	4	35	12	15	0
R 5632B	27	23	45	42	98	44	11.8	0	3	25	15	5	0
S 5621D	29	23	25	42	96	75	12.7	3	2	33	35	8	0
T 5611B	19	18	18	17	38	29	9.2	0	2	44	36	16	0
U 5595B	13	10	23	16	39	10	11.3	0	3	46	18	22	0
V 5591B	10	11	23	16	39	14	6.7	0	4	39	10	18	0
W 5569B	7	7	15	10	23	5	6.7	0	2	44	26	16	0
X 5556S	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 5525B	6	8	10	11	25	16	4.0	0	3	39	15	17	0
Z 5514D	1	2	1	2	2	3	-	-	-	-	-	-	0
AA 5507B	5	6	1	3	7	14	4.8	5	2	68	61	31	0
AB 5491B	7	5	3	9	19	11	8.6	0	2	38	28	10	0
AC 5467B	10	5	8	7	17	6	16.7	1	3	56	21	29	0
AD 5454B	8	6	8	14	7	2	9.7	2	2	56	25	27	0
AE 5447B	7	8	7	5	29	12	5.0	0	2	42	30	14	0
LINE 10240	(FLIGHT 10)												
A 609B	1	2	1	2	2	3	-	-	-	-	-	-	0
B 619B	1	2	1	2	1	2	-	-	-	-	-	-	0
C 626D	6	5	11	35	66	82	7.6	39	1	32	52	6	0
D 632D	6	15	11	30	66	75	2.2	6	2	39	43	13	0
E 647B	5	12	6	40	83	42	2.2	0	3	32	17	12	0
F 650B	18	13	31	40	83	42	12.7	9	2	32	24	10	0
G 662D	11	16	9	33	73	67	4.7	13	2	50	39	23	0
H 666D	10	4	9	33	73	67	20.6	35	2	43	34	18	0
I 678B?	6	4	6	6	14	15	9.5	42	2	55	30	29	0
J 688D	16	30	20	28	55	26	4.2	0	4	30	9	14	0
K 697B	20	14	49	33	70	29	13.5	16	5	30	5	16	0
L 700B	26	4	49	33	70	42	114.8	19	5	27	6	13	0
M 706B	23	18	42	53	115	53	12.3	9	4	23	7	8	0
N 708B	16	17	42	53	115	53	7.1	9	4	25	10	8	0
O 720D	43	42	28	57	138	162	11.8	6	4	21	10	6	0
P 728B	89	89	138	138	277	120	14.6	1	5	19	7	7	0
Q 742B	25	22	46	46	100	19	10.7	3	7	28	4	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE	10240	(FLIGHT		10)										
R	751B	4	7	17	22	47	10	2.5	15	7	35	3	22	0
S	768B?	8	7	17	8	20	33	6.9	31	4	45	9	28	0
T	781B	9	3	4	5	14	36	26.0	36	4	32	10	14	0
U	788D	43	28	12	42	72	41	18.7	5	3	33	16	13	0
V	803M	0	11	6	17	20	41	0.4	0	1	16	526	0	470
W	805D	4	12	11	17	5	41	1.7	10	1	31	688	0	0
X	819D	47	37	54	65	145	109	15.2	0	4	30	11	13	0
Y	826D	15	26	19	23	48	88	4.2	3	3	29	13	11	0
Z	829D	34	53	17	23	48	88	6.5	0	3	22	15	5	0
AA	839B	100	50	131	101	218	75	35.2	1	6	18	4	7	0
AB	852B	14	12	12	13	32	24	9.0	8	5	31	7	15	0
AC	859D	32	15	49	33	70	23	26.9	8	6	29	4	15	0
AD	866B	15	6	8	3	8	9	27.5	28	6	34	5	20	0
AE	874B	58	40	30	88	193	92	19.3	2	4	25	9	10	0
AF	876B	56	39	30	88	193	92	19.2	4	3	28	14	10	0
AG	887D	16	25	6	17	53	104	5.3	9	1	35	100	4	0
AH	896D	24	15	38	34	82	16	16.8	13	2	44	29	19	0
AI	899B	6	8	8	41	37	31	3.8	21	3	36	13	17	0
AJ	904B	22	15	4	10	21	18	14.7	17	4	44	11	26	0
AK	908B	20	17	6	10	21	46	11.1	14	3	47	17	26	0
AL	916B	10	3	21	5	18	9	1.0	0	1	39	44	24	0
AM	937B	16	13	3	9	11	30	10.6	0	3	39	16	16	0
AN	942B	7	13	3	9	11	30	3.0	0	3	36	14	16	0
AO	949B	12	14	4	25	37	31	6.2	8	1	47	111	10	30
AP	974M	0	2	0	2	0	4	-	-	-	-	-	-	930
AQ	980M	0	2	0	2	0	4	-	-	-	-	-	-	0
AR	990M	0	1	0	1	0	7	0.4	0	1	110	1025	0	0
AS	1017B	1	2	1	0	2	3	-	-	-	-	-	-	0
AT	1034B	2	0	4	2	52	57	49.0	85	2	25	28	1	0
AU	1048B	5	3	3	5	13	16	7.7	18	2	48	40	17	0
AV	1054B	7	3	2	4	9	5	18.0	19	2	48	29	20	0
AW	1063B	10	9	7	6	12	6	8.3	2	3	35	22	11	0
AX	1069B	2	3	9	11	23	21	3.1	27	2	43	26	18	0
AY	1075D	13	13	9	19	39	31	7.5	9	2	42	25	18	5
AZ	1079D	13	11	4	19	2	12	8.8	14	3	43	20	21	0
BA	1085B	14	5	18	18	38	15	27.8	24	3	42	18	20	0
BB	1095B	9	9	2	9	21	28	6.0	15	2	48	29	22	0
BC	1104B	7	7	4	3	8	7	5.6	16	3	48	20	24	0
BD	1130D	6	2	4	8	19	13	28.3	47	2	36	33	10	0
BE	1133D	5	2	3	8	19	13	13.1	44	2	36	33	11	0
BF	1157B	9	6	9	15	31	20	12.0	9	2	44	27	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10240	(FLIGHT	10)											
BG 1168B	5	9	11	9	36	26	2.6	0	2	40	24	15	0
BH 1176B	8	6	11	12	27	17	8.2	9	3	34	23	10	0
LINE 10250	(FLIGHT	10)											
A 1660D	19	23	9	13	32	40	6.8	0	1	27	88	0	0
B 1658D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 1656D	9	15	3	13	3	12	3.8	2	2	45	51	15	0
D 1652D	6	12	2	10	29	16	2.9	3	1	32	58	3	0
E 1649B	8	7	6	7	29	16	7.5	19	1	33	55	4	0
F 1643B	8	5	3	9	1	12	12.1	22	2	45	53	14	0
G 1635B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 1630B	7	5	8	12	23	23	8.6	23	2	64	44	32	0
I 1627B	10	3	8	12	23	15	32.9	29	2	48	40	19	0
J 1619D	17	20	19	31	67	52	6.9	2	2	40	30	15	0
K 1616D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 1602B	11	3	1	3	6	6	33.8	27	3	47	22	23	0
M 1595D	18	18	8	30	72	23	8.1	0	3	28	17	7	0
N 1587D	50	33	59	61	136	60	19.2	0	5	24	6	9	0
O 1584D	12	5	27	61	30	18	23.5	30	5	25	6	11	40
P 1581D	42	4	27	64	30	18	356.5	9	5	21	5	8	0
Q 1569B	15	17	44	15	32	1	7.0	0	7	25	4	12	0
R 1565B	1	7	39	22	26	4	0.8	0	6	36	4	21	0
S 1559B	1	2	1	2	0	4	-	-	-	-	-	-	0
T 1541B	11	12	34	11	24	2	6.9	0	5	35	8	17	0
U 1538B	11	6	34	22	4	9	16.2	3	3	35	21	11	0
V 1514B	35	23	63	2	6	64	0.1	0	1	25	25	13	0
W 1510B	54	13	6	78	164	121	84.5	4	4	17	9	1	0
X 1504B	10	17	65	61	139	62	3.9	5	5	22	5	9	0
Y 1503D	18	17	65	61	139	62	9.3	9	4	22	10	6	0
Z 1500D	16	13	85	46	112	52	10.3	11	4	23	8	7	0
AA 1498D	77	15	85	45	110	52	127.9	0	7	18	3	6	0
AB 1497D	77	47	85	45	110	1	25.3	0	7	18	3	5	0
AC 1495D	1	2	1	2	2	1	-	-	-	-	-	-	0
AD 1491D	13	18	112	80	188	61	5.7	1	1	51	64	18	0
AE 1484D	9	9	35	15	35	16	6.9	9	1	70	67	33	490
AF 1481B	19	11	35	15	35	16	15.9	1	3	42	18	19	0
AG 1480B	18	13	35	15	35	9	12.2	0	4	34	10	15	0
AH 1477B	11	9	20	3	4	5	10.1	2	4	32	10	13	0
AI 1474B	11	8	20	17	4	18	10.4	2	3	32	14	11	0
AJ 1463H	20	11	19	11	22	12	18.3	0	4	33	8	14	0
AK 1439M	0	2	0	2	2	4	-	-	-	-	-	-	940

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10250	(FLIGHT	10)											
AL 1432M	0	2	0	3	7	14	0.4	0	1	93	990	0	0
AM 1426M	1	1	1	2	2	4	-	-	-	-	-	-	0
AN 1414B	48	40	72	56	132	80	14.3	0	4	26	11	9	0
AO 1410B	23	15	72	56	132	80	15.4	0	4	30	10	12	50
AP 1403B	15	13	26	12	45	27	9.1	6	2	45	42	17	0
AQ 1388B	3	4	7	12	28	34	3.4	27	2	45	46	16	0
AR 1382D	2	8	2	11	27	17	1.4	0	2	35	29	9	0
AS 1377B	11	11	1	9	18	4	7.2	8	2	35	26	11	0
AT 1376B	1	1	1	2	2	4	-	-	-	-	-	-	0
AU 1371D	6	4	2	1	6	14	10.8	28	3	35	22	12	0
AV 1365D	11	5	10	5	11	2	19.1	14	3	32	20	9	0
AW 1360B	6	8	0	16	37	16	4.6	18	2	49	29	23	0
AX 1356B	10	11	10	16	37	33	6.6	11	2	35	25	12	0
AY 1352B	3	3	10	16	37	33	3.3	32	3	43	22	19	0
AZ 1323D	11	11	6	4	30	32	7.1	3	2	41	44	12	0
BA 1318D	8	12	6	11	31	32	4.6	4	2	41	43	13	0
BB 1305H	2	9	13	11	22	17	1.3	0	2	33	26	8	0
BC 1291B?	4	5	2	6	10	8	4.2	8	2	47	36	17	0
LINE 10260	(FLIGHT	10)											
A 1824B	6	2	3	6	28	44	20.9	51	1	32	57	5	0
B 1829D	23	34	15	21	66	115	6.0	6	1	28	51	4	0
C 1832D	8	18	15	21	66	115	3.0	11	2	39	42	14	0
D 1843D	6	10	7	11	31	32	3.5	20	1	38	59	10	0
E 1849D	12	14	6	8	17	8	6.7	10	2	46	51	16	0
F 1867B?	5	2	1	6	4	20	13.3	51	1	89	75	50	0
G 1876B	4	5	5	5	13	13	4.6	37	2	68	37	39	0
H 1882D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 1888B	17	18	26	37	15	47	7.6	9	2	39	27	15	0
J 1891B	17	23	3	38	25	69	6.1	5	2	32	23	11	0
K 1894B	12	23	3	38	25	69	4.0	5	2	43	33	18	0
L 1917D	6	13	3	6	11	11	2.6	7	3	32	14	13	0
M 1924D	9	12	8	38	68	121	4.6	20	3	24	13	7	0
N 1933D	42	38	56	69	170	43	12.7	8	4	22	8	8	0
O 1936D	15	26	126	7	22	44	4.5	11	5	23	6	10	30
P 1939D	85	89	126	150	332	198	13.6	0	5	20	5	8	0
Q 1941D	89	80	126	150	332	194	16.3	0	5	18	7	5	0
R 1951B	21	21	20	37	81	53	8.7	12	4	29	11	13	0
S 1955B	5	11	15	34	43	28	2.5	13	4	33	10	17	0
T 1967B	5	4	33	24	29	18	7.6	43	6	25	4	12	0
U 1984B	55	41	31	83	113	47	17.6	0	7	23	3	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT
LINE 10260	(FLIGHT	10)											
V 1996B	14	21	19	42	89	87	4.7	3	4	29	8	13	0
W 2012B	48	26	30	13	140	30	25.1	9	5	21	6	8	0
X 2018B	4	6	30	71	62	38	3.4	36	4	22	11	7	0
Y 2024D	16	25	17	11	3	25	4.9	7	1	35	61	8	0
Z 2033M	1	2	1	0	2	4	-	-	-	-	-	-	0
AA 2051D	4	22	12	23	61	45	1.0	0	3	49	22	26	0
AB 2055B	1	1	1	2	2	4	-	-	-	-	-	-	0
AC 2059D	41	40	22	15	16	2	11.2	2	4	28	10	12	0
AD 2063D	9	2	155	121	51	38	49.0	54	6	30	4	17	0
AE 2066D	115	77	155	174	369	182	25.4	2	3	26	13	10	0
AF 2085B	54	18	122	119	263	154	50.7	14	5	33	5	20	0
AG 2087B	64	55	122	119	263	154	15.1	4	4	31	8	16	0
AH 2096D	25	23	20	14	26	15	10.5	8	1	64	88	27	0
AI 2107B	37	47	31	68	158	133	8.2	5	2	29	33	7	0
AJ 2115D	51	41	84	83	183	146	15.6	5	3	27	16	9	0
AK 2120B	1	1	84	79	170	92	5.7	99	4	32	10	14	0
AL 2125D	11	9	19	15	32	15	10.0	15	3	31	14	11	0
AM 2134B	4	5	11	20	10	11	3.9	33	3	40	16	20	0
AN 2151D	1	2	1	2	2	4	-	-	-	-	-	-	90
AO 2156D	10	4	2	1	5	21	28.0	25	1	52	70	18	0
AP 2185M	0	2	0	2	0	4	-	-	-	-	-	-	520
AQ 2195M	0	4	0	2	0	12	0.4	0	1	107	1025	0	590
AR 2214B	8	7	2	13	1	9	7.7	0	3	43	17	19	0
AS 2221B	4	5	6	9	20	8	3.6	0	3	34	15	10	0
AT 2227B	13	6	5	3	36	29	20.5	4	2	42	27	16	0
AU 2230D	11	12	9	3	36	29	6.4	0	2	43	45	13	0
AV 2262B	11	12	5	17	11	9	6.7	5	3	39	22	15	10
AW 2270B	31	39	2	59	138	124	8.0	0	3	24	20	5	0
AX 2275B	24	14	29	34	75	121	18.3	12	3	25	16	6	0
AY 2282D	4	10	8	12	28	63	2.1	13	2	35	27	13	0
AZ 2286D	12	16	19	17	38	54	5.3	13	3	34	18	14	0
BA 2293B	7	13	5	15	32	39	3.2	18	3	41	14	22	0
BB 2304B	41	39	36	64	142	105	11.7	0	3	21	12	5	0
BC 2305B	47	44	36	64	142	105	12.4	0	3	19	13	2	0
BD 2326D	10	18	6	9	21	109	3.7	8	2	40	35	15	0
BE 2331D	11	30	8	20	62	118	2.7	0	2	28	47	4	0
BF 2333D	11	30	8	20	62	118	2.7	0	2	24	42	0	0
BG 2342B	15	14	7	12	26	38	9.0	14	2	30	27	8	0
BH 2351B	12	16	5	18	42	39	5.1	11	2	27	24	6	0
BI 2355B	13	18	18	28	59	46	5.3	8	2	30	24	8	0
BJ 2363D	13	22	16	17	42	29	4.1	0	2	28	29	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10260	(FLIGHT 10)												
BK 2367D	11	15	16	16	38	33	5.4	5	3	37	18	16	0
HL 2376B?	9	6	4	6	12	8	13.1	21	3	41	19	18	0
EM 2386B	6	1	1	8	10	10	49.0	55	2	47	25	23	0
LINE 10270	(FLIGHT 10)												
A 2841D	9	11	8	16	7	4	5.8	8	1	39	60	9	0
B 2837H	4	6	3	1	1	4	0.1	0	1	21	93	4	0
C 2808B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2803D	1	2	1	2	2	4	-	-	-	-	-	-	0
E 2800D	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2792D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 2786D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2780B?	4	7	12	12	6	17	2.7	1	4	55	11	33	0
I 2775B?	4	2	4	4	5	18	9.1	43	4	41	9	22	0
J 2767B?	25	17	5	26	62	30	14.3	0	5	26	6	11	0
K 2755H	4	11	21	5	43	12	2.1	0	5	27	7	10	0
L 2733B?	10	10	10	12	7	14	7.2	0	4	35	10	15	0
M 2728D	23	13	9	13	49	10	18.1	0	3	31	14	10	0
N 2725D	16	3	7	18	41	20	72.5	13	3	42	21	17	0
O 2722D	13	9	7	18	41	20	12.1	8	2	49	39	20	0
P 2708D	5	5	11	3	29	10	5.6	29	1	15	438	0	740
Q 2703D	14	20	22	34	57	60	5.6	4	1	40	78	8	0
R 2689B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 2682B	37	26	69	70	148	66	16.2	2	3	36	14	16	0
T 2669B	9	11	26	21	51	24	5.8	1	2	40	50	9	0
U 2667B	9	11	26	21	51	24	5.5	0	2	40	32	13	0
V 2664B	10	11	26	21	53	15	6.0	0	2	38	35	10	0
W 2658M	0	1	1	0	2	1	-	-	-	-	-	-	1120
X 2653D	2	9	9	11	34	16	1.3	0	1	49	131	8	0
Y 2645B?	0	6	3	5	1	12	0.4	0	1	51	175	4	0
Z 2626M	0	3	0	2	0	1	0.4	0	1	68	909	0	520
AA 2608B	3	19	7	1	23	73	0.8	0	2	43	38	17	0
AB 2600B	6	7	2	12	29	17	5.4	24	3	39	16	18	0
AC 2587D	2	12	16	14	47	99	0.9	0	1	28	68	1	0
AD 2560B?	1	7	9	8	4	17	0.5	0	1	62	62	29	0
AE 2550B	12	10	5	9	43	57	9.0	12	2	39	25	15	0
AF 2545B	17	28	8	16	77	88	5.0	1	2	32	24	11	0
AG 2542D	17	15	8	16	26	88	9.4	14	3	38	21	16	0
AH 2537B?	9	7	25	35	73	33	9.0	25	3	31	19	10	4
AI 2526D	9	5	12	12	25	17	12.6	36	2	46	24	23	0
AJ 2523D	12	5	6	4	2	12	21.3	33	3	47	20	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10270	(FLIGHT	10)											
AK 2518D	16	9	7	13	30	8	15.8	24	3	45	14	25	0
AL 2514D	31	9	37	37	7	20	48.3	19	4	37	10	20	0
AM 2511D	6	9	37	37	7	20	3.6	22	4	34	11	17	0
AN 2508D	22	8	24	17	36	80	34.8	23	4	31	11	14	0
AO 2506D	5	2	24	17	36	69	17.6	55	4	29	10	12	0
AP 2500B?	18	13	13	14	46	23	12.6	9	3	37	13	17	0
AQ 2483B	50	50	34	84	127	65	12.0	0	3	19	17	1	0
AR 2469D	8	14	22	25	63	57	3.7	6	2	28	34	4	0
AS 2467D	19	24	22	29	63	57	6.7	1	2	27	29	4	0
AT 2464D	10	6	8	26	61	34	12.0	24	2	26	22	5	0
AU 2460B	20	21	35	21	45	41	8.1	0	3	21	15	2	0
AV 2458B	26	13	35	21	45	41	22.7	5	4	22	11	5	0
LINE 10280	(FLIGHT	10)											
A 3026B	4	5	3	6	11	24	4.8	37	1	64	105	26	0
B 3042D	14	17	5	6	48	8	6.2	8	1	37	68	7	0
C 3050D	8	8	2	9	30	40	5.7	23	1	36	68	7	0
D 3062D	9	12	6	1	3	8	4.5	15	1	43	63	13	0
E 3109D	2	4	4	8	9	42	1.5	37	1	65	114	27	0
F 3113D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3136D	17	6	17	19	29	41	34.2	31	4	44	10	26	0
H 3146B	29	24	74	54	120	57	12.3	11	5	32	6	18	14
I 3151B	12	5	24	13	19	73	24.2	37	5	32	6	18	0
J 3157B	22	12	27	17	32	73	17.8	20	6	32	4	19	0
K 3160B	31	17	45	29	55	6	20.1	10	5	25	5	11	0
L 3163B	4	16	29	29	55	42	1.6	0	5	28	7	13	0
M 3172B	24	11	18	19	35	33	25.3	16	5	26	5	13	0
N 3192B	7	6	20	15	33	17	6.1	34	6	43	5	29	0
O 3198B?	6	8	18	1	7	62	4.2	25	4	38	10	21	0
P 3205B	24	49	39	84	191	165	4.6	0	3	31	12	14	0
Q 3207B	32	49	39	90	212	165	6.4	2	4	27	11	11	0
R 3209B	44	59	10	90	212	190	8.1	0	3	21	11	5	0
S 3218B	52	38	7	59	139	73	17.2	4	3	30	17	11	0
T 3226D	7	7	16	13	20	43	5.5	39	1	62	78	29	0
U 3229B?	5	7	11	13	20	43	4.1	36	1	69	116	31	0
V 3239D	17	14	35	29	67	81	9.9	20	3	59	22	35	13
W 3243D	24	30	35	29	67	87	7.4	6	1	26	59	1	0
X 3263B	20	22	18	26	60	60	8.1	5	2	40	48	12	0
Y 3286B	11	10	20	23	9	4	8.9	12	2	62	29	34	0
Z 3291B	11	8	20	23	9	10	10.8	16	1	35	354	0	0
AA 3296M	0	2	1	1	2	4	-	-	-	-	-	-	1170

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
	1050 HZ		892 HZ		7323 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE 10280	(FLIGHT		10)										
AB 3310D	11	12	1	16	20	5	6.1	17	1	15	588	0	0
AC 3316M	0	5	0	3	4	5	0.4	0	1	17	610	0	260
AD 3333M	0	2	0	1	0	10	0.4	0	1	63	871	0	680
AE 3351M	0	1	0	1	0	4	-	-	-	-	-	-	510
AF 3358M	0	2	0	1	2	3	-	-	-	-	-	-	1030
AG 3370D	5	13	10	26	74	42	2.0	4	1	26	250	0	0
AH 3377B	3	2	10	26	74	43	11.2	68	1	27	696	0	0
AI 3382M	0	2	0	2	2	4	-	-	-	-	-	-	1150
AJ 3395B	6	5	0	2	1	7	8.0	12	2	73	60	35	0
AK 3416B	12	8	12	16	5	2	12.5	11	2	38	27	13	0
AL 3436B	5	5	7	1	1	21	4.9	13	2	51	44	20	0
AM 3446B	7	7	1	1	6	6	7.2	15	2	43	31	17	0
AN 3451B	6	4	2	9	19	17	10.6	28	2	44	27	18	0
AO 3463B	13	5	17	33	71	57	24.1	26	2	29	24	7	0
AP 3472B	6	7	4	10	20	4	5.4	24	2	48	26	23	0
AQ 3499D	5	8	11	13	35	19	3.3	13	3	49	19	26	0
AR 3513B	6	5	2	1	4	24	6.6	29	2	47	32	20	0
AS 3518B?	7	6	9	12	26	14	6.9	21	2	36	37	10	0
AT 3523D	1	2	1	1	2	4	-	-	-	-	-	-	0
AU 3531D	6	9	8	13	30	17	4.1	12	2	38	40	11	0
AV 3535D	6	6	1	4	6	30	6.7	23	2	40	41	13	0
AW 3539D	7	6	19	7	20	13	7.9	21	2	39	28	14	0
AX 3541D	11	8	6	13	41	13	10.2	13	2	36	24	12	0
AY 3547D	9	6	7	5	22	16	9.5	14	3	27	19	5	0
AZ 3553B?	8	5	6	6	6	6	10.7	14	3	24	16	3	0
LINE 10290	(FLIGHT		10)										
A 4102B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 4089B	4	4	0	8	14	22	4.9	30	1	52	106	13	0
C 4085B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 4076B	6	10	7	15	34	50	3.3	3	1	43	67	10	9
E 4067B	6	9	1	4	12	30	3.6	2	2	40	47	10	0
F 4038D	7	12	6	14	27	33	3.1	9	1	66	61	32	0
G 4034D	3	4	0	0	14	5	4.1	41	2	83	48	49	0
H 4027B?	1	2	1	1	2	4	-	-	-	-	-	-	0
I 4020B	3	6	12	8	11	13	2.2	23	4	49	11	29	0
J 4014B	8	3	37	23	55	23	25.2	41	4	51	8	33	0
K 4010B	23	13	44	38	95	23	17.8	10	6	34	5	19	0
L 4009B	23	13	46	38	95	29	19.3	10	5	31	6	15	0
M 3996B	10	8	17	10	26	24	9.5	13	7	48	4	33	0
N 3994B	12	8	17	10	25	24	11.5	8	7	45	4	30	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10290	(FLIGHT	10)											
O 3984B	10	6	16	10	26	11	11.8	2	6	34	4	18	0
P 3982B	9	2	16	10	26	12	42.9	16	6	34	5	18	0
Q 3975D	9	10	6	14	32	27	5.6	0	4	36	11	17	0
R 3973D	17	15	12	9	32	27	9.0	0	4	32	11	13	0
S 3971D	9	8	12	9	32	17	7.6	6	4	36	9	17	0
T 3967D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 3964D	12	7	19	8	28	12	14.0	17	3	61	23	35	18
V 3960D	1	10	14	3	16	25	0.5	0	2	59	41	29	0
W 3958D	11	14	15	18	16	25	5.2	6	2	65	44	34	0
X 3955D	12	11	16	18	40	23	8.0	11	1	47	129	8	0
Y 3944B?	1	2	1	1	2	4	-	-	-	-	-	-	0
Z 3938B	10	9	16	10	24	23	8.9	5	1	56	64	21	0
AA 3931B	8	5	15	8	17	20	12.6	9	3	74	15	49	0
AB 3927B	6	7	14	8	17	20	4.8	3	1	66	180	17	440
AC 3901M	0	2	0	2	2	4	-	-	-	-	-	-	1110
AD 3893M	0	2	0	0	2	4	-	-	-	-	-	-	1160
AE 3888M	0	2	1	2	2	3	-	-	-	-	-	-	0
AF 3881B?	5	9	3	3	7	8	3.2	5	1	42	324	0	0
AG 3878M	1	5	14	1	20	11	0.6	0	1	25	728	0	830
AH 3873B	12	12	17	12	27	7	7.7	10	2	68	31	39	0
AI 3855D	18	19	12	8	19	21	7.8	3	2	58	35	29	0
AJ 3848D	4	5	6	4	12	14	3.7	18	2	56	48	24	0
AK 3839B?	3	9	4	8	20	32	2.0	3	2	50	48	20	0
AL 3832B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 3826B?	9	8	2	6	29	26	7.4	11	2	41	28	16	0
AN 3796B	64	53	75	45	211	17	16.2	0	5	22	7	7	0
AO 3777B?	6	9	14	20	45	33	3.4	0	2	50	27	23	0
AP 3767B?	5	4	4	3	7	7	6.6	13	3	41	17	17	0
AQ 3754H	11	9	18	9	9	16	9.2	0	3	32	15	10	0
AR 3740H	6	5	9	12	24	12	6.9	6	3	40	19	15	0
LINE 10300	(FLIGHT	11)											
A 984S	8	11	4	6	13	3	4.3	7	1	37	165	0	0
B 1003S?	6	8	1	5	16	25	3.9	21	1	44	83	11	0
C 1016B?	13	6	6	30	76	49	22.1	26	1	28	51	2	0
D 1021B?	4	4	3	30	3	1	6.2	42	2	37	45	10	0
E 1027H	9	11	7	11	19	25	5.6	21	2	37	45	11	0
F 1047B?	5	6	9	10	1	12	4.4	38	2	53	32	28	0
G 1060D	13	23	26	31	69	26	4.0	8	2	35	25	13	0
H 1066D	11	17	17	5	11	31	4.3	15	2	45	43	18	0
I 1070D	6	9	5	8	32	31	4.0	22	2	56	35	29	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10300	(FLIGHT	11)											
J 1074D	7	7	3	8	18	15	5.9	26	2	48	33	21	0
K 1087B	4	3	14	2	83	13	8.1	53	3	35	15	16	0
L 1091B	29	5	4	3	1	12	110.3	17	4	33	9	17	0
M 1100B	19	12	48	18	34	48	14.6	16	5	22	7	7	0
N 1107B	17	11	45	20	25	30	14.3	22	5	27	6	13	0
O 1110B	31	9	84	20	11	30	54.3	22	7	30	3	18	0
P 1117B	25	8	49	6	16	41	43.5	25	8	28	2	18	0
Q 1123B?	11	13	7	23	42	45	6.6	23	6	30	4	17	0
R 1132B	27	25	29	47	107	65	10.8	11	6	25	4	13	0
S 1139D	9	14	39	19	37	19	4.5	17	5	31	6	16	0
T 1147D	48	36	32	66	153	79	16.3	5	6	24	4	12	0
U 1151D	20	16	32	19	45	33	11.6	18	7	23	3	12	0
V 1157D	27	34	11	74	162	24	7.7	6	6	24	4	11	4
W 1162D	33	18	41	31	67	40	21.8	14	4	27	8	12	0
X 1170B	19	29	28	29	69	70	5.6	1	3	26	13	8	0
Y 1179B?	7	2	32	21	53	1	21.4	42	4	38	8	20	0
Z 1184B?	12	9	32	21	54	18	11.7	16	5	28	6	13	90
AA 1188D	46	30	36	62	148	69	19.6	0	3	21	12	3	0
AB 1197B?	4	3	0	11	28	11	8.1	46	2	50	42	21	0
AC 1202D	10	6	14	11	19	5	13.1	29	1	44	109	9	0
AD 1220S	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 1234B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 1243D	11	8	10	4	12	61	10.0	25	1	44	85	12	0
AG 1252D	1	2	1	1	2	4	-	-	-	-	-	-	0
AH 1257D	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 1261M	2	3	0	6	1	11	3.9	51	1	20	682	0	0
AJ 1280M	1	2	0	0	2	1	-	-	-	-	-	-	790
AK 1305M	0	3	0	1	8	3	0.4	0	1	61	845	0	770
AL 1314M	0	2	0	2	6	13	0.4	0	1	68	887	0	670
AM 1320M	0	2	0	1	2	4	-	-	-	-	-	-	0
AN 1327M	0	0	0	1	0	4	-	-	-	-	-	-	1410
AO 1346S	0	3	1	3	2	25	0.1	0	1	20	326	0	0
AP 1356M	0	1	20	12	35	3	0.4	0	1	20	702	0	1110
AQ 1361D	15	13	26	12	25	7	8.9	11	2	57	27	31	0
AR 1365D	6	6	26	12	27	9	5.8	30	2	64	26	38	0
AS 1373D	7	6	11	19	42	9	6.9	28	2	65	30	38	0
AT 1381B	10	11	14	21	50	34	6.1	3	2	31	24	8	0
AU 1385D	4	11	9	20	50	34	2.2	9	3	68	22	43	16
AV 1393D	19	25	20	31	80	84	6.3	0	1	24	52	0	0
AW 1413B	12	19	4	8	12	2	4.7	0	2	36	28	12	0
AX 1417B	2	7	3	8	17	32	1.6	11	2	36	27	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10300	(FLIGHT 11)												
AY 1420D	10	8	4	8	17	32	8.9	20	2	39	25	15	0
AZ 1426D	1	7	2	2	20	22	0.7	0	2	34	24	11	0
BA 1431B	11	10	5	10	20	9	7.5	13	2	33	26	9	0
BB 1444D	12	9	17	13	32	8	10.5	11	3	33	17	12	0
BC 1455B	7	7	11	14	33	1	6.7	5	4	25	10	7	0
BD 1467B	15	12	21	19	39	18	9.9	9	4	40	9	22	0
BE 1473D	20	13	18	20	43	22	14.4	12	3	41	18	20	0
BF 1489B	7	13	10	12	30	54	3.5	14	2	43	32	18	0
BG 1507B?	1	2	0	2	2	4	-	-	-	-	-	-	0
BH 1519B	5	10	3	11	31	36	2.9	15	2	34	24	12	0
BI 1529B	16	10	4	18	42	30	14.3	19	3	35	19	14	0
BJ 1556B?	4	9	11	14	34	39	2.4	16	3	50	22	26	0
BK 1557B?	7	10	12	14	34	39	4.5	19	3	46	20	23	0
BL 1567B?	15	17	4	39	91	76	6.9	6	3	28	17	8	0
BM 1579B	4	13	10	9	17	21	1.7	3	2	49	23	26	0
BN 1586B?	19	14	9	16	36	16	12.3	16	2	52	25	28	0
BO 1599D	6	5	3	7	18	5	6.6	30	2	50	47	20	0
BP 1603D	16	11	4	7	18	13	13.4	14	2	45	54	15	0
LINE 10310	(FLIGHT 11)												
A 2316S	1	4	0	7	1	15	1.1	9	1	17	610	0	0
B 2288S?	8	14	2	26	61	88	3.3	12	1	17	171	0	8
C 2276B?	5	4	3	3	12	14	5.6	35	1	53	71	20	0
D 2264B?	3	3	5	13	27	4	6.6	50	2	46	48	17	0
E 2261B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2258D	9	8	10	11	24	15	7.7	18	2	37	33	12	0
G 2250D	9	11	10	21	48	29	5.0	11	2	35	33	10	0
H 2248D	12	13	10	21	48	36	6.4	10	2	31	32	7	0
I 2246D	10	13	10	20	48	38	5.3	11	2	35	30	11	0
J 2243D	5	6	4	6	29	3	4.0	26	2	40	34	14	0
K 2239B?	6	9	27	42	97	13	4.0	16	2	34	35	9	0
L 2235B	30	29	37	42	96	64	10.3	4	3	28	18	9	0
M 2230D	10	17	37	14	17	40	4.0	0	2	32	27	8	0
N 2225D	10	12	7	6	23	35	5.5	10	2	37	38	11	0
O 2221D	14	8	9	8	16	15	14.0	18	2	40	28	16	0
P 2218D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2215B?	5	6	0	9	22	22	5.4	24	2	44	35	17	0
R 2206B?	10	5	27	13	30	15	17.1	27	4	46	12	26	0
S 2195D	21	19	1	36	78	47	10.0	4	4	32	10	14	0
T 2194D	21	19	1	36	78	47	10.0	3	4	31	8	14	0
U 2189D	23	7	1	33	74	18	49.4	6	5	28	5	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10310		(FLIGHT		11)										
V	2172B	21	16	30	11	7	5	12.6	3	6	36	5	21	0
W	2165B	38	1	63	47	37	4	999.0	7	6	30	4	15	0
X	2163B	40	24	65	47	109	36	20.4	0	6	26	4	12	0
Y	2144B	26	23	11	15	35	59	10.7	0	4	28	10	11	0
Z	2140D	23	6	11	11	17	5	47.9	14	5	28	6	13	0
AA	2136D	38	28	18	26	4	46	16.1	0	4	29	8	12	0
AB	2133B?	38	11	12	26	4	46	54.4	3	3	52	20	28	0
AC	2129D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD	2126B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AE	2121B?	6	7	4	5	9	19	4.3	13	1	54	91	16	0
AF	2102B	12	11	28	20	43	13	7.7	3	3	43	16	21	0
AG	2091D	1	2	1	1	2	4	-	-	-	-	-	-	0
AH	2064M	0	2	0	1	7	0	0.4	0	1	76	929	0	700
AI	2057M	0	6	23	20	60	29	0.4	0	1	45	756	0	680
AJ	2051B	33	32	54	28	68	33	10.7	1	3	36	14	17	0
AK	2044B	25	27	18	19	48	32	9.1	0	2	47	42	19	20
AL	2029B	12	12	11	15	22	21	7.4	3	2	53	25	27	0
AM	2025B	1	2	1	2	2	4	-	-	-	-	-	-	0
AN	2013B	7	6	5	9	20	9	7.2	18	2	55	35	26	0
AO	1991B	1	1	1	2	2	4	-	-	-	-	-	-	0
AP	1975D	6	11	9	2	6	11	3.1	9	2	59	48	28	0
AQ	1965B	14	10	3	13	27	11	11.5	11	3	39	22	15	0
AR	1938D	8	7	9	3	19	3	6.8	33	2	54	25	30	0
AS	1927D	15	9	13	12	31	8	14.2	8	4	41	9	23	0
AT	1916D	10	8	21	11	23	18	8.6	11	3	32	18	11	0
AU	1913D	7	8	8	8	21	12	5.6	11	2	35	24	11	0
AV	1895B	10	12	8	15	39	36	5.4	9	3	39	20	17	0
AW	1889D	1	2	1	2	2	4	-	-	-	-	-	-	0
AX	1881B	8	8	10	15	34	18	6.8	8	3	37	17	15	0
AY	1862B?	9	9	11	17	37	6	6.9	13	3	42	17	20	0
AZ	1857D	11	10	10	2	5	1	8.3	1	3	53	17	29	0
BA	1852D	12	3	5	8	1	3	43.7	0	4	38	10	17	0
LINE 10320		(FLIGHT		11)										
A	2472S	3	7	1	11	32	30	1.8	21	1	14	310	0	0
B	2490B?	11	13	2	11	2	24	5.8	18	1	40	79	9	0
C	2494B?	13	14	6	3	27	39	6.8	17	1	36	63	8	0
D	2502B	18	31	10	44	116	165	4.8	6	1	21	57	0	0
E	2504B	6	14	5	44	116	165	2.4	12	1	36	54	10	40
F	2508B	23	32	14	31	79	115	6.3	10	1	31	52	6	0
G	2513B	2	10	14	31	79	108	1.0	5	2	39	36	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10320	(FLIGHT	11)											
H 2519D	8	18	6	18	39	63	3.1	6	2	32	36	8	0
I 2527D	13	12	5	20	19	45	8.0	17	2	38	35	13	0
J 2529D	12	16	14	20	19	45	5.4	13	2	40	31	16	0
K 2546B	22	19	23	27	55	48	10.5	14	2	41	23	19	0
L 2560B	15	16	19	19	51	47	7.8	11	2	42	27	18	0
M 2565B	11	13	19	20	43	20	6.3	18	2	49	26	25	0
N 2572B	7	11	3	6	17	29	3.6	14	2	51	39	24	0
O 2584B	15	12	2	17	51	10	10.0	20	3	42	19	20	0
P 2605B	12	20	16	43	64	53	4.1	13	4	36	10	19	0
Q 2619B	11	16	17	15	37	21	4.9	10	4	34	8	17	0
R 2621B	10	15	5	17	39	30	4.2	9	4	32	8	15	0
S 2624B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 2628B	20	14	19	16	27	9	12.8	17	5	35	7	20	0
U 2633B	9	8	8	7	5	33	7.3	25	5	40	7	23	0
V 2639B	13	7	15	8	14	31	17.7	16	5	28	5	13	0
W 2643B	30	10	15	40	93	53	42.4	6	4	27	10	10	0
X 2650D	9	7	33	25	53	53	8.3	20	3	54	24	29	0
Y 2657B	37	33	12	8	164	68	12.2	1	4	28	10	11	0
Z 2662B	16	2	4	26	17	8	49.0	34	5	27	6	13	0
AA 2666B	8	6	10	2	9	7	8.4	32	5	27	6	12	0
AB 2691D	3	5	4	3	9	16	2.2	18	1	74	89	34	0
AC 2697D	6	5	3	6	14	37	7.6	27	1	44	242	0	4
AD 2706S	5	6	1	4	13	14	4.6	22	1	25	345	0	0
AE 2724D	7	5	2	6	13	16	9.4	30	1	27	492	0	0
AF 2729M	1	2	1	2	2	4	-	-	-	-	-	-	1130
AG 2749B	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 2777M	0	2	0	2	2	4	-	-	-	-	-	-	0
AI 2779B?	0	6	0	2	2	4	0.4	0	1	63	852	0	450
AJ 2780M	0	7	8	2	15	4	0.4	0	1	55	821	0	450
AK 2786B	8	5	2	12	4	16	12.5	25	2	79	33	48	0
AL 2792B	9	11	14	12	4	7	5.5	4	2	57	55	24	0
AM 2814H	12	7	2	10	2	18	14.6	7	4	46	10	26	70
AN 2824D	13	14	18	1	1	10	6.8	5	1	59	75	23	0
AO 2829D	4	8	3	6	27	6	2.2	10	2	116	49	78	0
AP 2862B	25	27	2	13	28	47	8.5	0	3	32	21	10	0
AQ 2869D	3	4	1	18	44	35	3.3	32	2	42	25	18	0
AR 2875D	13	19	7	18	45	38	5.3	10	2	41	25	18	0
AS 2883B	15	13	1	6	1	7	9.5	22	2	57	24	33	0
AT 2928B	9	14	26	22	69	13	4.1	21	3	32	17	13	0
AU 2933B	74	52	35	92	97	177	20.6	6	3	22	12	6	0
AV 2943D	5	5	20	17	8	9	6.3	43	2	35	40	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10320	(FLIGHT	11)											
AW 2949B	7	17	10	22	53	79	2.5	7	2	33	35	9	0
AX 2952B	6	17	10	22	53	79	2.2	5	2	37	27	15	0
AY 2958D	14	17	19	28	59	47	6.1	17	3	45	19	24	0
AZ 2961B	10	13	19	28	59	47	5.4	21	3	47	12	28	0
BA 2970B?	8	11	8	13	27	21	4.5	19	3	50	14	30	0
BB 2975D	11	20	8	17	45	67	3.7	5	3	41	21	19	0
BC 2978D	11	21	6	17	45	67	3.5	3	2	30	23	9	0
BD 2990B?	16	8	8	12	3	16	21.8	21	3	31	21	10	0
BE 3004B	8	15	3	9	21	39	3.5	8	2	35	26	13	0
BF 3033B	10	16	2	12	24	24	4.3	7	2	39	47	12	0
BG 3058B	74	41	93	32	53	83	27.9	0	4	25	7	10	0
BH 3077B	14	15	23	2	37	43	7.6	11	2	39	30	15	0
BI 3087B	15	8	14	17	23	17	17.1	27	6	56	5	40	0
BJ 3093B	25	11	41	20	49	17	26.4	20	6	50	5	35	0
LINE 10330	(FLIGHT	11)											
A 3656S	2	5	0	8	22	51	1.6	10	1	9	459	0	0
B 3625S?	5	4	4	3	15	11	1.0	0	1	8	167	0	0
C 3619B	10	13	3	15	37	30	5.1	18	1	27	123	0	0
D 3616D	9	6	3	15	37	30	10.1	35	1	44	74	14	0
E 3612B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3608B	19	20	32	38	88	46	8.1	7	2	31	30	8	0
G 3606B	12	22	32	41	89	46	4.0	1	3	31	21	10	0
H 3604B	9	19	32	41	89	61	3.3	1	2	30	28	8	0
I 3599D	5	4	7	24	7	2	7.2	41	2	52	45	23	0
J 3595D	11	12	17	25	58	20	6.4	14	2	45	34	19	0
K 3589B	12	20	7	25	18	2	4.6	0	2	33	35	8	0
L 3587D	10	8	7	14	11	2	9.5	22	2	41	36	15	0
M 3562B	10	8	10	11	22	20	8.5	9	2	56	39	26	0
N 3554D	12	25	20	29	68	53	3.5	0	2	57	30	30	0
O 3550B	13	8	20	30	68	53	14.0	11	3	42	21	18	0
P 3535D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3514H	9	6	14	12	3	1	11.5	15	5	31	6	14	0
R 3492H	4	20	55	10	111	41	1.2	0	6	21	5	6	0
S 3481B?	12	9	11	15	30	12	11.3	9	4	42	8	24	0
T 3473H	7	10	18	5	36	4	3.7	0	5	27	6	10	0
U 3465B	12	8	4	2	3	5	12.4	0	4	46	11	24	0
V 3451D	10	10	4	9	21	20	6.5	7	2	65	42	34	0
W 3448D	4	7	10	5	2	7	2.8	13	2	64	37	34	0
X 3445D	12	11	10	5	17	8	7.8	4	1	43	77	8	0
Y 3433S?	1	6	1	5	15	38	0.8	0	1	47	209	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10330	(FLIGHT	11)											
Z 3425D	5	8	3	6	15	8	3.6	0	1	26	303	0	0
AA 3379S?	0	2	1	2	2	4	-	-	-	-	-	-	0
AB 3366D	2	7	3	5	21	28	1.2	9	1	35	734	0	0
AC 3357M	0	4	2	1	5	11	0.4	0	1	79	878	0	0
AD 3351M	0	2	3	1	4	1	0.4	0	1	82	744	1	0
AE 3342D	9	31	27	10	27	80	2.0	0	2	28	22	7	0
AF 3334B	38	34	35	49	111	88	12.0	0	3	23	13	5	0
AG 3323B	13	15	36	28	60	36	6.8	10	4	31	10	13	0
AH 3316D	4	5	1	5	12	18	4.3	25	2	32	23	9	0
AI 3311D	12	10	4	11	24	19	8.7	7	2	32	31	7	0
AJ 3305D	2	12	0	2	5	24	0.8	0	2	50	32	24	18
AK 3294B?	1	1	1	2	1	1	-	-	-	-	-	-	0
AL 3263B	27	38	2	22	129	108	6.7	0	3	19	12	2	0
AM 3259B	29	41	48	71	163	108	6.7	0	3	21	17	3	0
AN 3241B?	12	6	12	12	20	2	18.7	29	2	37	22	15	0
AO 3238D	9	8	12	12	26	1	7.0	20	3	38	17	17	0
AP 3232B	4	4	14	13	26	2	4.6	32	3	39	18	17	0
AQ 3229B	9	3	14	5	13	19	33.8	28	3	33	13	13	0
AR 3207B?	4	2	2	5	7	11	9.4	23	3	32	19	8	0
AS 3202B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 3179H	8	7	1	4	11	9	6.5	0	3	34	20	10	0
AU 3156B	10	3	7	13	5	14	41.3	12	5	43	6	26	0
AV 3148B	19	10	21	12	11	1	18.1	1	4	47	12	26	0
LINE 10340	(FLIGHT	11)											
A 3783S	1	2	1	1	2	1	-	-	-	-	-	-	0
B 3813D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3822B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3826B	6	13	6	26	63	142	2.4	10	1	25	134	0	0
E 3838D	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3840D	3	16	28	31	72	16	1.1	0	2	43	42	16	0
G 3845B	20	17	29	11	72	29	10.5	11	3	34	20	13	0
H 3854B?	1	2	0	2	1	4	-	-	-	-	-	-	120
I 3862B	9	1	4	5	8	15	49.0	45	2	41	38	15	0
J 3868B	16	23	4	33	8	6	5.8	0	2	37	28	13	0
K 3898B	5	5	1	4	12	12	5.9	34	2	75	48	42	0
L 3903D	7	7	5	9	16	14	5.6	23	2	79	44	46	0
M 3911B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 3920B	15	24	12	34	87	95	4.9	1	1	29	81	0	0
O 3959D	20	16	33	26	46	31	11.3	11	3	51	15	30	0
P 3964D	4	10	33	26	59	31	2.2	12	4	46	9	28	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10340	(FLIGHT	11)											
Q 3969D	10	5	19	18	44	24	19.5	25	3	35	13	16	0
R 3985B	19	37	45	81	173	163	4.4	1	4	23	7	9	0
S 3995D	10	6	5	10	24	22	13.8	27	6	27	4	13	0
T 4000B	34	2	68	89	193	35	49.0	18	5	21	5	9	0
U 4003B	44	50	68	89	193	35	9.8	0	5	21	5	8	0
V 4015B	12	8	6	13	33	17	12.5	23	4	29	9	13	0
W 4021D	12	16	28	16	40	32	5.3	7	4	25	10	8	0
X 4031B	28	20	9	14	67	27	15.2	11	5	29	6	14	0
Y 4051D	31	43	64	80	56	71	7.2	5	4	27	9	12	0
Z 4055D	26	1	64	49	47	82	49.0	26	4	24	9	8	0
AA 4059D	10	8	50	47	46	82	9.9	24	4	32	11	15	0
AB 4066D	13	19	7	7	15	37	5.3	3	4	34	11	15	0
AC 4073D	5	5	5	6	14	7	5.9	29	2	55	38	26	0
AD 4077D	13	12	2	2	5	15	8.7	10	1	45	78	12	0
AE 4080D	10	11	8	2	16	19	6.3	11	1	44	110	8	0
AF 4104B	26	21	26	47	111	45	12.4	2	2	30	38	4	0
AG 4106B	25	23	11	50	111	45	10.3	0	2	26	45	0	0
AH 4114M	0	2	0	2	2	4	-	-	-	-	-	-	940
AI 4118B?	1	7	0	1	5	0	0.5	0	1	63	900	0	0
AJ 4134B?	3	6	2	0	1	5	2.0	2	1	31	673	0	0
AK 4143M	1	4	0	4	6	10	1.0	8	1	30	764	0	0
AL 4145B?	0	2	0	2	2	4	-	-	-	-	-	-	0
AM 4163B?	6	7	3	5	14	6	4.6	9	1	60	94	21	0
AN 4172D	16	16	12	15	46	21	7.6	0	2	43	32	17	0
AO 4179D	8	12	13	4	4	29	4.4	0	2	68	32	38	0
AP 4189B?	10	6	9	8	17	7	12.5	0	3	42	15	18	0
AQ 4217B	41	34	57	53	113	50	14.1	0	4	21	11	4	0
AR 4227D	14	18	10	14	29	47	5.7	5	2	35	40	9	0
AS 4236D	9	7	9	23	55	73	9.3	31	2	43	47	16	0
AT 4250D	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 4272B?	1	2	1	1	1	3	-	-	-	-	-	-	0
AV 4281B	7	20	28	4	6	7	2.1	0	2	41	23	17	0
AW 4288B	5	6	13	41	3	19	4.4	26	2	28	25	6	0
AX 4292B	23	27	13	41	93	37	7.6	2	2	22	27	1	0
AY 4301B	8	10	7	10	2	7	4.8	16	2	37	36	12	0
AZ 4318D	8	8	3	3	11	18	6.5	22	2	41	49	13	0
BA 4331B?	10	6	10	7	14	4	13.7	21	2	52	42	22	0
BB 4349D	11	12	14	15	33	11	7.1	7	3	35	18	13	0
BC 4352D	17	13	14	15	33	16	10.7	5	3	32	15	12	0
BD 4357D	14	19	10	2	43	6	5.7	0	3	39	18	17	0
BE 4362B?	12	12	8	14	43	42	7.4	3	3	36	18	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE FATH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10340	(FLIGHT		11)										
BF 4375B?	13	10	24	21	40	33	10.1	9	2	48	32	21	0
BG 4380B?	10	5	20	6	10	24	17.6	0	2	50	28	21	0
BH 4397H	6	5	10	5	16	6	7.3	0	6	37	5	19	0
BI 4427H	12	11	21	20	48	37	8.3	0	3	36	18	13	0
BJ 4441H	12	8	6	13	26	18	12.3	6	2	51	39	21	0
LINE 10350	(FLIGHT		11)										
A 5111S?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5105B?	6	4	2	7	7	34	10.0	40	1	35	156	0	0
C 5100S	1	2	1	1	1	4	-	-	-	-	-	-	5
D 5074B	5	10	1	5	19	47	2.7	6	1	26	161	0	0
E 5070D	3	4	6	4	19	47	3.7	39	1	42	97	8	0
F 5065B	19	8	26	16	33	8	25.7	19	2	42	37	15	0
G 5063B	3	11	26	16	33	8	1.2	0	3	48	16	27	0
H 5060B	15	11	26	18	40	12	11.9	14	2	50	24	25	0
I 5052B?	4	5	1	3	9	21	4.7	31	1	67	65	32	0
J 5044H	3	5	7	5	1	9	2.9	19	2	58	25	31	0
K 5023H	7	6	4	9	19	24	7.1	16	1	68	65	32	0
L 5012D	11	11	9	15	36	22	6.6	3	2	71	58	36	0
M 5008D	8	11	5	15	36	19	5.0	3	2	59	46	27	0
N 4987D	7	4	6	11	4	7	11.9	32	2	66	27	39	0
O 4981D	3	7	5	10	4	16	1.7	0	4	44	13	22	0
P 4971B?	8	6	9	6	14	11	8.5	13	4	49	9	30	0
Q 4968D	12	8	9	6	14	11	11.4	7	5	44	7	26	0
R 4962B?	17	11	4	17	37	19	14.2	0	5	29	6	13	0
S 4941D	7	6	11	10	20	9	6.5	15	3	45	14	23	0
T 4932D	7	6	13	14	32	2	7.8	26	4	51	9	32	0
U 4921B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 4914D	8	14	10	26	35	19	3.8	0	6	31	4	16	0
W 4912D	34	11	10	2	11	15	42.2	0	6	32	5	17	0
X 4909B?	2	10	5	23	49	5	1.2	0	5	34	6	17	0
Y 4902D	9	2	31	5	45	9	41.0	23	2	45	53	13	0
Z 4896D	9	9	8	3	9	26	7.1	6	1	49	100	11	0
AA 4886B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 4879B?	2	3	0	2	23	6	2.8	26	1	17	355	0	0
AC 4871D	2	12	1	10	30	28	0.6	0	1	21	725	0	0
AD 4846D	11	10	32	1	1	10	8.4	6	2	55	44	24	0
AE 4840B	5	8	5	6	8	15	2.9	2	4	40	13	19	0
AF 4832B	9	4	11	7	16	1	16.8	15	3	48	18	24	0
AG 4805D	8	5	5	4	9	24	10.4	11	3	38	17	15	0
AH 4798D	12	7	5	10	17	27	13.5	4	3	28	21	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FTID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10350	(FLIGHT 11)												
AI 4779B	8	4	2	4	5	12	15.3	37	2	50	39	22	0
AJ 4776B	6	11	1	2	3	10	0.2	0	1	37	69	21	0
AK 4751D	22	16	29	34	68	32	13.8	0	3	22	18	1	0
AL 4749B	22	16	29	34	68	32	13.2	3	3	22	19	2	0
AM 4742D	10	13	2	15	39	37	5.2	9	2	33	46	6	0
AN 4740D	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 4735D	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 4731B	18	12	26	25	50	49	13.5	2	3	37	18	15	0
AQ 4720E	11	11	17	22	48	27	7.5	3	2	34	39	7	0
AR 4715B?	3	4	2	3	8	6	3.4	24	2	35	26	10	0
AS 4710B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 4702B?	13	9	8	20	3	8	11.3	9	3	45	19	22	0
AU 4699D	3	7	8	20	3	8	2.2	5	3	64	17	40	0
AV 4684D	11	13	13	18	55	51	5.9	8	1	45	97	10	0
AW 4671B	8	5	10	13	28	12	10.2	16	2	81	39	48	0
AX 4666B	5	5	10	12	28	12	5.5	14	2	80	61	43	0
AY 4657B?	5	3	4	2	5	4	10.9	39	1	116	75	72	0
LINE 10360	(FLIGHT 11)												
A 5214H	8	5	1	3	6	19	0.3	0	1	23	106	7	0
B 5230S	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5241S	2	5	1	6	13	51	1.9	28	1	15	479	0	0
D 5252B?	7	13	2	1	41	58	3.4	12	1	27	164	0	0
E 5262B	38	32	49	18	26	67	12.9	8	2	31	24	11	0
F 5266B	27	31	49	18	15	67	8.4	8	3	35	12	17	0
G 5274B	19	7	7	16	41	17	31.8	27	3	56	23	32	0
H 5280D	8	7	23	4	23	20	6.8	32	1	72	61	38	20
I 5290B?	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5320D	1	2	1	2	2	4	-	-	-	-	-	-	0
K 5330B?	2	4	1	8	16	2	1.8	20	1	69	67	33	0
L 5342D	11	11	9	12	30	22	6.5	0	2	53	33	24	0
M 5345D	5	6	8	13	30	22	4.8	19	2	59	35	30	0
N 5369D	1	2	0	2	2	4	-	-	-	-	-	-	0
O 5386B	31	4	20	5	24	16	156.9	1	5	29	6	13	4
P 5395B?	1	2	1	0	2	4	-	-	-	-	-	-	0
Q 5399B?	11	8	18	24	49	18	10.0	16	3	35	19	13	0
R 5406B?	14	1	23	10	20	23	49.0	29	5	46	8	29	90
S 5418B?	13	9	1	8	15	29	11.6	25	4	53	10	34	0
T 5428D	6	7	12	2	11	25	5.3	25	2	54	24	29	0
U 5450B	7	30	48	56	121	65	1.6	0	5	25	6	10	0
V 5464B?	30	11	73	26	69	14	34.7	5	8	22	2	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10360	(FLIGHT	11)											
W 5472B?	8	12	17	26	60	48	4.0	5	6	25	4	11	0
X 5477D	49	22	63	26	79	49	31.6	0	6	23	4	10	0
Y 5481D	59	18	63	30	79	23	57.7	0	8	22	2	10	0
Z 5488B	62	44	2	103	230	140	19.6	3	4	28	10	12	0
AA 5505H	5	4	5	9	22	15	7.2	38	2	54	28	28	0
AB 5521D?	1	2	1	1	2	4	-	-	-	-	-	-	0
AC 5545D	3	6	0	3	23	14	2.3	13	1	20	714	0	0
AD 5555M	0	3	0	3	10	3	0.4	0	1	35	764	0	220
AE 5569M	0	2	0	3	9	22	0.4	0	1	64	867	0	310
AF 5572D?	0	3	0	4	9	4	1.0	0	1	10	972	0	0
AG 5575M	0	3	0	5	9	25	0.4	0	1	44	778	0	110
AH 5582M	0	0	9	2	36	4	1.1	27	1	48	792	0	1120
AI 5588E	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 5600H	2	11	2	3	8	9	0.7	0	3	44	20	20	0
AK 5629D	23	20	36	37	75	44	10.8	0	3	35	17	14	0
AL 5632D	18	17	14	17	45	29	8.9	1	2	32	24	9	0
AM 5644B?	7	5	2	4	11	8	9.0	19	2	41	36	13	0
AN 5657B?	4	6	4	5	14	7	3.5	25	2	52	44	23	0
AO 5677B	10	8	8	6	16	12	8.2	14	3	27	18	6	0
AP 5689D	17	7	28	41	84	15	26.1	25	3	26	19	7	0
AQ 5693D	20	4	2	4	33	25	65.0	26	3	26	15	7	0
AR 5699B	23	24	38	45	100	76	9.1	6	3	29	19	9	0
AS 5708B?	12	10	5	12	26	25	9.4	15	2	37	38	11	0
AT 5709B?	10	11	5	12	26	24	6.8	14	2	36	38	11	0
AU 5717D	7	11	23	27	61	25	3.9	11	2	43	39	16	0
AV 5723B	33	23	56	53	112	39	16.4	1	3	29	12	11	0
AW 5725B	34	23	56	53	112	39	16.7	2	4	31	11	13	0
AX 5741B?	15	2	5	14	35	2	90.9	23	2	30	33	5	0
AY 5752B?	6	5	6	10	23	9	8.0	27	3	40	21	17	0
AZ 5756B?	4	7	5	13	38	8	2.4	14	2	42	26	17	0
BA 5758B?	2	5	4	13	38	8	1.4	15	2	35	30	10	0
BB 5763D	17	17	3	23	57	40	8.5	3	2	32	34	7	0
BC 5773D	14	12	5	8	23	9	9.6	2	2	32	43	4	0
BD 5778D	1	2	1	2	2	4	-	-	-	-	-	-	0
BE 5783B?	6	2	10	12	28	2	17.0	33	3	47	19	23	0
BF 5788B?	1	2	1	1	1	4	-	-	-	-	-	-	0
BG 5795B?	1	2	1	2	2	2	-	-	-	-	-	-	0
BH 5817D	7	5	6	9	18	2	11.2	0	1	81	82	38	0
BI 5840S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10370	(FLIGHT	11)											
A 6382B?	6	5	2	4	12	18	6.6	25	1	34	133	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10370	(FLIGHT	11)											
B 6367B?	6	8	2	7	22	32	4.4	14	1	36	118	0	0
C 6359B?	13	9	15	6	6	11	11.5	18	2	46	44	18	0
D 6357B?	13	11	15	6	6	3	8.7	12	2	47	53	16	0
E 6326H	15	6	2	20	4	20	24.0	16	3	44	15	22	0
F 6290B?	10	4	10	4	28	22	20.3	36	2	46	50	18	0
G 6270B	29	25	41	43	89	41	11.7	0	3	30	16	10	0
H 6253D	13	19	4	16	15	31	5.0	0	2	49	29	23	0
I 6252D	14	17	5	11	22	28	6.1	1	2	42	27	17	0
J 6250D	1	2	1	2	2	4	-	-	-	-	-	-	0
K 6247B?	5	6	6	11	22	28	4.6	28	2	34	35	9	0
L 6243B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 6241B	8	16	22	36	81	152	3.0	9	2	29	34	6	6
N 6239B	2	20	52	36	81	152	0.6	0	2	29	31	7	0
O 6236B	2	20	53	37	87	152	0.6	0	4	38	10	21	0
P 6234B	29	2	2	4	81	1	428.6	22	5	36	5	22	0
Q 6230B	7	33	3	37	81	49	1.4	0	5	29	5	16	0
R 6228B	47	36	3	68	147	91	16.1	5	6	29	5	16	0
S 6226B	47	29	3	68	147	91	21.0	6	5	31	5	17	0
T 6218B	23	17	51	44	99	37	12.3	7	5	28	7	13	120
U 6217B	29	19	51	44	99	37	17.2	5	5	27	5	13	0
V 6211D	22	12	30	30	68	48	19.4	13	6	32	5	18	0
W 6209D	25	14	30	30	68	48	18.5	11	5	30	6	15	0
X 6207B?	13	15	24	29	66	48	6.7	10	5	32	6	17	0
Y 6196H	15	10	17	14	33	10	13.5	2	5	25	7	8	0
Z 6184B?	26	17	54	30	85	37	15.6	0	7	25	3	12	0
AA 6181B?	29	25	36	41	96	37	11.8	0	6	22	4	8	6
AB 6177B?	5	5	16	1	94	36	6.1	14	8	33	3	20	0
AC 6174B?	8	5	16	4	8	1	11.5	13	8	35	3	21	0
AD 6169E	20	10	1	18	44	21	19.9	0	3	37	17	15	0
AE 6161B?	5	5	9	9	20	14	4.9	24	2	62	43	31	0
AF 6158B?	6	4	9	9	20	13	8.9	28	2	63	53	30	0
AG 6149D	2	3	1	2	8	13	2.2	28	1	48	210	3	0
AH 6140D	0	5	3	6	19	14	0.4	0	1	26	384	0	0
AI 6126M	0	2	0	2	0	4	-	-	-	-	-	-	840
AJ 6121M	0	1	0	0	0	2	-	-	-	-	-	-	0
AK 6117M	0	1	0	2	2	9	0.4	0	1	72	883	0	260
AL 6107B	9	2	2	9	23	67	41.8	39	2	43	36	17	0
AM 6102D	3	6	8	9	23	17	2.1	17	3	53	21	29	30
AN 6093D	3	6	10	19	47	42	2.7	26	3	57	23	32	0
AO 6087D	8	8	11	22	29	52	6.3	21	2	40	24	17	0
AP 6084D	12	11	3	22	29	52	8.2	16	2	41	23	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT
LINE 10370	(FLIGHT	11)											
AQ 6074B	24	34	29	40	101	101	6.3	0	3	27	16	8	0
AR 6068B	8	12	34	19	44	19	4.3	9	4	26	8	10	0
AS 6063B	32	17	34	50	111	39	21.8	5	3	26	18	6	0
AT 6055B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 6047B?	5	11	5	5	5	47	2.4	8	2	52	32	25	0
AV 6028H	10	6	11	31	23	26	11.6	15	3	28	13	8	0
AW 6017B	21	15	25	28	65	30	13.4	2	4	26	11	8	0
AX 6010B?	20	15	34	31	69	27	11.7	0	3	29	21	7	0
AY 6000D	4	5	0	3	9	11	4.2	21	2	44	41	15	0
AZ 5996D	10	10	12	1	9	25	6.6	6	2	47	41	18	0
BA 5992D	9	5	12	14	31	7	14.5	15	2	53	43	22	0
BB 5981H	1	2	1	2	2	1	-	-	-	-	-	-	0
BC 5965H	13	8	5	13	29	11	14.6	0	3	28	21	3	0
BD 5936B?	5	8	2	4	11	3	3.6	0	2	69	29	38	0
BE 5928B?	8	5	11	6	15	1	10.2	8	5	91	9	68	0
BF 5903B?	0	4	2	7	17	3	0.4	0	1	39	309	0	0
BG 5894B?	0	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10380	(FLIGHT	11)											
A 6535H	5	9	2	3	25	17	3.3	17	1	26	190	0	0
B 6561H	7	8	4	32	54	129	5.9	32	1	38	97	7	0
C 6576B	11	17	7	21	48	78	4.4	16	1	19	252	0	0
D 6603B?	5	14	18	17	33	36	2.1	5	1	38	56	10	0
E 6607B?	8	13	2	16	2	36	3.9	16	2	46	30	21	0
F 6611H	12	4	5	13	24	56	33.5	29	3	47	15	26	0
G 6636H	6	2	7	10	5	34	24.4	51	1	55	84	20	0
H 6643B?	2	7	2	1	14	11	1.2	10	1	64	213	18	0
I 6656H	15	22	4	29	40	54	5.1	7	2	42	46	15	0
J 6677B?	5	9	5	11	5	5	2.8	10	2	38	39	12	0
K 6681B?	6	10	25	38	5	5	3.3	11	2	37	35	12	0
L 6684B	16	20	20	24	61	9	6.4	7	2	31	23	9	0
M 6687B	17	19	20	24	61	11	7.2	9	3	33	18	13	0
N 6693D	12	10	14	22	57	38	8.4	22	2	33	28	11	0
O 6697D	16	17	14	22	57	38	7.3	11	2	30	38	6	0
P 6702D	17	28	8	37	87	146	5.0	7	2	25	41	2	0
Q 6703D	17	25	8	37	87	146	5.6	11	2	25	37	3	0
R 6707D	12	26	9	34	76	139	3.3	5	2	28	40	5	0
S 6710B?	7	12	9	40	101	78	3.6	20	2	32	32	10	0
T 6714B?	13	12	5	40	101	78	8.8	23	2	30	37	7	0
U 6722B?	8	20	25	31	63	128	2.7	10	2	39	45	14	0
V 6725B?	12	17	26	31	63	128	5.0	19	2	37	29	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10380	(FLIGHT 11)												
W 6729B?	6	12	26	30	50	94	2.8	17	3	45	20	23	0
X 6737D	20	11	22	27	56	48	17.9	25	4	44	11	26	0
Y 6741D	21	16	27	27	56	48	13.2	20	4	45	8	28	0
Z 6754B?	35	28	65	54	18	59	13.6	8	5	32	7	17	0
AA 6757D	9	9	23	54	18	59	6.6	24	5	30	5	16	0
AB 6760D	11	17	14	1	2	42	4.1	4	6	24	4	11	80
AC 6763D	47	7	59	39	23	8	147.2	6	7	24	3	11	0
AD 6767D	29	13	28	10	92	37	25.2	9	6	26	4	12	0
AE 6772D	17	12	28	20	48	20	12.5	13	5	34	8	17	0
AF 6784H	29	30	62	58	137	85	9.5	5	5	29	5	15	0
AG 6794B?	12	3	28	10	47	12	44.1	28	6	30	5	15	0
AH 6802B?	17	12	31	24	56	4	13.1	19	5	32	5	18	0
AI 6809B	84	31	132	66	160	23	49.8	5	9	24	2	14	0
AJ 6817B	48	5	23	14	53	7	280.7	13	3	36	12	18	0
AK 6831D	1	2	0	2	2	4	-	-	-	-	-	-	0
AL 6844B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 6852B?	8	10	16	19	35	19	5.4	17	2	52	31	25	0
AN 6856B?	16	14	24	7	72	21	9.4	12	2	43	48	15	0
AO 6862M	0	2	1	2	2	4	-	-	-	-	-	-	1590
AP 6879M	0	8	0	5	0	1	0.4	0	1	69	856	0	790
AQ 6883M	0	2	0	2	0	4	-	-	-	-	-	-	830
AR 6901D	8	14	7	11	36	61	3.6	5	2	45	26	21	0
AS 6919B?	9	5	9	3	6	18	13.7	6	2	39	38	9	30
AT 6932B	1	1	9	33	36	3	4.3	78	5	28	7	12	13
AU 6955B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 6963B?	8	26	14	43	98	132	2.2	0	2	35	39	10	0
AW 6978B?	8	12	16	16	43	36	4.2	1	2	32	29	7	0
AX 6986B	9	9	14	23	45	14	6.5	9	4	25	9	8	0
AY 6993D	11	9	30	20	46	38	8.6	11	4	26	9	8	0
AZ 6996D	22	12	30	25	57	40	17.5	6	4	25	10	7	0
BA 7004B?	14	11	23	23	52	10	10.9	12	2	31	22	9	0
BB 7020B?	9	6	12	1	4	3	10.7	24	2	50	32	23	0
LINE 10381	(FLIGHT 15)												
A 4963B?	3	4	2	16	36	8	3.8	37	1	61	68	27	0
B 4956E	21	29	47	41	121	48	6.4	1	3	30	18	10	0
C 4954B	32	25	47	41	121	48	13.7	0	3	30	13	11	0
D 4950B?	14	15	21	29	66	50	7.3	8	3	32	13	13	0
E 4938B?	8	10	9	13	32	24	4.9	18	3	43	17	22	0
F 4932B	19	17	25	49	43	59	9.6	10	3	52	16	30	0
G 4930B	24	22	25	49	43	59	10.1	6	3	41	13	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10381	(FLIGHT 15)												
H 4921D	8	7	11	8	18	5	7.0	20	1	106	103	61	0
I 4898B	16	13	2	21	51	50	9.5	7	2	51	47	21	0
J 4892B?	7	5	9	17	33	6	9.6	21	2	64	55	30	0
K 4875B?	5	1	11	7	12	42	32.2	59	2	118	56	79	0
L 4870B	8	13	8	18	48	58	3.7	11	1	58	76	23	0
M 4865B	9	8	8	18	48	58	8.2	24	1	50	161	10	0
N 4861B	4	6	8	13	33	56	3.3	28	1	58	61	26	0
LINE 10390	(FLIGHT 11)												
A 7615S	1	2	1	2	2	4	-	-	-	-	-	-	0
B 7574H	6	11	11	18	4	46	3.0	2	1	29	102	0	0
C 7558H	20	16	31	31	74	30	11.0	2	3	33	14	13	0
D 7546B?	16	12	4	17	41	16	10.8	5	3	41	18	19	0
E 7543B?	12	12	14	17	42	25	7.6	6	2	39	28	14	0
F 7539B?	1	2	1	2	2	4	-	-	-	-	-	-	0
G 7535B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 7509B	10	8	17	17	34	18	9.0	7	2	39	24	15	0
I 7506B	11	8	17	17	34	18	10.7	9	2	41	24	16	0
J 7503B	12	9	13	23	55	65	9.6	12	2	43	33	17	0
K 7500D	13	19	13	23	55	65	5.1	2	1	34	57	5	0
L 7492B?	7	9	7	6	17	9	4.6	11	2	54	41	25	0
M 7482B?	1	2	0	2	2	4	-	-	-	-	-	-	0
N 7470B	2	8	15	13	28	26	1.0	0	3	64	15	41	0
O 7465B	8	8	15	12	28	26	6.4	20	3	58	15	36	0
P 7455B	29	25	53	51	121	79	11.6	4	4	34	9	17	0
Q 7450B	1	2	1	2	2	2	-	-	-	-	-	-	0
R 7447D	47	25	77	58	120	45	25.5	0	5	18	6	4	0
S 7445D	6	25	77	58	120	45	1.6	0	5	29	6	14	70
T 7440B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 7427B	30	28	40	41	101	62	10.7	0	5	29	7	13	0
V 7424B	5	27	15	19	50	30	1.1	0	6	25	4	11	0
W 7414D	5	3	47	22	48	8	9.9	34	5	35	5	20	0
X 7410B	22	8	47	23	50	5	34.4	11	8	28	2	16	0
Y 7408D	13	10	47	23	50	43	10.9	13	8	32	3	19	16
Z 7406B	33	23	47	44	106	43	15.8	0	5	32	7	16	0
AA 7388B	6	3	11	6	12	1	13.2	11	3	49	20	22	0
AB 7365M	0	3	0	1	3	4	0.4	0	1	130	1025	0	960
AC 7351D	12	6	3	2	14	13	17.8	3	3	62	18	36	0
AD 7342D	11	11	0	11	8	24	7.5	0	3	42	20	18	0
AE 7337B	14	7	7	5	13	10	16.8	0	4	33	8	14	0
AF 7334B	12	1	23	8	4	2	303.1	6	4	38	11	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 10390	(FLIGHT	11)											
AG 7305D	15	3	4	12	27	9	70.1	14	3	35	17	13	0
AH 7300B	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 7299B	3	6	19	3	55	4	2.4	5	6	26	5	11	0
AJ 7297B	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 7293B	4	6	29	8	5	27	3.6	18	5	25	6	9	0
AL 7290B	40	32	29	8	76	24	14.6	0	4	25	9	8	0
AM 7282B	1	1	1	2	2	4	-	-	-	-	-	-	0
AN 7264B	9	5	11	12	22	5	12.5	1	2	33	32	6	0
LINE 10391	(FLIGHT	15)											
A 5040D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5049D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5067D	9	14	21	36	90	10	4.2	16	2	37	22	16	0
D 5070D	10	2	21	36	90	10	49.0	45	2	36	23	15	0
E 5074D	2	2	8	21	50	28	2.6	58	2	55	27	30	0
F 5090S?	5	13	4	25	60	128	1.9	10	1	30	152	0	0
G 5100D	8	7	12	14	36	5	7.4	32	1	58	120	20	0
H 5104B?	7	4	13	1	1	20	0.1	0	1	45	89	27	0
I 5122B	32	35	60	78	143	179	9.3	8	2	34	25	13	0
J 5132D	8	2	10	1	15	15	29.8	59	1	68	227	24	0
K 5138B?	3	6	2	9	16	63	1.8	31	1	64	188	23	0
L 5148D	7	8	8	13	37	70	4.7	32	1	71	129	31	0
M 5152D	6	17	13	2	9	13	2.2	1	2	68	48	37	0
N 5156D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 5170B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10400	(FLIGHT	11)											
A 7777S	2	8	1	10	14	63	1.1	8	1	31	156	0	0
B 7811S	3	9	2	12	29	89	1.4	7	1	6	486	0	0
C 7829B?	1	2	1	2	2	1	-	-	-	-	-	-	0
D 7836B?	8	5	5	14	30	21	11.6	37	2	60	43	30	0
E 7842D	4	4	4	0	3	9	4.4	41	2	70	54	37	0
F 7853D	1	2	0	2	2	3	-	-	-	-	-	-	0
G 7861B	29	24	29	4	31	25	12.4	9	3	35	16	15	0
H 7871D	9	7	21	36	59	115	8.4	34	3	46	18	25	0
I 7874D	16	18	21	36	59	115	6.9	17	3	34	17	15	0
J 7877D	2	3	21	41	72	68	2.5	49	3	33	17	14	0
K 7881D	28	23	43	36	93	50	12.0	14	2	35	22	14	0
L 7883B?	19	23	40	36	93	50	7.0	13	2	34	25	13	0
M 7892D	22	16	18	24	56	16	12.7	19	2	41	28	19	0
N 7893D	23	16	21	24	56	13	14.1	20	2	39	26	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	M	COND DEPTH .SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10400	(FLIGHT	11)											
O 7905D	4	5	8	7	14	44	3.9	33	2	44	31	19	0
P 7908D	3	4	8	7	18	25	4.2	42	2	48	26	23	0
Q 7911D	11	8	4	11	24	25	10.7	23	2	40	30	15	0
R 7921H	5	4	9	10	23	21	7.8	39	2	41	31	16	0
S 7938H	11	1	2	5	22	19	49.0	36	2	28	32	4	0
T 7943B?	12	14	1	4	7	34	6.3	8	2	39	40	13	0
U 7958B?	4	6	6	13	23	41	3.5	31	1	51	78	18	0
V 7967B?	5	7	3	5	14	21	3.9	26	2	57	53	26	0
W 7991D	19	17	22	3	6	20	9.7	6	3	43	20	20	0
X 8006B	35	24	27	22	10	48	16.6	0	4	31	8	14	0
Y 8011B	3	8	27	22	10	48	2.0	7	6	43	5	27	0
Z 8013D	17	6	1	11	32	2	28.5	18	5	43	6	27	40
AA 8033D	32	28	41	7	62	25	12.4	0	4	28	8	12	0
AB 8036D	53	10	26	14	16	92	120.9	3	5	22	5	8	0
AC 8038D	56	31	26	14	16	92	25.8	0	6	23	4	10	0
AD 8050B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 8057B?	20	16	31	25	55	11	11.0	13	5	47	6	30	0
AF 8059B?	13	13	31	25	55	11	7.9	17	5	57	8	38	0
AG 8070B?	7	4	17	9	29	13	13.7	30	4	57	9	37	0
AH 8079B?	9	8	24	17	38	42	7.9	16	2	45	40	17	0
AI 8091B?	20	15	4	31	72	35	12.4	5	4	35	10	17	0
AJ 8108B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 8113B?	3	13	6	19	38	63	1.2	0	1	31	756	0	0
AL 8120M	0	2	0	1	0	4	-	-	-	-	-	-	1320
AM 8161D	23	10	13	20	45	30	24.2	9	3	31	19	10	0
AN 8164D	8	20	14	7	34	30	2.7	0	3	36	18	15	0
AO 8175D	11	5	22	13	31	10	17.8	12	4	35	11	15	30
AP 8181B	1	1	11	13	28	21	10.3	95	5	34	7	17	0
AQ 8187B	28	14	11	14	28	29	22.8	3	4	34	11	15	0
AR 8206B?	2	3	2	5	13	6	2.4	31	2	51	53	19	0
AS 8213B?	1	2	0	2	2	2	-	-	-	-	-	-	0
AT 8237B?	7	2	18	2	4	11	0.2	0	1	21	16	11	0
AU 8244D	7	7	16	4	5	4	6.4	20	3	31	19	9	0
AV 8248D	10	14	32	9	22	11	4.9	9	3	35	20	13	0
AW 8254B	40	24	56	70	97	64	20.1	9	3	25	12	8	0
AX 8256B	36	23	56	70	97	64	18.1	6	4	29	10	13	0
AY 8261D	11	14	7	30	46	45	5.2	10	3	23	12	5	0
AZ 8263D	36	23	18	30	46	41	18.1	2	3	21	13	4	0
BA 8266B?	24	10	5	17	75	32	28.4	10	3	24	20	4	0
BB 8279D	19	13	20	23	52	26	12.9	5	2	31	27	7	0
BC 8286B?	7	7	11	2	10	18	6.2	22	2	47	53	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10400	(FLIGHT	11)											
BD 8291D	15	8	2	13	34	8	18.7	9	2	36	23	13	0
BE 8295D	15	10	9	13	20	9	12.2	6	3	34	16	13	0
BF 8298D	2	5	2	13	20	11	1.4	6	3	36	14	15	0
BG 8324H	7	3	7	5	6	0	15.7	26	3	50	21	25	0
BH 8333B?	4	20	4	44	132	26	1.3	0	1	30	71	1	0
BI 8338B?	10	26	20	44	132	26	2.8	0	2	28	39	3	0
LINE 10401	(FLIGHT	15)											
A 5247B	4	13	21	25	86	68	1.5	0	3	51	19	28	0
B 5245B	12	18	3	25	86	136	4.7	4	3	39	22	17	0
C 5242B	12	25	3	25	86	136	3.6	0	2	26	40	2	0
D 5228B	16	11	28	25	65	32	12.3	11	3	46	16	25	0
E 5223B	19	16	27	31	70	30	10.6	8	2	48	25	23	0
LINE 10410	(FLIGHT	11)											
A 8889B?	4	6	10	4	6	7	0.5	0	1	45	169	20	0
B 8874S	2	5	4	3	11	42	0.2	0	1	17	249	0	0
C 8857S	3	7	3	2	22	70	2.2	17	1	31	140	0	0
D 8835S	3	12	5	18	2	86	1.1	8	1	32	179	0	0
E 8820S	2	17	2	31	49	170	0.5	0	1	5	447	0	0
F 8805B?	3	9	8	8	16	26	1.4	11	1	31	417	0	0
G 8796D	8	5	11	3	11	5	11.7	32	1	60	66	26	0
H 8789S?	1	8	2	8	17	41	0.7	0	1	48	77	16	0
I 8785D	4	4	16	6	15	17	5.6	46	1	60	69	26	0
J 8777H	14	10	26	24	53	24	10.7	15	3	46	14	26	0
K 8768D	9	12	20	23	58	47	5.1	12	3	40	18	18	0
L 8765D	14	15	20	23	58	47	7.4	14	3	42	17	21	0
M 8763D	18	15	18	22	50	35	10.5	16	2	39	35	14	0
N 8757D	27	18	35	45	98	57	15.7	15	3	42	18	21	0
O 8755D	34	27	35	45	98	58	14.0	8	3	34	19	14	0
P 8748D	6	12	3	8	14	44	3.1	20	2	43	43	17	0
Q 8740B?	11	12	1	12	20	73	6.5	20	2	38	38	13	0
R 8735B?	20	22	9	28	68	52	7.5	10	2	37	29	14	0
S 8719B?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 8715D	11	14	4	26	70	37	5.3	5	2	42	37	15	0
U 8701D	8	9	3	8	11	14	5.3	12	1	54	69	20	0
V 8678B	15	18	10	28	63	15	6.5	14	3	35	15	16	0
W 8670B	22	22	28	28	65	51	9.2	2	5	31	7	15	0
X 8656B	17	9	23	13	33	17	17.4	12	5	39	6	23	0
Y 8638H	4	5	9	7	7	4	3.5	19	7	32	4	18	80
Z 8609D	13	28	19	30	73	58	3.5	0	3	32	14	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE FARH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10410 (FLIGHT 11)													
AA 8583B	40	29	85	58	149	50	16.2	0	5	32	6	17	0
AB 8581B	31	29	85	58	149	34	10.9	0	3	23	18	3	0
AC 8576M	0	2	1	2	2	4	-	-	-	-	-	-	950
AD 8557H	8	7	9	6	12	1	7.5	0	3	31	15	7	0
AE 8547B	16	6	14	8	22	3	26.8	0	4	39	9	19	0
AF 8543B	12	8	14	9	23	8	11.8	0	3	42	19	17	0
AG 8522D	15	16	7	18	36	40	7.2	0	2	43	38	15	0
AH 8505D	11	13	12	19	38	25	6.0	0	2	37	23	13	0
AI 8495B?	8	3	30	17	52	0	24.6	17	3	49	16	25	0
AJ 8481B?	10	7	7	28	60	13	10.8	6	2	42	48	11	0
AK 8475B?	6	6	7	11	21	12	5.5	11	1	63	65	27	0
AL 8457B?	5	5	6	5	13	5	5.7	12	2	69	45	36	0
LINE 10411 (FLIGHT 15)													
A 5306H	9	6	2	2	2	11	10.2	33	4	61	12	40	0
B 5323D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5326D	4	20	19	29	76	16	1.2	0	2	45	29	21	0
D 5328D	16	20	23	29	69	16	6.5	8	3	47	19	25	0
E 5332B	26	18	23	29	69	46	15.2	7	4	33	12	14	0
F 5342B?	8	11	8	14	35	25	5.0	16	3	41	14	21	0
G 5347B?	16	9	14	15	41	4	17.0	23	4	44	10	26	0
H 5356D	3	11	13	10	30	113	1.6	8	2	43	43	17	0
I 5364D	12	7	22	9	15	13	15.1	28	3	60	20	36	0
J 5369B?	6	8	22	17	15	21	4.4	26	3	59	18	36	0
K 5380B	13	9	12	13	28	24	11.2	24	3	61	20	38	0
L 5382B	14	9	12	22	28	24	13.1	26	3	74	22	48	0
M 5397D	8	8	3	3	7	16	6.7	37	1	103	264	49	0
N 5401B?	1	2	1	1	2	3	-	-	-	-	-	-	0
O 5410D	6	6	1	5	15	8	6.1	38	1	87	210	38	0
P 5414B?	6	6	7	3	15	8	7.0	41	2	105	54	69	0
LINE 10420 (FLIGHT 11)													
A 8996H	2	8	7	8	15	20	1.4	0	1	44	69	12	0
B 9014H	4	10	4	14	26	72	1.9	12	1	30	125	0	0
C 9034H	2	5	3	10	4	51	1.4	27	1	43	116	9	0
D 9073B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 9087D	23	8	19	28	29	22	37.0	23	2	41	29	18	0
F 9094B	5	7	9	14	30	30	4.3	32	2	42	35	17	0
G 9101B	6	5	10	3	6	15	8.6	42	2	41	48	14	0
H 9102B	6	4	10	7	6	37	9.4	44	2	41	46	14	0
I 9111B	17	7	9	6	12	21	25.4	30	3	42	14	23	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10420	(FLIGHT 11)												
J 9123B	7	10	1	6	11	8	3.9	27	3	46	19	25	0
K 9129B	17	15	1	4	13	19	10.0	21	2	45	25	23	0
L 9132B	14	9	20	22	66	27	13.1	26	2	46	30	21	0
M 9145B	6	10	4	10	26	48	3.5	26	2	42	36	18	0
N 9148B?	1	2	1	2	2	4	-	-	-	-	-	-	0
O 9152B	6	16	18	3	10	38	2.1	2	2	44	24	21	0
P 9155B	16	17	18	10	30	38	8.0	9	2	34	29	10	4
Q 9178B?	2	11	15	17	43	9	0.7	0	2	32	34	7	0
R 9183D	15	25	7	54	138	189	4.5	0	2	35	23	13	0
S 9186B	23	39	7	54	138	189	5.1	1	2	25	32	4	0
T 9204D	8	11	7	15	39	17	4.9	19	1	44	93	11	0
U 9209D	1	2	1	2	2	4	-	-	-	-	-	-	0
V 9213D	7	16	4	23	58	65	2.6	5	2	36	44	10	0
W 9214D	13	14	4	23	58	65	6.9	16	1	31	50	5	0
X 9222D	7	4	5	12	26	17	10.7	42	2	44	36	19	0
Y 9245D	39	14	26	41	3	45	39.1	1	4	27	8	10	12
Z 9251B?	3	13	33	31	75	30	1.0	0	4	36	9	19	0
AA 9265D	32	41	43	77	174	142	8.0	2	5	24	6	11	0
AB 9267D	34	8	43	77	174	142	69.6	17	5	23	7	9	0
AC 9272D	32	40	66	38	86	106	8.2	1	5	21	5	8	0
AD 9274D	29	40	66	38	86	106	7.2	0	5	22	5	9	90
AE 9286B	21	17	32	36	74	50	11.5	15	5	28	6	14	0
AF 9307B	9	13	14	9	15	22	4.4	18	2	49	26	25	0
AG 9327D	11	6	2	7	14	26	15.0	20	1	37	95	3	0
AH 9333D	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 9340B?	12	6	1	6	23	9	19.0	14	2	52	29	25	0
AJ 9348B?	14	9	21	9	8	13	13.6	7	2	42	25	17	0
AK 9356B?	6	6	2	1	3	4	6.5	16	1	41	122	2	350
AL 9366H	14	7	8	9	43	13	19.3	0	3	26	21	2	0
AM 9375B	11	9	17	16	37	18	8.7	0	3	25	13	4	0
AN 9386B	14	12	26	25	59	16	8.9	9	3	35	14	15	8
AO 9399B	30	22	28	29	71	50	14.6	3	3	37	15	17	0
AP 9408B	12	13	16	18	42	37	7.0	6	2	33	36	7	0
AQ 9418D	7	7	8	10	4	11	6.7	22	2	55	27	29	0
AR 9444H	16	11	5	14	32	15	13.9	1	3	25	13	5	0
AS 9467H	7	7	9	6	17	7	6.7	7	2	53	29	25	0
AT 9479B?	7	5	20	15	36	20	8.6	5	3	45	15	21	0
AU 9486B	30	2	24	5	11	7	405.9	5	4	26	9	8	0
AV 9491B	3	7	24	5	11	34	2.2	12	3	28	15	9	0
AW 9494D	22	17	6	11	22	34	12.1	10	2	33	28	11	0
AX 9505D	9	17	11	17	41	24	3.7	10	2	40	37	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10420	(FLIGHT	11)											
AY 9509B?	2	4	11	17	41	23	2.6	42	2	52	28	27	0
LINE 10421	(FLIGHT	15)											
A 5550S	1	2	1	1	1	4	-	-	-	-	-	-	0
B 5531B?	5	31	19	51	137	74	1.2	0	4	29	10	12	0
C 5521B?	20	28	58	60	139	82	6.2	3	4	28	10	12	0
D 5519B	33	33	58	62	145	82	10.4	2	5	25	7	11	0
E 5518B	34	33	58	62	145	81	10.9	2	5	26	6	12	0
F 5510D	22	8	38	28	68	31	30.5	14	3	32	13	13	0
G 5508D	22	18	38	12	68	31	11.1	4	3	31	22	9	0
H 5499D	9	8	17	25	63	42	7.1	17	1	73	86	34	0
I 5491B	7	9	9	12	29	30	4.9	18	2	68	41	37	0
J 5488D	9	8	8	12	28	25	7.5	23	1	84	67	47	0
K 5483D	6	5	17	19	46	49	6.9	32	1	105	65	65	0
L 5479D	10	16	17	19	46	49	4.3	6	2	58	37	30	0
M 5468S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10430	(FLIGHT	11)											
A 517H	26	12	45	27	31	13	26.1	17	6	38	4	24	0
B 502H	24	10	50	8	7	77	28.6	22	4	51	8	33	0
C 485H	4	6	7	14	21	39	3.5	33	1	46	82	14	0
D 469D	5	6	2	3	13	19	5.4	32	1	36	348	0	0
E 460H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 447H	6	8	2	14	19	51	3.7	23	1	43	115	8	0
G 431S	3	7	1	10	14	20	1.6	21	1	23	576	0	0
H 421B?	3	4	2	7	16	12	2.7	34	1	35	688	0	0
I 403D	34	11	11	60	137	138	46.3	18	2	27	28	6	0
J 399B?	13	28	9	4	91	136	3.5	2	2	32	28	11	0
K 381B?	15	11	30	24	46	22	11.9	18	3	40	18	19	0
L 379B?	17	10	30	24	46	22	15.9	20	4	46	12	26	0
M 374B?	7	6	0	6	15	15	7.5	32	3	46	17	25	0
N 369H	18	18	24	27	60	33	8.8	12	3	43	17	22	0
O 348B	43	42	39	63	141	91	11.6	0	3	26	19	7	0
P 345B?	5	24	39	63	141	91	1.4	0	2	50	24	26	0
Q 342B	12	11	2	32	32	61	8.7	13	2	57	33	29	0
R 323B	12	15	2	20	49	35	5.7	2	2	42	32	16	0
S 317B	12	13	16	20	46	34	7.2	0	2	37	42	9	0
T 310B?	3	5	1	3	12	10	2.8	15	1	70	85	30	0
U 305B?	8	10	5	0	19	25	5.3	0	1	43	90	6	0
V 279B	12	18	10	23	58	40	5.0	0	3	34	16	13	0
W 275B	13	13	27	19	45	26	7.5	4	4	29	10	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10430		(FLIGHT 11)													
X	271B	25	20	40	10	28	19	12.6	0	5	24	6	9	0	
Y	254B	38	26	13	19	37	44	16.6	1	6	28	5	14	0	
Z	250B	12	9	13	19	37	27	10.2	19	6	28	4	14	40	
AA	245H	23	22	24	42	99	40	9.7	0	5	30	6	14	0	
AB	229H	4	9	4	2	42	1	1.0	0	1	32	63	15	0	
AC	216D	7	6	5	4	12	11	6.8	14	1	63	75	26	0	
AD	197B	16	10	31	19	42	6	13.7	3	2	38	25	13	0	
AE	187B?	12	6	12	9	19	20	17.3	9	2	48	28	21	0	
AF	184B?	7	6	6	8	19	16	6.8	9	2	45	26	18	0	
AG	174H	21	12	22	23	50	23	17.3	0	3	33	14	12	0	
AH	131H	2	8	8	7	16	27	1.0	0	3	60	20	34	0	
AI	112B	15	8	12	21	49	39	18.2	2	2	40	42	10	0	
AJ	91B?	9	6	9	7	17	7	9.7	0	1	36	75	0	0	
AK	64B?	12	7	6	6	15	12	14.4	19	3	64	21	39	0	
LINE 10431		(FLIGHT 15)													
A	5634B	8	10	36	34	70	36	4.7	11	3	26	15	7	0	
B	5642H	1	2	1	2	2	4	-	-	-	-	-	-	0	
C	5657D	4	4	5	6	2	19	5.6	35	1	75	62	38	0	
D	5687D	3	6	1	7	29	48	2.1	23	1	65	185	21	0	
E	5695D	8	6	3	6	13	5	9.5	28	2	98	44	63	0	
F	5699H	11	6	3	7	3	9	14.0	22	3	75	23	47	0	
G	5724S	1	2	1	1	2	4	-	-	-	-	-	-	0	
H	5739S	1	2	1	2	2	4	-	-	-	-	-	-	7	
LINE 10440		(FLIGHT 11)													
A	681H	8	11	15	23	35	66	4.6	28	4	51	11	33	0	
B	694H	2	1	7	23	54	94	6.3	84	1	24	97	0	0	
C	705S	2	10	0	15	22	100	0.9	2	1	27	165	0	0	
D	716S	5	9	1	12	18	85	3.0	24	1	28	205	0	0	
E	723B?	1	2	0	2	2	4	-	-	-	-	-	-	0	
F	727B?	3	8	0	10	15	77	1.7	19	1	48	202	9	0	
G	741B?	4	6	6	11	15	50	2.9	29	1	55	62	24	0	
H	750S?	1	2	1	2	2	4	-	-	-	-	-	-	0	
I	771S?	1	2	1	2	2	4	-	-	-	-	-	-	0	
J	782D	8	13	11	30	49	12	3.5	17	1	40	99	8	0	
K	785D	14	25	32	71	146	12	4.2	8	1	34	59	7	0	
L	790D	63	55	76	93	186	79	15.0	3	3	23	16	6	0	
M	793D	1	35	76	93	186	95	0.4	0	3	29	15	11	0	
N	798D	8	7	8	32	78	35	7.4	35	2	37	22	16	0	
O	803D	2	4	11	12	13	36	1.4	31	2	35	33	12	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10440	(FLIGHT	11)											
P 830B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 840B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 849D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 853B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 855B	3	21	15	29	16	46	0.7	0	2	38	41	12	0
U 861B	14	14	5	2	8	5	7.6	12	2	39	24	16	0
V 865D	10	10	19	5	47	30	7.1	13	2	37	36	11	0
W 874B	4	4	6	8	20	13	5.5	38	2	53	39	25	0
X 888B	5	5	10	12	31	5	4.9	28	2	46	31	20	0
Y 894B	8	10	8	3	4	30	4.7	10	2	51	46	21	0
Z 904B	15	21	15	36	76	71	5.6	7	2	35	36	10	0
AA 909D	2	4	11	33	68	70	2.2	32	2	53	48	23	0
AB 913D	3	9	4	14	36	32	1.4	2	1	39	59	9	0
AC 915D	5	12	4	15	44	44	2.6	2	1	32	57	4	0
AD 924B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 928B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 932D	12	17	13	24	57	45	5.0	12	2	43	27	19	0
AG 933D	12	17	13	24	57	45	5.0	11	2	47	32	21	0
AH 954B?	7	4	14	10	20	12	11.2	29	4	45	13	24	0
AI 963B?	8	7	16	20	48	30	8.4	22	3	40	14	20	0
AJ 969D	18	13	27	39	79	38	12.6	14	4	41	10	22	0
AK 974B	3	16	54	39	79	17	1.0	0	4	37	9	20	0
AL 978B	21	4	54	10	11	4	84.0	22	4	32	8	16	0
AM 983D	11	12	38	38	73	40	6.9	14	2	35	26	12	0
AN 992D	16	8	19	10	26	15	19.3	18	4	45	11	26	20
AO 996D	5	6	7	10	26	15	4.7	30	4	49	11	29	0
AP 998D	4	6	7	6	14	11	3.2	24	3	50	15	29	0
AQ 1007B?	4	7	12	14	32	25	2.7	14	3	48	17	26	0
AR 1012B	10	8	12	13	25	10	9.0	7	3	33	16	12	0
AS 1022D	6	12	5	10	23	41	2.9	3	3	44	16	23	0
AT 1025D	3	11	4	14	23	41	1.4	0	3	50	16	28	0
AU 1040D	10	11	11	10	17	4	6.9	0	1	53	86	16	0
AV 1066H	4	16	3	8	19	14	1.5	0	4	30	12	10	30
AW 1078D	10	6	7	12	44	37	12.5	25	4	39	12	20	0
LINE 10443	(FLIGHT	22)											
A 2830B?	8	6	8	5	7	23	0.3	0	1	20	17	9	0
B 2834B?	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2848B	6	4	15	12	30	14	9.1	36	3	42	13	22	0
D 2855B	5	4	7	18	46	6	6.6	28	3	40	15	19	0
E 2900D	6	5	7	10	26	17	7.5	26	3	47	22	23	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10443	(FLIGHT 22)												
F 2916D	5	3	1	13	38	11	8.5	47	3	62	22	38	0
G 2923B	6	8	5	14	42	17	4.4	26	2	50	27	25	0
H 2932B?	4	7	1	8	22	29	2.8	16	3	58	21	33	0
I 2949B	5	3	2	0	1	2	11.2	38	3	77	25	48	0
J 2984B	4	2	5	14	38	38	8.5	26	2	74	41	40	0
K 2989B	8	14	9	19	78	61	3.5	0	2	37	45	8	0
L 2994D	8	3	7	29	78	61	21.5	38	2	56	39	27	0
M 2999B	9	15	12	24	35	53	3.7	0	2	40	41	12	0
N 3020H	2	1	2	2	4	23	0.1	0	1	19	39	4	0
O 3037B	18	8	3	2	29	5	24.6	1	4	28	8	10	0
P 3043B	17	1	3	4	5	7	309.5	6	3	35	15	13	0
Q 3060H	7	5	2	4	10	9	1.0	0	1	32	53	15	0
R 3081H	1	1	1	2	2	4	-	-	-	-	-	-	0
S 3134H	3	2	3	3	16	12	1.0	0	1	42	87	22	12
T 3153D	6	2	2	3	3	4	27.4	60	2	94	33	64	0
U 3206D	6	12	3	1	19	43	2.5	8	1	50	357	3	0
V 3265D	1	2	1	1	0	4	-	-	-	-	-	-	0
LINE 10450	(FLIGHT 11)												
A 1516D	26	17	62	39	94	36	16.4	6	7	35	4	22	0
B 1514D	30	13	62	35	90	32	28.2	11	8	38	3	26	0
C 1511D	30	17	62	35	90	12	19.5	6	7	35	3	22	0
D 1500H	10	4	29	18	37	61	28.0	40	6	56	4	41	0
E 1492H	34	11	26	27	34	90	43.0	18	5	51	7	34	0
F 1475H	4	4	1	5	9	48	0.2	0	1	21	231	0	0
G 1461H	2	8	2	13	24	49	1.2	2	1	37	107	3	0
H 1448H	6	10	7	19	48	67	3.5	11	1	34	69	4	0
I 1443D?	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1426B?	2	6	2	8	14	78	1.1	14	1	37	219	0	0
K 1421D	4	3	1	1	5	78	6.9	50	1	53	198	11	0
L 1412B?	4	4	7	11	4	22	4.6	34	2	53	55	22	0
M 1408D	9	9	15	13	16	45	6.4	14	2	42	46	13	0
N 1405D	12	16	26	11	29	45	5.1	6	2	36	23	14	0
O 1402D	26	16	26	11	29	34	16.1	7	3	26	18	6	0
P 1399D	29	23	26	6	18	13	12.5	1	3	25	19	5	0
Q 1396D	12	12	30	40	18	15	7.6	12	3	31	20	10	0
R 1385B?	3	4	8	6	10	11	4.7	39	2	50	26	25	0
S 1377H	25	16	44	35	82	27	15.5	3	4	31	8	14	0
T 1370B	18	17	1	29	69	33	8.9	1	3	33	18	12	0
U 1366B	16	17	5	30	74	38	7.6	2	2	33	23	11	0
V 1361D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10450	(FLIGHT	11)											
W 1356D	7	5	6	7	18	18	8.4	27	2	51	34	23	0
X 1350D	8	6	8	2	11	8	9.6	24	2	50	32	24	0
Y 1346B	6	8	4	6	14	21	4.0	19	2	51	44	22	0
Z 1337H	10	5	3	11	24	13	16.5	23	2	41	27	16	0
AA 1325B	13	15	10	23	54	49	6.6	9	2	40	30	15	0
AB 1323B	12	14	10	22	48	49	6.7	11	2	45	38	18	0
AC 1318D	6	5	6	9	22	7	7.5	17	2	48	32	21	0
AD 1315D	10	7	6	9	22	14	9.8	11	2	40	34	13	0
AE 1311D	4	6	5	7	13	12	4.1	21	2	53	29	26	0
AF 1308D	8	10	7	10	22	25	4.7	14	2	50	34	23	0
AG 1306D	7	9	7	10	22	30	4.6	16	2	53	32	27	0
AH 1286B	1	3	13	10	21	24	0.8	18	3	69	21	45	0
AI 1281B	12	7	13	10	24	17	12.9	29	3	64	19	40	0
AJ 1276B	8	5	8	13	26	15	12.6	36	3	61	15	38	0
AK 1262D	11	11	1	13	30	9	7.2	8	3	44	22	20	0
AL 1258D	5	5	17	12	20	5	5.9	27	2	46	47	17	0
AM 1251D	3	9	13	7	12	17	1.9	5	2	56	55	24	0
AN 1240H	6	8	11	7	24	12	3.9	5	4	43	11	23	0
AO 1229B	21	19	37	27	63	23	10.5	0	4	26	8	9	0
AP 1212B	2	5	15	9	21	4	1.5	4	2	62	31	33	0
AQ 1191D	35	20	21	12	28	23	21.4	0	5	31	8	14	0
AR 1187B	12	10	21	12	28	10	8.4	0	4	39	11	18	0
LINE 10454	(FLIGHT	22)											
A 2709B	18	8	32	29	75	28	23.2	0	3	34	13	13	0
B 2705B	6	2	13	3	33	12	29.6	20	4	42	11	20	40
C 2699H	8	7	4	9	18	13	7.5	6	3	41	15	19	0
D 2685H	5	6	5	3	5	1	1.0	0	1	47	45	30	0
E 2669B	10	10	18	17	44	2	6.7	0	3	53	20	27	0
F 2666B	1	2	1	2	2	2	-	-	-	-	-	-	0
G 2659B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2649D	6	15	2	16	14	39	2.2	0	2	93	43	58	0
I 2644D	7	8	2	20	14	38	5.9	11	3	62	20	37	0
J 2633H	1	1	1	2	2	4	-	-	-	-	-	-	0
K 2616B?	5	4	1	5	12	25	0.4	0	1	33	166	12	0
L 2598B	7	4	15	10	26	8	12.9	0	3	50	23	20	0
M 2591D	8	2	11	2	1	15	41.1	13	3	44	24	17	0
N 2586D	8	4	12	9	3	12	13.1	0	3	52	16	26	0
O 2572B	1	2	1	2	1	1	-	-	-	-	-	-	0
P 2556D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2547B?	6	4	22	1	3	15	10.1	32	6	158	6	138	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10454	(FLIGHT	22)											
R 2542B	14	6	31	13	46	12	24.7	2	8	51	3	37	0
S 2507B?	4	5	1	1	1	17	4.2	47	1	209	1025	0	0
T 2483S	0	2	0	2	1	4	-	-	-	-	-	-	0
U 2462D	9	12	6	10	26	32	5.0	9	1	82	161	35	0
LINE 10460	(FLIGHT	13)											
A 647H	7	3	10	3	10	32	24.1	46	8	47	3	34	0
B 662E	23	14	24	31	43	28	17.4	18	5	51	6	35	0
C 710H	4	8	3	3	7	41	0.1	0	1	13	143	0	0
D 752B?	3	11	6	20	33	114	1.2	7	1	35	146	2	0
E 769D	1	2	1	2	2	4	-	-	-	-	-	-	0
F 775D	4	7	6	14	36	45	2.7	27	1	54	61	24	0
G 781D	6	12	11	7	30	16	3.1	19	2	38	46	12	0
H 786D	4	13	0	1	30	28	1.7	11	2	40	41	15	0
I 790D	13	17	71	105	262	161	5.6	18	2	36	28	14	0
J 794D	44	52	60	113	278	161	9.5	6	3	25	17	7	0
K 796D	54	63	60	113	278	161	10.3	5	3	29	11	14	0
L 800D	29	54	17	39	109	166	5.2	3	2	27	27	7	0
M 804D	13	22	16	39	109	60	4.3	12	3	36	21	16	0
N 813B	1	2	1	2	2	2	-	-	-	-	-	-	0
O 817D	5	6	8	13	23	17	4.5	35	2	47	25	24	0
P 831B	12	6	7	4	44	9	17.2	35	4	48	12	29	0
Q 839B	13	7	13	30	81	22	15.6	31	5	35	7	20	0
R 848B	7	10	20	23	59	59	4.3	24	4	32	11	15	0
S 852B	1	2	2	14	39	34	1.1	33	3	37	14	18	0
T 856B	2	11	7	18	42	34	1.0	3	3	32	16	14	0
U 870B	5	14	7	28	78	84	2.3	11	2	36	39	12	0
V 872B	8	15	9	28	78	84	3.2	14	2	35	37	12	0
W 887B	7	7	2	5	15	12	5.5	30	2	53	37	26	0
X 895D	2	2	0	9	18	5	3.4	72	2	68	55	35	0
Y 906H	8	10	6	4	13	38	5.1	22	2	46	33	21	0
Z 912B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 922B	13	7	21	19	35	13	14.7	24	2	57	39	29	0
AB 931D	8	10	5	13	31	53	4.8	22	1	60	70	27	0
AC 939D	8	9	5	15	37	24	5.8	15	2	54	32	27	0
AD 952D	8	11	2	12	31	30	5.0	20	2	54	43	26	0
AE 964B	8	8	1	2	2	24	6.8	36	2	64	33	38	0
AF 976B?	6	5	4	7	14	14	6.0	44	2	64	31	37	0
AG 985D	4	7	2	5	12	20	2.7	30	2	64	31	37	0
AH 996B	4	9	2	10	21	69	2.5	27	2	58	41	31	0
AI 1009B	15	22	15	10	10	39	5.6	17	2	46	25	24	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10460	(FLIGHT 13)												
AJ 1015D	7	15	16	42	110	123	2.7	14	3	47	16	27	0
AK 1017D	10	22	16	42	110	123	3.4	7	3	37	20	17	0
AL 1028D	3	10	9	10	30	9	1.5	1	4	46	9	27	0
AM 1032D	8	4	13	16	6	1	14.8	38	4	46	9	29	0
AN 1036B	5	4	13	16	6	32	6.2	42	3	41	15	21	0
AO 1073D	76	26	56	66	154	260	53.5	7	5	25	6	12	0
AP 1077D	57	76	56	11	160	271	9.1	2	6	21	4	9	0
AQ 1079D	15	76	7	11	85	271	1.8	0	6	22	4	10	0
AR 1086B	26	18	64	50	126	63	14.3	18	4	38	10	21	30
AS 1093B	28	29	36	57	141	103	9.6	12	4	32	11	16	0
AT 1098B	6	5	11	3	11	30	6.9	41	4	27	7	12	50
AU 1104B	7	29	11	2	8	23	1.6	0	5	30	7	15	0
AV 1108D	17	16	22	13	33	16	8.6	15	4	41	11	23	0
AW 1116B	3	8	2	27	4	103	1.7	16	2	43	24	20	0
AX 1122D	7	18	21	26	11	103	2.3	10	1	59	143	21	0
AY 1155B?	8	5	1	1	1	6	12.8	8	4	49	11	27	40
AZ 1167B?	3	5	11	10	14	20	2.6	12	4	53	11	32	50
BA 1178B?	5	15	15	33	37	14	1.9	0	3	46	15	26	4
BB 1186D	23	10	31	14	37	56	25.8	25	3	32	13	15	0
BC 1192D	20	15	21	29	65	67	11.6	23	3	41	16	22	0
BD 1196D	11	21	11	16	27	99	3.8	14	2	46	29	23	0
BE 1214B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BF 1220B	13	11	8	5	12	40	9.5	24	3	39	17	19	0
BG 1231B	9	8	8	5	18	31	8.1	30	3	44	18	23	0
BH 1251D	12	14	28	29	72	50	6.5	7	4	37	8	20	5
BI 1253B	12	16	28	29	72	50	5.6	4	4	32	8	16	0
BJ 1263D	8	8	3	14	33	23	6.6	12	4	42	10	22	0
BK 1272B	17	16	6	27	62	64	8.3	14	3	39	15	20	0
BL 1283B	14	23	6	36	7	105	4.7	10	2	40	45	14	0
BM 1294B	7	13	14	29	81	99	3.5	14	1	30	109	0	0
BN 1307H	1	1	1	2	2	4	-	-	-	-	-	-	0
BO 1343D	5	6	2	7	18	18	4.5	23	1	46	156	6	0
BP 1350B	1	2	1	1	2	4	-	-	-	-	-	-	0
BQ 1362B	9	7	7	12	34	18	8.0	12	2	36	39	9	0
BR 1376B	12	5	6	7	11	10	21.4	18	3	41	14	20	0
BS 1386B	3	3	12	9	22	13	4.9	39	3	47	15	25	0
LINE 10461	(FLIGHT 15)												
A 6337B?	2	3	1	3	11	22	0.5	0	1	41	546	11	0
B 6315D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 6305B	9	14	8	16	39	33	4.3	16	1	72	88	34	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10461	(FLIGHT 15)												
D 6258B?	1	2	0	2	2	4	-	-	-	-	-	-	0
E 6244B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10470	(FLIGHT 13)												
A 1919B	16	14	48	26	79	36	9.3	0	7	39	4	25	0
B 1903B?	9	6	10	10	24	13	9.7	14	5	50	8	31	0
C 1896H	14	4	8	12	5	4	32.5	18	6	46	5	30	0
D 1869H	3	7	3	11	6	57	2.3	12	1	39	82	6	0
E 1836H	6	4	4	5	17	33	8.0	47	1	55	107	19	0
F 1813H	4	5	1	12	23	75	3.2	32	1	42	103	9	0
G 1806B?	8	8	10	17	49	33	6.8	25	2	44	42	17	0
H 1804B?	8	8	10	17	49	27	6.1	21	2	50	34	23	0
I 1792B	12	14	17	29	68	41	6.0	4	2	28	31	4	0
J 1791B	6	16	2	29	28	41	2.2	0	2	30	25	7	0
K 1788D	18	13	19	20	49	25	12.7	4	3	38	22	14	0
L 1784B	9	3	19	20	48	8	22.7	27	2	48	31	20	0
M 1778B	7	9	7	11	26	7	5.1	9	2	53	29	26	0
N 1767B	14	12	12	12	28	21	9.2	0	3	46	21	22	0
O 1759D	3	11	12	12	41	21	1.2	0	2	53	26	27	50
P 1756D	7	13	11	17	49	35	3.1	4	2	42	34	16	0
Q 1742D	7	12	12	21	53	60	3.1	15	2	50	45	22	0
R 1738B	7	10	12	21	53	59	3.7	12	2	61	57	28	0
S 1732B	6	7	10	13	31	17	4.5	18	1	64	69	28	0
T 1728D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 1724D	1	2	1	2	2	4	-	-	-	-	-	-	0
V 1722D	8	12	5	15	38	48	4.3	15	1	54	158	14	0
W 1714D	14	16	12	20	55	42	6.4	11	2	56	52	26	0
X 1710B	9	14	9	7	12	46	4.4	12	2	54	45	25	0
Y 1705D	10	10	9	7	19	32	7.2	22	2	56	34	29	0
Z 1687B	5	7	7	8	18	49	3.9	28	2	57	33	30	0
AA 1667B	3	35	10	26	63	31	0.6	0	3	28	15	9	0
AB 1664B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 1652B	12	6	6	1	5	32	19.1	17	3	59	24	33	0
AD 1644B	49	21	93	77	174	21	34.5	0	3	39	14	19	0
AE 1640B	49	34	93	77	174	94	18.3	0	5	23	5	9	0
AF 1637B	27	23	61	52	112	94	11.9	0	6	28	4	14	0
AG 1632B	11	8	24	19	43	25	11.1	19	6	46	4	30	0
AH 1628B	7	9	24	15	43	26	5.2	16	4	50	10	30	0
AI 1624B	19	1	43	29	81	11	381.6	22	4	43	9	25	0
AJ 1612B	6	10	11	14	30	45	3.4	12	1	68	62	34	0
AK 1594B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10470	(FLIGHT	13)											
AL 1586H	5	5	19	13	30	22	5.9	14	3	39	14	16	12
AM 1568H	2	5	8	8	15	12	1.7	0	2	55	25	28	0
LINE 10471	(FLIGHT	15)											
A 6521B	6	3	3	8	18	14	14.4	56	3	66	16	44	0
B 6529B	2	5	13	6	16	37	1.6	31	2	67	25	42	0
C 6539D	6	9	17	23	56	42	4.1	23	2	50	24	26	0
D 6577B	4	9	39	20	35	53	2.4	9	5	35	8	19	0
E 6580B	16	15	6	20	35	53	9.0	9	4	38	10	20	0
F 6590B	9	10	18	16	40	25	5.4	16	3	57	17	34	0
G 6613B	15	16	39	16	31	66	7.2	8	3	29	19	9	0
H 6616B	3	23	39	16	31	66	0.8	0	3	28	13	10	0
I 6620B	10	10	28	40	18	3	6.6	16	3	37	19	16	0
J 6628B	17	7	9	19	52	14	26.1	23	3	38	19	17	0
K 6635B	3	8	29	2	9	21	1.7	4	2	64	27	37	0
L 6679D	6	10	9	12	33	35	3.8	9	1	68	70	31	0
M 6690B	8	6	18	3	26	7	8.9	28	6	88	5	70	0
N 6723D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 6731D?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 6752M	0	2	0	2	0	4	-	-	-	-	-	-	0
Q 6799D	28	17	24	31	49	34	18.0	0	3	43	19	21	0
R 6811B	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10480	(FLIGHT	15)											
A 272H	18	11	44	26	67	22	15.1	2	9	32	2	19	0
B 284H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 302H	1	2	1	0	1	4	-	-	-	-	-	-	0
D 321B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 335B?	0	3	2	5	15	14	0.5	0	1	49	81	15	0
F 338D	4	4	11	8	22	13	5.3	38	1	57	72	22	0
G 354H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 379H	2	7	3	13	29	56	1.0	9	1	28	102	0	0
I 402B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 412H	2	3	1	6	8	40	2.3	40	1	48	94	14	0
K 422D	7	12	4	19	31	69	3.5	18	1	41	88	10	0
L 425D	9	15	4	19	31	69	3.9	13	2	44	49	16	0
M 427D	11	18	4	19	31	13	4.4	10	2	46	53	18	0
N 431D	4	9	7	15	40	39	2.5	18	1	40	63	11	0
O 435D	6	13	7	14	35	35	2.8	9	1	33	59	5	0
P 440D	4	4	6	16	50	56	5.1	46	1	35	53	8	0
Q 444D	8	11	28	16	50	56	4.5	18	2	32	45	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		1050 HZ		892 HZ		7323 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE 10480	(FLIGHT	15)												
R	448D	41	35	29	45	100	46	13.3	4	2	30	26	9	0
S	451D	20	27	41	39	111	88	6.5	6	2	28	36	4	0
T	458B	13	10	25	20	46	39	10.0	23	2	42	46	15	0
U	461D	13	10	26	20	46	39	10.0	26	2	40	30	17	0
V	465D	2	8	30	39	93	20	0.9	8	2	36	22	15	0
W	469B?	9	18	20	40	96	70	3.3	9	2	42	27	19	0
X	480D	16	22	8	19	51	38	5.5	13	2	48	24	26	0
Y	485D	7	43	42	55	75	8	1.1	0	3	32	16	14	0
Z	488D	23	32	42	11	116	82	6.4	10	3	30	12	14	0
AA	490D	27	32	42	11	116	82	8.1	10	3	37	13	19	0
AB	494D	14	15	54	32	33	14	7.3	17	2	50	25	27	0
AC	504B?	8	14	11	25	68	85	3.7	18	1	40	59	13	0
AD	508D	6	11	2	3	65	64	3.1	21	2	43	44	17	0
AE	513B?	8	12	18	22	55	43	4.2	16	2	42	35	16	0
AF	527D	9	10	51	66	163	88	6.3	30	2	56	25	33	0
AG	531B	33	36	51	66	163	89	9.5	4	3	32	17	13	0
AH	549B?	8	11	6	26	30	88	4.2	26	1	36	135	4	0
AI	563D	12	22	21	41	105	80	3.6	2	2	41	33	16	0
AJ	564D	11	25	21	41	105	80	3.3	0	2	39	37	14	0
AK	570D	10	13	15	16	31	48	4.9	6	2	38	48	10	0
AL	574D	8	15	15	15	35	66	3.1	9	2	43	40	17	0
AM	602B	9	2	4	2	6	36	37.1	45	2	48	23	24	0
AN	609D	1	2	1	2	2	4	-	-	-	-	-	-	0
AO	625D	8	12	12	4	53	8	4.2	14	3	42	15	22	0
AP	637D	25	24	46	43	97	64	10.1	0	5	28	7	12	0
AQ	640D	9	31	40	37	74	13	2.2	0	5	31	7	15	0
AR	643D	12	9	40	37	74	13	9.3	21	4	26	8	10	0
AS	651B	1	2	1	2	2	4	-	-	-	-	-	-	0
AT	655B	19	16	3	29	75	58	10.6	15	5	35	7	19	0
AU	665B	3	2	5	11	18	33	6.7	54	3	34	13	15	0
AV	686M	0	5	0	3	5	23	0.4	0	1	16	523	0	0
AW	688M	0	1	0	1	5	23	0.6	11	1	18	543	0	0
AX	692M	13	14	16	17	94	41	6.6	21	1	10	478	0	1090
AY	696B	13	14	23	17	94	70	6.6	13	1	33	73	4	0
AZ	704B	8	4	10	1	3	8	15.7	42	2	73	28	45	0
BA	712B	8	8	0	9	32	41	7.1	22	3	61	23	35	0
BB	725B	7	10	18	8	19	5	4.4	0	5	26	8	8	40
BC	736B	8	12	8	16	41	48	4.5	5	3	31	22	8	0
BD	745B	4	5	4	11	26	25	4.3	22	2	27	23	5	30
BE	762B	11	12	6	15	37	28	6.8	4	1	32	54	3	0
BF	770B	5	5	3	0	30	12	4.8	18	2	46	43	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10480	(FLIGHT 15)												
BG 783D	16	17	22	25	82	53	7.9	2	2	30	32	6	0
BH 800D	3	10	3	8	14	9	1.7	13	2	63	32	37	0
BI 807D	9	4	12	2	5	46	14.8	44	2	43	31	19	0
BJ 814B	9	13	14	22	58	38	4.5	19	3	33	19	13	0
BK 815B	8	13	14	22	58	56	3.6	17	3	33	16	14	0
BL 826B	14	30	8	64	153	138	3.6	7	3	36	21	16	0
BM 836D	24	23	47	50	111	67	10.1	4	3	34	17	14	0
BN 840D	7	6	47	50	106	17	6.8	38	4	43	12	25	0
BO 846D	16	18	5	2	39	40	7.2	19	3	54	19	32	0
BP 879B	1	2	1	2	2	4	-	-	-	-	-	-	0
BQ 889D	9	15	12	4	13	22	4.0	9	2	36	27	13	0
BR 893D	8	4	9	0	31	17	13.1	41	3	50	20	27	0
BS 948B	11	7	12	5	4	25	12.3	18	3	62	13	40	0
BT 953D	5	13	12	10	4	33	2.5	0	4	57	10	36	0
BU 970B	2	3	8	7	8	3	1.9	40	4	104	10	81	0
BV 1004D	1	4	2	5	16	29	0.8	20	1	108	432	34	0
BW 1024M	0	2	0	1	2	3	-	-	-	-	-	-	180
BX 1034M	0	2	0	2	2	4	-	-	-	-	-	-	240
BY 1041S	2	3	1	2	7	9	2.7	48	1	145	894	16	0
BZ 1081D	9	9	11	2	2	28	7.1	23	1	96	82	56	0
CA 1088D	1	2	1	2	2	4	-	-	-	-	-	-	0
CB 1093D	17	14	4	19	47	30	11.0	10	2	54	32	27	0
CC 1117S?	1	2	1	0	2	4	-	-	-	-	-	-	0
LINE 10490	(FLIGHT 15)												
A 1747H	4	6	11	13	22	39	2.9	29	4	56	11	37	0
B 1713H	5	11	9	18	45	41	2.5	6	1	30	60	2	0
C 1702H	6	11	6	12	20	83	2.9	14	1	36	79	6	0
D 1697H	3	12	2	25	36	113	1.4	4	2	45	51	16	0
E 1683H	4	1	6	11	19	65	17.1	68	1	28	125	0	0
F 1666H	1	2	1	2	2	4	-	-	-	-	-	-	0
G 1654H	8	14	11	19	28	112	3.6	17	1	33	73	5	0
H 1643B?	6	9	4	11	21	49	3.2	24	1	32	113	2	0
I 1641D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1636D	7	8	10	16	38	33	5.2	30	1	35	104	4	0
K 1631D	8	12	10	16	34	41	4.0	16	1	34	90	4	0
L 1626B	4	8	5	11	32	21	2.3	15	1	28	72	0	0
M 1615D	32	19	45	43	93	36	19.7	5	3	24	20	4	0
N 1611B?	16	18	45	27	93	39	7.5	6	2	37	24	15	0
O 1602B	9	6	6	7	18	18	9.7	25	2	48	51	18	0
P 1593B	14	10	24	19	42	18	11.4	16	2	42	36	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	1050 HZ		892 HZ		7323 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	
LINE 10490	(FLIGHT		15)											
Q 1589B	5	6	24	19	42	6	3.7	22	3	53	17	31	0	
R 1579B	20	31	41	55	136	116	5.7	4	3	32	17	13	0	
S 1574D	8	6	41	55	136	47	8.7	28	2	51	43	22	0	
T 1572D	8	9	5	16	42	47	5.5	20	1	33	54	6	0	
U 1568D	5	7	5	16	24	28	4.1	24	1	38	64	8	0	
V 1562B?	7	4	1	8	21	18	11.2	41	1	43	57	14	0	
W 1556D	1	2	1	2	2	4	-	-	-	-	-	-	0	
X 1552D	5	10	8	6	12	14	2.5	12	2	54	43	25	0	
Y 1545D	1	2	1	2	2	4	-	-	-	-	-	-	0	
Z 1535B	4	34	25	71	157	182	0.7	0	1	27	53	3	0	
AA 1532B	11	31	25	71	157	182	2.7	0	2	32	44	8	0	
AB 1525D	1	2	1	2	2	4	-	-	-	-	-	-	0	
AC 1522D	1	2	1	2	2	4	-	-	-	-	-	-	0	
AD 1517B?	4	11	1	16	29	75	1.7	11	1	40	116	7	0	
AE 1508D	12	11	20	20	48	28	7.4	21	1	57	60	25	0	
AF 1505D	8	17	33	2	9	32	3.2	0	2	44	23	20	0	
AG 1500B	12	10	33	24	56	13	9.0	18	3	46	18	24	0	
AH 1498B	12	7	23	23	55	7	16.1	28	2	55	26	30	0	
AI 1490D	8	9	4	11	22	20	6.4	26	2	54	34	28	0	
AJ 1486D	4	13	15	10	25	20	1.8	5	2	47	26	23	0	
AK 1475B	5	4	22	1	63	23	7.8	36	3	45	19	23	0	
AL 1470D	16	18	27	30	72	53	6.8	0	3	31	13	11	0	
AM 1469B	18	18	27	30	72	53	8.4	0	4	30	12	11	0	
AN 1462B	9	7	12	15	34	23	8.7	18	3	47	16	25	0	
AO 1460B	12	9	12	15	34	28	10.2	11	3	38	16	17	120	
AP 1458B	8	11	12	15	34	28	4.7	1	3	35	15	14	0	
AQ 1453D	14	8	13	14	21	6	16.9	5	2	44	26	18	0	
AR 1445B	7	8	3	17	66	37	5.4	15	1	39	91	5	0	
AS 1436M	0	0	0	0	11	20	1.1	25	1	54	821	0	1340	
AT 1432M	1	2	1	2	2	4	-	-	-	-	-	-	0	
AU 1430D	5	8	1	13	19	11	3.5	12	1	55	91	18	0	
AV 1415H	1	2	0	2	2	4	-	-	-	-	-	-	0	
AW 1401B?	3	4	9	10	23	10	3.8	17	1	46	112	6	0	
AX 1390B?	1	2	1	1	2	1	-	-	-	-	-	-	0	
AY 1382B?	8	13	10	2	3	22	4.0	0	2	39	29	13	0	
AZ 1380H	11	11	10	2	3	22	7.3	0	4	30	12	9	0	
BA 1361B	12	21	24	41	87	109	4.3	8	1	46	121	11	0	
BB 1355D	1	2	1	2	2	4	-	-	-	-	-	-	0	
BC 1342D	10	17	9	14	9	79	3.9	2	1	40	73	8	0	
BD 1339D	10	13	9	11	9	79	5.0	0	1	37	57	6	0	
BE 1320D	12	4	6	6	15	3	28.1	14	2	32	32	6	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10490	(FLIGHT	15)											
BF 1316D	4	5	6	4	14	16	3.9	16	2	31	27	7	0
BG 1306D	6	4	10	12	26	4	11.0	34	3	46	20	22	0
BH 1303D	11	7	10	9	26	6	11.9	22	3	46	20	23	0
BI 1294D	6	14	3	7	15	26	2.3	0	2	55	36	27	0
BJ 1290D	6	10	13	7	15	26	3.4	3	2	50	31	23	0
BK 1253B	0	3	4	6	12	18	0.5	0	2	97	45	60	0
BL 1230B	2	6	6	7	17	0	1.7	2	1	82	89	41	0
BM 1201D	5	3	5	5	11	11	9.3	35	2	112	60	71	0
BN 1186D	11	8	21	18	7	17	9.3	0	2	39	53	6	0
BO 1184B	6	7	21	18	7	4	4.8	2	3	40	18	16	0
BP 1180D	10	9	14	14	7	5	7.6	0	2	54	31	25	0
LINE 10500	(FLIGHT	15)											
A 1911H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1931H	2	5	4	9	16	46	1.9	24	4	70	12	48	9
C 1959H	1	2	1	1	2	4	-	-	-	-	-	-	0
D 1972H	2	5	1	8	11	2	1.4	27	1	38	77	9	0
E 1983D	3	4	4	4	18	69	0.3	0	1	19	101	3	0
F 1985H	3	10	5	15	21	69	1.5	3	1	33	68	4	0
G 2002H	4	4	5	13	11	67	4.4	44	2	41	47	14	0
H 2025H	3	9	3	10	15	79	1.4	13	1	28	126	0	0
I 2037H	1	8	1	13	17	78	0.6	5	1	22	168	0	0
J 2053H	1	1	1	2	2	4	-	-	-	-	-	-	0
K 2068H	5	11	8	23	52	82	2.4	10	1	25	108	0	0
L 2077D	1	5	1	14	38	43	0.9	16	1	27	267	0	0
M 2083D	11	5	34	39	103	36	20.9	35	1	26	83	0	0
N 2088D	18	33	20	60	155	147	4.4	3	2	21	34	0	0
O 2091D	13	24	33	52	155	147	4.1	6	2	26	35	3	0
P 2098D	11	14	12	17	45	52	5.5	15	1	30	51	4	0
Q 2104D	19	11	42	14	35	17	17.2	21	3	39	17	19	0
R 2117B	1	2	1	2	2	1	-	-	-	-	-	-	0
S 2124D	2	3	11	3	6	25	2.6	40	1	63	65	29	4
T 2132D	22	25	2	45	110	83	7.9	0	2	31	29	7	0
U 2134B	22	25	2	45	110	91	7.9	4	3	32	17	13	0
V 2136B	1	4	4	11	29	14	0.6	3	3	33	16	14	0
W 2138B	1	1	1	2	2	4	-	-	-	-	-	-	0
X 2143D	2	15	8	2	8	23	0.5	0	2	38	29	15	0
Y 2147D	6	14	20	2	8	77	2.4	12	1	38	63	10	0
Z 2154D	6	5	5	14	39	41	6.7	41	1	44	101	11	0
AA 2159D	3	6	3	9	23	24	2.2	29	1	48	75	17	0
AB 2163D	8	10	7	13	35	13	5.3	24	1	44	54	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10500	(FLIGHT	15)											
AC 2166B?	7	6	13	15	4	14	7.9	34	2	41	50	14	0
AD 2176D	5	9	4	3	23	50	2.6	20	1	66	73	32	0
AE 2186B	7	10	7	18	37	60	4.3	23	1	43	76	13	0
AF 2198D	5	10	5	12	39	24	2.7	11	1	56	140	16	0
AG 2205D	15	22	10	30	100	30	5.2	4	1	29	63	1	0
AH 2207D	1	2	1	2	2	3	-	-	-	-	-	-	0
AI 2212D	3	5	9	20	41	53	2.7	25	2	45	37	18	0
AJ 2228D	8	8	12	5	12	27	7.2	33	1	59	69	26	0
AK 2236B	14	19	18	24	55	53	5.5	7	2	33	23	11	0
AL 2239B	8	15	18	24	55	57	3.4	9	2	39	28	16	0
AM 2244D	7	9	12	12	30	41	5.2	27	2	50	38	23	0
AN 2249B	6	9	25	17	44	47	3.5	21	2	40	25	17	0
AO 2254B	9	7	3	4	39	19	9.0	34	3	45	19	24	0
AP 2272D	12	18	12	26	40	69	4.6	11	2	33	46	8	0
AQ 2282D	28	21	27	43	95	130	13.8	8	3	32	14	13	0
AR 2287D	23	47	27	43	96	155	4.4	0	3	24	12	8	0
AS 2288D	23	9	10	23	58	155	31.3	25	3	26	12	10	0
AT 2290D	18	9	8	14	40	37	21.3	26	3	28	12	11	0
AU 2292D	15	13	43	34	68	37	9.3	20	4	26	11	9	0
AV 2295D	20	19	43	34	89	60	9.4	16	4	26	9	11	0
AW 2297D	20	19	9	34	89	65	9.4	18	4	27	9	12	0
AX 2300D	30	23	9	38	48	65	13.7	16	4	26	9	11	100
AY 2304D	56	42	22	80	191	120	17.3	5	4	26	10	10	0
AZ 2309D	8	6	52	56	127	20	9.4	39	3	46	17	25	0
BA 2316B	41	57	79	116	274	210	7.9	2	3	21	12	6	0
BB 2321B	33	38	59	114	256	157	8.8	6	4	30	10	14	0
BC 2327D	5	3	5	5	12	24	10.1	54	3	41	19	20	0
BD 2335B	12	11	25	28	70	35	8.8	17	1	41	87	8	0
BE 2347B	17	9	29	19	53	26	17.6	17	2	54	28	28	0
BF 2357B	11	16	19	30	69	34	4.8	6	3	40	21	18	0
BG 2362D	4	11	20	4	9	34	1.9	5	2	40	24	17	0
BH 2363D	8	4	20	4	9	31	15.7	33	2	37	23	14	0
BI 2373D	23	28	47	54	124	76	7.2	0	3	25	15	6	0
BJ 2378B	8	9	27	21	46	25	6.2	19	4	24	10	7	12
BK 2380B	31	23	25	23	104	34	14.5	4	4	23	10	7	0
BL 2389B?	6	12	23	23	65	51	3.1	17	1	43	68	13	40
BM 2397D	15	20	15	36	97	111	5.7	13	1	34	55	8	0
BN 2400B	18	28	4	2	43	111	5.4	6	2	31	36	7	0
BO 2405D	1	13	8	28	94	71	0.4	0	3	25	19	6	50
BP 2409B	1	2	1	2	2	4	-	-	-	-	-	-	0
BQ 2417B	21	17	40	29	82	34	11.7	11	3	26	12	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10500	(FLIGHT	15)											
BR 2421D	23	24	40	29	82	34	8.4	6	4	29	10	12	0
BS 2430B	7	7	28	29	73	33	6.5	23	3	29	13	10	0
BT 2437B	1	4	29	23	20	48	1.3	23	3	22	12	5	0
BU 2440B	19	1	24	23	61	48	49.0	27	3	26	16	8	0
BV 2448D	18	26	11	53	134	109	5.6	7	3	45	21	23	0
BW 2459D	8	12	13	30	64	97	4.5	23	1	50	70	20	0
EX 2465B	0	11	8	43	12	42	0.4	5	2	49	29	26	0
BY 2480H	4	6	1	3	2	11	0.1	0	1	29	120	10	0
BZ 2488B?	1	2	1	1	2	4	-	-	-	-	-	-	0
CA 2497D	1	2	0	1	2	4	-	-	-	-	-	-	0
CB 2520D	1	1	29	1	4	5	0.6	0	1	17	30	5	0
CC 2524D	7	15	6	18	26	25	2.8	3	2	31	24	9	5
CD 2540D	1	2	1	2	2	4	-	-	-	-	-	-	0
CE 2547B	11	7	27	7	19	11	12.1	31	4	70	10	50	0
CF 2565H	10	18	16	11	50	27	3.8	0	2	35	34	9	0
CG 2620B?	1	2	1	2	2	4	-	-	-	-	-	-	0
CH 2660D	0	2	1	2	2	4	-	-	-	-	-	-	0
CI 2694S	0	1	0	1	1	4	-	-	-	-	-	-	0
CJ 2713B?	5	1	4	1	11	10	41.1	49	1	91	93	48	0
CK 2721B	6	3	5	3	11	7	13.4	23	2	78	38	45	0
CL 2731D	12	12	10	12	15	39	8.0	12	1	50	109	13	0
CM 2739B?	7	5	16	15	33	18	10.5	37	2	67	31	39	0
LINE 10510	(FLIGHT	15)											
A 3412D	20	17	45	32	77	91	10.9	16	6	54	4	39	0
B 3409B	17	15	29	33	79	3	9.7	18	7	54	4	40	0
C 3398H	2	5	6	9	13	52	1.4	21	4	58	11	38	0
D 3391B?	6	9	4	14	21	84	3.7	23	3	58	17	36	0
E 3381B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3367D	24	3	5	5	10	52	166.4	27	8	54	3	42	0
G 3362D	7	2	6	1	7	2	28.4	53	10	51	2	40	0
H 3358D	15	13	23	29	41	96	9.2	20	7	41	3	28	0
I 3350H	8	15	44	30	63	154	3.1	16	2	38	47	13	0
J 3338B	6	11	18	19	51	46	3.1	9	2	37	31	12	0
K 3334B	10	2	3	4	18	101	53.6	40	2	37	35	12	0
L 3318H	1	2	0	2	2	4	-	-	-	-	-	-	0
M 3295H	3	8	2	13	24	83	1.6	13	1	19	179	0	0
N 3281H	9	11	16	24	58	148	5.0	22	2	37	46	11	0
O 3272B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 3268H	2	6	6	13	25	60	1.6	16	1	33	81	3	0
Q 3266D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10510	(FLIGHT	15)											
R 3258B	11	22	7	24	92	85	3.3	4	2	31	42	6	0
S 3256B	12	22	19	24	92	85	3.6	6	2	35	39	10	0
T 3255B	7	6	19	30	92	85	8.5	37	2	41	35	16	0
U 3252D	2	4	5	9	20	7	2.4	40	2	44	41	17	0
V 3248D	4	7	15	12	28	26	2.4	22	2	39	47	13	0
W 3243B	12	19	28	32	79	92	4.4	10	2	30	31	8	0
X 3240D	28	28	39	45	110	103	9.6	5	2	30	24	9	0
Y 3238B	12	28	39	45	110	103	3.1	0	2	37	23	14	0
Z 3228B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 3219B	22	20	20	35	106	75	10.4	11	2	35	23	13	0
AB 3217D	22	17	19	35	106	57	12.8	14	2	46	33	21	9
AC 3215D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 3202B	8	15	19	27	62	49	3.3	6	2	40	36	15	0
AE 3194D	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 3182D	11	11	17	19	42	57	6.9	20	1	50	109	14	0
AG 3176D	2	4	1	6	10	17	1.5	30	1	92	170	44	0
AH 3168B	14	19	6	19	55	72	5.6	11	2	40	51	13	0
AI 3164D	9	17	6	33	44	79	3.4	9	2	41	46	14	0
AJ 3155D	9	13	13	22	54	55	4.5	10	2	41	26	17	0
AK 3151D	13	13	18	21	47	25	8.3	14	2	43	34	17	0
AL 3147B	14	14	17	26	64	42	7.6	15	3	45	22	22	0
AM 3144B	7	7	17	26	64	42	6.2	31	3	62	22	37	0
AN 3139D	5	4	6	4	8	13	8.2	44	2	66	40	36	0
AO 3130B	7	9	7	18	44	34	4.9	20	2	44	38	18	0
AP 3127B	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 3122D	6	5	9	35	87	56	6.9	30	2	47	31	21	0
AR 3119D	19	18	9	35	87	56	9.1	2	3	27	17	7	0
AS 3117D	21	17	14	35	87	56	11.5	3	3	32	13	13	0
AT 3115D	7	6	14	6	20	29	7.7	23	4	30	10	12	0
AU 3112B	7	5	26	33	12	15	8.4	27	5	33	7	17	30
AV 3110D	15	16	33	33	76	33	7.4	7	5	32	7	16	70
AW 3108D	27	22	60	29	84	33	12.8	3	5	34	7	18	0
AX 3106D	14	11	60	29	84	33	11.0	16	5	28	6	13	0
AY 3105D	35	26	60	29	84	33	14.8	1	5	29	5	14	0
AZ 3100D	5	6	37	10	25	44	4.9	19	4	42	12	21	0
BA 3096B	6	6	5	8	16	10	6.6	16	3	37	15	15	0
BB 3093D	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 3090D	1	2	1	2	2	4	-	-	-	-	-	-	0
BD 3087D	11	7	9	3	9	10	12.0	16	3	44	20	20	30
BE 3082D	17	13	19	21	45	33	11.4	14	2	49	27	24	0
BF 3074B	11	11	28	36	90	64	7.3	5	2	38	40	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10510	(FLIGHT 15)												
BG 3070B	20	13	28	38	99	87	13.7	11	3	34	22	12	0
BH 3065D	1	2	1	2	2	4	-	-	-	-	-	-	0
BI 3063H	7	20	8	11	26	16	2.1	0	3	27	15	7	0
BJ 3048B	2	5	7	9	20	19	1.9	0	2	43	44	12	0
BK 3027H	4	5	11	12	2	1	4.8	8	3	50	24	23	0
BL 3014B?	5	7	10	14	31	9	3.9	2	1	85	94	41	0
BM 3009B	6	3	12	2	33	9	1.0	0	1	34	62	16	0
BN 3003B	1	2	1	2	2	4	-	-	-	-	-	-	0
BO 2992B	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 2978D	10	12	20	22	24	25	5.9	0	2	65	36	33	0
BQ 2973H	2	2	1	1	1	3	4.5	37	3	33	19	8	0
BR 2945H	0	4	3	7	12	9	0.4	0	2	56	54	18	0
BS 2840B?	4	4	2	5	12	3	5.6	28	1	80	435	8	0
BT 2828B?	1	2	1	0	1	2	-	-	-	-	-	-	0
BU 2812H	11	6	10	2	6	11	13.1	0	4	41	13	19	0
LINE 10520	(FLIGHT 15)												
A 3877H	3	5	8	12	19	45	2.1	29	4	64	11	43	0
B 3904H	2	9	6	14	18	85	0.9	8	4	59	8	41	0
C 3914B?	16	7	30	12	9	10	20.2	28	7	53	3	40	0
D 3927H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3954H	6	12	12	21	57	46	3.0	8	2	39	24	16	0
F 3983B?	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3993B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 4001D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 4013S	2	7	3	9	18	50	1.1	9	1	40	81	9	0
J 4018D	5	4	6	4	30	15	7.9	48	2	49	46	21	0
K 4021S	2	10	5	20	30	140	0.7	1	1	35	60	8	0
L 4028S	4	12	8	25	50	139	1.6	9	1	31	72	4	0
M 4034B?	4	3	0	20	50	14	5.9	52	1	43	100	11	0
N 4038S	1	8	15	21	51	62	0.6	2	2	38	45	12	0
O 4046D	4	5	4	5	12	12	4.4	36	1	47	57	17	0
P 4050D	4	7	6	14	31	57	2.8	24	1	44	62	14	0
Q 4055D	7	10	15	30	21	14	4.3	23	2	38	48	12	0
R 4058D	12	22	9	28	72	8	4.0	7	2	36	38	12	0
S 4062D	12	4	16	28	72	67	29.1	36	2	29	32	7	0
T 4067D	6	10	16	24	7	39	3.3	16	2	44	32	19	0
U 4071D	19	14	10	16	10	22	12.4	14	2	42	32	17	0
V 4090D	13	4	26	25	55	34	33.8	38	2	48	35	22	0
W 4094D	15	20	4	27	67	50	5.9	12	2	45	24	22	0
X 4097D	15	14	4	27	67	40	9.3	18	2	42	30	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE	10520	(FLIGHT		15)										
Y	4104B	9	10	6	17	45	52	6.4	20	1	39	54	11	0
Z	4115B	5	9	6	12	32	44	3.0	25	2	47	45	20	0
AA	4119D	1	2	1	2	2	4	-	-	-	-	-	-	4
AB	4123B	6	10	9	16	43	42	3.5	24	1	46	52	18	0
AC	4126B	6	1	9	16	43	42	40.1	63	2	46	37	20	0
AD	4135D	7	6	1	6	16	11	7.5	43	1	59	66	27	0
AE	4141D	1	2	0	2	2	2	-	-	-	-	-	-	0
AF	4150D	5	5	0	11	7	10	5.9	36	1	61	654	0	0
AG	4161D	5	4	5	2	16	14	6.3	30	1	63	523	0	0
AH	4166D	1	2	1	2	2	4	-	-	-	-	-	-	0
AI	4173D	3	3	1	8	16	16	4.9	19	1	68	63	30	0
AJ	4186D	13	15	8	6	14	13	6.0	0	2	42	31	15	0
AK	4190D	5	6	8	9	22	20	4.8	30	2	47	35	21	0
AL	4198B?	6	4	11	15	36	21	8.9	41	2	50	30	24	0
AM	4210D	18	26	28	47	119	124	5.6	5	1	27	49	2	0
AN	4214D	13	26	28	47	115	64	3.7	4	2	37	24	15	0
AO	4220D	1	2	1	2	2	4	-	-	-	-	-	-	0
AP	4227D	32	40	9	9	11	107	8.1	2	4	33	10	16	0
AQ	4230D	5	40	6	12	12	107	0.9	0	5	31	7	17	0
AR	4233D	21	54	43	67	46	40	3.6	0	5	31	5	17	0
AS	4236D	48	26	70	67	142	113	24.7	12	5	23	5	10	0
AT	4237D	13	40	70	67	141	112	2.6	0	6	23	4	12	100
AU	4240D	37	18	62	57	141	112	26.6	16	6	25	5	13	100
AV	4243D	51	37	44	68	160	112	17.2	8	5	30	6	16	0
AW	4247B	33	33	57	65	156	69	10.5	9	5	27	6	14	0
AX	4252D	10	7	57	13	156	30	10.4	33	5	37	7	21	0
AY	4258B	19	9	56	22	63	20	20.6	21	6	28	4	16	0
AZ	4261D	20	6	56	20	63	65	36.7	24	6	30	5	16	0
BA	4265B	7	12	34	22	47	72	3.3	17	4	34	11	17	0
BB	4269D	18	23	13	30	68	9	6.5	12	3	33	12	16	0
BC	4272D	21	46	90	95	224	11	4.0	0	4	32	9	16	0
BD	4274D	52	46	90	95	224	118	13.9	2	4	27	10	11	160
BE	4277D	0	18	82	91	216	118	0.4	0	4	36	10	19	0
BF	4281D	3	7	46	42	106	31	2.4	22	2	49	25	25	0
BG	4292B	11	18	36	45	103	90	4.1	7	3	32	14	14	0
BH	4294B	14	18	36	41	103	90	5.8	10	3	34	17	14	0
BI	4306D	20	21	39	45	115	35	8.3	0	3	28	12	9	20
BJ	4308D	7	26	5	45	115	48	1.7	0	3	25	13	7	10
BK	4311B	25	20	44	45	41	48	12.4	3	4	31	11	13	0
BL	4320D	8	13	16	32	81	102	4.1	14	2	33	50	7	0
BM	4323D	7	16	15	32	81	102	2.9	6	1	27	84	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10520	(FLIGHT	15)											
BN 4329B	2	6	2	12	26	26	1.1	12	1	40	127	6	0
BO 4342D	2	17	1	11	26	26	0.7	0	2	32	26	10	0
BP 4347B	7	1	22	35	78	11	49.0	49	3	28	20	7	0
BQ 4351B	8	11	22	35	78	52	4.2	15	4	34	12	15	0
BR 4359D	10	13	15	29	70	63	5.3	17	3	43	18	22	0
BS 4362D	11	17	17	29	70	63	4.4	13	3	37	15	18	0
BT 4366D	2	14	17	28	65	22	0.6	0	3	45	15	25	0
BU 4391B	7	7	10	1	35	50	5.9	28	1	65	78	30	0
BV 4398B	4	7	11	4	35	31	2.6	21	2	70	37	40	0
BW 4411B?	1	2	1	2	2	4	-	-	-	-	-	-	0
EX 4424B?	7	3	6	12	30	28	14.4	14	1	41	93	3	0
BY 4442H	6	7	13	1	5	12	4.8	14	3	48	24	23	0
BZ 4480B	8	10	12	8	46	25	4.6	9	2	63	48	31	0
CA 4486B	6	5	1	2	1	7	6.7	31	3	89	14	65	0
CB 4581S	0	2	1	2	2	4	-	-	-	-	-	-	40
CC 4588B?	1	2	1	0	1	4	-	-	-	-	-	-	0
CD 4606B?	0	2	1	2	1	4	-	-	-	-	-	-	0
CE 4613B?	3	5	4	2	6	4	2.4	23	1	115	96	69	0
LINE 10530	(FLIGHT	15)											
A 7586D	5	2	7	4	4	15	18.8	34	5	47	8	28	0
B 7581B	9	6	2	10	20	14	11.2	32	4	56	11	36	0
C 7558H	2	10	8	19	5	106	0.8	0	3	56	14	35	0
D 7529H	2	8	38	14	11	9	0.8	0	11	50	1	40	0
E 7507H	2	4	5	9	19	38	2.4	29	2	55	55	23	0
F 7497D	8	8	10	17	8	50	6.7	25	2	61	52	30	0
G 7490B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 7484D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 7476B?	1	4	7	7	13	41	0.8	13	1	46	64	15	4
J 7451B?	1	2	1	2	2	4	-	-	-	-	-	-	0
K 7447B	14	3	11	7	17	36	68.8	40	2	57	28	32	0
L 7437D	3	6	7	7	26	59	2.6	26	1	42	76	11	0
M 7425H	16	10	3	16	34	35	15.3	27	3	43	22	21	0
N 7410H	2	11	5	23	52	116	0.6	1	1	29	71	3	0
O 7405D	9	5	4	8	22	37	11.9	38	2	37	43	12	0
P 7403D	12	13	14	16	41	33	6.7	21	2	39	37	15	0
Q 7401D	12	7	14	16	41	33	12.7	33	2	43	33	18	0
R 7389D	7	8	13	15	39	19	5.1	31	2	42	31	18	0
S 7387D	2	5	11	15	39	22	1.8	30	2	45	24	22	0
T 7384D	41	27	60	58	127	46	18.0	8	3	29	14	11	0
U 7380D	9	8	60	58	127	10	7.4	27	2	43	27	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10530	(FLIGHT		15)										
V 7375B	6	12	16	23	54	50	3.1	14	2	35	38	11	0
W 7372D	15	18	21	23	54	48	6.7	14	2	39	28	16	0
X 7369D	3	3	8	7	15	18	4.5	54	3	40	17	20	0
Y 7367D	18	17	8	7	15	18	8.9	12	3	40	15	20	0
Z 7365D	14	15	8	29	61	41	7.2	14	3	44	20	22	0
AA 7359D	3	4	2	3	12	17	3.4	45	2	60	44	30	0
AB 7351D	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 7347D	2	7	5	8	23	19	1.6	14	2	56	35	28	0
AD 7344D	5	5	7	6	8	2	4.6	29	2	50	34	23	0
AE 7336D	6	8	8	13	10	4	3.8	22	2	66	49	35	0
AF 7315D	2	4	3	8	14	30	1.5	29	1	103	171	53	0
AG 7307D	9	18	3	10	25	71	3.2	8	1	47	65	16	0
AH 7297D	16	17	12	20	44	62	7.7	9	2	41	30	17	0
AI 7289D	19	26	19	44	107	117	6.0	6	2	35	27	13	0
AJ 7286D	11	16	17	44	47	65	4.8	12	2	38	31	14	0
AK 7281D	10	12	6	12	31	29	6.1	14	2	38	39	12	0
AL 7277D	32	18	65	35	88	46	20.3	7	3	36	20	15	0
AM 7275D	32	26	65	19	31	49	13.1	2	4	32	10	14	0
AN 7272D	29	14	65	22	64	6	24.8	8	4	32	8	16	0
AO 7265D	5	4	27	29	68	37	6.5	35	5	47	7	30	0
AP 7261D	13	18	32	41	91	46	5.3	1	5	37	7	21	0
AQ 7259D	18	18	32	41	91	46	8.3	4	5	30	8	13	11
AR 7257D	15	16	32	41	91	29	7.3	7	4	35	8	18	0
AS 7254D	9	7	20	14	34	29	8.9	26	5	34	6	18	9
AT 7251D	13	15	32	38	85	53	7.0	12	5	32	6	17	0
AU 7247D	3	21	32	38	85	15	0.6	0	4	27	11	10	0
AV 7242D	28	26	8	46	116	9	10.8	1	4	28	9	11	0
AW 7241D	21	20	8	43	116	9	8.9	4	4	31	10	14	200
AX 7236D	4	4	29	30	76	15	4.4	35	3	47	17	25	0
AY 7232B?	6	6	9	7	17	14	5.4	21	3	39	18	17	0
AZ 7223B?	5	11	3	13	36	52	2.5	8	2	39	28	15	0
BA 7216D	5	6	12	7	14	38	4.3	19	3	43	15	21	0
BB 7212D	16	4	36	22	59	38	46.3	12	4	38	9	19	0
BC 7209D	18	11	36	22	59	23	15.2	1	4	30	12	11	70
BD 7203B?	6	5	1	6	21	26	8.4	25	2	47	45	17	0
BE 7195D	6	4	3	6	17	19	11.3	30	2	44	35	17	30
BF 7188D	2	2	5	7	14	2	3.7	39	4	43	13	22	0
BG 7184D	11	8	8	10	3	46	10.9	14	3	45	17	22	0
BH 7182D	9	11	9	13	3	49	5.3	12	3	45	15	24	0
BI 7179D	8	14	9	19	35	49	3.5	6	3	45	20	22	0
BJ 7163D	7	13	7	21	47	56	3.3	3	1	69	69	33	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10530	(FLIGHT 15)												
BK 7148D	1	2	1	2	2	4	-	-	-	-	-	-	0
BL 7128D	4	6	7	15	53	38	3.0	24	2	37	27	13	0
BM 7126D	4	2	7	15	53	38	9.8	53	3	29	20	8	0
BN 7123D	15	6	7	15	53	9	27.9	23	3	35	17	14	0
BO 7108D	6	5	5	3	12	14	8.0	26	2	89	40	56	0
BP 7085B	6	6	14	12	11	4	5.3	16	2	72	30	42	0
BQ 7011S	1	2	1	2	2	4	-	-	-	-	-	-	0
BR 6999D	4	5	2	2	4	19	4.2	23	1	109	951	0	0
BS 6986B	2	6	6	7	16	24	1.4	8	1	90	71	51	0
LINE 10540	(FLIGHT 15)												
A 7691B	1	2	21	5	16	15	0.9	3	7	61	4	45	0
B 7697B	7	1	21	5	16	29	49.0	47	6	59	5	43	0
C 7728H	9	5	20	16	20	109	14.4	42	5	64	8	46	0
D 7741H	2	8	4	16	26	14	1.0	12	2	61	30	35	0
E 7754H	2	11	25	23	67	20	0.8	3	6	59	4	44	0
F 7799B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 7803B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 7808D	8	5	44	7	27	66	10.7	38	4	48	9	30	0
I 7811D	5	11	44	16	29	66	2.3	13	5	45	8	28	0
J 7814D	8	4	35	13	42	66	16.9	47	4	54	10	35	0
K 7821D	2	1	35	13	30	58	12.1	85	2	56	24	31	0
L 7833S	2	3	2	6	17	21	2.9	46	1	35	266	0	0
M 7842D	1	2	1	2	2	4	-	-	-	-	-	-	0
N 7846D	20	14	35	31	40	52	13.1	21	2	50	23	27	0
O 7853H	7	8	13	20	42	99	5.2	31	2	42	37	17	0
P 7861H	3	4	4	6	8	45	3.2	49	1	46	61	17	0
Q 7873H	17	4	21	22	31	16	47.8	30	3	43	14	24	0
R 7888D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 7896D	9	9	8	14	34	53	6.5	33	2	39	47	14	7
T 7900D	4	2	8	21	20	62	10.1	69	2	40	48	14	0
U 7902D	5	8	5	22	57	67	3.7	31	1	36	52	10	0
V 7907D	3	21	17	32	79	137	0.7	0	2	32	39	9	0
W 7909D	13	17	10	19	48	57	5.8	19	2	30	34	8	0
X 7915D	36	34	44	47	110	70	11.5	9	2	38	32	15	0
Y 7919B	6	9	44	47	110	12	3.6	25	2	53	36	27	0
Z 7923B	1	2	1	1	2	4	-	-	-	-	-	-	0
AA 7930D	7	14	17	19	65	53	2.8	16	2	47	36	22	0
AB 7936B	0	13	2	5	10	29	0.4	0	2	41	23	19	0
AC 7938D	14	3	2	5	10	29	76.1	36	3	43	19	22	0
AD 7941D	15	19	8	33	84	58	6.1	11	3	43	18	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10540	(FLIGHT 15)												
AE 7942D	16	18	8	33	84	59	7.0	12	2	40	23	18	0
AF 7951D	3	6	7	6	12	26	2.3	24	1	50	81	16	0
AG 7958D	6	7	12	16	53	16	4.4	24	2	50	53	20	0
AH 7963D	10	16	12	19	43	60	4.2	11	2	42	43	15	0
AI 7972S?	7	15	24	39	67	78	2.6	1	2	34	32	9	0
AJ 7983S?	0	2	1	2	2	4	-	-	-	-	-	-	0
AK 8006D	3	4	2	3	4	2	3.5	19	1	153	1025	0	0
AL 8016E	12	17	21	25	67	25	5.0	0	2	40	35	13	0
AM 8023D	15	13	8	26	68	24	9.3	12	2	31	30	8	0
AN 8030B?	8	9	5	15	37	58	5.2	24	1	34	55	7	0
AO 8038D	10	11	13	28	51	56	6.2	21	2	37	35	13	0
AP 8040D	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 8043D	4	10	13	28	62	42	1.9	13	2	44	26	21	0
AR 8049B?	11	16	22	31	73	80	4.9	18	3	41	17	21	0
AS 8055D	4	2	16	3	61	1	15.7	62	4	50	11	31	0
AT 8058B	13	6	31	25	61	37	19.3	32	5	46	8	29	40
AU 8062D	12	11	16	25	61	5	7.8	24	4	44	8	27	0
AV 8068D	44	25	67	87	209	148	22.2	13	4	28	10	13	0
AW 8072B	32	36	67	65	209	148	8.8	7	4	28	8	13	20
AX 8082D	42	56	65	107	258	220	8.2	2	4	24	9	9	0
AY 8085D	13	58	65	107	258	220	1.9	0	3	24	12	8	0
AZ 8087D	1	5	20	33	258	220	1.0	21	3	27	13	11	0
BA 8089D	1	12	6	8	28	39	0.4	0	3	27	13	10	0
BB 8092D	37	45	6	8	28	165	8.7	2	3	27	13	10	0
BC 8105B	28	34	58	68	162	120	7.8	5	3	29	13	12	0
BD 8114D	8	15	11	29	83	77	3.2	10	1	29	53	4	0
BE 8116B	7	13	11	29	83	77	3.2	12	2	31	37	7	0
BF 8121D	5	4	8	25	46	41	8.6	41	2	37	30	14	0
BG 8127D	3	7	1	8	20	31	1.9	17	2	40	23	18	0
BH 8133B	15	5	69	8	19	67	32.1	28	3	39	16	19	0
BI 8135B	21	31	80	72	171	69	5.7	0	5	37	7	20	100
BJ 8138D	45	31	80	72	171	69	18.2	0	4	21	9	6	80
BK 8147D	9	8	8	12	32	111	7.3	31	1	44	54	16	120
BL 8151D	4	14	4	14	42	111	1.4	4	1	35	69	7	0
BM 8161H	14	11	5	25	62	56	10.1	26	2	36	29	14	0
BN 8169B?	4	10	8	1	3	14	2.1	16	2	42	27	19	0
BO 8182D	17	13	20	33	75	70	11.2	19	3	40	18	20	0
BP 8184D	10	15	20	33	75	70	4.5	14	3	40	14	20	0
BQ 8187D	4	5	8	26	61	70	4.3	41	3	44	16	24	0
BR 8192D	16	15	13	29	57	45	9.1	18	3	40	18	20	0
BS 8195D	7	10	13	29	57	45	3.9	22	3	35	17	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10540	(FLIGHT	15)											
BT 8201D	15	24	12	35	87	94	5.0	10	2	47	27	24	0
BU 8212D	11	17	11	26	60	82	4.4	12	1	47	95	14	0
BV 8217D	2	14	11	21	1	2	0.5	0	2	48	45	21	0
BW 8221D	6	13	1	29	33	60	2.7	9	1	53	61	22	0
BX 8242B?	9	11	11	23	53	32	5.3	4	2	45	29	19	0
BY 8255B	11	16	8	30	25	44	4.9	0	3	39	22	15	0
BZ 8257D	12	15	8	6	25	44	5.7	4	3	36	21	13	0
CA 8261D	7	7	5	4	25	44	5.9	21	3	56	17	33	0
CB 8265D	12	7	5	13	38	8	13.2	25	3	63	16	39	0
CC 8274B?	5	6	2	2	2	19	4.1	36	2	96	56	60	0
LINE 10541	(FLIGHT	21)											
A 1383B	12	8	24	14	23	23	13.2	26	3	75	20	50	0
B 1327S	1	2	1	2	2	4	-	-	-	-	-	-	0
C 1283B	7	9	9	11	21	6	4.3	11	2	70	41	38	0
D 1281B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1276B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1265B	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10550	(FLIGHT	21)											
A 312H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 334H	11	1	12	25	55	16	49.0	49	3	49	20	27	0
C 359H	3	4	4	7	14	23	3.4	40	2	71	31	42	0
D 371H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 387H	1	2	1	2	1	4	-	-	-	-	-	-	0
F 406D	6	11	3	10	25	53	2.8	19	1	62	83	27	0
G 431E	24	15	65	22	99	48	17.2	2	5	38	7	21	0
H 434B?	21	22	64	22	99	117	8.4	7	5	43	6	27	0
I 443D	13	8	11	5	7	41	13.3	29	4	62	9	43	4
J 454H	3	8	10	2	20	72	1.7	18	5	66	7	48	0
K 473H	7	7	3	9	27	31	6.5	30	1	41	153	4	0
L 484D	8	4	18	8	24	30	14.2	30	2	61	55	28	0
M 488D	10	4	18	7	12	24	27.1	32	3	68	22	42	0
N 490D	8	5	9	5	12	55	9.9	31	2	62	29	35	0
O 503H	9	9	13	13	30	4	7.3	27	2	50	35	24	0
P 512H	5	4	1	7	16	3	7.2	53	1	43	62	15	0
Q 518B?	3	9	14	26	62	100	1.8	19	1	43	62	15	0
R 521B?	12	16	27	27	63	100	5.5	21	2	35	43	11	4
S 523B?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 527B	15	17	27	40	84	69	6.7	15	2	40	26	18	8
U 539B?	7	12	3	6	18	7	3.6	19	1	37	73	8	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE	10550	(FLIGHT 21)												
V	542D	5	7	4	6	18	12	3.8	33	1	33	65	6	0
W	546D	1	2	1	2	2	4	-	-	-	-	-	-	0
X	550D	1	2	1	2	2	4	-	-	-	-	-	-	0
Y	552D	7	9	10	9	32	41	5.2	30	1	38	59	11	0
Z	556D	1	2	1	2	2	4	-	-	-	-	-	-	0
AA	559D	6	10	5	15	48	24	3.0	27	1	45	76	15	0
AB	571D	10	11	10	17	41	26	6.4	23	1	43	58	14	0
AC	574D	5	9	10	17	41	26	3.0	22	1	49	60	19	0
AD	582B	5	14	7	21	50	51	1.9	5	1	41	77	10	0
AE	585B	9	14	7	21	50	71	4.2	11	1	40	61	11	0
AF	594D	13	10	18	23	55	43	10.5	23	2	58	39	30	0
AG	601B	7	5	2	1	17	52	8.0	36	2	42	27	19	0
AH	614D	6	7	8	18	46	50	4.9	28	2	50	49	21	0
AI	626B	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ	632B?	6	7	2	9	31	34	4.8	33	1	48	73	17	0
AK	642D	1	2	1	1	2	4	-	-	-	-	-	-	0
AL	651H	1	2	1	2	2	4	-	-	-	-	-	-	0
AM	661B?	9	7	2	8	42	10	9.3	17	2	34	48	6	0
AN	670H	5	19	10	4	28	77	1.7	0	2	31	43	7	8
AO	678D	10	6	11	13	44	20	13.1	36	2	46	49	19	0
AP	684D	4	8	7	8	13	61	2.3	22	1	34	124	2	0
AQ	690D	4	7	4	4	9	48	0.2	0	1	16	140	0	0
AR	696D	4	7	2	10	25	23	3.2	25	1	43	79	11	0
AS	708B	14	12	2	3	31	32	9.8	16	2	41	28	17	0
AT	712D	1	11	3	13	31	35	0.5	0	2	43	25	19	0
AU	731B	10	5	3	11	10	10	16.4	36	2	46	26	23	0
AV	736D	6	4	3	2	4	8	8.5	41	3	50	20	27	0
AW	741D	1	2	1	2	2	4	-	-	-	-	-	-	0
AX	749B	24	25	11	21	53	82	9.1	9	3	33	14	15	0
AY	757D	23	18	20	26	62	25	11.7	12	3	27	16	9	0
AZ	760D	23	19	20	29	79	43	11.4	11	3	27	14	9	5
BA	763D	11	12	21	21	46	18	6.4	18	3	28	12	11	0
BB	765D	5	16	21	21	46	18	1.7	1	3	30	14	12	0
BC	775D	15	16	5	45	117	35	7.1	10	3	33	17	13	0
BD	778D	1	2	1	2	2	4	-	-	-	-	-	-	90
BE	803B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BF	828D	8	2	11	24	36	16	31.9	48	2	36	32	12	0
BG	834B?	8	14	2	21	50	30	3.4	14	2	55	32	29	90
BH	839D	20	21	16	13	75	81	8.4	7	2	42	37	16	0
BI	842D	9	9	15	23	70	77	6.5	16	2	51	32	24	0
BJ	855B	8	16	1	1	7	14	3.3	7	1	35	80	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10550	(FLIGHT	21)											
BK 866B	14	18	10	35	96	91	6.1	18	2	35	45	10	40
BL 880D	5	7	3	23	51	22	3.5	26	2	36	21	15	0
BM 884B	12	10	3	2	61	44	9.2	27	3	48	13	29	0
BN 886B	13	8	16	26	61	44	12.9	33	3	48	15	28	0
BO 894D	4	3	12	13	3	3	7.2	51	2	61	25	36	0
BP 902D	11	18	9	7	23	57	4.3	15	2	44	26	21	0
BQ 907D	3	5	2	18	50	10	3.3	45	3	48	21	26	0
BR 914B	3	24	23	50	130	135	0.8	1	2	36	20	17	0
BS 927D	10	17	3	3	80	98	4.1	16	2	60	31	34	0
BT 936D	4	9	5	13	34	57	2.4	20	1	75	59	41	0
BU 944D	3	9	4	2	30	32	1.5	14	1	47	69	17	0
BV 949D	1	2	1	2	2	4	-	-	-	-	-	-	0
BW 953D	1	2	1	2	2	4	-	-	-	-	-	-	0
BX 999B	10	10	5	11	17	34	6.9	3	2	35	33	8	0
BY 1005B	1	1	1	2	2	3	-	-	-	-	-	-	0
BZ 1061B	1	2	1	2	2	4	-	-	-	-	-	-	0
CA 1124B	1	2	1	2	2	4	-	-	-	-	-	-	0
CB 1215H	4	6	0	6	5	32	3.1	24	1	84	78	46	0
LINE 10560	(FLIGHT	16)											
A 1802H	7	1	10	4	8	25	49.0	59	4	51	9	33	0
B 1758S	1	5	3	7	12	53	0.8	16	1	50	97	16	0
C 1730S	3	9	3	15	26	82	1.4	9	1	48	113	13	0
D 1711D	4	2	15	11	19	56	11.3	47	6	47	5	31	0
E 1708B?	10	3	10	10	23	23	33.1	33	5	42	5	26	0
F 1699H	1	2	1	2	2	4	-	-	-	-	-	-	0
G 1694B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 1689B?	11	5	22	11	26	20	17.7	35	8	53	3	40	0
I 1684B?	6	4	7	9	5	98	10.5	44	7	56	4	42	0
J 1661S	5	13	5	14	18	140	2.3	17	1	28	191	0	4
K 1656D	12	6	17	3	7	131	17.6	33	2	62	44	33	0
L 1650D	9	9	17	11	23	45	6.7	26	1	55	61	24	0
M 1645D	4	3	1	6	17	21	7.2	51	1	64	93	27	0
N 1642D	7	8	12	9	41	19	5.5	25	1	53	110	16	0
O 1637B	6	9	16	3	17	65	4.3	23	2	46	40	19	0
P 1635B	9	6	17	3	17	59	11.3	34	2	42	38	16	0
Q 1632B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 1628D	8	5	2	2	15	1	9.5	36	2	49	54	19	0
S 1614D	16	13	32	45	116	66	10.7	23	2	34	42	10	0
T 1609D	8	9	18	4	10	65	5.5	29	2	33	48	8	0
U 1601D	6	14	1	12	49	122	2.6	13	1	36	77	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10560	(FLIGHT	16)											
V 1599D	8	20	7	29	87	92	2.7	7	1	31	81	3	0
W 1597D	7	14	7	29	87	92	2.9	14	1	34	67	6	0
X 1591D	12	14	31	25	76	47	6.2	14	1	30	60	3	0
Y 1589D	50	19	31	55	152	99	41.8	5	2	36	24	14	0
Z 1587D	50	39	45	55	152	99	16.0	1	2	27	22	7	0
AA 1576H	5	6	3	9	24	12	4.4	34	1	50	61	19	0
AB 1570D	9	5	23	27	74	7	13.4	37	2	60	47	30	0
AC 1565B	19	17	25	33	84	58	9.6	16	2	42	22	20	0
AD 1562B	7	10	25	33	84	58	4.3	23	3	53	23	30	0
AE 1552B	9	13	17	23	67	53	4.3	12	2	41	36	15	0
AF 1549B	10	15	17	23	67	55	4.4	9	2	34	44	8	0
AG 1544D	2	5	3	18	55	57	1.7	26	1	48	69	17	0
AH 1537D	9	8	7	9	26	11	7.4	24	2	35	46	9	0
AI 1532D	11	14	13	17	48	38	5.7	15	2	35	35	11	0
AJ 1529D	7	10	13	14	33	20	4.5	20	2	40	46	13	0
AK 1526B	6	8	10	17	50	25	4.8	26	2	41	38	15	0
AL 1522B	10	13	8	12	36	29	4.8	13	2	39	38	13	0
AM 1518D	4	5	6	7	19	22	4.0	34	2	47	45	19	0
AN 1515D	7	8	11	7	19	22	4.9	24	2	45	53	16	0
AO 1511D	20	23	29	40	104	65	7.3	8	2	34	30	11	0
AP 1509D	26	35	29	40	104	75	7.1	6	2	41	29	18	0
AQ 1507D	15	22	23	38	98	98	5.1	13	2	41	35	17	0
AR 1503D	6	10	19	33	89	34	3.5	24	1	56	61	25	0
AS 1494D	19	32	35	56	152	131	4.9	3	2	32	41	8	0
AT 1492D	35	47	35	56	152	114	7.7	0	3	28	20	8	0
AU 1490D	37	41	35	56	152	111	9.9	1	3	27	20	7	0
AV 1485D	29	27	23	28	80	79	10.8	8	2	34	32	11	0
AW 1482D	15	21	23	28	80	65	5.7	11	3	43	18	23	0
AX 1479B	27	27	19	31	68	73	9.6	9	2	35	22	15	0
AY 1471B	10	7	19	6	18	33	10.6	32	2	40	25	18	0
AZ 1467B	18	12	33	4	52	30	15.0	18	3	35	16	16	0
BA 1463B	22	13	1	4	13	24	16.7	16	4	34	12	16	0
BB 1462B	22	16	1	4	13	30	13.5	13	4	31	11	14	0
BC 1459D	16	17	21	11	36	49	7.6	12	3	35	14	16	0
BD 1457B	5	11	7	10	27	22	2.2	9	3	30	18	11	0
BE 1450B	20	21	25	32	86	46	8.2	6	3	30	18	10	0
BF 1446D	10	8	25	32	86	18	9.2	25	2	45	31	20	0
BG 1441H	11	15	9	23	64	70	5.1	11	2	31	29	8	0
BH 1423H	9	12	3	20	60	52	4.6	14	2	31	29	8	0
BI 1419B?	3	8	11	19	59	55	1.7	12	2	35	30	12	0
BJ 1408B?	9	13	11	23	59	62	4.4	16	2	39	37	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 10560	(FLIGHT 16)													
BK 1396D	10	12	10	6	32	19	5.5	11	2	47	50	18		0
BL 1392D	8	12	6	8	35	69	4.1	15	1	42	99	9		0
BM 1390D	1	2	1	2	2	4	-	-	-	-	-	-		0
BN 1375H	10	5	15	7	22	10	15.8	30	3	49	17	27		0
BO 1361B	9	8	2	10	30	37	7.1	14	2	55	48	24		0
BP 1354B	8	7	8	13	31	26	7.0	18	2	53	44	22		0
BQ 1325D	3	7	1	1	5	21	2.3	31	1	129	194	74		0
BR 1313D	12	19	18	37	55	74	4.5	12	2	75	55	43		0
BS 1307D	16	27	3	64	153	236	4.7	9	1	26	53	2		0
BT 1303D	1	4	32	44	114	169	0.9	13	2	39	26	16		0
BU 1299D	21	38	32	44	114	54	4.8	0	2	24	24	3		0
BV 1296D	21	7	28	6	13	84	40.2	20	2	37	31	13		0
BW 1268S	1	2	1	1	1	4	-	-	-	-	-	-		0
BX 1209B	6	9	12	12	33	8	4.2	28	2	122	51	85		0
BY 1142B?	1	2	1	2	2	4	-	-	-	-	-	-		0
BZ 1129B?	4	4	2	2	11	15	0.8	0	1	59	163	35		0
LINE 10570	(FLIGHT 16)													
A 1967H	6	9	13	12	34	58	3.4	14	4	42	8	24		0
B 1990H	6	11	8	1	6	60	3.3	22	3	57	21	34		0
C 2010H	1	2	1	2	2	4	-	-	-	-	-	-		0
D 2027H	1	6	1	9	14	75	0.8	9	1	63	92	26		0
E 2041H	7	8	6	13	28	52	4.8	25	2	54	42	26		0
F 2079D	3	9	30	21	4	80	1.5	16	3	48	21	26		0
G 2084B	5	2	34	22	59	75	13.3	60	3	55	16	33		0
H 2088B	13	11	38	23	63	81	9.0	25	4	47	8	30		0
I 2091D	8	9	38	23	63	81	6.1	28	5	48	6	32		0
J 2094D	6	4	10	29	71	3	8.5	46	5	54	6	38		0
K 2102B	42	12	88	31	86	62	60.4	19	12	42	1	32		0
L 2104B	4	9	88	26	86	179	2.5	23	8	47	2	35	4	
M 2106B	4	9	86	26	50	179	2.3	21	4	43	8	26		0
N 2113B	33	10	66	26	88	117	50.7	23	3	61	15	40		0
O 2137B	8	5	5	7	9	121	11.6	45	4	63	11	43		0
P 2139B	15	10	5	16	24	121	12.6	29	3	54	18	32		0
Q 2155B	11	10	13	18	44	51	8.2	21	2	46	40	19		0
R 2168D	5	7	5	15	31	42	4.1	26	2	61	48	30		0
S 2178H	15	17	25	29	78	12	7.0	4	3	38	19	16		0
T 2193B	1	2	1	2	2	4	-	-	-	-	-	-		0
U 2197B	1	2	1	2	2	4	-	-	-	-	-	-		0
V 2207D	13	10	9	16	41	25	9.9	16	2	45	36	18		0
W 2210D	7	8	14	16	41	23	4.6	21	2	50	47	21		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10570	(FLIGHT	16)											
X 2225B	12	9	14	11	67	6	9.7	26	2	53	26	28	0
Y 2228B	14	13	24	24	67	49	8.5	15	3	47	18	26	0
Z 2241H	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 2256H	6	4	6	9	19	24	10.3	43	2	51	52	21	0
AB 2268D	8	8	3	8	32	7	6.4	27	2	49	44	21	0
AC 2269D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 2273D	11	13	17	8	34	32	5.8	11	2	38	32	13	0
AE 2275D	19	14	29	25	77	32	12.5	12	2	36	24	13	0
AF 2281D	9	8	29	24	66	8	7.1	27	1	36	69	8	0
AG 2288B?	18	19	26	36	102	36	8.1	14	2	33	30	11	0
AH 2289B?	19	19	26	36	102	36	8.8	13	2	36	28	13	0
AI 2298B	15	15	15	25	64	57	7.8	18	3	50	22	27	0
AJ 2299B	15	16	15	25	64	58	7.6	17	2	48	27	24	0
AK 2306D	14	13	11	17	45	36	8.1	17	2	61	34	34	9
AL 2309D	14	15	11	17	45	39	7.3	13	2	50	29	25	0
AM 2312D	11	7	6	5	9	14	12.6	26	2	52	29	26	0
AN 2328B	16	1	15	17	44	20	49.0	22	4	30	11	12	0
AO 2338B	17	4	8	12	31	51	50.9	21	3	38	15	17	70
AP 2346B	15	18	15	34	95	83	6.7	7	2	30	41	5	0
AQ 2347B	12	19	15	34	95	83	4.7	4	2	28	28	6	0
AR 2349B	10	17	15	34	95	83	4.0	4	2	32	32	8	0
AS 2367H	9	4	5	3	17	58	15.7	32	2	34	37	9	0
AT 2378B?	9	9	13	16	8	9	6.4	9	1	52	59	19	0
AU 2392D	8	10	6	11	28	10	5.0	4	1	43	96	6	130
AV 2399B	8	13	1	21	58	62	3.6	10	1	47	75	15	16
AW 2411H	3	16	9	35	90	18	1.0	0	4	35	8	18	30
AX 2417B?	16	13	20	25	64	36	10.0	10	3	30	16	10	0
AY 2426B	30	36	49	63	163	117	8.2	4	3	34	13	16	0
AZ 2434B?	11	11	5	13	28	32	7.5	22	2	61	37	33	0
BA 2445D	5	8	2	9	5	27	3.2	16	1	54	100	17	0
BB 2471B	21	28	12	25	78	65	6.5	0	2	34	31	10	0
BC 2473D	2	38	3	25	78	65	0.5	0	2	34	26	11	0
BD 2476B	11	15	3	24	65	65	5.2	13	2	35	27	13	0
BE 2483D	15	15	19	22	59	40	8.0	21	1	46	56	18	0
BF 2489D	16	19	14	11	40	60	6.9	11	1	39	91	7	0
BG 2493B	1	2	1	2	2	4	-	-	-	-	-	-	0
BH 2533H	3	3	6	4	10	4	1.0	0	1	89	120	65	0
BI 2550H	4	4	1	2	1	1	4.5	46	1	140	112	90	0
BJ 2580H	4	7	10	6	3	17	3.2	0	2	63	35	31	0
BK 2599H	1	2	1	2	2	4	-	-	-	-	-	-	0
BL 2612H	5	5	8	6	10	11	6.3	42	2	87	34	57	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 10570 (FLIGHT 16)													
EM 2634H	5	4	5	6	19	12	8.4	31	1	65	86	27	0
LINE 10580 (FLIGHT 16)													
A 3344H	7	3	41	14	31	16	21.6	48	4	38	8	22	0
B 3325H	11	5	20	9	28	19	22.8	37	4	52	10	33	0
C 3314B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3285H	1	2	1	2	1	4	-	-	-	-	-	-	0
E 3259B	4	12	21	12	63	64	2.0	3	3	35	16	15	0
F 3254B	18	27	39	50	131	94	5.4	0	4	29	12	11	0
G 3237H	5	2	1	2	5	65	0.1	0	1	25	19	15	0
H 3217H	2	4	10	8	13	50	1.4	25	2	53	33	26	0
I 3213D	5	3	15	3	2	50	9.9	54	2	61	26	36	0
J 3206D	27	9	24	20	49	48	38.7	17	4	49	11	30	0
K 3203D	4	13	24	20	51	48	1.4	2	4	53	11	33	0
L 3192B?	4	5	1	7	16	41	4.1	37	1	61	123	22	0
M 3182B?	3	7	0	7	14	35	2.0	18	1	46	121	10	0
N 3173H	16	13	12	25	55	53	10.2	17	3	45	21	23	0
O 3154H	10	10	19	15	37	36	7.5	25	2	49	24	25	0
P 3136B	19	4	7	4	10	49	61.3	33	2	41	25	19	0
Q 3130D	8	17	17	24	55	127	2.7	11	1	33	65	6	0
R 3122D	4	6	7	14	36	63	3.4	32	1	45	57	17	0
S 3118D	4	5	4	8	23	63	3.4	39	1	37	56	10	0
T 3116D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 3112B	10	13	2	25	64	71	5.2	17	2	35	32	11	0
V 3108D	8	10	20	22	61	29	4.8	18	2	36	32	12	0
W 3092D	15	11	20	13	41	45	11.2	20	2	41	33	16	0
X 3089B?	2	4	4	13	41	45	1.8	28	3	47	18	25	0
Y 3087B?	1	4	4	8	31	9	1.0	17	3	40	19	19	0
Z 3084H	0	2	1	2	2	4	-	-	-	-	-	-	0
AA 3064H	4	3	3	9	17	46	6.6	49	1	52	66	20	0
AB 3046B?	1	2	1	2	2	1	-	-	-	-	-	-	0
AC 3040B?	5	2	4	10	43	33	13.4	52	2	39	51	11	0
AD 3035D	10	8	13	5	17	23	9.2	22	2	43	36	16	0
AE 3031B	14	30	31	41	121	90	3.7	0	2	33	22	11	0
AF 3028B	29	30	31	41	121	90	9.6	2	2	29	23	8	0
AG 3023B	17	17	6	18	48	21	7.9	10	2	51	27	26	0
AH 3019B	16	12	10	16	39	29	11.6	16	3	51	23	28	0
AI 3013D	13	10	5	14	32	27	9.7	19	2	59	33	31	0
AJ 3011D	16	14	13	17	41	37	9.9	16	2	52	28	27	6
AK 3009D	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 3005B	8	14	24	17	69	17	3.5	15	2	49	26	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10580	(FLIGHT	16)											
AM 3002B	18	16	28	28	76	51	10.1	18	3	42	16	22	0
AN 2999D	18	16	28	28	76	51	10.1	16	3	42	13	23	0
AO 2993D	17	22	26	42	117	59	6.6	8	3	31	15	12	0
AP 2991D	20	27	26	41	117	70	6.2	4	3	30	14	12	0
AQ 2988D	4	4	25	41	16	13	6.4	47	3	36	18	16	0
AR 2984D	7	7	8	17	46	79	5.3	26	3	29	19	9	0
AS 2982B	20	22	8	34	95	47	7.7	1	3	31	16	11	0
AT 2964H	13	22	14	40	116	26	4.3	7	2	32	45	7	0
AU 2950D	6	16	11	19	57	70	2.5	1	2	43	52	14	0
AV 2942B?	12	15	11	27	69	55	5.4	7	2	38	44	11	0
AW 2940B?	12	14	11	27	69	47	6.5	9	2	36	45	9	0
AX 2933H	7	7	6	15	46	33	6.6	22	1	36	53	7	0
AY 2928B?	1	2	1	1	2	2	-	-	-	-	-	-	0
AZ 2920B?	14	13	18	21	52	38	8.3	6	2	34	27	10	0
BA 2917D	5	6	18	6	17	26	4.5	18	2	48	47	18	0
BB 2907H	5	4	5	5	15	11	6.6	25	2	48	32	20	0
BC 2895B	7	9	5	13	34	44	5.0	17	2	57	54	26	0
BD 2887B?	4	6	7	10	28	26	3.2	18	2	58	54	26	0
BE 2875H	2	7	2	8	24	23	0.9	0	1	61	105	21	0
BF 2862B	11	17	4	21	50	50	4.8	11	2	66	53	34	0
BG 2859H	15	27	35	21	50	50	4.3	0	3	39	22	17	0
BH 2840B	8	22	9	19	68	130	2.5	0	1	30	100	0	0
BI 2833H	0	2	1	2	2	4	-	-	-	-	-	-	0
BJ 2800H	13	13	13	19	50	9	7.8	12	3	53	22	29	0
BK 2783H	10	9	8	6	17	21	8.1	17	3	62	20	37	0
BL 2771H	1	2	1	2	2	4	-	-	-	-	-	-	0
BM 2718H	3	6	5	1	18	10	2.5	12	1	60	150	15	0
LINE 10590	(FLIGHT	16)											
A 3525H	33	28	11	2	31	119	12.6	0	6	31	4	17	0
B 3553H	11	5	30	10	41	9	20.9	32	5	53	6	36	0
C 3579H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3596H	6	7	7	13	20	108	5.3	26	2	63	26	37	0
E 3612H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3626H	3	3	4	9	23	36	4.2	32	6	35	5	19	0
G 3651H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3671H	15	5	9	6	19	29	32.9	29	4	62	9	42	0
I 3688H	5	12	7	16	33	104	2.4	12	1	42	76	11	0
J 3700B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 3707D	12	12	8	12	31	29	7.4	8	1	51	62	19	0
L 3724B	10	8	17	11	20	54	8.2	29	2	41	45	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10590	(FLIGHT	16)											
M 3731D	7	10	7	14	27	66	4.2	24	2	42	46	15	0
N 3743H	8	3	8	7	1	38	21.9	43	2	44	39	18	0
O 3760B?	8	6	6	8	16	52	8.0	32	2	38	50	11	0
P 3767D	7	12	15	21	64	49	3.5	9	1	30	59	2	0
Q 3770D	6	16	15	28	86	66	2.5	2	2	32	36	7	0
R 3773B	13	22	25	16	43	73	4.3	6	2	29	33	7	0
S 3776B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 3778B	6	16	28	16	43	10	2.4	0	2	35	23	13	0
U 3780D	22	9	38	39	77	37	28.6	10	2	23	22	2	0
V 3785B?	8	6	36	7	80	5	8.9	23	2	37	52	8	0
W 3792B?	2	2	1	2	15	27	4.1	61	1	48	68	17	0
X 3795D	6	7	9	8	15	42	5.2	30	1	44	62	14	0
Y 3806H	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 3811D	5	10	4	23	17	32	2.5	13	2	52	33	25	0
AA 3815D	14	15	4	21	61	42	7.1	14	2	49	41	21	0
AB 3831H	5	9	4	13	32	11	2.8	25	1	45	128	10	0
AC 3843B?	4	6	4	4	14	14	3.0	23	1	53	79	19	0
AD 3846B?	4	2	4	5	23	13	13.7	54	1	53	57	20	0
AE 3852D	5	13	5	17	34	69	2.1	0	1	31	76	1	0
AF 3860D	13	11	7	21	49	53	9.2	14	2	48	50	18	0
AG 3870B	21	29	23	44	116	108	6.4	0	2	33	27	10	0
AH 3876D	9	10	15	17	41	27	5.4	18	2	39	36	14	0
AI 3879D	4	5	14	13	39	18	4.3	32	2	46	45	18	0
AJ 3882D	11	10	14	14	32	27	8.4	17	2	38	42	11	0
AK 3893D	19	14	18	10	101	34	12.2	13	3	39	17	18	0
AL 3896D	30	21	18	37	101	29	15.3	8	3	33	13	14	0
AM 3899D	30	22	39	37	94	58	14.4	6	3	25	13	8	0
AN 3908D	7	9	12	16	44	30	4.4	19	3	29	17	10	0
AO 3910B	20	23	12	41	125	84	7.6	6	3	35	17	15	0
AP 3912B	21	25	3	41	125	84	7.4	6	3	31	21	10	0
AQ 3921B	5	8	2	8	22	25	3.4	20	1	35	60	6	0
AR 3928D	5	9	9	35	104	98	3.3	17	2	36	48	9	0
AS 3931B	10	22	16	37	109	98	3.2	0	2	28	42	3	0
AT 3953B	10	16	9	23	66	56	4.4	0	1	30	54	2	0
AU 3964B	6	9	8	13	41	40	4.3	16	1	39	99	5	0
AV 3973B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 4000B	12	15	14	29	78	69	5.7	13	2	45	37	19	0
AX 4002B	16	20	14	29	78	69	6.7	10	2	44	41	17	0
AY 4012H	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 4038B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BA 4048H	8	7	16	20	45	51	7.2	29	2	49	34	23	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10590	(FLIGHT	16)											
BB 4057H	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 4073H	1	1	1	2	2	1	-	-	-	-	-	-	0
BD 4144B?	1	5	1	3	6	18	0.6	0	1	118	211	60	0
BE 4214H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10600	(FLIGHT	13)											
A 2215H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2253H	8	4	22	9	24	29	14.4	44	5	64	6	47	0
C 2289H	10	7	11	10	10	11	9.9	33	4	49	9	31	0
D 2302H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 2329H	19	12	42	25	47	7	15.0	15	6	43	5	28	0
F 2349H	24	17	54	33	79	33	13.7	1	7	26	3	14	0
G 2359H	22	13	54	22	18	22	17.2	17	7	42	4	28	0
H 2383H	8	8	22	13	31	60	6.5	25	4	54	12	34	0
I 2406D	14	5	26	7	18	53	32.8	27	4	60	13	38	0
J 2420H	10	8	16	14	24	57	8.9	27	2	46	45	18	0
K 2449H	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2468D	8	10	9	14	35	21	4.6	9	2	54	57	22	0
M 2476D	10	16	21	27	54	31	4.1	5	2	43	47	14	0
N 2482H	14	13	21	27	54	31	8.4	17	2	36	28	13	0
O 2503H	9	17	13	34	65	124	3.3	12	2	31	45	7	0
P 2524D	10	13	28	56	136	177	5.6	17	1	30	58	3	0
Q 2530B	20	28	28	56	136	177	6.0	8	2	25	37	3	30
R 2538B	8	7	8	12	27	33	8.4	30	2	39	48	12	0
S 2548B?	5	8	6	14	28	51	3.2	23	2	40	43	14	0
T 2554D	15	9	20	15	37	8	15.7	24	2	46	34	20	0
U 2566B	6	6	6	10	25	21	6.5	37	1	48	70	17	0
V 2586B	21	19	29	35	45	54	9.7	16	3	42	20	20	0
W 2592D	22	8	29	35	45	177	36.1	26	2	47	23	24	0
X 2596D	9	28	48	60	154	180	2.4	3	2	48	24	25	0
Y 2600D	21	29	48	60	154	180	6.5	14	2	36	30	14	0
Z 2613B?	6	11	18	24	19	178	3.5	26	1	5	385	0	0
AA 2614M	1	2	1	2	2	4	-	-	-	-	-	-	320
AB 2616B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 2619B	10	15	12	24	63	119	4.4	22	1	35	130	4	0
AD 2645B	9	13	19	22	52	34	4.7	13	2	49	26	24	0
AE 2650B	7	10	19	22	47	34	4.9	8	2	50	52	19	0
AF 2669D	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 2671D	21	29	36	47	109	125	6.5	4	1	35	61	7	0
AH 2688B	31	33	38	46	110	81	9.6	0	3	36	15	16	0
AI 2697D	13	20	30	11	33	44	4.6	15	2	44	39	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10600	(FLIGHT 13)												
AJ 2705D	18	25	21	38	104	59	6.0	12	2	39	36	15	0
AK 2708D	18	30	21	38	104	59	5.0	10	2	35	27	13	0
AL 2722D	38	26	65	51	133	102	17.2	13	4	31	10	15	0
AM 2725D	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 2730B	27	18	11	31	69	92	15.8	16	3	28	11	11	0
AO 2737B	28	30	21	49	112	121	9.0	8	4	24	11	8	0
AP 2740B	28	27	21	49	116	121	10.2	9	4	25	11	9	0
AQ 2743B	20	18	21	49	116	0	10.0	15	3	30	12	13	0
AR 2750B	12	21	23	13	41	54	4.1	9	3	31	15	12	0
AS 2755B	19	10	9	13	41	54	21.0	22	3	32	18	12	0
AT 2761B	5	5	39	5	103	74	5.9	35	3	32	18	12	0
AU 2765B	17	4	26	33	56	82	50.9	25	3	39	21	17	0
AV 2773D	8	13	7	17	47	49	3.9	8	2	38	42	11	0
AW 2787D	7	13	23	47	116	107	3.1	10	1	41	60	12	0
AX 2791D	16	34	23	52	134	107	3.9	0	2	30	41	6	0
AY 2795D	17	34	23	52	134	153	4.1	1	2	31	31	9	0
AZ 2799D	14	27	23	52	134	153	4.0	2	2	31	37	7	0
BA 2831H	2	4	2	8	18	38	1.7	22	1	43	139	4	0
BB 2847B	11	13	15	22	61	48	5.5	3	2	38	53	8	70
BC 2850B	4	11	15	22	61	61	2.0	3	1	41	96	7	0
BD 2878B	5	5	4	8	35	31	6.4	36	1	26	258	0	0
BE 2895D	4	9	5	18	34	55	2.4	10	1	34	109	1	0
BF 2910B	5	7	13	15	37	36	3.5	27	2	54	48	25	0
BG 2918B	5	8	12	15	37	38	3.2	21	2	52	45	24	0
BH 2929D	5	9	10	18	44	27	3.1	13	2	50	39	22	0
BI 2935B	3	14	10	18	44	35	1.2	0	2	46	31	20	0
BJ 2944D	1	2	1	2	2	4	-	-	-	-	-	-	0
BK 2978D	4	5	8	6	19	9	4.2	24	1	94	78	53	0
BL 2998B	3	4	26	30	15	36	2.6	21	3	38	23	14	0
BM 3004B	12	14	26	30	15	36	6.4	5	2	45	34	18	0
BN 3010D	7	1	23	23	4	28	168.9	50	1	58	84	22	0
BO 3038H	4	3	1	1	3	3	7.5	41	2	154	48	112	0
BP 3162H	5	2	2	4	7	13	12.6	41	2	97	33	64	0
BQ 3193H	3	5	1	8	21	69	2.6	29	1	37	160	0	0
LINE 10610	(FLIGHT 13)												
A 3980H	1	1	1	2	1	4	-	-	-	-	-	-	0
B 3961H	20	31	149	109	255	83	5.3	0	6	22	4	10	13
C 3940H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3909H	7	12	16	16	28	38	3.4	18	4	57	12	37	0
E 3899H	1	2	1	1	1	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10610	(FLIGHT		13)										
F 3872H	5	3	12	16	25	46	9.4	48	4	47	9	29	0
G 3856H	8	11	17	24	50	72	4.2	20	3	45	14	25	12
H 3841H	17	14	32	29	58	110	10.3	21	4	44	10	26	0
I 3827H	14	10	34	30	43	82	12.0	22	3	42	19	21	0
J 3815H	1	1	1	1	2	4	-	-	-	-	-	-	0
K 3769D	5	7	3	9	22	53	3.8	19	2	44	38	17	0
L 3760B	10	12	4	26	58	34	5.5	17	2	32	39	8	0
M 3757B	14	0	4	3	10	141	999.0	38	2	35	26	13	0
N 3752D	9	18	3	31	10	141	3.3	10	1	32	58	6	0
O 3742B?	6	9	7	15	34	49	3.9	22	2	39	51	12	0
P 3735D	11	15	13	26	65	22	5.3	12	2	31	38	7	0
Q 3731D	3	4	13	25	7	26	4.1	44	2	50	41	23	0
R 3720D	13	4	21	12	25	6	35.5	30	2	46	23	22	0
S 3707H	8	7	11	14	28	27	7.2	23	2	41	27	17	0
T 3701D	13	11	9	22	48	23	9.6	14	3	34	21	13	0
U 3696D	15	10	27	18	49	7	12.7	16	3	45	17	23	0
V 3693B	10	7	24	18	49	9	11.8	25	2	48	24	24	0
W 3686H	5	8	7	14	9	37	3.6	23	1	56	58	24	0
X 3655B	15	16	21	22	95	57	7.4	2	2	36	24	12	0
Y 3650D	13	19	22	28	64	58	5.1	4	3	41	14	21	0
Z 3648D	11	10	33	22	52	58	7.8	15	3	53	20	29	0
AA 3643B	22	22	36	44	100	58	9.0	1	3	28	12	10	0
AB 3638D	8	6	34	18	22	9	10.1	30	2	42	23	19	0
AC 3631H	18	12	40	28	64	31	13.7	9	4	32	8	16	14
AD 3623D	10	8	15	13	28	10	10.2	9	4	34	11	14	0
AE 3622D	10	6	15	13	28	10	12.6	14	3	36	13	15	0
AF 3618D	6	3	4	5	9	5	14.2	29	3	39	19	16	0
AG 3612H	10	7	17	15	35	16	10.2	12	3	35	17	14	0
AH 3602H	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 3575D	6	7	7	6	15	10	4.2	9	2	61	44	29	0
AJ 3572B	1	2	1	2	2	4	-	-	-	-	-	-	20
AK 3570B	8	11	7	5	15	13	4.4	0	2	34	31	7	0
AL 3566D	1	5	2	17	44	6	0.7	0	1	72	94	31	0
AM 3557D	0	2	1	2	2	4	-	-	-	-	-	-	0
AN 3549D	5	8	9	11	27	18	2.8	3	1	41	83	6	0
AO 3541D	15	9	2	16	39	29	13.4	5	2	34	30	8	0
AP 3535D	9	9	19	16	37	23	7.1	4	4	33	12	13	0
AQ 3532D	8	10	18	16	37	23	4.6	6	3	49	17	26	0
AR 3527D	11	9	3	11	24	28	9.2	10	2	42	25	17	0
AS 3504D	5	6	7	3	8	23	4.1	30	1	81	79	43	0
AT 3493B	3	4	1	18	50	17	2.6	32	2	48	29	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10610	(FLIGHT 13)												
AU 3488D	4	4	1	2	5	22	6.2	36	2	32	26	9	0
AV 3462H	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 3417H	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 3378H	1	2	1	1	2	1	-	-	-	-	-	-	0
AY 3351B?	3	5	3	6	20	17	2.8	0	1	39	238	0	0
LINE 10620	(FLIGHT 13)												
A 4084B	94	60	55	129	325	165	25.0	0	7	26	3	14	10
B 4086B	94	57	55	129	325	165	26.7	0	11	26	1	16	0
C 4091B	94	57	55	102	188	8	26.7	0	8	25	3	14	0
D 4121H	10	5	24	10	23	33	18.4	40	5	62	6	45	0
E 4164H	4	13	7	27	38	136	1.6	9	3	53	21	31	0
F 4198H	18	16	30	29	80	30	9.5	10	4	37	8	21	0
G 4224H	2	7	4	13	36	28	1.2	9	3	52	22	28	0
H 4241D	23	42	76	89	212	163	4.9	3	4	32	9	16	17
I 4243D	29	42	76	89	212	163	6.6	4	4	37	8	21	0
J 4251D	11	9	72	15	27	58	8.7	28	3	48	14	28	0
K 4269H	17	4	15	5	13	19	57.2	29	4	53	9	34	11
L 4278B?	15	5	23	10	19	89	30.6	32	2	46	24	23	0
M 4286H	3	10	16	7	8	89	1.4	8	1	37	73	8	0
N 4317S	1	2	1	2	2	4	-	-	-	-	-	-	0
O 4330D	9	6	13	5	17	5	9.4	24	1	78	84	39	0
P 4341D	19	6	6	7	16	75	38.1	20	2	41	41	14	0
Q 4345D	14	16	6	7	16	51	6.5	8	2	48	36	21	0
R 4351B?	10	12	8	24	41	30	6.0	15	2	50	34	23	0
S 4354D	7	9	8	24	41	30	4.7	20	2	56	44	27	0
T 4362D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 4369B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 4376D	17	22	20	17	51	58	5.9	12	2	37	36	13	0
W 4382B	7	17	20	13	55	52	2.5	10	1	39	62	12	0
X 4389B?	4	4	4	60	175	197	4.4	43	1	39	58	11	0
Y 4397B	12	34	20	60	175	197	2.9	1	2	31	39	8	0
Z 4401D	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 4404D	3	9	7	7	13	81	1.9	20	2	43	48	17	0
AB 4417D	8	9	13	17	36	83	5.0	24	2	35	32	12	0
AC 4425B?	6	2	21	19	33	83	36.2	53	3	51	22	27	0
AD 4428D	16	10	21	15	15	7	13.7	19	2	46	28	21	0
AE 4439B?	1	2	1	1	2	4	-	-	-	-	-	-	0
AF 4448B?	8	8	13	17	38	33	5.7	27	2	49	38	22	0
AG 4464B?	6	8	6	13	36	36	4.0	21	2	55	34	28	0
AH 4467B?	5	10	6	13	36	36	2.9	14	2	44	36	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10620	(FLIGHT	13)											
AI 4484D	14	9	4	13	33	19	13.0	28	2	59	33	33	0
AJ 4501S	4	8	3	14	11	54	2.2	21	1	57	124	20	0
AK 4543B	13	20	2	1	76	60	1.0	0	1	23	68	7	0
AL 4557D	21	15	22	26	59	45	13.8	12	3	37	19	16	0
AM 4563B	7	11	10	10	30	31	4.0	14	3	41	22	18	0
AN 4575D	13	14	27	26	62	35	6.8	15	3	41	17	20	0
AO 4579D	22	18	38	37	89	35	11.5	11	3	35	12	17	0
AP 4585D	20	17	38	43	112	83	10.4	13	3	36	13	18	0
AQ 4592D	20	15	14	25	62	47	11.8	10	3	29	15	10	0
AR 4597D	13	11	20	13	34	31	8.5	16	3	33	16	13	0
AS 4603D	12	14	15	11	30	49	6.3	15	3	34	17	14	0
AT 4610D	5	7	5	6	15	40	4.1	24	3	34	20	13	0
AU 4630D	8	17	10	23	61	53	2.7	4	2	43	45	16	0
AV 4635D	10	20	24	36	67	78	3.4	4	2	35	36	11	0
AW 4652D	5	4	2	3	9	22	6.1	35	1	55	72	21	0
AX 4665H	6	9	5	19	48	74	3.4	15	1	33	82	2	0
AY 4683B	7	8	10	7	16	22	5.6	2	2	43	34	14	0
AZ 4692B?	9	11	16	19	48	36	5.7	10	2	53	33	25	0
BA 4719D	1	6	2	7	20	38	0.7	0	1	43	236	0	0
BB 4726D	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 4798B	11	13	23	28	69	36	6.0	7	2	41	38	14	0
BD 4817B	4	6	21	23	55	36	3.5	19	2	39	26	15	0
BE 4831D	4	8	3	12	44	44	2.8	10	1	60	77	23	0
BF 4840D	1	2	1	2	2	4	-	-	-	-	-	-	0
BG 4844D	4	3	16	12	26	5	6.9	30	2	99	43	63	0
BH 4852H	7	6	16	12	26	14	8.4	16	3	57	17	32	0
BI 4871H	6	13	19	23	31	24	2.9	2	2	49	25	24	0
BJ 4899H	1	2	1	2	2	4	-	-	-	-	-	-	0
EK 4914H	10	8	13	9	34	7	8.6	8	3	63	17	38	0
EL 5008H	4	6	8	14	35	26	3.2	18	1	73	83	34	0
EM 5030H	1	2	1	2	2	4	-	-	-	-	-	-	0
EN 5047H	3	12	3	24	52	132	1.4	3	1	23	200	0	0
EO 5064H	3	9	4	17	23	134	1.8	19	1	30	177	0	0
LINE 10630	(FLIGHT	13)											
A 5855B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5849B	11	1	32	1	4	29	0.1	0	1	17	186	0	0
C 5845D	10	7	43	21	44	29	10.6	28	5	56	6	39	0
D 5843D	15	11	43	21	44	50	11.4	19	4	56	9	37	0
E 5836D	21	9	27	19	49	86	27.2	15	6	50	5	33	0
F 5805H	7	2	1	4	14	33	26.1	40	9	65	2	51	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10630	(FLIGHT 13)												
G 5788H	5	3	12	5	14	34	11.5	44	6	64	5	47	0
H 5770D	4	5	26	10	30	18	3.6	33	5	38	7	22	0
I 5767B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5754H	3	5	5	8	12	46	2.6	31	3	56	16	34	0
K 5732B	9	1	7	5	18	12	49.0	42	4	46	8	28	0
L 5713H	10	10	29	16	39	62	7.2	21	5	48	6	31	0
M 5708D	14	6	27	16	39	62	21.5	24	2	46	35	20	0
N 5699H	6	8	14	7	16	4	4.6	12	2	43	51	13	0
O 5683S	3	3	1	6	11	47	3.4	39	1	29	453	0	0
P 5665D	7	4	1	6	11	15	11.5	19	1	56	65	21	0
Q 5658B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 5654B	4	8	5	13	25	50	2.5	17	1	56	58	24	0
S 5642D	7	9	10	18	54	47	4.2	19	2	68	53	36	0
T 5640D	6	15	10	7	54	47	2.3	0	2	52	37	24	0
U 5635D	9	5	10	1	5	8	16.1	33	2	53	47	23	0
V 5627B?	1	2	1	2	2	4	-	-	-	-	-	-	0
W 5621D	7	23	30	61	150	168	2.1	0	1	29	52	4	0
X 5618D	14	18	30	61	150	14	6.3	15	2	33	31	10	0
Y 5616D	14	16	16	23	58	14	6.5	20	2	32	36	9	19
Z 5614D	4	12	15	12	49	14	1.9	14	2	33	45	9	0
AA 5609D	9	15	5	17	36	66	4.1	19	2	40	39	16	0
AB 5608B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 5604D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 5600D	6	5	10	11	31	29	7.6	44	2	43	34	19	0
AE 5595D	15	12	21	24	62	45	10.0	22	2	39	29	16	0
AF 5592D	1	8	21	24	53	37	0.7	4	2	41	22	20	0
AG 5587B	4	4	2	5	19	28	5.0	45	2	47	37	21	0
AH 5579B?	7	11	10	19	43	44	4.2	17	2	42	29	18	0
AI 5575D	4	7	7	9	18	20	3.0	20	2	46	37	20	0
AJ 5570B	7	10	9	16	14	32	4.3	6	2	40	34	13	0
AK 5567B	7	8	9	16	14	14	4.7	11	2	47	29	21	0
AL 5556D	11	9	3	12	27	15	9.5	8	2	50	38	21	0
AM 5544S?	2	8	5	13	31	67	1.3	7	1	50	103	15	0
AN 5523D	5	5	7	5	8	11	5.3	27	1	82	68	44	0
AO 5516B	11	8	10	16	3	4	11.4	15	3	52	18	28	0
AP 5510D	7	5	11	5	6	10	10.7	22	4	41	13	20	0
AQ 5509D	9	2	11	5	9	5	39.5	28	3	37	18	14	0
AR 5504B	9	13	15	25	62	49	4.4	5	3	34	19	13	0
AS 5502B	11	16	15	25	62	49	5.0	5	3	39	18	17	0
AT 5495H	3	2	2	7	20	18	7.0	40	3	41	15	19	0
AU 5489D	12	8	18	13	31	5	10.7	5	3	34	17	12	20

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG	
	1050 HZ		892 HZ		7323 HZ		DIKE		SHEET	EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH	RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M OHM-M	M	NT	
LINE 10630	(FLIGHT	13)											
AV 5486D	8	9	15	14	35	13	5.5	5	3	35	18	12	0
AW 5484D	7	7	15	14	35	11	5.4	8	3	40	23	16	0
AX 5481D	2	8	14	7	16	13	1.3	0	2	47	35	19	0
AY 5478D	3	10	15	21	46	28	1.7	0	2	39	31	13	0
AZ 5476B?	6	8	14	21	46	28	4.9	4	2	42	26	16	0
BA 5467B	6	9	16	20	48	30	4.3	0	1	31	67	0	0
BB 5455H	5	3	12	7	17	15	10.5	33	2	49	28	22	70
BC 5395D	1	2	1	2	2	4	-	-	-	-	-	-	0
BD 5391B	8	6	17	33	81	67	9.8	22	2	43	55	13	0
BE 5386B	9	17	17	33	81	85	3.2	0	2	37	42	9	0
BF 5382D	4	3	5	30	78	82	9.3	43	1	82	68	44	0
BG 5376D	1	2	1	2	2	4	-	-	-	-	-	-	0
BH 5363H	9	8	14	18	45	36	7.4	6	3	41	23	17	0
BI 5353B	6	9	22	18	35	26	3.6	0	3	42	21	18	0
BJ 5347B	7	1	22	12	38	22	198.0	23	1	55	69	18	0
BK 5332B?	1	2	1	0	2	4	-	-	-	-	-	-	0
BL 5323B	9	9	4	4	10	12	6.7	6	3	66	22	39	0
BM 5318B	3	3	12	2	26	18	1.0	0	1	39	57	21	0
BN 5284H	1	2	1	2	2	4	-	-	-	-	-	-	0
BO 5262E	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 5238H	2	5	3	9	30	27	1.7	6	1	34	151	0	0
BQ 5208H	1	1	1	2	1	4	-	-	-	-	-	-	0
LINE 10640	(FLIGHT	13)											
A 5951H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5982H	6	2	15	22	37	147	27.4	60	3	64	21	41	11
C 5992H	10	11	23	23	47	76	6.8	25	3	63	15	42	0
D 6012H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 6050H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 6079H	19	15	51	28	48	154	11.1	23	6	51	5	36	0
G 6106H	14	12	36	23	58	52	8.7	19	6	53	5	37	0
H 6127D	18	16	36	28	61	18	9.4	6	6	44	4	29	0
I 6140H	5	7	17	14	34	26	4.3	24	4	45	10	26	0
J 6154B	12	9	18	18	38	26	9.9	24	2	43	26	20	0
K 6166B?	14	22	21	41	104	105	5.0	4	2	37	49	10	0
L 6191H	1	6	2	10	24	46	0.9	5	1	35	563	0	0
M 6211D	5	7	2	11	26	41	4.1	20	1	58	102	20	0
N 6228B	6	6	11	9	27	3	6.7	19	2	50	40	20	0
O 6236D	1	2	1	2	2	4	-	-	-	-	-	-	0
P 6241B	12	16	7	32	69	96	5.4	13	2	38	35	14	0
Q 6258D	5	4	13	19	35	31	6.0	43	1	53	60	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT
LINE 10640	(FLIGHT	13)											
R 6265D	4	8	13	19	42	49	2.7	20	1	45	62	15	0
S 6274B	10	14	13	32	77	84	4.4	13	2	32	45	6	0
T 6278D	4	8	12	32	33	63	2.2	19	1	43	60	14	0
U 6284B	9	9	8	18	12	7	6.3	24	2	43	43	16	0
V 6286B	9	9	8	18	12	7	6.3	24	2	44	46	17	0
W 6294D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 6298B	6	6	5	15	31	34	5.2	29	2	47	32	21	0
Y 6308D	3	6	5	8	21	13	2.6	25	2	55	40	27	0
Z 6316D	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 6322D	4	4	10	10	23	26	5.6	47	1	55	93	20	0
AB 6324M	1	1	10	10	23	26	1.7	56	1	25	381	0	370
AC 6338B	11	14	13	22	54	49	5.6	17	2	47	39	21	0
AD 6357D	10	12	14	19	19	25	6.0	19	2	56	52	26	0
AE 6374B?	3	6	1	3	3	12	2.0	22	1	83	116	41	0
AF 6389B	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 6397B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 6405B	20	15	15	30	20	41	12.1	5	4	47	11	27	0
AI 6413D	20	12	32	23	48	26	16.6	18	3	40	16	20	0
AJ 6418D	8	5	32	18	40	79	10.7	38	2	48	27	24	0
AK 6425D	19	15	40	40	61	79	11.4	15	3	38	18	17	0
AL 6429D	26	28	40	43	77	75	8.9	4	3	40	15	20	0
AM 6439D	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 6457H	17	25	34	51	123	85	5.4	0	3	29	21	8	0
AO 6478B	8	8	11	22	59	40	6.5	14	2	46	47	17	0
AP 6500B	17	18	41	51	108	56	7.9	0	2	30	33	5	0
AQ 6518B	12	9	16	18	48	34	10.1	12	2	41	24	17	30
AR 6525D	8	9	2	12	34	44	5.7	11	2	55	24	29	0
AS 6530D	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 6535B?	9	11	24	18	3	34	5.0	0	2	53	34	24	0
AU 6540D	6	10	2	18	21	22	3.5	0	1	68	100	25	0
AV 6670E	9	12	25	32	18	44	4.9	3	1	44	106	7	0
AW 6676D	14	18	9	6	18	60	5.9	0	3	42	18	19	0
AX 6681D	11	10	9	18	18	60	8.6	14	2	39	34	13	0
AY 6686D	1	11	7	18	41	60	0.4	0	3	56	21	32	0
AZ 6689D	5	13	9	30	71	70	2.3	1	2	46	25	21	0
BA 6691D	8	14	9	30	71	70	3.2	1	2	35	24	12	0
BB 6699B	8	8	71	14	26	24	6.1	5	3	45	20	21	0
BC 6706D	34	32	76	67	159	85	11.0	0	4	34	9	17	0
BD 6708B	35	34	76	67	159	85	10.7	0	5	24	6	9	0
BE 6710B	1	2	1	2	2	4	-	-	-	-	-	-	0
BF 6724D	23	35	52	70	180	91	5.7	0	3	35	14	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10640	(FLIGHT	13)											
BG 6726D	26	18	52	70	180	90	14.2	9	3	34	22	13	0
BH 6730D	12	17	52	70	180	90	5.0	12	2	47	38	21	0
BI 6765B	14	9	26	20	1	61	13.1	2	4	47	10	27	0
BJ 6771D	8	20	24	28	44	61	2.8	0	2	52	26	27	0
BK 6809H	4	6	5	8	1	31	2.8	26	1	100	77	60	0
BL 6849H	5	5	5	8	38	38	4.4	20	1	44	111	7	7
BM 6889S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10650	(FLIGHT	16)											
A 5006H	3	3	4	6	20	3	5.1	53	1	77	119	35	0
B 4969H	25	5	5	29	91	48	84.2	21	6	48	4	33	10
C 4918H	4	6	14	11	27	20	3.7	32	5	57	7	39	0
D 4899H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 4876H	6	12	13	9	28	48	2.9	11	4	50	9	31	0
F 4865D	12	12	23	20	51	77	7.7	18	4	43	10	25	13
G 4861B	11	8	26	13	43	77	11.5	25	5	51	6	34	0
H 4859B	12	8	26	13	43	15	12.2	21	5	46	6	30	0
I 4846H	13	10	21	11	26	10	11.5	22	3	46	21	24	0
J 4840D	11	6	21	5	12	41	15.2	29	2	44	41	17	0
K 4834H	18	24	8	43	114	100	6.3	10	1	34	50	9	0
L 4821S?	4	11	1	13	19	115	1.8	15	1	22	413	0	0
M 4796B	11	9	14	7	14	44	9.2	26	2	53	45	25	0
N 4792D	3	4	14	6	11	36	3.2	37	2	57	44	28	0
O 4789D	4	7	2	6	17	29	3.0	26	1	51	55	22	0
P 4781D	6	8	12	15	37	43	3.6	23	2	50	52	21	0
Q 4772D	7	19	10	23	76	83	2.5	3	1	39	54	12	0
R 4764D	7	14	8	5	14	86	3.0	13	1	38	74	8	6
S 4761D	9	12	18	25	75	79	4.4	18	2	42	50	15	0
T 4758D	9	8	18	25	75	79	7.2	26	2	46	38	20	0
U 4750D	8	13	4	13	36	62	3.6	13	1	41	68	11	0
V 4733H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 4722D	9	18	12	21	61	58	3.2	8	1	44	58	15	0
X 4721B?	9	18	12	21	61	58	3.2	6	2	40	44	14	0
Y 4706H	6	7	1	2	2	14	4.6	27	2	50	43	21	0
Z 4692B	13	12	10	23	61	43	8.3	18	2	50	44	22	0
AA 4688B	10	15	10	23	61	19	4.3	13	2	47	50	18	0
AB 4678B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 4669B	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 4666D	14	30	27	32	90	50	3.5	1	2	48	23	25	0
AE 4661D	15	11	27	19	48	18	11.2	19	3	38	19	17	0
AF 4658D	16	15	27	29	70	48	8.7	15	2	34	24	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10650	(FLIGHT	16)											
AG 4652D?	10	8	24	17	44	26	8.7	29	2	40	25	18	0
AH 4649D	24	15	5	28	75	11	16.7	17	3	37	16	17	0
AI 4646D	32	21	33	44	111	62	17.4	11	3	29	13	11	0
AJ 4642B?	19	21	33	44	111	49	7.9	13	3	42	20	21	0
AK 4626B	14	16	14	23	63	44	6.3	13	2	35	41	10	0
AL 4623D	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 4619D	10	15	8	19	58	71	4.3	12	1	35	73	6	0
AN 4614D	4	5	8	20	60	31	3.2	29	2	55	50	25	0
AO 4608B	36	35	66	75	181	88	10.8	0	2	21	23	1	0
AP 4605B	1	2	1	2	2	1	-	-	-	-	-	-	0
AQ 4603D	11	7	66	61	136	20	13.2	31	3	51	21	28	0
AR 4597D	24	26	31	68	194	122	8.9	11	2	39	29	16	13
AS 4594D	13	28	31	68	194	124	3.6	1	2	25	25	5	50
AT 4591D	3	29	31	68	194	124	0.6	0	2	40	30	15	0
AU 4588D	19	3	8	9	16	24	88.8	26	2	37	35	12	0
AV 4584B	6	26	3	10	46	140	1.4	0	1	36	84	6	0
AW 4492S?	2	9	2	10	6	34	0.9	0	1	29	443	0	0
AX 4477S	1	2	1	2	2	4	-	-	-	-	-	-	0
AY 4463B	12	19	6	27	81	73	4.4	3	2	35	48	8	0
AZ 4454B	33	49	26	67	184	197	6.9	0	3	28	20	9	0
BA 4450D	4	5	6	9	32	13	3.4	29	3	31	17	11	0
BB 4448B	25	4	6	9	32	13	123.1	19	3	33	16	14	0
BC 4446D	27	28	38	44	118	26	9.6	3	3	34	19	13	0
BD 4443D	16	18	38	44	118	74	7.0	10	2	39	40	14	0
BE 4436D	8	7	2	2	8	15	6.9	34	2	77	48	45	0
BF 4416B	22	19	3	22	32	28	10.8	0	3	38	16	16	0
BG 4367D	14	9	26	27	54	12	13.5	19	2	64	24	38	0
BH 4365D	16	16	26	27	54	12	7.9	8	2	55	35	27	0
BI 4357H	5	8	1	7	16	55	3.0	26	1	29	334	0	0
BJ 4344H	2	6	3	7	18	47	1.7	18	1	25	351	0	0
BK 4323S	1	2	1	2	2	4	-	-	-	-	-	-	0
BL 4303H	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 10660	(FLIGHT	16)											
A 5145H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5191H	22	2	5	3	12	5	270.2	16	5	41	7	24	0
C 5244B	5	8	2	5	13	47	3.6	19	8	39	3	26	0
D 5247B	31	22	2	5	13	47	15.6	3	7	33	3	20	0
E 5250B	21	12	2	30	13	10	18.4	14	7	40	4	26	0
F 5260H	12	9	23	8	38	59	11.0	27	5	55	7	38	0
G 5271H	4	3	6	5	10	16	7.8	48	5	64	8	45	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10660	(FLIGHT 16)												
H 5287H	13	2	19	3	8	69	79.1	36	5	54	6	37	0
I 5296B	9	14	13	13	34	131	4.2	17	2	41	24	19	17
J 5312B	15	26	17	41	54	6	4.5	6	3	39	17	19	0
K 5315B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 5320D	5	7	3	8	21	26	4.3	32	2	39	27	17	0
M 5322D	3	4	2	8	21	26	3.5	46	2	44	22	22	0
N 5325D	15	22	12	0	68	98	1.0	0	1	21	73	6	0
O 5332B	3	16	10	15	55	94	0.9	0	1	47	77	16	0
P 5370B	9	6	3	12	3	50	11.0	30	2	57	46	27	0
Q 5372B	9	10	8	6	9	51	6.3	22	2	55	52	25	0
R 5381B	9	9	2	9	19	81	6.8	27	1	46	63	16	0
S 5382B	6	9	1	9	19	81	3.3	21	1	46	63	16	0
T 5384B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 5388B	10	8	15	23	59	103	8.5	26	2	57	39	29	0
V 5391B	13	16	15	23	59	105	6.2	15	2	43	34	18	0
W 5397D	8	7	11	4	18	21	8.1	33	1	50	67	19	0
X 5401D	4	6	5	10	26	15	3.8	34	1	54	63	23	0
Y 5404B	3	4	5	10	22	15	3.5	39	2	55	54	24	0
Z 5413B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 5417D	8	17	6	11	51	105	2.9	7	1	32	85	3	0
AB 5421B	7	10	4	13	37	45	3.8	23	1	46	75	15	0
AC 5423B	6	8	4	13	37	44	4.1	27	1	44	68	15	0
AD 5425B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 5428D	1	2	1	2	2	4	-	-	-	-	-	-	5
AF 5435D	3	19	5	25	72	70	0.9	0	2	43	34	18	0
AG 5437D	25	27	41	35	106	73	8.6	11	2	44	31	20	0
AH 5440D	21	22	41	35	106	64	8.3	13	2	46	29	23	0
AI 5444B	12	8	31	5	19	45	11.9	28	1	55	70	22	0
AJ 5446M	2	4	21	5	19	40	2.3	33	1	8	523	0	540
AK 5449D	13	7	16	6	17	15	15.5	24	1	53	80	19	0
AL 5453D	13	9	0	22	63	8	12.2	21	2	57	53	25	0
AM 5456D	11	14	17	34	97	81	5.6	10	2	39	46	12	0
AN 5459D	13	22	17	34	97	81	4.4	0	2	33	33	9	0
AO 5460D	10	21	17	34	97	81	3.2	0	2	32	34	8	0
AP 5466B?	6	7	14	22	60	47	4.9	25	2	61	47	30	0
AQ 5479B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 5494D	9	10	5	0	32	19	6.3	18	2	55	29	29	0
AS 5498B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 5508B	39	74	110	76	203	113	5.6	0	3	21	13	5	0
AU 5509B	39	76	110	76	203	113	5.6	0	4	21	9	6	0
AV 5510B	3	51	62	76	203	113	0.6	0	4	26	9	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10660	(FLIGHT	16)											
AW 5513B	22	29	61	9	30	89	6.6	8	3	28	14	11	0
AX 5515B	5	6	12	11	38	42	4.0	34	3	29	15	11	0
AY 5517B	7	9	8	14	27	42	5.3	29	3	27	14	10	0
AZ 5519D	31	16	17	14	27	42	22.5	16	3	35	13	17	0
BA 5522D	20	29	17	25	85	57	6.0	6	2	39	26	17	0
BB 5531D	4	6	3	6	20	1	3.2	30	2	53	41	25	0
BC 5538B	13	21	15	31	91	53	4.4	2	2	30	40	5	0
BD 5547D	14	14	18	24	66	34	7.5	9	1	37	61	7	0
BE 5553B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BF 5557B	1	2	1	2	2	4	-	-	-	-	-	-	0
BG 5559B	7	6	9	9	24	22	7.5	25	2	55	30	28	0
BH 5566B	4	8	19	9	48	20	2.4	6	2	56	35	27	0
BI 5571B	13	14	19	9	48	33	6.7	8	2	57	51	26	0
BJ 5579E	5	5	3	10	27	57	6.0	26	1	126	400	39	0
BK 5704B?	1	2	1	1	2	4	-	-	-	-	-	-	0
BL 5711B	5	5	4	5	7	8	6.8	25	1	104	76	61	0
BM 5718B	3	3	15	17	45	36	5.3	42	2	60	45	28	0
BN 5728B	14	20	19	38	110	106	5.3	3	2	33	24	11	0
BO 5730D	15	19	19	38	110	106	6.2	2	3	36	20	14	0
BP 5734D	14	16	23	32	95	88	6.5	0	2	45	25	20	0
BQ 5743D	10	5	4	5	7	4	14.7	26	3	71	17	46	0
BR 5749B	9	10	3	1	10	26	0.3	0	1	34	30	20	0
BS 5754D	13	11	15	21	39	43	9.3	16	3	48	14	27	0
BT 5765H	11	4	12	11	15	4	24.9	33	4	58	11	37	0
BU 5770B	7	4	15	8	17	30	13.2	39	3	68	15	44	0
BV 5775B	4	6	6	3	3	30	3.2	32	2	73	31	45	0
BW 5780B	11	4	10	16	45	26	21.1	40	2	56	26	32	0
BX 5785B	4	7	12	16	44	11	2.5	15	2	52	29	26	0
BY 5788B	5	10	1	4	16	11	3.0	10	2	45	46	16	0
BZ 5796B	12	9	4	12	3	5	9.9	20	2	73	41	42	0
CA 5821H	1	6	3	7	1	51	0.5	0	1	38	260	0	0
CB 5843B?	1	2	1	2	2	4	-	-	-	-	-	-	0
CC 5847B?	1	4	1	2	10	14	1.2	19	1	58	652	0	0
CD 5864H	3	7	2	2	2	8	0.1	0	1	39	87	21	0
LINE 10670	(FLIGHT	3)											
A 7711B	2	10	22	15	46	53	0.9	0	1	57	57	24	0
B 7702H	5	4	21	12	26	9	8.4	38	5	57	7	38	0
C 7688E	1	2	1	2	2	4	-	-	-	-	-	-	0
D 7662B?	4	5	1	3	4	3	3.5	40	1	121	178	68	13
E 7652B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10670	(FLIGHT	3)											
F 7642H	0	9	18	2	18	16	0.4	0	3	46	15	25	7
G 7608B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 7597D	32	25	17	41	89	43	13.6	1	3	37	13	18	0
I 7588B	10	12	24	25	71	54	5.8	16	4	46	9	28	0
J 7586B	14	12	24	25	71	54	8.6	13	4	37	8	21	5
K 7584B	10	8	24	25	71	54	9.2	21	4	39	8	21	0
L 7555H	2	1	4	6	2	26	6.8	87	5	50	7	33	0
M 7539B	14	11	34	29	73	9	10.6	20	6	51	5	36	0
N 7537B	17	17	34	3	73	83	8.7	11	5	44	6	28	0
O 7533D	10	13	20	18	43	83	5.2	18	5	49	6	33	8
P 7522B	19	13	14	26	57	81	13.4	21	4	46	9	28	0
Q 7521B	14	13	14	26	57	81	8.1	20	4	46	11	28	6
R 7509D	27	19	34	9	83	69	15.0	11	3	36	16	16	0
S 7507D	27	3	33	6	8	40	209.2	20	4	34	11	16	0
T 7505D	29	5	33	6	5	28	98.8	18	4	36	10	19	0
U 7499B	4	6	2	7	23	75	3.3	33	2	32	29	10	0
V 7494B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 7486B	6	16	11	6	36	107	2.4	10	1	34	142	2	0
X 7470B	5	9	7	4	11	29	0.3	0	1	36	165	16	0
Y 7461B	13	24	27	43	96	101	4.1	11	2	39	32	16	0
Z 7458D	17	6	27	43	96	101	34.3	28	2	44	24	22	4
AA 7453B	3	14	17	14	21	116	1.1	2	1	39	90	9	5
AB 7445H	8	10	10	16	33	66	5.1	20	2	41	44	14	0
AC 7426B	7	10	12	24	36	53	4.3	22	2	40	43	14	0
AD 7424D	7	15	12	24	36	53	3.0	10	2	38	51	11	0
AE 7419B	4	5	6	5	16	7	4.1	33	1	47	68	16	0
AF 7410D	12	18	7	24	56	120	4.8	13	1	28	96	0	0
AG 7406D	2	7	4	22	49	120	1.3	15	1	54	81	21	12
AH 7402D	4	9	2	17	44	91	2.6	18	1	44	77	12	0
AI 7399B	5	13	6	18	44	91	2.1	6	1	32	88	2	0
AJ 7395B	5	6	2	7	15	27	4.9	35	1	36	65	8	0
AK 7389D	15	20	24	29	61	63	6.0	11	2	46	29	22	0
AL 7387D	18	16	22	29	61	62	9.6	9	3	38	19	16	0
AM 7383D	4	9	22	29	61	44	2.2	11	2	62	30	35	0
AN 7381D	14	13	21	23	54	47	8.7	16	2	52	38	25	0
AO 7378D	16	16	21	23	57	47	8.6	13	2	41	49	14	0
AP 7369B	4	4	9	1	4	12	5.3	39	1	61	93	24	0
AQ 7363B	8	11	1	18	37	52	4.2	18	1	49	74	17	0
AR 7361B	8	12	1	18	37	57	4.3	16	2	46	52	18	0
AS 7353D	8	7	3	10	20	34	7.5	28	2	49	49	19	4
AT 7344H	5	4	9	9	20	12	7.0	34	2	50	24	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10670	(FLIGHT 3)													
AU 7332D	16	13	9	16	18	16	10.2	13	3	43	21	20	0	
AV 7326D	7	10	13	24	13	25	3.8	16	3	35	14	16	0	
AW 7320B	8	4	20	8	17	31	16.7	42	2	43	34	18	0	
AX 7316D	1	2	1	2	2	4	-	-	-	-	-	-	0	
AY 7312D	16	14	62	56	133	39	9.2	15	2	35	25	13	0	
AZ 7309D	22	28	62	56	133	56	7.0	2	3	28	12	10	0	
BA 7303D	10	10	13	25	58	50	6.4	12	3	27	13	8	0	
BB 7299D	26	26	13	25	58	50	9.4	2	3	29	14	10	0	
BC 7296B	7	24	2	30	77	45	2.0	0	3	22	20	2	0	
BD 7290B	12	9	21	14	34	32	10.0	14	2	29	32	5	0	
BE 7283B	20	17	25	52	76	42	10.8	4	2	21	31	0	0	
BF 7279D	1	2	1	2	2	4	-	-	-	-	-	-	0	
BG 7276D	3	6	3	21	51	50	2.3	15	1	56	62	22	0	
BH 7270D	17	14	29	33	71	23	10.2	0	2	31	30	6	0	
BI 7268B	15	14	29	33	71	23	8.7	4	3	34	20	12	0	
BJ 7261D	3	5	5	11	36	31	2.6	24	2	56	28	30	0	
BK 7257D	9	10	11	19	43	31	5.5	12	2	40	29	15	0	
BL 7252B	2	4	11	20	11	12	2.8	33	2	41	36	14	0	
BM 7237D	6	15	7	9	44	52	2.2	0	1	28	342	0	0	
BN 7099S	1	2	0	2	2	4	-	-	-	-	-	-	0	
BO 7077B?	8	5	3	11	6	20	11.4	22	2	68	47	35	0	
BP 7066H	11	7	11	14	4	9	11.8	11	3	47	23	22	0	
BQ 7053B?	14	10	15	10	23	17	10.9	4	3	57	15	33	0	
BR 7040B	13	12	10	14	31	26	8.0	8	3	56	20	31	0	
BS 7032B	22	12	34	25	41	10	19.9	10	5	44	8	26	0	
BT 7020H	8	4	8	5	10	2	13.8	21	3	68	24	40	0	
BU 7008B	6	5	3	4	13	6	8.9	24	1	72	139	27	0	
BV 6979S	1	2	1	2	2	4	-	-	-	-	-	-	0	
BW 6957S	0	5	2	8	3	30	0.4	0	1	36	432	0	0	
BX 6933H	1	2	1	2	2	4	-	-	-	-	-	-	0	
LINE 10680	(FLIGHT 3)													
A 6057B	41	12	136	20	138	11	57.8	2	25	30	1	25	19	
B 6065D	45	34	89	71	153	56	16.0	0	2	26	25	4	60	
C 6085H	3	8	5	13	32	41	1.6	2	1	55	124	15	0	
D 6101B	3	5	5	6	13	17	2.7	19	2	73	47	40	0	
E 6141H	3	8	20	17	37	13	1.6	0	4	40	11	19	0	
F 6183H	13	10	28	12	37	25	10.6	14	8	55	2	41	0	
G 6198H	40	21	80	39	109	18	24.9	0	9	35	2	23	0	
H 6230H	14	9	11	16	40	15	12.3	4	5	45	6	28	0	
I 6255H	9	14	40	15	37	14	4.0	0	5	36	6	20	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10680	(FLIGHT	3)											
J 6276H	1	2	1	2	2	4	-	-	-	-	-	-	0
K 6286B	4	4	2	2	3	19	4.2	22	2	57	25	30	0
L 6295D	19	23	32	42	89	53	7.0	3	2	34	24	12	0
M 6298D	16	9	32	42	89	53	16.1	18	3	41	14	21	0
N 6303B	14	4	1	2	11	65	40.6	24	3	41	22	17	0
O 6308D	3	8	11	4	21	69	0.4	0	1	17	84	2	0
P 6310D	5	8	6	4	21	37	3.6	20	1	36	63	7	0
Q 6319D	14	14	18	16	44	27	8.2	11	2	38	26	14	0
R 6322D	12	4	2	10	44	11	26.5	29	2	48	32	22	0
S 6327D	6	11	1	16	12	57	3.1	13	1	44	84	11	0
T 6332B	2	5	2	4	5	57	1.4	16	1	54	133	15	0
U 6345B	4	7	5	12	24	34	2.8	26	1	47	142	10	0
V 6356H	4	11	3	17	30	95	1.7	9	1	37	113	5	0
W 6369H	7	6	6	7	22	12	8.4	30	2	54	53	24	0
X 6384B	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 6388D	5	5	1	12	26	22	4.4	33	1	42	106	8	0
Z 6404B	8	9	7	10	20	46	5.4	27	1	43	59	15	0
AA 6411D	5	5	6	8	12	10	6.6	40	2	39	45	13	0
AB 6413D	7	9	6	8	12	32	4.7	21	2	40	37	14	0
AC 6416D	7	9	6	11	25	39	4.4	19	2	42	42	15	0
AD 6423D	11	5	4	5	8	64	18.9	30	1	42	56	13	0
AE 6438H	7	12	7	18	38	49	3.7	13	1	40	57	11	0
AF 6447B?	1	2	1	2	2	4	-	-	-	-	-	-	5
AG 6463B	38	30	60	54	117	44	14.5	4	4	38	8	22	0
AH 6465B	32	26	60	54	117	58	13.1	10	3	41	15	22	0
AI 6473B	8	11	5	15	28	43	4.1	18	2	48	53	19	0
AJ 6477B	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 6484B	13	12	29	27	95	26	7.7	21	2	39	40	14	0
AL 6488D	20	21	11	11	38	28	8.6	12	3	36	19	16	0
AM 6491D	12	13	22	31	64	33	7.1	19	3	29	19	9	40
AN 6493D	10	20	22	31	64	33	3.3	5	3	32	15	13	0
AO 6496B	27	38	50	63	141	48	6.6	0	3	28	19	9	0
AP 6498B	34	38	50	63	141	48	9.1	4	3	27	14	10	0
AQ 6501B	18	20	50	63	141	82	7.7	14	2	35	26	14	0
AR 6507B	20	21	14	17	25	4	8.1	3	2	35	23	12	0
AS 6511D	22	22	15	17	25	7	9.3	5	2	40	29	16	0
AT 6528B	27	15	25	49	114	63	19.7	10	2	28	46	3	0
AU 6534D	13	13	25	8	19	10	7.1	12	2	42	35	16	0
AV 6537D	6	7	7	9	23	15	4.6	25	2	40	32	15	0
AW 6541B	10	8	5	8	23	10	9.0	25	2	45	26	20	0
AX 6544B	3	4	6	6	12	24	3.9	41	3	44	22	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10680	(FLIGHT	3)											
AY 6566D	0	2	0	2	2	4	-	-	-	-	-	-	0
AZ 6612S	0	2	0	2	2	4	-	-	-	-	-	-	0
BA 6707B	6	6	3	5	12	8	5.2	0	1	67	67	27	0
BB 6717D	25	19	25	25	55	31	13.2	0	3	33	16	11	0
BC 6719D	32	27	25	25	55	38	12.7	0	4	28	9	10	0
BD 6722D	23	27	25	25	55	38	7.7	0	4	37	11	18	0
BE 6730B	13	10	3	15	34	17	10.5	7	4	41	10	22	0
BF 6733B	16	12	3	15	34	17	11.1	0	4	24	9	5	0
BG 6742D	13	16	49	10	23	17	5.7	0	4	37	12	17	0
BH 6768B	8	8	7	9	12	10	6.0	22	3	68	21	43	0
BI 6786B	8	3	1	5	12	18	20.5	32	2	72	36	41	0
BJ 6790B	1	2	1	2	2	2	-	-	-	-	-	-	0
BK 6825B?	5	7	0	6	11	16	3.8	31	1	46	188	7	0
BL 6834B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BM 6849S	2	6	2	3	4	1	1.0	0	1	25	314	3	0
BN 6877H	2	4	1	9	7	39	1.8	22	1	32	371	0	0
LINE 10690	(FLIGHT	3)											
A 5872B	7	3	43	23	52	6	16.9	34	2	97	27	66	40
B 5866D	38	28	44	32	77	75	15.3	2	1	37	63	8	0
C 5848B	45	32	115	81	174	86	17.1	5	4	30	8	14	0
D 5836B	11	13	15	28	66	42	5.4	14	3	46	20	24	0
E 5832B	8	14	15	28	66	42	3.6	12	3	55	22	32	0
F 5823D	6	9	19	13	28	14	3.6	19	4	71	13	49	0
G 5812B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 5801H	3	4	3	5	9	22	3.5	44	1	77	78	40	0
I 5778B?	14	9	9	0	29	35	13.8	16	2	118	42	81	0
J 5766B	12	8	18	8	40	16	12.0	6	3	54	14	31	0
K 5755H	8	10	8	12	32	34	5.1	8	2	56	46	25	0
L 5729B	8	9	13	8	12	6	5.2	7	3	90	17	63	0
M 5725B	10	2	5	5	11	6	54.3	29	4	97	11	73	0
N 5720B	3	5	2	1	9	12	3.1	25	4	100	10	77	0
O 5700H	4	5	18	9	22	31	4.4	36	7	73	4	57	0
P 5683B	21	13	32	18	49	30	15.2	19	7	58	4	43	0
Q 5671B	3	8	12	12	23	50	2.0	21	4	85	9	64	0
R 5666B	5	7	12	12	23	50	3.9	36	4	91	12	68	0
S 5641B	33	26	36	13	102	104	13.5	3	4	31	8	15	0
T 5631B	5	9	1	11	20	52	3.0	24	3	58	15	37	0
U 5614B	11	9	8	10	32	20	9.7	20	3	40	22	17	0
V 5606B	8	10	4	8	40	61	5.1	14	2	32	31	8	0
W 5599B	17	4	8	27	8	78	51.5	34	3	37	16	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10690	(FLIGHT	3)											
X 5594D	23	22	33	36	13	135	9.9	13	3	39	16	19	4
Y 5580B	17	25	18	39	84	84	5.6	8	2	31	26	10	0
Z 5576D	4	15	18	39	84	84	1.6	6	2	40	35	16	0
AA 5572B	12	22	1	29	72	114	3.8	11	1	36	76	8	0
AB 5563D	3	8	1	8	19	49	1.9	14	1	49	182	9	0
AC 5561D	4	11	2	8	19	49	2.0	12	1	35	202	0	0
AD 5558D	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 5548B	3	8	2	7	13	50	2.0	19	1	35	224	0	0
AF 5516H	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 5506B	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 5500B	6	11	3	8	7	102	2.9	18	1	44	86	12	0
AI 5497D	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 5492B	6	7	2	9	26	47	4.3	24	1	39	54	10	0
AK 5488D	10	8	8	10	19	26	7.9	22	2	47	41	19	0
AL 5485D	5	5	8	10	19	26	6.8	36	2	55	32	28	0
AM 5479B	10	8	18	9	15	42	9.5	26	2	47	46	19	0
AN 5474D	12	5	18	10	25	8	22.5	30	2	47	38	20	0
AO 5468B	3	6	1	5	11	33	2.1	23	1	49	73	16	0
AP 5456B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 5449H	22	22	54	44	94	57	9.1	7	4	33	10	16	0
AR 5440B	14	10	25	29	57	34	12.5	18	3	38	15	18	0
AS 5436B	26	18	25	35	83	44	14.8	8	3	41	13	22	0
AT 5424D	17	22	18	31	70	76	6.0	11	2	45	38	19	0
AU 5421D	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 5418D	5	4	6	22	58	49	6.9	41	2	52	39	24	0
AW 5410H	18	19	9	30	74	29	8.3	2	3	30	16	10	40
AX 5397D	6	4	21	5	8	4	10.6	31	2	35	32	9	0
AY 5395B	4	13	7	1	10	10	1.6	0	3	39	22	16	0
AZ 5375B	29	34	14	55	134	107	8.3	0	2	28	34	4	0
BA 5373D	11	26	14	54	121	52	3.1	0	2	38	26	15	0
BB 5368B	3	5	4	13	29	52	3.0	32	3	54	17	31	0
BC 5365D	8	6	4	13	26	9	10.2	29	3	55	23	31	20
BD 5357D	10	9	14	11	32	21	7.7	18	1	61	64	27	0
BE 5351D	4	9	3	8	18	27	2.1	15	1	64	183	20	0
BF 5343B	1	2	1	2	2	4	-	-	-	-	-	-	0
BG 5323S	0	1	1	2	2	4	-	-	-	-	-	-	0
BH 5262B?	1	2	0	2	2	4	-	-	-	-	-	-	0
BI 5240S?	1	1	0	1	1	1	-	-	-	-	-	-	0
BJ 5207D	5	17	13	17	47	69	1.8	2	1	70	196	25	0
BK 5202D	9	3	11	17	47	69	20.1	26	2	68	38	37	0
BL 5180B	18	46	39	45	219	127	3.4	0	3	29	12	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10690	(FLIGHT	3)											
BM 5146H	10	10	13	17	44	25	7.1	19	2	57	41	28	0
BN 5120H	1	2	1	0	2	1	-	-	-	-	-	-	0
BO 5097S	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 5083S	1	2	1	2	2	4	-	-	-	-	-	-	0
BQ 5069B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10700	(FLIGHT	3)											
A 4253B	45	79	156	152	329	123	6.3	0	3	23	14	6	0
B 4255D	69	11	156	152	329	25	156.3	5	5	19	5	6	0
C 4258D	69	11	156	25	53	25	156.3	4	4	18	9	3	110
D 4259D	4	22	10	25	53	176	0.9	0	3	21	11	5	0
E 4277B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 4280B	11	8	16	11	27	14	10.3	12	3	73	23	45	0
G 4298H	1	3	1	3	10	24	0.4	0	1	25	330	0	0
H 4324H	1	4	2	7	17	11	1.2	12	2	71	38	40	0
I 4372H	9	5	26	7	29	2	11.8	32	7	65	4	49	0
J 4411B	9	1	20	1	45	15	49.0	47	6	48	4	33	0
K 4415B	6	10	20	18	45	10	3.1	2	7	27	4	14	0
L 4420B	2	8	21	14	36	38	0.9	0	5	28	7	12	0
M 4423B	6	9	21	17	36	38	3.9	13	5	29	5	15	5
N 4427E	30	17	21	17	36	28	20.1	14	5	47	6	31	0
O 4439H	4	6	3	12	18	58	3.3	28	3	53	20	30	4
P 4457D	14	22	12	12	26	123	4.7	12	2	44	22	23	0
Q 4459B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 4463B	5	15	12	31	49	121	1.7	7	2	47	26	24	0
S 4479B	15	6	19	10	20	13	25.0	24	3	46	15	26	0
T 4488B	6	20	4	31	65	140	2.1	1	1	29	61	3	0
U 4496H	7	5	8	1	4	8	9.3	35	2	43	31	18	0
V 4505B	5	8	10	12	30	40	3.0	21	1	44	101	10	0
W 4510D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 4514D	2	12	4	16	27	93	0.9	2	1	36	98	6	0
Y 4519B	5	3	7	18	2	85	9.1	53	1	46	77	15	0
Z 4522B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 4543H	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 4558H	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 4570D	3	7	3	10	18	40	1.9	18	1	53	79	19	0
AD 4574B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 4579B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 4587B	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 4590B	10	11	16	21	50	34	5.9	18	2	43	39	17	0
AH 4594D	11	12	16	21	50	23	6.6	15	2	43	42	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10700	(FLIGHT	3)											
AI 4600D	8	9	9	12	18	11	5.1	21	1	51	65	20	0
AJ 4604D	6	12	9	14	31	47	2.9	16	1	43	65	14	0
AK 4612B	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 4619B	2	7	18	3	8	6	1.0	13	1	36	51	11	0
AM 4623D	15	16	3	13	25	11	7.3	22	2	41	30	18	0
AN 4625D	15	16	2	13	25	11	7.5	19	2	43	25	20	0
AO 4635B	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 4640D	21	15	31	35	72	45	13.1	21	3	41	17	21	0
AQ 4643D	24	20	26	27	48	68	11.5	17	3	42	12	24	0
AR 4645D	13	30	26	27	48	4	3.2	1	4	33	9	17	0
AS 4650B	39	29	68	2	179	140	15.3	8	2	30	44	6	0
AT 4662D	23	35	21	52	119	125	5.9	3	2	31	41	7	0
AU 4672D	40	18	67	113	275	257	29.6	12	3	21	19	3	0
AV 4675B	41	66	67	65	125	106	6.6	0	3	21	18	3	0
AW 4676B	41	24	67	65	125	106	20.9	13	2	20	19	2	0
AX 4689B	18	17	27	40	83	29	8.8	17	2	32	25	10	0
AY 4690B	15	17	27	40	83	32	6.8	16	3	35	18	15	0
AZ 4695D	14	15	16	12	15	12	7.4	22	2	43	22	22	0
BA 4717B	21	24	59	38	87	106	7.5	9	2	32	40	8	0
BB 4720B	20	15	59	38	87	31	12.3	17	3	28	18	9	0
BC 4738D	14	19	15	29	68	70	5.5	8	2	41	38	15	0
BD 4740D	1	2	1	2	2	4	-	-	-	-	-	-	0
BE 4742D	14	14	7	5	11	24	8.3	15	1	48	74	16	0
BF 4746D	4	6	10	10	25	24	2.8	28	1	50	158	11	0
BG 4749D	5	6	3	9	18	34	4.7	28	1	35	318	0	0
BH 4751D	5	6	1	9	18	34	3.7	24	1	46	719	0	0
BI 4827B?	0	2	1	2	2	4	-	-	-	-	-	-	0
BJ 4839B?	0	2	1	2	2	4	-	-	-	-	-	-	0
BK 4887D	8	11	17	10	24	43	4.6	9	2	73	49	40	0
BL 4891B	7	11	2	10	8	43	3.9	4	3	61	18	36	0
BM 4892B	7	8	11	17	27	27	5.4	12	3	64	16	40	0
BN 4895B	1	2	1	2	2	4	-	-	-	-	-	-	0
BO 4905H	10	10	11	17	39	4	7.5	7	3	56	16	32	0
BP 4925H	7	5	10	8	2	2	11.0	31	3	85	15	60	0
BQ 4937D	1	2	1	2	2	4	-	-	-	-	-	-	0
BR 4952H	1	1	1	1	2	4	-	-	-	-	-	-	0
LINE 10710	(FLIGHT	3)											
A 4071B?	0	2	0	1	2	4	-	-	-	-	-	-	0
B 4023B	12	15	24	23	63	26	5.5	0	2	38	40	10	30
C 4021B	11	10	24	23	63	26	8.4	0	3	45	24	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10710	(FLIGHT	3)											
D 4017B	2	8	7	18	52	71	1.2	0	2	51	41	21	30
E 4010D	11	13	13	22	51	35	6.3	14	2	37	35	12	110
F 4005D	11	8	45	26	55	11	10.8	22	2	39	26	15	0
G 4002D	21	21	46	26	55	11	9.2	2	3	37	13	18	0
H 3986B	3	3	1	2	15	10	4.8	37	2	92	52	55	0
I 3978B	7	10	3	8	19	21	4.1	7	1	64	67	29	0
J 3963B	3	5	0	3	5	12	2.5	9	2	106	65	64	0
K 3949D	4	13	0	19	64	136	1.7	7	1	48	162	10	0
L 3940D	3	12	4	14	22	94	1.3	10	1	49	101	16	0
M 3927B	5	5	7	3	13	41	5.6	42	1	68	79	33	0
N 3915B	8	14	11	26	65	28	3.7	6	4	41	8	24	0
O 3908B	6	6	10	8	21	18	5.7	30	4	49	9	31	0
P 3903B	12	12	20	20	39	48	7.3	20	5	57	8	39	0
Q 3880B	6	16	18	15	54	20	2.4	0	11	27	1	17	0
R 3875B	22	29	72	53	117	54	6.7	8	8	31	2	20	0
S 3869H	20	19	40	33	77	40	9.6	12	6	38	4	24	0
T 3860B?	1	2	1	2	2	4	-	-	-	-	-	-	0
U 3849B	21	19	31	29	72	71	10.2	13	5	43	7	27	0
V 3838H	8	8	21	14	23	17	7.0	35	5	60	7	42	0
W 3816H	1	2	1	2	2	4	-	-	-	-	-	-	0
X 3809D	7	14	21	25	53	87	3.2	17	3	40	20	20	0
Y 3798D	16	18	27	37	64	183	7.2	20	2	43	25	21	0
Z 3795D	13	7	27	16	47	44	15.7	36	2	46	26	23	0
AA 3789D	6	18	5	24	51	153	2.0	6	1	29	77	2	0
AB 3784B?	5	1	10	24	51	153	49.0	66	2	42	41	16	0
AC 3770B	15	9	17	21	40	33	13.1	24	2	40	44	14	0
AD 3761B	6	3	5	3	3	26	15.4	51	1	50	68	18	0
AE 3743H	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 3722D	7	14	4	13	10	43	2.9	14	1	48	71	17	0
AG 3714H	3	7	2	9	27	76	1.7	20	1	33	87	4	0
AH 3707B	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 3703D	9	14	15	26	49	68	4.5	19	2	43	33	18	0
AJ 3701D	11	14	15	23	47	57	6.0	18	2	48	46	20	0
AK 3694B	7	9	6	15	32	71	4.6	27	1	41	62	12	0
AL 3689B	5	10	3	4	13	57	2.5	20	1	37	83	7	11
AM 3686B	7	11	9	15	42	30	3.9	22	1	37	69	8	0
AN 3682B	9	4	5	15	42	30	18.0	43	2	43	44	16	0
AO 3678B	10	3	11	3	13	22	28.9	40	2	39	41	13	0
AP 3674D	16	9	17	15	24	17	15.9	19	2	35	26	13	0
AQ 3671B	1	5	1	15	24	10	1.0	9	3	35	22	13	0
AR 3665H	6	7	11	16	36	25	5.2	31	3	43	19	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10710	(FLIGHT	3)											
AS 3656B	13	10	88	94	135	44	11.1	23	3	39	14	20	0
AT 3651D	50	53	88	74	229	63	11.1	0	2	28	25	7	0
AU 3637B	18	24	6	13	29	122	6.1	0	2	41	32	15	0
AV 3633D	10	46	10	28	29	122	1.8	0	2	23	28	1	0
AW 3631D	19	26	10	28	22	4	6.2	4	2	27	27	5	0
AX 3627B	11	19	6	40	109	122	3.9	7	2	26	36	3	0
AY 3623B	8	14	5	15	40	46	3.3	10	2	37	32	13	0
AZ 3615D	16	10	15	19	41	24	14.2	19	2	36	23	14	0
BA 3612B	21	16	4	9	3	20	12.2	10	3	42	19	20	0
BB 3609B	21	5	6	4	15	3	59.8	21	3	43	19	21	0
BC 3592E	15	19	27	39	84	83	6.0	9	1	49	69	17	0
BD 3590B	5	24	27	39	84	83	1.2	0	2	45	28	21	0
BE 3583D	7	8	7	8	18	9	4.8	23	2	52	23	28	80
BF 3580D	10	9	7	21	51	33	8.3	22	3	53	21	29	0
BG 3579D	10	13	4	21	51	33	5.2	13	2	50	25	25	0
BH 3577D	9	10	4	21	51	33	5.7	18	2	47	25	23	0
BI 3570B	13	18	2	13	78	38	5.4	5	1	43	60	13	0
BJ 3568B	13	6	2	13	78	38	20.2	24	1	36	90	4	0
BK 3546S	1	2	1	2	2	2	-	-	-	-	-	-	0
BL 3501S	1	2	1	2	2	3	-	-	-	-	-	-	0
BM 3476M	0	1	1	1	0	2	-	-	-	-	-	-	230
BN 3406D	5	6	5	10	4	2	4.7	36	2	150	29	115	0
BO 3400D	11	7	12	10	25	15	14.2	31	2	95	28	65	0
BP 3396B	1	2	1	2	2	4	-	-	-	-	-	-	0
BQ 3389B	5	4	11	6	12	25	6.6	41	2	75	28	47	0
BR 3382B	8	9	14	18	44	19	5.5	22	3	67	17	44	0
BS 3379B	10	14	14	18	44	27	5.3	12	3	55	23	30	0
BT 3366H	1	2	1	0	2	4	-	-	-	-	-	-	0
BU 3313S	1	2	1	1	1	4	-	-	-	-	-	-	0
BV 3264B?	3	6	4	3	8	15	0.4	0	1	41	160	18	0
LINE 10720	(FLIGHT	3)											
A 2423E	1	9	10	26	43	89	0.5	0	1	90	305	33	0
B 2426B?	1	14	10	26	43	89	0.4	0	1	40	123	5	0
C 2439B?	1	2	1	2	2	4	-	-	-	-	-	-	50
D 2441D	7	14	19	21	49	37	3.0	5	2	61	26	34	0
E 2444D	8	11	19	21	49	37	4.1	14	2	69	28	41	0
F 2452B	4	4	4	8	17	22	3.8	32	2	73	49	40	0
G 2455B	1	2	1	2	2	4	-	-	-	-	-	-	10
H 2471B?	1	2	1	1	2	4	-	-	-	-	-	-	0
I 2488B?	9	25	2	39	82	236	2.6	4	1	31	114	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10720	(FLIGHT	3)											
J 2500B	1	4	1	11	48	61	1.2	27	1	60	59	29	0
K 2510B?	3	6	4	21	35	85	2.3	24	2	92	34	61	0
L 2518H	1	3	3	6	8	37	1.5	30	2	78	34	48	0
M 2536H	15	9	10	36	36	39	14.8	16	4	47	9	28	0
N 2591H	30	16	13	35	7	44	21.8	0	10	35	2	23	0
O 2612H	1	2	1	2	1	1	-	-	-	-	-	-	0
P 2634H	6	3	9	5	8	16	18.2	45	6	69	5	52	0
Q 2651B?	4	2	2	2	2	25	13.0	62	4	62	9	43	0
R 2659H	5	8	4	4	6	1	1.0	0	1	34	66	19	0
S 2670B	16	19	12	41	78	100	6.6	14	2	45	32	21	0
T 2673B	22	19	12	41	78	100	10.4	14	2	39	36	15	0
U 2683B	2	11	4	21	33	103	0.8	2	1	34	140	1	0
V 2686B	3	11	3	21	33	107	1.6	11	1	29	153	0	0
W 2700B	11	17	2	28	53	94	4.3	15	1	31	99	2	0
X 2704D	4	5	5	28	53	18	3.5	37	1	43	111	9	0
Y 2708D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 2714D	13	6	14	10	25	5	19.6	32	1	44	55	15	0
AA 2718D	5	10	10	14	7	138	2.7	20	1	46	59	18	11
AB 2730H	6	6	7	14	49	50	5.1	38	1	31	70	4	0
AC 2746B?	6	7	5	12	25	73	4.7	34	1	44	73	14	0
AD 2748B?	7	8	5	12	25	16	5.4	32	1	43	59	15	0
AE 2757B?	6	13	7	24	45	100	2.8	13	1	32	63	5	0
AF 2763D	6	7	4	9	21	37	4.9	31	1	39	83	8	0
AG 2766D	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 2770D	5	5	3	8	20	20	5.5	40	1	46	68	15	0
AI 2774D	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 2777D	7	12	5	13	28	30	3.8	20	1	37	75	8	0
AK 2780D	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 2785D	6	12	5	13	31	24	2.9	18	1	33	86	4	180
AM 2790B	3	11	9	14	35	48	1.1	3	1	33	56	6	0
AN 2796B?	8	12	6	19	42	31	4.0	18	2	39	47	12	0
AO 2815D	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 2819D	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 2824D	26	22	28	66	178	192	12.0	11	3	32	16	14	0
AR 2826D	26	44	28	66	178	192	5.6	0	2	17	42	0	0
AS 2831D	23	24	30	63	153	177	9.0	6	3	31	21	10	0
AT 2834B	25	44	30	63	153	177	5.3	0	2	24	23	4	0
AU 2843B	14	11	19	22	46	20	10.3	18	2	33	22	11	0
AV 2849B	9	9	14	10	20	19	7.7	25	2	39	35	14	0
AW 2858D	13	13	11	17	43	48	7.7	21	2	35	36	11	0
AX 2865B	13	12	15	5	50	30	9.0	19	2	43	33	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10720	(FLIGHT 3)												
AY 2874D	4	8	7	9	19	33	2.8	23	1	61	67	28	0
AZ 2882B	1	2	1	2	2	4	-	-	-	-	-	-	0
BA 2893B	15	15	12	30	68	54	8.6	13	2	50	39	23	200
BB 2899D	15	9	12	10	23	15	14.9	18	2	47	27	22	0
BC 2903D	1	2	1	1	2	4	-	-	-	-	-	-	0
BD 2907D	21	4	4	8	54	2	90.9	8	2	34	30	8	0
BE 2971S	1	3	1	6	15	33	0.8	14	1	66	553	1	0
BF 3009M	0	1	0	1	0	2	-	-	-	-	-	-	290
BG 3063H	9	2	9	14	12	11	63.3	28	4	69	13	46	0
BH 3076H	5	6	8	10	22	10	5.4	21	3	59	17	35	0
BI 3087H	6	5	15	8	4	10	7.8	25	3	69	21	43	0
BJ 3103H	1	2	1	2	2	4	-	-	-	-	-	-	8
BK 3120D	6	9	6	15	15	12	4.1	18	1	55	91	19	0
BL 3125B	2	5	1	3	14	7	2.1	26	1	61	97	24	0
BM 3132D	13	14	9	15	40	30	7.2	7	1	41	59	10	0
BN 3133D	12	12	9	15	36	30	7.4	11	2	41	54	12	0
BO 3137D	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 3146B	5	13	7	16	18	37	2.5	0	1	40	151	0	0
BQ 3165B?	1	2	1	1	2	2	-	-	-	-	-	-	0
BR 3185D	4	9	4	11	30	31	2.4	4	1	46	153	5	0
BS 3193D	5	5	0	2	7	11	5.2	24	1	59	215	11	0
LINE 10730	(FLIGHT 3)												
A 2112E	6	14	5	29	71	39	2.3	0	1	45	236	0	0
B 2106D	3	6	5	29	71	39	2.6	18	1	52	77	17	0
C 2101D	5	4	8	9	17	14	7.6	24	2	67	33	37	0
D 2091B	8	3	8	7	18	8	20.5	19	2	64	33	33	0
E 2077B	10	7	12	10	20	13	12.0	20	2	71	48	38	60
F 2062D	1	12	1	9	18	95	0.4	0	1	36	398	0	0
G 2047D	4	7	3	7	1	7	2.8	29	1	59	129	21	0
H 2031B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 2020B	9	13	14	12	42	39	4.7	11	2	69	36	40	0
J 2006B	5	7	10	8	18	20	4.5	23	3	108	21	79	0
K 1969H	7	4	2	1	14	35	11.4	39	6	82	5	64	0
L 1925H	1	8	23	1	10	20	0.4	0	7	55	3	41	0
M 1912D	2	3	14	3	16	6	2.0	37	3	56	20	32	0
N 1892B?	11	5	9	2	26	72	20.0	31	1	40	63	10	0
O 1887B?	5	12	9	14	26	72	2.5	12	1	35	105	4	0
P 1877H	3	12	12	14	17	112	1.1	4	1	24	210	0	0
Q 1873B	11	12	12	12	40	32	6.7	21	1	36	69	7	0
R 1868D	8	12	8	16	28	45	3.9	20	1	35	124	3	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10730	(FLIGHT	3)											
S 1860B?	1	2	1	2	2	4	-	-	-	-	-	-	5
T 1857B?	13	8	13	15	32	62	14.1	25	1	40	54	12	0
U 1846B	17	17	23	33	63	73	7.8	15	2	34	34	11	0
V 1844B	13	16	23	33	63	73	6.2	17	2	34	41	10	0
W 1839B	4	6	10	14	46	78	4.0	37	1	45	57	16	4
X 1833B	10	10	2	14	38	29	6.9	25	1	33	93	3	0
Y 1818B?	9	9	6	15	34	33	6.7	28	1	40	56	12	0
Z 1810B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1807B	9	12	9	18	42	46	4.8	20	1	36	54	10	0
AB 1803B	6	6	5	18	42	10	5.6	37	1	41	60	13	0
AC 1800D	8	8	5	9	15	21	6.3	31	1	38	54	11	0
AD 1796B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 1793D	9	3	8	17	26	106	27.2	48	1	29	72	2	100
AF 1788B	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 1786B	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 1772D	6	9	7	11	23	73	3.4	26	1	54	58	24	0
AI 1761B?	15	15	11	17	39	16	8.3	18	2	49	24	26	0
AJ 1758B?	22	13	7	19	25	16	18.2	15	3	35	14	17	0
AK 1752B	8	5	49	31	81	36	10.4	37	3	27	12	10	0
AL 1748B	21	15	49	40	81	70	13.5	15	4	26	11	10	0
AM 1747B	20	11	49	40	81	70	19.0	21	2	25	21	5	0
AN 1742B	15	8	34	28	58	70	17.8	29	2	28	21	9	0
AO 1737B?	8	5	34	28	58	4	11.9	40	2	35	23	14	0
AP 1727B?	8	7	2	9	10	15	7.2	28	2	55	26	29	0
AQ 1724B?	7	5	5	9	20	15	9.2	35	2	50	29	24	0
AR 1715D	11	19	11	27	66	46	3.7	5	2	34	37	9	0
AS 1712D	17	25	11	39	85	17	5.7	3	2	31	31	8	0
AT 1693B?	5	9	3	6	13	17	3.0	7	2	74	43	41	0
AU 1684D	21	15	21	25	54	32	13.3	0	2	40	41	11	120
AV 1680D	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 1676B	15	13	0	2	2	17	9.4	0	3	34	23	10	0
AX 1615S	0	2	1	2	2	4	-	-	-	-	-	-	0
AY 1511S	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 1494B	15	14	16	12	23	48	8.3	14	3	64	22	40	0
BA 1489B	10	18	19	18	36	48	4.0	6	4	48	12	29	0
BB 1486B	9	9	19	18	36	17	6.7	24	3	54	22	30	0
BC 1479B	23	20	42	34	40	30	11.2	14	3	52	14	31	0
BD 1463S	1	2	1	2	2	4	-	-	-	-	-	-	0
BE 1439B?	5	13	9	3	17	34	2.2	6	1	43	84	10	0
BF 1435D	17	22	9	11	35	18	6.2	9	1	35	99	4	50
BG 1432D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10730 (FLIGHT 3)													
BH 1427D	8	9	3	8	16	30	5.6	29	1	52	109	17	0
BI 1423D	1	2	1	1	2	4	-	-	-	-	-	-	0
BJ 1419D	6	4	6	8	4	9	8.2	46	1	67	78	32	0
BK 1412B	5	8	2	4	1	6	3.6	28	1	61	136	22	0
BL 1388S	0	2	1	2	2	3	-	-	-	-	-	-	0
BM 1369B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10740 (FLIGHT 3)													
A 561B?	0	2	0	2	2	4	-	-	-	-	-	-	11
B 583B?	3	12	9	14	27	75	1.4	0	1	56	64	23	0
C 585B?	5	12	8	9	58	75	2.2	4	1	42	81	9	0
D 596B?	1	6	3	5	12	12	1.0	0	1	59	306	32	0
E 620B	20	20	9	6	12	15	8.6	0	3	45	16	23	0
F 630B?	8	5	20	15	33	22	9.9	39	2	99	30	68	0
G 646H	2	7	5	11	19	7	1.6	21	2	73	48	42	0
H 664B?	5	9	9	19	44	39	2.7	20	3	76	21	50	10
I 693H	10	4	17	5	12	20	27.5	48	10	81	2	69	0
J 708B	1	1	1	2	2	4	-	-	-	-	-	-	0
K 712B	35	25	2	14	69	68	15.9	0	6	36	4	22	0
L 718B	3	3	34	8	29	10	3.7	48	8	42	2	30	0
M 722B	26	9	34	8	29	10	35.5	21	11	42	1	32	0
N 726B	11	4	21	7	18	4	24.0	37	9	41	2	30	0
O 744B	10	10	16	18	26	45	7.6	27	4	53	11	34	0
P 754B	12	6	27	13	36	3	17.6	31	5	51	6	35	0
Q 761B	18	7	24	17	13	36	29.8	28	4	49	11	30	0
R 763B	14	11	24	7	13	36	10.8	24	3	49	16	28	0
S 788H	9	10	13	14	18	64	6.0	28	1	43	52	16	0
T 798B?	3	8	2	17	37	124	2.0	21	1	27	167	0	9
U 805D	7	5	2	12	38	104	8.2	42	1	24	147	0	0
V 809B?	9	4	5	13	16	84	21.4	46	1	31	124	0	0
W 814B?	2	11	6	15	17	93	1.1	9	1	25	123	0	0
X 817B	3	6	2	15	17	26	2.2	30	1	25	142	0	0
Y 821B	4	10	21	56	106	39	1.9	18	1	31	105	2	0
Z 825B	24	33	24	57	108	212	6.7	12	1	24	53	2	0
AA 827B	24	29	24	57	108	212	7.7	14	1	28	46	5	0
AB 834B	6	6	17	16	40	48	5.4	36	2	43	47	16	0
AC 837B	14	11	19	17	45	48	10.0	22	2	37	28	14	0
AD 847B	3	10	3	10	11	82	1.4	7	1	28	73	1	0
AE 849B	8	13	5	10	15	66	3.5	16	1	29	84	1	0
AF 854D	6	12	1	7	24	31	2.6	14	1	35	92	4	0
AG 860D	6	8	3	9	24	33	4.2	29	1	36	88	6	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10740	(FLIGHT	3)											
AH 869B	1	1	1	2	2	4	-	-	-	-	-	-	0
AI 875D	7	22	4	36	80	157	2.1	5	1	22	70	0	0
AJ 879D	5	9	5	20	35	109	2.7	26	1	30	66	4	0
AK 883D	7	15	10	35	67	172	2.7	15	1	24	59	0	0
AL 885D	8	23	10	35	67	172	2.3	6	1	22	54	0	0
AM 887D	5	13	9	30	62	172	2.3	16	1	24	52	1	0
AN 890B	7	37	8	19	22	130	1.4	0	1	21	71	0	0
AO 892B	15	40	1	19	22	130	3.1	2	1	17	76	0	0
AP 895B	8	15	2	18	34	129	3.1	16	1	30	84	2	0
AQ 902B?	6	2	11	4	9	111	20.3	51	1	37	113	4	0
AR 911H	11	16	3	31	73	53	4.7	14	2	35	39	10	0
AS 917B	8	11	2	10	24	20	4.9	21	2	33	43	8	0
AT 921D	8	11	2	11	24	15	5.0	18	2	37	39	11	0
AU 925D	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 934H	10	7	28	28	64	24	10.5	32	3	30	19	10	0
AW 940D	9	7	28	30	57	18	9.0	28	2	29	24	8	0
AX 942D	1	2	1	2	2	4	-	-	-	-	-	-	0
AY 944D	6	3	13	8	24	19	11.0	47	2	33	27	11	0
AZ 950D	20	20	32	18	31	121	8.8	13	3	29	17	11	0
BA 953B	1	2	32	18	31	121	3.1	75	3	32	20	12	0
BB 957B	18	10	6	36	80	115	16.2	23	3	34	16	15	0
BC 964D	9	9	2	18	45	37	6.2	25	2	37	28	14	0
BD 969B	20	16	14	18	41	20	11.7	17	2	41	23	19	0
BE 974D	7	7	14	3	9	15	6.1	31	2	49	24	25	0
BF 980B	15	17	22	45	100	54	7.0	8	2	35	31	11	0
BG 982B	14	24	22	45	100	57	4.4	2	2	27	29	5	0
BH 984B	15	3	22	45	100	57	80.6	31	2	27	38	3	0
BI 989D	8	14	1	17	23	10	3.4	8	2	54	44	24	0
BJ 993D	9	9	8	18	41	30	6.1	20	2	60	55	28	0
BK 1000B	22	19	36	35	79	28	11.2	8	2	49	25	25	0
BL 1003B	23	23	36	35	79	37	9.2	3	3	40	16	19	0
BM 1008B	5	10	2	2	4	16	2.8	8	2	38	24	14	0
BN 1013B	10	8	6	9	22	11	9.3	23	2	45	24	22	0
BO 1026D	18	11	25	20	47	31	15.9	16	2	43	30	18	0
BP 1031D	9	20	1	11	17	3	3.0	0	1	40	87	7	12
BQ 1078S	4	4	1	2	2	12	4.8	32	1	84	783	0	0
BR 1162S	1	1	1	1	2	4	-	-	-	-	-	-	0
BS 1175S	3	8	1	11	23	59	1.6	8	1	42	226	1	0
BT 1191B	2	23	31	40	9	51	0.5	0	3	48	13	28	0
BU 1194B	20	14	31	33	36	51	13.1	17	4	51	10	32	0
BV 1212B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10740	(FLIGHT	3)												
BW 1228D	5	8	2	4	15	24	3.6	16	1	49	216	5	0	
BX 1241S	1	2	1	1	2	4	-	-	-	-	-	-	0	
BY 1276D	3	5	0	5	13	10	3.0	36	1	47	385	2	0	
BZ 1287B?	4	6	1	4	7	1	3.5	29	1	61	730	0	0	
CA 1313B?	7	4	4	5	15	12	12.2	12	1	43	302	0	0	
LINE 10750	(FLIGHT	16)												
A 6707S	1	2	0	2	2	4	-	-	-	-	-	-	0	
B 6681D	2	11	4	19	73	81	0.7	0	1	41	462	0	4	
C 6675H	1	2	1	2	2	4	-	-	-	-	-	-	0	
D 6665D	18	34	32	74	190	179	4.3	7	1	26	80	0	0	
E 6662D	6	25	32	74	50	71	1.7	1	1	47	74	17	0	
F 6648B	3	5	1	4	25	44	2.6	37	1	95	522	20	0	
G 6640B	3	2	3	3	21	1	4.8	59	1	93	103	50	0	
H 6635D	7	9	13	26	2	68	4.2	20	1	53	69	20	0	
I 6630B	1	15	11	30	113	18	0.4	0	2	35	35	9	0	
J 6626D	9	12	26	30	113	18	5.4	8	1	53	59	20	0	
K 6611B?	1	6	4	6	19	37	0.6	0	1	70	154	25	0	
L 6599H	4	2	5	4	12	16	0.8	0	1	48	98	26	0	
M 6585H	16	9	27	19	44	18	16.0	12	6	53	4	37	0	
N 6570H	10	3	9	6	21	16	26.4	36	5	68	6	51	0	
O 6552H	11	3	21	7	13	23	34.2	45	9	71	2	58	0	
P 6536H	4	6	8	11	8	36	3.0	32	4	68	9	48	0	
Q 6521H	1	0	1	2	0	4	-	-	-	-	-	-	0	
R 6507B?	5	4	7	7	9	17	6.7	48	2	63	37	35	0	
S 6497B?	5	3	13	12	24	91	14.3	52	1	67	61	34	0	
T 6489H	5	10	4	14	29	61	2.4	18	1	42	113	9	0	
U 6479B?	6	5	2	9	21	37	6.3	33	1	36	148	0	0	
V 6469D	17	10	5	15	45	55	16.2	25	1	42	86	11	0	
W 6461B	5	5	3	7	17	27	5.8	38	1	44	67	13	0	
X 6455H	9	13	12	26	58	102	4.8	19	1	36	51	10	0	
Y 6439B?	5	7	3	8	16	58	4.0	31	1	39	93	8	5	
Z 6428B	5	5	6	14	34	80	5.1	39	1	46	61	16	0	
AA 6425B	3	7	0	4	3	16	2.2	22	1	45	66	15	0	
AB 6420B	8	9	7	4	13	2	6.0	26	1	43	55	14	0	
AC 6416B	11	14	9	35	91	62	5.7	17	2	36	49	10	0	
AD 6412D	2	9	12	35	91	62	1.2	5	1	53	69	20	0	
AE 6409D	1	2	1	2	2	4	-	-	-	-	-	-	0	
AF 6406D	1	2	1	2	2	4	-	-	-	-	-	-	0	
AG 6402D	6	7	3	19	11	59	5.1	28	1	54	77	20	0	
AH 6395B	10	7	12	24	49	81	9.6	34	2	48	43	21	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10750	(FLIGHT 16)												
AI 6391D	5	6	17	7	17	40	4.6	39	2	50	46	22	0
AJ 6382B	22	18	26	26	91	7	11.5	13	3	37	15	17	0
AK 6379D	15	17	32	34	91	30	7.0	13	3	35	14	16	0
AL 6377D	12	11	28	30	81	30	8.6	21	3	36	19	15	0
AM 6374D	4	5	28	30	81	30	3.7	32	2	43	27	19	0
AN 6368D	9	7	16	10	26	29	9.7	27	3	38	19	17	0
AO 6363B	10	11	3	11	61	13	6.0	17	3	41	14	21	0
AP 6349D	9	8	12	7	18	22	8.1	32	2	63	33	36	0
AQ 6339D	10	9	9	12	29	41	7.4	26	2	65	46	35	0
AR 6331D	9	9	5	8	21	31	7.2	26	1	63	81	27	0
AS 6325D	12	16	20	21	52	45	5.6	13	2	50	37	23	60
AT 6321D	14	11	20	3	11	31	10.3	18	2	64	26	37	0
AU 6315B	11	10	11	9	22	17	8.1	20	3	57	18	34	0
AV 6310D	11	9	7	11	28	27	9.9	22	2	45	23	22	0
AW 6307D	2	6	7	20	34	23	1.1	6	3	50	18	27	0
AX 6304H	14	10	21	19	54	23	11.5	11	3	38	16	17	0
AY 6300D	3	9	21	16	47	9	1.7	0	2	44	27	19	0
AZ 6295D	18	16	18	7	20	39	9.5	3	2	41	41	14	0
BA 6283S	1	2	1	2	2	4	-	-	-	-	-	-	0
BB 6251B?	0	2	1	2	2	4	-	-	-	-	-	-	0
BC 6173S	1	2	1	0	1	2	-	-	-	-	-	-	0
BD 6165D	6	15	7	18	50	90	2.4	3	1	54	170	13	0
BE 6155H	22	18	37	33	85	47	10.9	9	4	49	10	30	0
BF 6144S?	7	6	4	2	30	32	7.5	27	1	61	117	22	0
BG 6115B?	1	2	1	2	2	3	-	-	-	-	-	-	0
BH 6110B?	5	6	5	9	25	15	4.0	11	1	66	124	22	0
BI 6040D	3	10	3	7	22	24	1.2	0	1	71	239	20	0
LINE 10760	(FLIGHT 12)												
A 533S	1	2	0	0	0	4	-	-	-	-	-	-	0
B 569B?	0	2	1	2	2	4	-	-	-	-	-	-	0
C 571D	0	12	5	19	45	78	0.4	0	1	36	358	0	0
D 582D	0	9	5	12	29	45	0.4	0	1	59	223	14	0
E 589B?	2	4	3	12	29	31	1.7	31	1	118	104	71	0
F 620H	6	8	10	12	29	24	4.1	11	3	54	18	30	0
G 649B	14	9	11	14	19	10	11.8	5	4	48	11	28	15
H 657B	7	7	12	10	11	18	6.3	16	3	61	13	38	20
I 669H	8	7	10	9	18	9	7.4	15	3	47	14	26	40
J 687H	14	4	29	9	28	17	42.2	30	7	56	4	41	0
K 698H	7	5	22	12	28	22	10.2	38	8	58	3	44	4
L 715H	6	5	16	8	22	14	8.7	39	11	69	2	58	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10760	(FLIGHT	12)											
M 751H	7	13	13	19	37	40	3.3	13	4	52	9	34	0
N 773H	8	4	26	8	21	31	17.0	43	5	60	7	42	0
O 789B?	11	7	15	18	34	63	12.9	28	2	61	24	36	0
P 795B	6	4	15	18	29	29	10.2	33	2	78	41	46	0
Q 805D	12	20	13	48	83	143	4.1	6	1	31	109	0	0
R 811D	17	32	6	48	123	179	4.3	0	1	26	68	0	0
S 825D	6	7	2	11	30	81	4.6	29	1	33	133	0	0
T 838D	22	23	21	43	99	112	8.6	11	1	27	57	2	0
U 847B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 852D	1	2	1	2	2	4	-	-	-	-	-	-	0
W 855B	4	15	7	31	61	150	1.6	8	1	27	81	0	0
X 865B	7	18	15	41	73	177	2.5	10	1	31	47	7	0
Y 869B	7	13	15	41	73	177	3.5	12	2	33	48	7	0
Z 877B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 885D	8	11	5	10	33	58	4.8	21	1	35	86	5	4
AB 892D	5	6	5	5	33	20	3.9	35	1	41	97	9	0
AC 897D	4	9	4	16	30	21	2.4	21	1	44	102	11	0
AD 909D	4	10	7	15	29	57	2.3	14	1	43	79	11	0
AE 915B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AF 926H	6	8	9	12	31	27	3.9	22	1	46	71	14	0
AG 931D	1	2	1	2	2	4	-	-	-	-	-	-	170
AH 937D	3	5	1	18	44	56	3.0	36	1	43	218	3	0
AI 943H	7	11	9	18	44	56	3.6	18	1	37	95	6	0
AJ 954D	16	19	9	49	18	24	6.4	13	2	37	45	11	0
AK 961D	20	29	9	49	18	140	5.7	8	2	32	30	10	0
AL 967D	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 969D	24	19	44	13	82	86	11.9	18	3	31	15	14	0
AN 973D	27	29	44	13	24	79	8.9	12	3	29	15	12	0
AO 979D	20	27	4	10	86	79	6.4	10	2	31	22	11	0
AP 984B	9	14	10	24	7	125	3.9	18	2	34	27	12	0
AQ 997B	8	8	16	11	23	34	6.4	27	3	38	18	18	0
AR 1006B	3	13	36	40	97	50	1.2	3	3	39	15	19	0
AS 1009B	7	18	36	40	97	50	2.6	8	3	40	14	21	0
AT 1012D	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 1017B	11	14	34	37	7	52	5.1	18	2	48	23	25	0
AV 1029D	6	6	8	9	30	38	6.8	35	2	55	39	28	0
AW 1041B	11	10	17	23	53	37	7.8	25	2	50	49	21	0
AX 1051D	7	10	17	8	18	44	4.2	22	1	63	67	30	0
AY 1058D	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 1063D	7	12	11	14	38	49	3.3	20	1	58	106	22	0
BA 1066B	8	9	11	14	38	49	5.2	25	1	53	70	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10760	(FLIGHT	12)											
BB 1078B?	6	10	4	12	29	22	3.7	23	2	56	35	29	0
BC 1088B	5	7	27	42	97	47	3.1	25	2	56	27	31	0
BD 1090D	10	17	27	42	97	47	3.9	11	2	47	25	23	0
BE 1097B	9	15	27	42	97	76	3.9	7	3	36	21	15	0
BF 1099B	8	14	27	42	97	57	3.4	5	2	42	23	18	0
BG 1105B	6	5	7	26	66	19	6.7	31	2	53	27	27	0
BH 1114H	6	9	11	17	35	54	3.7	19	3	53	19	29	0
BI 1127B	17	20	11	15	37	21	6.9	0	2	46	27	21	14
BJ 1155S?	1	2	0	2	2	4	-	-	-	-	-	-	0
BK 1364B	9	8	10	25	54	55	6.9	26	1	49	57	19	0
BL 1376H	10	6	27	17	38	12	13.8	34	5	69	7	51	0
BM 1389B	6	13	19	27	43	46	2.6	10	1	57	67	24	0
BN 1399B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BO 1413B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 1420B?	3	6	1	5	8	32	2.6	22	1	82	251	29	0
BQ 1455H	1	2	1	2	2	4	-	-	-	-	-	-	0
BR 1489S	1	2	1	2	2	4	-	-	-	-	-	-	0
BS 1526M	0	0	1	2	2	2	-	-	-	-	-	-	250
LINE 10770	(FLIGHT	12)											
A 2396B	1	4	0	2	2	8	0.9	10	1	176	1025	0	0
B 2386B	5	7	7	10	3	17	3.9	24	1	87	171	39	0
C 2376B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2370B	6	9	4	8	23	3	3.9	11	1	65	62	30	0
E 2356B	7	8	13	13	26	18	5.1	18	2	56	28	30	0
F 2349B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 2345B	7	11	12	20	47	47	3.7	19	2	57	41	29	0
H 2342B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 2332B?	1	2	1	2	2	4	-	-	-	-	-	-	0
J 2324H	4	8	11	11	25	14	2.9	0	3	57	18	32	40
K 2307H	10	6	14	4	8	14	12.3	25	5	81	6	62	0
L 2292H	1	2	1	2	2	4	-	-	-	-	-	-	0
M 2281B	5	28	131	49	44	46	1.2	0	12	22	1	14	0
N 2276B	11	16	25	40	10	41	4.6	6	18	26	1	19	0
O 2271B	27	5	50	15	33	41	95.6	16	9	38	2	26	0
P 2254H	8	8	5	14	5	30	5.7	29	5	48	7	32	0
Q 2250D	14	4	5	12	28	8	40.1	40	4	53	10	35	0
R 2238B	6	9	14	11	27	40	3.5	15	3	42	22	19	0
S 2235D	4	9	9	10	25	40	2.3	10	2	46	30	20	0
T 2230H	6	9	23	19	31	41	3.7	15	2	44	24	20	0
U 2210B	8	14	6	23	49	78	3.3	13	1	45	88	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10770	(FLIGHT	12)											
V 2199D	4	6	0	5	11	20	3.5	15	1	39	285	0	0
W 2193D	2	5	2	2	21	22	1.9	32	1	49	221	8	0
X 2185B	16	17	23	27	73	58	7.5	11	2	36	31	12	0
Y 2184B	16	17	23	27	73	58	7.5	12	2	36	43	10	0
Z 2177D	3	8	3	8	35	73	1.5	13	1	35	120	2	0
AA 2174D	5	12	5	15	45	64	2.1	9	1	32	100	2	0
AB 2171D	5	9	4	15	45	60	3.1	20	1	34	98	3	0
AC 2167D	1	7	18	22	56	33	0.5	0	2	44	51	16	0
AD 2163B	9	11	19	22	56	41	5.5	19	2	37	33	13	0
AE 2160B	6	8	18	22	56	41	4.6	27	2	36	49	10	0
AF 2154D	5	11	6	16	29	88	2.6	16	1	37	79	7	0
AG 2151B	4	6	6	14	29	63	3.3	32	1	48	81	16	0
AH 2148D	5	7	3	3	9	15	3.8	32	1	50	92	16	0
AI 2141B	3	6	1	22	41	128	2.0	25	1	32	72	4	0
AJ 2137B	7	11	9	2	3	128	4.1	20	1	34	56	7	0
AK 2132D	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 2128B	5	8	3	14	9	50	3.3	27	1	29	62	3	0
AM 2124B	10	25	1	45	61	177	3.0	4	1	23	54	0	0
AN 2121B	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 2118B	4	8	10	25	81	144	2.9	25	1	36	70	7	0
AP 2111B	5	4	4	9	18	39	8.3	46	1	37	69	8	0
AQ 2103B	8	7	10	9	22	23	8.2	35	2	46	46	19	0
AR 2099D	1	2	1	2	2	2	-	-	-	-	-	-	0
AS 2095B	15	10	57	24	33	24	12.7	18	3	35	12	16	0
AT 2093D	25	10	64	53	126	87	31.3	16	5	37	7	20	0
AU 2090B	26	19	64	53	126	87	14.4	9	5	25	7	10	0
AV 2082B	6	9	23	34	78	25	3.6	20	3	37	21	16	0
AW 2080B	10	12	23	34	78	53	5.8	17	3	29	20	9	0
AX 2072B	12	9	24	17	40	42	10.1	22	3	37	12	19	0
AY 2067B	17	8	30	32	29	22	21.1	19	3	35	14	15	0
AZ 2053H	3	2	2	15	33	29	10.6	63	2	56	29	29	0
BA 2038B	8	6	11	11	27	18	8.5	16	1	64	61	29	0
BB 2030H	5	3	8	4	12	5	12.3	38	3	50	21	25	0
BC 2005B	8	8	13	14	35	27	6.5	11	2	55	26	28	0
BD 2002B	9	10	13	14	35	27	6.1	6	3	50	21	25	0
BE 1992H	4	3	15	1	2	6	7.3	26	3	62	21	35	0
BF 1915S	0	2	1	2	1	2	-	-	-	-	-	-	0
BG 1872H	1	3	4	3	3	10	0.2	0	1	21	316	0	0
BH 1863H	19	15	52	42	91	28	10.9	0	4	31	8	13	0
BI 1849B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BJ 1806H	4	3	7	4	1	8	0.1	0	1	39	101	17	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT
LINE 10780	(FLIGHT 13)										
A 7930S	1	1	0	1	0	0	-	-	-	-	0
B 8007B	4	6	8	8	21	11	3.5	2	2	77	0
C 8016B	2	3	5	7	19	6	2.1	20	2	93	0
D 8038D	10	11	4	8	17	10	6.0	10	2	52	0
E 8046B	4	12	20	19	17	4	1.9	0	4	41	0
F 8063B	1	2	0	2	2	4	-	-	-	-	0
G 8091H	10	5	2	12	23	5	14.9	13	11	40	0
H 8141H	8	14	6	4	12	1	1.0	0	1	22	0
I 8151H	7	9	16	18	40	38	5.1	19	4	40	0
J 8161H	2	1	34	44	119	65	9.2	85	4	25	0
K 8179D	5	3	3	10	13	23	11.5	55	2	56	0
L 8183D	1	2	1	2	2	4	-	-	-	-	0
M 8187B	9	3	11	11	11	37	24.7	43	2	50	0
N 8189B	7	4	1	6	11	36	14.9	45	2	52	0
O 8211H	2	2	5	4	17	6	1.0	0	1	18	0
P 8232D	6	5	6	5	11	29	7.3	28	1	73	0
Q 8236D	1	2	1	2	2	4	-	-	-	-	0
R 8255B	6	10	8	3	32	48	0.9	0	1	14	0
S 8265D	9	7	16	4	18	28	8.1	26	2	44	0
T 8272B	1	2	1	2	2	4	-	-	-	-	0
U 8312H	2	10	4	16	40	95	0.7	0	1	31	0
V 8324B	7	7	11	9	20	30	6.4	28	2	42	0
W 8330D	6	7	2	9	28	23	4.5	28	1	41	0
X 8345H	6	5	5	9	19	19	6.7	40	2	41	0
LINE 10781	(FLIGHT 13)										
A 8430B?	1	3	4	8	14	55	1.2	33	2	42	0
B 8439B	1	11	11	25	48	81	0.5	2	2	47	0
C 8455B	25	6	50	39	83	43	56.8	26	4	48	0
D 8470B	4	24	12	7	13	8	0.9	0	3	43	0
E 8476D	10	9	13	12	30	5	8.2	25	3	29	0
F 8483D	19	29	39	56	112	118	5.4	8	2	27	0
G 8487D	7	8	35	37	93	118	5.4	30	2	39	0
H 8492D	22	11	65	59	26	23	21.1	21	4	30	130
I 8495D	22	20	65	59	26	62	10.2	12	4	25	0
J 8500D	21	17	23	33	74	38	11.7	13	4	27	0
K 8506D	12	5	31	44	109	64	23.9	31	3	24	0
L 8509D	15	10	31	44	43	26	13.4	16	3	22	0
M 8517B	1	2	1	2	2	4	-	-	-	-	0
N 8521D	13	12	6	0	1	4	8.5	15	3	42	0
O 8523D	10	11	6	8	14	17	6.1	23	3	54	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10781	(FLIGHT	13)											
P 8530B	15	8	16	17	36	21	17.5	24	3	54	22	30	0
Q 8543D	10	11	20	24	57	30	6.4	14	2	39	30	15	0
R 8547D	5	8	19	20	25	12	3.1	19	3	46	20	23	0
S 8553B	3	5	9	12	26	35	3.1	32	2	54	27	29	0
T 8559B	13	15	9	21	47	57	6.4	14	2	40	29	16	0
U 8563D	15	5	2	3	3	63	30.3	30	2	44	27	20	0
V 8577B	4	7	1	5	11	25	3.2	15	1	64	89	25	0
W 8589B	9	11	3	4	22	37	5.7	7	2	48	28	22	0
X 8596D	12	5	8	4	9	16	20.5	27	2	55	25	30	0
Y 8617D	24	29	2	9	39	29	7.7	3	3	30	14	12	0
Z 8621D	7	13	2	9	39	19	3.1	18	2	43	22	21	0
AA 8625B	20	19	4	7	13	79	9.5	14	1	53	72	21	0
AB 8726S	1	1	0	2	1	4	-	-	-	-	-	-	13
AC 8766S	0	2	0	2	2	4	-	-	-	-	-	-	0
AD 8806B	1	1	1	2	2	4	-	-	-	-	-	-	0
AE 8813D	7	9	11	14	29	14	4.2	12	1	40	116	4	0
AF 8822B	6	7	7	12	31	17	5.4	26	1	47	117	11	5
AG 8825B?	6	1	1	12	34	17	84.7	54	1	32	163	0	0
AH 8841D	8	5	6	6	15	11	10.6	37	1	53	238	10	0
AI 8858D	1	2	0	2	2	4	-	-	-	-	-	-	0
AJ 8887B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 8892H	1	5	0	3	9	2	1.0	0	1	35	158	12	0
AL 8920D	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10790	(FLIGHT	13)											
A 707B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 702B	11	15	8	23	33	80	4.8	4	1	38	81	5	0
C 697B	9	11	9	7	52	29	5.9	8	2	57	33	28	20
D 684H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 675B?	4	4	3	1	5	3	5.0	30	2	84	54	48	0
F 661B	5	5	7	8	18	13	5.7	26	2	73	37	42	30
G 654B	1	2	1	2	2	4	-	-	-	-	-	-	30
H 651B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 634H	1	2	1	2	2	3	-	-	-	-	-	-	0
J 606H	6	3	11	10	39	33	12.1	37	4	52	10	32	0
K 600B	6	8	21	17	38	10	4.0	21	3	52	18	30	0
L 597B	8	8	21	17	38	44	6.2	24	3	59	15	37	0
M 584H	1	2	1	2	2	4	-	-	-	-	-	-	0
N 574B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 565B	4	6	3	10	20	47	3.2	25	1	48	56	18	0
P 558D	6	6	5	11	22	38	6.8	25	2	48	43	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG
		1050 HZ		892 HZ		7323 HZ		DIKE		SHEET	EARTH		CORR
ANOMALY/	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	COND DEPTH*	COND DEPTH	RESIS	DEPTH	DEPTH		NT
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	
LINE 10790	(FLIGHT 13)												
Q 539B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 533B	5	2	4	4	9	11	21.8	47	1	87	91	45	0
S 509H	7	3	10	8	16	4	19.2	35	2	46	30	20	0
T 465B	4	4	6	7	15	8	5.2	35	2	53	55	22	0
U 453H	8	6	28	14	27	17	9.1	20	4	42	8	24	0
V 444H	10	11	27	27	60	67	5.9	8	3	43	16	21	0
W 433H	16	15	24	25	58	44	8.7	8	3	50	15	29	0
X 429H	9	6	12	8	17	6	12.1	19	3	42	13	21	0
Y 419H	16	16	26	25	54	30	8.2	6	3	36	13	17	0
Z 409B?	1	2	1	1	2	3	-	-	-	-	-	-	0
AA 399D	6	5	7	5	11	6	7.0	24	2	71	36	40	0
AB 393D	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 389B	5	5	9	11	13	8	5.7	22	3	60	21	34	0
AD 374B?	3	5	1	5	13	22	3.0	24	2	67	37	36	0
AE 370B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 368B	1	1	1	2	2	0	-	-	-	-	-	-	0
AG 364B	8	4	10	11	27	21	16.4	16	3	47	17	23	0
AH 354H	15	5	18	11	27	20	36.9	18	4	47	10	27	0
AI 298S	0	2	1	2	2	4	-	-	-	-	-	-	0
AJ 239B	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 226D	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 209B?	5	4	5	4	9	2	7.8	26	1	70	92	30	0
AM 196S	1	1	1	2	1	4	-	-	-	-	-	-	0
AN 169H	3	3	3	4	8	8	4.6	8	1	76	105	30	0
LINE 10800	(FLIGHT 14)												
A 377L?	4	7	13	9	33	76	2.5	22	1	87	200	37	0
B 385B	9	11	5	16	44	40	5.5	0	2	50	46	18	0
C 412D	1	2	1	2	2	4	-	-	-	-	-	-	0
D 439H	15	11	21	19	48	35	11.5	15	4	63	8	44	0
E 454H	5	5	12	8	22	9	6.3	26	5	69	7	50	0
F 501H	7	10	12	21	35	32	4.2	19	3	61	17	38	0
G 523H	7	6	15	9	20	27	7.0	36	2	57	32	30	4
H 541B	14	19	27	45	88	114	5.8	18	2	39	27	18	0
I 551B	20	26	38	58	119	104	6.8	13	2	35	33	12	0
J 570D	3	9	1	12	21	84	1.7	11	1	65	133	25	0
K 579B	3	5	1	2	4	17	2.6	28	1	89	91	48	0
L 590H	5	4	5	8	15	20	7.6	35	2	71	53	37	0
M 604D	7	9	5	27	59	107	4.6	10	1	68	70	31	0
N 625H	10	16	25	39	79	111	3.9	12	2	34	32	11	0
O 633D	4	13	7	19	32	125	1.7	8	2	38	48	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10800	(FLIGHT	14)											
P 637D	7	13	7	19	32	135	3.5	21	1	39	53	13	0
Q 644B	3	13	2	20	20	135	1.4	6	1	40	55	13	0
R 674H	9	12	12	16	42	72	5.0	21	2	45	48	17	0
S 684B	7	5	6	8	21	11	8.6	38	1	47	89	14	0
T 704B?	1	16	18	7	10	50	0.4	0	2	45	42	19	0
U 728D	4	7	48	11	32	28	2.6	24	3	46	14	26	0
V 733B	22	25	48	52	119	118	7.9	8	4	44	11	26	0
W 736B	21	23	48	52	119	118	8.2	11	2	38	28	15	0
X 755H	12	10	19	20	50	27	8.3	16	3	55	22	30	0
Y 764D	3	6	8	9	21	19	2.1	14	3	56	19	32	0
Z 769D	3	4	22	11	23	18	3.6	27	2	61	25	34	0
AA 776H	11	12	22	23	52	34	6.6	11	3	44	16	23	0
AB 790H	10	10	21	23	59	32	6.7	20	3	46	20	23	0
AC 817D	3	3	8	7	14	13	5.1	44	2	80	45	47	0
AD 829H	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 867D	11	14	21	27	58	73	5.5	9	2	77	51	44	0
AF 870D	9	14	17	23	52	53	4.0	0	2	43	26	18	0
AG 886B	11	9	25	21	51	34	9.3	11	2	52	27	26	0
AH 906B	8	8	7	18	16	19	6.3	17	3	46	17	24	0
AI 916D	11	12	2	6	10	52	6.3	16	1	53	69	20	0
AJ 965S	0	2	0	2	1	4	-	-	-	-	-	-	0
AK 1009S	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 1072B	2	4	7	10	26	30	2.0	18	1	56	136	14	0
AM 1079D	6	9	7	12	18	13	3.4	1	1	55	122	14	0
AN 1111B	8	10	13	18	37	40	5.2	18	1	77	104	36	0
AO 1119B	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 1148S	3	5	2	6	12	32	2.2	23	1	52	386	2	0
AQ 1239S	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 10810	(FLIGHT	14)											
A 2052L	0	2	1	2	2	4	-	-	-	-	-	-	0
B 2017E	12	10	10	16	4	65	10.0	26	1	60	65	27	0
C 2003B	12	19	16	24	56	82	4.2	13	2	58	39	30	0
D 1993B	6	3	2	3	9	24	0.3	0	1	39	82	22	0
E 1988B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1979D	5	6	0	3	16	12	5.0	25	1	68	99	28	0
G 1970B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 1964D	5	7	3	8	22	9	3.8	22	3	56	20	32	17
I 1953B	11	9	21	27	42	26	10.3	28	5	54	7	37	0
J 1949B	7	6	19	19	13	12	8.0	34	4	79	9	59	4
K 1943B	6	4	7	5	12	9	10.1	38	3	78	16	53	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10810	(FLIGHT 14)												
L 1929H	11	4	24	6	13	12	25.8	34	10	66	2	54	0
M 1921B	27	10	67	22	73	22	36.1	18	10	52	2	41	0
N 1907H	6	7	1	14	21	30	4.7	31	2	61	24	36	0
O 1884H	5	6	9	10	10	40	4.5	32	2	64	49	34	0
P 1867B	6	3	6	5	14	3	14.6	40	1	49	58	17	0
Q 1857B	5	8	9	14	29	28	2.8	19	1	50	57	20	0
R 1846D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 1836D	4	10	3	7	9	57	2.4	18	1	66	208	21	0
T 1825D	12	16	7	9	27	35	5.2	7	1	64	108	25	0
U 1818B	6	9	9	27	61	98	3.9	14	1	56	58	23	0
V 1814B	10	14	9	27	61	98	4.6	9	1	36	59	7	0
W 1804H	8	10	2	16	35	52	4.8	15	2	40	35	14	0
X 1784H	4	8	7	8	11	10	2.5	15	2	50	39	22	0
Y 1741H	12	6	24	16	5	4	18.8	2	5	49	8	29	0
Z 1726H	8	6	12	12	29	20	8.5	4	3	59	18	33	0
AA 1713D	6	8	11	15	34	20	4.0	5	3	54	24	28	0
AB 1669B	7	5	12	9	22	6	8.0	12	3	40	17	17	0
AC 1667D	8	4	13	9	21	7	14.1	21	3	48	21	23	0
AD 1657D	5	3	1	7	12	21	9.2	27	3	52	20	27	0
AE 1647H	6	2	8	4	2	2	20.3	32	4	42	11	22	0
AF 1631B	8	6	7	7	14	28	8.4	15	2	53	44	22	0
AG 1545S	1	6	2	5	14	25	0.9	0	1	47	579	0	0
AH 1525B?	5	7	2	4	18	9	3.6	0	1	41	117	0	0
AI 1484S	2	2	2	1	2	1	2.5	43	1	95	324	29	0
LINE 10820	(FLIGHT 14)												
A 2374L	1	8	0	5	41	72	0.4	0	1	206	1025	0	0
B 2432B?	7	10	10	12	33	7	4.2	0	1	60	62	24	0
C 2438H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2450H	4	4	1	3	9	20	4.0	34	1	89	350	26	0
E 2472H	4	9	18	16	39	11	2.3	0	2	55	29	27	7
F 2506H	3	4	8	5	13	14	1.0	0	1	60	117	37	0
G 2537H	12	11	8	22	3	59	7.8	15	5	57	7	39	0
H 2551H	5	5	8	18	7	47	5.2	41	1	49	67	18	0
I 2580H	7	12	8	21	47	78	3.7	17	1	43	93	10	0
J 2615H	4	7	2	11	18	8	2.4	18	1	48	145	9	0
K 2628D	7	7	3	5	7	32	5.9	11	1	72	142	26	0
L 2643D	11	14	5	19	39	63	5.6	2	1	53	63	20	0
M 2658B?	5	11	13	24	48	81	2.8	15	2	45	53	16	0
N 2668B?	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2717H	3	3	7	8	16	32	4.5	44	2	44	47	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10820	(FLIGHT	14)											
P 2733B	4	16	9	29	47	144	1.6	6	1	37	60	10	0
Q 2770H	9	15	65	29	16	28	3.5	12	5	43	7	27	0
R 2801D	26	25	64	58	128	90	9.7	10	4	51	11	32	0
S 2804D	26	28	64	58	128	90	8.9	10	4	51	12	32	0
T 2811D	12	20	33	23	69	122	4.1	11	1	44	52	17	0
U 2820B	7	10	12	17	42	55	3.8	21	2	52	38	25	0
V 2838D	9	12	11	15	33	60	5.0	21	2	53	39	26	0
W 2854H	15	21	35	52	140	109	5.7	8	3	31	17	11	0
X 2879H	7	16	12	27	55	95	3.0	11	2	41	26	19	0
Y 2885B	5	14	6	25	50	27	2.3	10	2	46	35	21	0
Z 2888B	6	5	23	25	14	27	8.2	46	2	43	32	19	0
AA 2897B	12	9	20	15	36	20	9.5	30	3	46	17	26	0
AB 2902D	21	19	46	49	107	85	10.0	19	3	35	14	17	0
AC 2906B	15	19	46	49	107	85	5.8	16	3	39	12	21	0
AD 2915D	29	32	40	53	122	67	8.9	8	3	31	15	13	0
AE 2920B	35	29	96	75	169	66	12.9	11	5	28	7	13	0
AF 2927D	34	32	96	68	150	86	11.0	10	4	31	8	16	0
AG 2933B	20	3	88	68	150	3	136.8	33	4	36	10	19	0
AH 2940D	5	8	23	27	67	72	3.3	25	4	41	11	23	0
AI 2943D	35	14	8	27	67	72	33.1	10	3	27	15	9	0
AJ 2951D	23	25	52	27	67	63	8.5	4	2	45	28	21	0
AK 2968D	0	2	1	2	2	4	-	-	-	-	-	-	0
AL 2993S	0	8	1	11	21	66	0.4	0	1	36	664	0	0
AM 3027S	1	6	1	14	35	75	0.4	0	1	21	500	0	0
AN 3050B?	16	22	29	42	103	66	5.7	5	2	39	34	14	0
AO 3053B?	14	22	29	42	103	66	4.7	6	2	40	45	14	0
AP 3127S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10830	(FLIGHT	14)											
A 4045S	2	4	3	6	24	40	1.4	20	1	46	359	0	0
B 4008L	0	2	3	4	12	39	0.3	0	1	47	594	15	0
C 3926H	5	4	8	11	24	20	7.4	35	1	58	66	24	0
D 3908B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3901H	8	5	11	7	15	6	9.5	21	3	66	14	42	0
F 3844E	13	17	7	22	50	34	5.8	6	2	48	26	24	0
G 3838H	14	12	30	23	60	53	9.7	22	3	47	14	27	0
H 3832B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3811D	3	5	6	6	14	20	2.6	27	1	46	262	2	0
J 3806B?	5	4	6	6	7	20	7.0	34	1	53	105	16	0
K 3794H	2	6	4	11	8	51	1.1	8	1	42	118	7	0
L 3776B?	5	6	2	6	6	30	4.0	21	1	48	165	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10830	(FLIGHT	14)											
M 3752D	6	10	6	6	5	36	2.9	15	1	46	88	12	0
N 3738H	10	17	19	37	87	103	4.1	10	2	33	39	8	0
O 3724H	10	13	8	6	4	22	5.0	16	2	35	34	11	0
P 3692D	10	6	11	9	26	16	12.8	23	2	47	36	19	0
Q 3688B?	6	9	18	14	38	22	4.0	13	3	50	20	27	0
R 3686B?	12	9	18	14	38	14	10.2	14	3	46	20	23	0
S 3676H	6	5	22	11	27	22	6.5	20	5	48	8	30	0
T 3665B	10	8	31	22	51	21	9.0	11	3	63	22	37	0
U 3647B	7	5	13	6	35	9	9.3	30	2	73	26	45	0
V 3644B	9	12	1	6	35	7	4.8	1	3	47	23	22	0
W 3637B	6	4	11	10	25	6	9.8	29	2	65	25	38	0
X 3633B	5	3	7	4	9	3	9.9	25	3	63	24	35	0
Y 3617D	11	19	24	18	23	26	3.7	0	3	37	19	15	0
Z 3613D	12	10	19	12	31	22	9.2	5	4	42	12	21	0
AA 3602B?	3	5	5	9	16	35	2.5	26	2	46	27	21	0
AB 3598H	8	5	1	6	13	20	12.1	29	2	47	29	22	0
AC 3567H	12	18	37	18	41	30	4.7	0	4	28	8	11	0
AD 3556H	31	9	78	56	105	2	50.6	3	5	24	7	8	0
AE 3505S	0	2	1	2	2	4	-	-	-	-	-	-	0
AF 3486H	7	7	13	10	20	8	6.9	0	2	37	34	8	0
LINE 10840	(FLIGHT	14)											
A 4164B	3	8	3	11	28	22	2.0	8	1	93	160	44	0
B 4183L	8	6	4	5	2	2	8.2	30	1	198	617	0	0
C 4350B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 4363B	28	23	69	56	138	53	12.5	7	4	35	11	17	0
E 4388H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 4433E	5	6	9	22	32	136	4.2	34	1	40	177	4	0
G 4444H	10	15	14	24	55	95	4.6	15	2	48	33	22	5
H 4466H	2	8	1	8	16	75	1.1	11	1	29	190	0	0
I 4475D	9	12	7	6	34	18	4.7	13	1	40	66	10	0
J 4495D	4	9	6	9	20	38	2.5	15	1	42	196	3	0
K 4507H	3	7	2	14	12	75	1.6	17	1	34	199	0	0
L 4519B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 4525B	3	6	3	6	14	34	2.7	21	1	61	150	18	0
N 4530B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 4537D	8	8	6	4	11	34	6.2	26	1	47	105	12	0
P 4543H	5	9	6	21	33	135	3.0	23	1	35	80	6	0
Q 4554H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 4558B?	8	8	3	24	52	76	6.5	29	2	51	46	23	0
S 4580H	3	7	3	12	21	59	2.3	27	1	42	67	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10840	(FLIGHT 14)												
T 4608H	10	11	6	20	41	57	5.8	25	1	35	57	9	0
U 4620D	10	16	15	4	3	90	4.4	18	2	37	44	12	0
V 4652H	22	19	7	52	78	53	10.5	14	5	32	7	17	0
W 4673B	51	43	90	90	76	121	14.8	2	5	32	7	17	0
X 4689B	10	19	32	41	87	73	3.5	4	3	47	17	25	0
Y 4697B	19	18	21	22	57	28	9.2	3	4	43	12	23	0
Z 4709H	12	13	12	20	42	53	7.2	17	3	51	21	28	0
AA 4725H	3	3	16	8	15	19	4.0	48	3	41	14	22	0
AB 4736D	9	10	34	10	44	18	5.9	10	3	34	14	14	0
AC 4738D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 4745H	14	9	8	4	13	58	0.2	0	1	23	36	11	0
AE 4769D	12	9	11	16	41	24	9.9	25	2	43	22	21	0
AF 4777B	16	11	12	17	39	44	12.1	22	2	44	23	22	7
AG 4787D	3	7	11	13	30	29	2.1	20	2	48	38	21	0
AH 4792D	4	6	23	22	55	8	3.3	27	2	49	30	24	0
AI 4797D	19	13	39	31	70	13	13.2	13	3	35	17	15	0
AJ 4800D	14	12	39	31	70	16	10.0	16	3	35	13	16	0
AK 4807D	10	8	5	16	31	50	9.9	26	3	36	20	15	0
AL 4817B	32	19	41	48	86	49	19.3	12	4	30	9	14	0
AM 4829B	15	7	7	20	42	32	20.3	27	3	38	17	18	0
AN 4832B	6	9	7	20	42	32	4.3	23	3	37	19	17	0
AO 4839E	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 4873S	3	6	2	8	21	38	1.8	16	1	10	512	0	0
AQ 4895H	5	5	8	11	23	29	5.5	32	2	62	43	32	0
AR 4914S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10850	(FLIGHT 19)												
A 10177B?	1	2	1	1	2	4	-	-	-	-	-	-	0
B 10170B?	6	10	12	15	34	47	3.7	11	2	59	32	31	0
C 10149B?	12	15	2	5	24	55	5.5	8	2	35	43	8	0
D 10148B	14	17	16	9	16	55	6.0	7	2	40	34	15	0
E 10145B	7	6	5	9	51	54	7.0	26	3	37	21	15	0
F 10141H	10	9	22	17	39	19	8.2	16	3	39	14	18	0
G 10128H	7	9	12	18	44	28	5.0	19	3	43	20	20	0
H 10112H	8	12	14	23	58	68	4.2	15	2	43	32	18	0
I 10102B?	6	7	21	30	83	46	5.4	27	2	48	51	19	0
J 10097D	23	26	15	53	126	75	8.0	1	3	30	21	9	0
K 10084H	2	6	3	6	14	15	1.4	0	2	48	28	21	0
L 10056S	6	5	6	19	61	7	6.0	30	1	27	150	0	0
M 10050D	7	6	7	4	7	5	7.2	28	1	48	79	15	0
N 10035B	4	3	1	7	4	3	8.9	40	1	75	119	31	50

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10850	(FLIGHT	19)											
O 9980S	0	2	1	2	0	4	-	-	-	-	-	-	0
P 9961B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 9944D	1	2	1	2	2	4	-	-	-	-	-	-	0
R 9940D	4	7	5	6	0	3	2.7	4	1	75	69	37	0
S 9897B?	0	4	2	5	12	14	0.8	0	1	50	470	17	0
LINE 10851	(FLIGHT	20)											
A 9976H	14	7	14	1	28	7	18.7	0	5	51	7	32	0
B 9958D	4	4	0	2	13	18	4.2	24	1	133	1025	0	0
C 9877S	0	2	1	2	2	4	-	-	-	-	-	-	0
D 9842S	1	8	2	5	6	21	0.6	0	1	71	232	20	0
E 9779D	1	2	1	2	2	4	-	-	-	-	-	-	0
F 9771B	13	9	12	4	36	61	11.3	20	4	77	9	56	7
G 9762S	7	9	5	14	35	39	4.5	23	1	55	89	20	0
H 9749S	3	6	1	4	16	29	0.6	0	1	17	331	0	0
I 9739B	10	17	8	20	55	20	3.9	3	2	46	53	16	0
J 9733S	6	12	4	16	38	85	2.5	10	1	44	125	8	0
K 9727D	8	9	6	16	35	85	5.8	24	1	83	144	38	0
L 9722S	2	7	2	5	13	55	1.3	10	1	49	297	4	0
M 9715S	3	7	1	8	13	55	2.1	18	1	65	257	17	0
N 9692S	3	7	1	8	27	78	2.4	25	1	47	151	9	0
O 9682B?	10	8	8	11	32	17	8.5	31	2	65	50	34	0
P 9678B?	10	5	10	12	36	7	15.3	37	2	63	43	33	0
Q 9670S	3	11	2	18	41	113	1.2	3	1	36	95	5	0
R 9667D	1	2	0	2	2	4	-	-	-	-	-	-	0
S 9659S	4	9	4	16	42	75	2.5	17	1	43	81	12	0
T 9644H	6	4	2	3	3	14	10.6	34	1	48	90	13	0
U 9631B	2	3	5	4	14	10	1.0	0	1	46	98	26	0
V 9607B	16	16	6	27	64	58	8.8	15	3	42	12	23	0
W 9594B	23	15	36	28	66	43	14.9	13	4	42	11	23	0
LINE 10860	(FLIGHT	19)											
A 9097S	1	1	0	1	1	4	-	-	-	-	-	-	0
B 9219H	3	5	3	2	17	27	0.7	0	1	21	280	0	0
C 9267H	3	12	4	14	27	52	1.5	0	2	55	44	26	0
D 9276H	5	3	7	9	13	22	9.8	47	3	74	20	48	0
E 9286B	9	6	3	16	30	95	12.5	36	2	64	48	33	0
F 9301B	2	5	2	11	28	49	1.7	25	1	55	173	14	0
G 9303D	5	9	11	9	39	49	2.6	17	1	50	156	11	0
H 9308D	12	15	13	16	40	64	5.8	16	1	42	67	12	0
I 9311D	9	8	13	16	41	64	8.0	32	1	50	66	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10860	(FLIGHT 19)												
J 9317B	13	10	6	14	30	32	10.0	21	1	42	71	11	0
K 9323D	4	5	5	8	16	69	4.9	36	1	50	99	15	0
L 9330B?	1	2	1	2	2	4	-	-	-	-	-	-	0
M 9344B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 9351S	3	8	4	15	43	138	2.0	21	1	32	182	0	0
O 9354B	1	2	1	1	1	4	-	-	-	-	-	-	0
P 9366B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 9374H	9	13	5	20	27	106	4.4	17	1	40	57	12	0
R 9384H	1	9	1	15	29	114	0.6	1	1	33	94	3	0
S 9393H	3	9	4	16	41	80	1.3	6	1	36	77	6	0
T 9405H	1	9	3	16	34	93	0.7	1	1	34	93	4	0
U 9414B?	5	8	2	11	27	69	3.2	25	1	37	89	7	0
V 9446H	3	4	7	10	19	33	3.4	47	2	62	27	36	0
W 9468D	4	6	36	14	48	14	2.9	25	4	52	10	33	0
X 9470D	4	9	36	14	14	14	2.0	6	5	46	8	29	0
Y 9474D	2	3	6	2	6	11	3.1	42	5	51	8	33	0
Z 9478D	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 9480D	22	17	23	19	46	63	12.5	13	5	47	7	30	0
AB 9483D	18	14	23	3	53	63	11.2	12	5	40	6	24	0
AC 9488D	18	7	49	15	45	34	26.2	10	4	43	12	23	0
AD 9496H	11	11	11	14	43	49	7.1	17	2	52	31	26	0
AE 9508H	2	9	11	14	36	62	1.0	0	2	44	25	20	0
AF 9519B?	6	3	9	6	25	7	12.9	44	2	53	30	26	0
AG 9526D	3	13	20	26	67	61	1.0	0	3	44	22	22	0
AH 9528D	12	17	20	26	67	61	5.0	13	3	42	20	20	0
AI 9534D	13	18	50	47	103	56	5.0	12	3	37	13	19	0
AJ 9537D	18	19	50	47	103	51	8.1	10	3	37	15	18	0
AK 9545H	5	9	8	17	17	52	3.1	21	2	45	27	21	0
AL 9560B	15	13	15	22	56	47	9.2	13	2	52	39	24	0
AM 9573H	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 9598B?	8	3	12	22	25	3	26.9	40	2	41	39	15	0
AO 9612D	20	22	22	39	108	92	8.0	10	1	29	75	1	0
AP 9630B?	4	3	3	3	17	31	6.6	54	1	14	329	0	40
AQ 9638D	0	3	1	7	30	23	0.4	0	1	35	127	1	0
AR 9644D	10	8	4	14	28	16	9.6	28	1	48	89	14	0
AS 9652H	2	5	2	11	23	7	2.2	26	2	73	45	40	0
AT 9668H	1	2	1	1	1	4	-	-	-	-	-	-	0
AU 9772B?	3	10	2	5	13	49	1.2	1	1	60	303	12	0
AV 9787H	1	2	0	1	2	4	-	-	-	-	-	-	0
LINE 10870	(FLIGHT 18)												
A 1968H	2	5	5	4	21	18	1.0	0	1	47	177	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FTID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10870	(FLIGHT	18)											
B 1888S	1	2	0	1	2	4	-	-	-	-	-	-	0
C 1836H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 1825H	6	13	5	15	9	66	2.4	9	2	63	57	31	0
E 1798H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1779H	16	12	23	11	11	9	11.7	20	3	54	18	32	0
G 1762H	6	7	10	13	29	89	4.9	34	1	46	75	15	0
H 1746H	9	14	7	22	56	128	3.9	18	1	30	116	0	0
I 1733H	19	14	26	33	69	60	12.3	17	2	39	26	16	0
J 1724B	19	8	30	26	52	58	25.1	21	3	55	16	33	0
K 1722B	25	13	30	26	52	58	22.1	19	2	43	29	19	0
L 1707B?	5	8	4	12	24	47	3.0	13	1	89	273	33	0
M 1703B	3	9	5	13	24	47	1.9	2	1	46	154	5	0
N 1697B?	1	2	1	2	2	4	-	-	-	-	-	-	0
O 1696H	4	7	3	12	21	57	2.5	19	1	43	170	4	0
P 1681H	4	8	4	10	8	44	2.7	21	1	43	123	7	0
Q 1672H	9	12	8	21	43	115	5.3	21	2	43	52	16	0
R 1653H	5	8	4	12	34	77	3.4	23	1	36	65	7	0
S 1635H	8	5	5	3	8	2	1.0	0	1	23	108	6	0
T 1610H	5	6	9	9	21	13	4.8	29	3	62	19	38	0
U 1600B	2	8	24	11	31	46	1.3	11	3	58	14	37	0
V 1589D	47	40	91	71	192	31	14.3	0	5	27	6	13	0
W 1587D	60	41	91	75	203	78	19.7	0	5	27	6	12	0
X 1578B?	29	23	53	48	125	84	12.5	9	4	38	11	20	0
Y 1575H	25	18	53	48	125	84	14.1	10	5	37	7	21	0
Z 1565B	16	15	15	28	66	69	9.2	14	3	40	12	21	0
AA 1563B	12	10	25	28	66	69	9.2	19	3	45	18	23	0
AB 1552B?	6	9	8	17	5	97	4.0	16	2	42	25	18	0
AC 1549H	2	16	8	17	2	98	0.7	0	2	41	30	17	0
AD 1539B	3	2	5	4	12	65	7.0	48	2	67	26	39	0
AE 1532H	12	8	16	15	40	25	13.7	16	3	66	22	39	0
AF 1524B?	6	5	1	8	26	33	7.4	32	1	93	66	54	0
AG 1518B	11	9	7	9	23	21	8.4	11	2	70	42	38	0
AH 1501B	5	12	16	21	62	33	2.0	4	2	54	38	26	0
AI 1490H	8	8	5	2	10	27	6.7	16	2	65	39	34	0
AJ 1473B?	5	11	6	13	33	68	2.5	9	1	44	150	6	0
AK 1462H	1	4	9	4	18	20	1.0	0	1	20	141	0	0
AL 1443H	3	2	4	3	4	8	7.4	39	2	130	47	89	0
AM 1378H	3	3	4	5	13	15	0.9	0	1	53	246	26	0
AN 1365H	7	12	5	18	54	61	3.4	5	1	36	159	0	0
AO 1354H	3	4	2	2	11	4	1.0	0	1	58	280	31	0
AP 1341D	4	8	5	7	15	39	2.3	22	1	68	321	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10880	(FLIGHT	18)											
A 516H	7	8	11	12	35	52	5.6	12	2	49	44	19	0
B 598S	0	1	0	1	2	4	-	-	-	-	-	-	0
C 629S	1	1	0	1	1	4	-	-	-	-	-	-	0
D 694S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 721H	3	1	19	0	1	20	35.7	73	3	69	15	45	0
F 728H	8	2	2	5	5	75	36.4	49	2	67	26	40	0
G 733H	1	7	2	9	16	75	0.7	6	1	50	78	17	0
H 742E	4	12	5	21	35	141	1.9	10	1	39	86	8	0
I 751H	1	4	2	9	21	59	0.6	6	1	31	143	0	0
J 761H	5	12	7	23	49	117	2.0	11	1	30	91	1	0
K 791H	10	5	10	12	29	14	15.9	25	2	51	32	24	0
L 805D	1	8	0	4	32	26	0.4	0	1	60	258	13	0
M 818D	5	1	8	17	42	55	54.6	55	1	45	129	7	0
N 833S	2	7	1	14	25	98	1.6	19	1	29	240	0	0
O 850B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 855B?	5	11	1	17	16	82	2.4	13	1	42	79	11	0
Q 870H	4	12	8	11	19	112	2.0	15	1	29	66	4	0
R 908H	6	2	11	9	19	38	28.1	58	2	50	38	23	0
S 914B?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 921D	6	5	5	6	11	20	7.3	35	1	54	65	22	0
U 926B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 949H	10	9	45	16	46	36	8.7	25	4	44	9	27	0
W 959D	19	14	78	34	87	17	13.0	13	5	36	7	20	0
X 962D	34	15	78	34	87	17	29.5	10	6	32	4	19	0
Y 965D	36	21	78	45	129	50	20.5	8	5	34	7	19	0
Z 977B	30	15	46	28	86	5	24.3	14	4	43	9	26	0
AA 979B	31	16	46	27	89	24	23.3	15	5	46	7	29	0
AB 987B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 992H	25	13	16	17	48	29	21.7	16	3	41	18	20	0
AD 1004B	7	5	10	22	56	11	10.1	41	2	43	38	18	0
AE 1016B	9	7	9	14	30	24	8.9	31	2	58	29	32	0
AF 1018B	12	8	9	14	30	25	13.4	30	2	53	24	29	0
AG 1023B	2	24	29	53	137	85	0.5	0	3	43	14	23	0
AH 1025D	36	15	29	53	137	85	32.1	15	4	44	11	26	0
AI 1028B	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 1035D	7	8	8	14	35	39	4.8	24	1	70	132	28	0
AK 1039D	9	11	13	16	13	41	5.1	15	2	62	50	30	0
AL 1042D	9	9	11	20	50	36	7.0	17	2	53	35	26	0
AM 1045D	9	7	11	19	50	40	8.3	23	2	50	48	20	0
AN 1054D	11	7	7	9	25	22	12.1	24	2	66	35	37	0
AQ 1058D	5	3	8	1	4	11	10.8	50	2	68	49	36	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10880	(FLIGHT	18)											
AP 1063D	14	15	17	24	63	61	7.3	14	2	44	34	18	0
AQ 1066D	10	11	17	22	63	45	6.9	22	2	55	33	29	10
AR 1069D	1	2	1	2	2	4	-	-	-	-	-	-	0
AS 1075D	6	2	4	5	11	6	22.3	56	2	58	37	31	0
AT 1094B	5	5	4	2	11	41	4.9	37	1	68	61	35	0
AU 1100B	6	11	8	14	40	35	3.4	16	1	50	59	19	0
AV 1107D	14	25	17	26	38	127	4.1	7	1	46	134	10	0
AW 1130S	1	2	0	2	2	4	-	-	-	-	-	-	0
AX 1219D	7	8	5	9	9	9	5.1	2	1	58	87	19	0
AY 1222B	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 1231B	1	2	1	2	2	4	-	-	-	-	-	-	0
BA 1245B	1	2	1	1	2	1	-	-	-	-	-	-	0
BB 1249B	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 1264B	3	4	1	3	9	24	0.3	0	1	40	631	10	0
LINE 10890	(FLIGHT	17)											
A 5069H	5	4	6	1	2	2	9.2	31	3	68	16	44	0
B 5100S	0	2	1	2	2	4	-	-	-	-	-	-	0
C 5135S	0	4	0	4	10	18	0.5	0	1	22	720	0	0
D 5178S	1	0	0	1	2	4	-	-	-	-	-	-	0
E 5190S	1	2	1	4	14	38	0.4	0	1	15	310	0	0
F 5201E	6	15	7	22	83	82	2.2	0	1	17	187	0	7
G 5208S	3	5	6	8	33	46	2.7	27	1	21	150	0	0
H 5226B?	5	10	6	6	36	61	2.6	12	1	56	66	23	0
I 5233H	7	4	13	5	15	26	14.0	42	3	72	14	49	10
J 5250B?	6	10	8	17	18	76	3.1	19	1	48	65	17	0
K 5254B?	1	2	1	2	2	4	-	-	-	-	-	-	0
L 5259H	1	5	1	7	19	41	1.0	15	1	40	136	5	0
M 5265B?	4	3	2	2	4	18	6.1	51	1	42	127	6	0
N 5273H	6	10	7	16	41	46	3.4	18	1	38	92	6	0
O 5286H	1	2	1	2	2	4	-	-	-	-	-	-	0
P 5309D	1	8	1	8	25	40	0.5	0	1	61	177	17	0
Q 5313D	4	4	1	3	10	15	5.8	41	1	79	218	29	0
R 5321B	5	7	10	12	36	31	4.6	28	1	63	65	30	0
S 5327B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 5333S	1	9	2	13	29	29	0.4	0	1	28	215	0	0
U 5369H	5	11	7	19	41	80	2.1	10	1	38	59	10	0
V 5382B?	5	5	3	8	18	37	6.1	40	1	50	65	19	0
W 5391B?	5	5	8	11	22	35	5.8	39	1	43	63	13	0
X 5404B?	5	11	6	17	39	85	2.5	15	2	43	41	17	0
Y 5413H	6	5	5	4	6	25	7.8	40	2	55	36	28	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10890	(FLIGHT	17)											
Z 5418B	4	5	5	7	12	37	4.8	38	2	52	51	23	0
AA 5421D	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 5432D	9	6	4	7	23	12	10.1	30	2	51	24	27	0
AC 5441B	23	7	40	24	4	2	41.8	21	4	40	9	22	0
AD 5445B	1	2	1	2	1	4	-	-	-	-	-	-	0
AE 5463D	4	7	23	12	37	12	2.9	22	6	51	4	36	0
AF 5467B	20	12	40	23	59	33	15.5	12	5	47	7	30	0
AG 5470B	15	12	31	25	61	31	10.3	10	4	46	13	26	0
AH 5478B	10	9	23	22	54	29	7.7	14	4	50	11	30	0
AI 5480B	11	10	23	21	54	28	9.0	10	4	44	11	24	0
AJ 5483B	7	3	23	21	54	28	19.6	33	3	60	13	37	0
AK 5488H	5	6	11	15	37	33	4.4	18	3	47	14	26	0
AL 5513B	27	22	28	36	92	55	12.2	5	3	41	22	18	0
AM 5523B	7	5	5	6	19	29	7.8	31	1	66	76	30	0
AN 5532D	6	6	10	9	23	17	5.9	17	2	58	33	29	0
AO 5540B	13	9	16	17	41	29	11.5	14	3	46	19	23	0
AP 5544D	4	5	16	17	41	3	4.3	26	2	59	37	29	0
AQ 5548B	7	4	15	11	23	9	11.5	34	3	53	17	30	0
AR 5554B	8	4	13	4	13	6	15.9	39	2	69	25	43	0
AS 5562B	5	2	3	3	6	8	15.2	58	2	70	39	40	0
AT 5572H	7	4	5	5	10	5	10.8	32	2	67	37	37	0
AU 5582B	9	12	9	15	43	32	5.3	11	1	45	58	14	0
AV 5589B	13	14	8	23	13	2	7.1	9	1	44	71	12	0
AW 5607B	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 5614H	4	3	3	1	1	19	0.1	0	1	44	411	16	0
AY 5703D	4	7	5	12	32	14	2.3	0	1	55	164	8	0
AZ 5708D	2	5	5	1	7	5	1.9	18	1	62	99	24	0
BA 5711D	11	10	15	16	42	5	7.7	11	1	53	81	18	0
BB 5714D	7	3	15	16	42	10	19.6	34	1	55	60	22	0
BC 5745D	3	5	4	8	14	22	2.6	32	1	76	334	22	0
BD 5747D	1	5	1	5	14	22	1.0	12	1	110	708	11	0
LINE 10900	(FLIGHT	17)											
A 4961L	28	15	12	22	26	78	21.5	8	4	37	10	19	0
B 4936H	7	2	3	6	14	14	28.4	45	5	67	8	47	0
C 4903H	11	8	17	11	26	45	9.6	23	2	57	24	32	0
D 4874H	2	9	1	12	3	8	1.2	0	1	33	151	0	0
E 4836S	1	8	1	15	36	95	0.4	0	1	18	448	0	0
F 4817B?	6	8	0	13	18	40	4.0	18	1	35	115	1	0
G 4814H	3	8	5	15	5	40	1.8	10	1	36	102	3	0
H 4790D	4	8	0	1	3	61	2.1	16	2	65	47	35	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 10900	(FLIGHT	17)											
I 4781H	6	2	7	5	20	7	1.0	0	1	23	144	5	0
J 4747H	4	9	5	10	36	58	2.1	14	1	32	104	1	0
K 4732B?	1	2	1	2	2	4	-	-	-	-	-	-	0
L 4707H	1	4	3	10	21	30	0.5	0	1	34	227	0	0
M 4691B?	12	10	16	20	39	54	8.8	26	1	49	53	20	0
N 4659H	1	1	1	2	2	4	-	-	-	-	-	-	0
O 4642H	2	6	1	7	20	32	1.5	12	1	40	110	6	0
P 4633B?	4	8	5	11	16	69	2.9	24	1	45	77	13	0
Q 4610H	3	4	6	10	6	32	3.6	36	2	49	29	23	0
R 4588H	6	4	12	8	21	6	10.3	40	3	57	18	34	0
S 4576D	7	6	8	9	27	4	7.7	30	3	60	15	37	0
T 4573D	7	6	8	9	27	13	7.7	27	3	57	15	35	0
U 4570D	4	6	8	7	17	19	3.2	21	3	59	20	34	0
V 4565H	6	5	7	5	13	10	1.0	0	1	33	45	18	0
W 4557H	11	6	22	13	36	12	16.7	22	5	45	7	28	0
X 4552H	26	18	37	35	93	50	14.3	2	4	44	12	24	0
Y 4537H	12	7	12	8	25	2	12.8	23	3	47	13	27	0
Z 4534B?	11	8	12	5	25	14	12.0	24	3	51	17	29	0
AA 4511B	15	13	18	24	58	45	9.6	14	2	46	25	22	0
AB 4498D	17	13	10	22	61	81	11.3	18	2	55	38	27	0
AC 4496B	21	19	10	32	79	81	10.2	11	3	49	23	26	0
AD 4495B	21	19	16	32	79	81	10.2	11	2	44	22	22	0
AE 4492B	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 4489B	5	2	23	32	79	60	20.7	55	2	48	27	23	0
AG 4487B	15	8	23	16	44	2	19.0	13	3	43	14	22	0
AH 4477H	1	2	1	2	1	4	-	-	-	-	-	-	0
AI 4463B	12	8	47	42	82	29	12.3	21	2	58	36	30	0
AJ 4459B	29	19	47	42	82	29	16.9	7	4	38	10	21	0
AK 4450B	5	5	13	9	19	20	5.8	31	1	43	63	12	0
AL 4444B	9	26	38	49	21	83	2.5	0	2	32	27	8	0
AM 4441B	22	22	38	49	69	83	9.1	0	2	33	31	8	0
AN 4428D	0	5	2	8	27	29	0.4	0	1	78	907	0	130
AO 4425D	4	6	1	8	27	29	3.1	19	1	65	815	0	0
AP 4417H	1	1	3	5	7	14	1.4	30	1	85	177	35	8
AQ 4363H	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 4344D	4	8	8	9	21	2	2.6	10	1	75	935	0	0
AS 4338D	7	6	8	6	15	12	6.2	27	1	68	236	19	0
AT 4331B	4	7	3	9	15	40	3.3	20	1	57	656	0	0
AU 4330B	4	7	1	9	15	40	3.5	22	1	39	547	0	0
AV 4299D	8	12	2	7	18	19	3.9	10	1	68	783	0	0
LINE 10910	(FLIGHT	17)											
A 3410H	9	15	13	26	42	31	4.0	6	2	30	38	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10910	(FLIGHT	17)											
B 3419L?	2	2	2	3	4	2	5.3	76	3	61	15	38	0
C 3449H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3478H	7	3	8	6	18	9	17.2	38	2	74	25	47	0
E 3503H	1	1	1	2	2	4	-	-	-	-	-	-	0
F 3547S	1	4	1	5	12	41	0.5	0	1	40	689	0	0
G 3562S?	1	5	3	4	10	32	0.3	0	1	18	431	0	0
H 3580H	4	6	2	5	34	26	1.0	0	1	15	116	0	0
I 3592B	6	2	1	2	4	7	29.2	44	2	65	43	33	0
J 3608H	9	2	19	9	14	19	37.9	38	4	61	12	40	0
K 3624H	1	4	2	5	4	3	0.7	3	1	37	149	0	0
L 3646H	3	7	6	11	33	40	2.3	15	1	34	166	0	0
M 3679H	2	2	3	6	17	3	3.9	68	1	41	219	2	0
N 3693B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 3701S?	2	6	1	8	10	63	1.5	17	1	21	428	0	0
P 3711S	1	6	1	8	17	70	0.5	0	1	22	426	0	0
Q 3727S?	3	8	2	14	16	100	1.8	14	1	45	114	10	0
R 3743H	6	7	5	10	18	42	5.6	29	1	47	97	12	0
S 3756H	1	2	1	2	2	4	-	-	-	-	-	-	0
T 3770B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 3776D	7	5	18	14	31	24	8.2	36	2	53	43	24	0
V 3785B	8	10	9	20	55	26	5.5	18	3	52	20	29	0
W 3787B	12	11	9	20	55	26	8.2	13	2	43	24	19	0
X 3810H	9	3	12	10	20	6	27.5	46	2	59	26	34	0
Y 3830B?	10	5	6	5	14	14	16.8	32	3	49	13	28	0
Z 3833B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 3844H	8	3	7	7	16	15	22.6	45	5	39	7	23	0
AB 3849B	43	29	74	20	55	27	17.5	2	5	35	6	20	0
AC 3854B	17	12	65	56	146	73	12.4	5	3	48	17	26	0
AD 3865H	19	18	29	29	20	62	9.7	4	4	48	11	28	0
AE 3888D	5	4	2	1	3	7	8.3	36	2	88	51	53	0
AF 3896B	9	9	10	18	46	35	6.9	7	2	64	30	35	0
AG 3898B	12	11	10	18	46	33	7.9	6	2	45	30	18	0
AH 3903D	17	7	12	8	13	33	25.1	20	1	43	63	12	0
AI 3905D	10	11	12	8	35	18	6.9	14	2	48	28	23	0
AJ 3913B	16	15	9	24	56	58	9.2	15	2	41	25	18	0
AK 3915B	12	10	18	17	36	59	9.1	26	2	49	26	25	0
AL 3918B	5	16	6	27	12	59	1.6	3	2	48	31	23	0
AM 3944H	19	2	23	19	41	9	174.0	20	3	51	18	28	0
AN 3963H	1	2	1	2	1	4	-	-	-	-	-	-	0
AO 4007D	10	10	6	10	8	8	7.8	4	1	45	221	0	0
AP 4026H	1	1	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10910	(FLIGHT	17)											
AQ 4105B?	1	2	1	1	2	1	-	-	-	-	-	-	0
AR 4111D	1	2	1	2	2	2	-	-	-	-	-	-	0
AS 4115B?	4	2	3	6	15	2	7.7	49	1	73	451	7	0
AT 4150B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 4154B?	0	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10920	(FLIGHT	17)											
A 3370H	5	11	10	12	38	31	2.3	1	2	41	25	17	0
B 3360H	8	11	10	9	21	13	4.5	19	3	53	23	30	0
C 3335H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 3305H	8	5	3	4	12	23	12.1	23	4	60	12	38	0
E 3284H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3230S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3211S	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3192H	9	9	22	4	13	77	6.0	22	4	44	10	26	0
I 3180B	10	11	24	14	41	52	6.3	16	2	45	24	21	9
J 3158H	1	5	3	11	23	54	0.8	13	1	34	147	1	0
K 3142H	4	7	5	12	31	56	2.6	20	1	34	142	0	0
L 3115H	1	6	2	9	6	50	0.9	9	1	34	243	0	0
M 3101H	7	6	12	11	20	58	7.0	33	1	53	61	22	0
N 3093H	2	6	2	10	6	68	1.5	13	1	31	281	0	0
O 3055H	1	9	12	12	26	54	0.4	0	2	46	40	18	0
P 3042D	2	5	4	5	12	22	2.0	25	1	57	106	20	0
Q 3035B	5	10	9	14	37	32	2.8	13	1	48	63	16	0
R 3027B	6	9	9	16	41	52	4.0	18	2	42	48	14	0
S 3018H	2	1	7	8	16	11	10.8	82	2	46	36	18	0
T 3012D	1	2	0	2	2	4	-	-	-	-	-	-	0
U 3007B	7	9	12	15	42	19	5.0	22	2	49	46	21	0
V 3003D	1	2	1	2	2	4	-	-	-	-	-	-	0
W 2999D	7	4	5	9	31	51	15.0	43	2	42	26	18	0
X 2997B?	2	5	5	9	31	0	2.1	28	2	47	28	23	0
Y 2990D	5	8	5	7	13	12	3.1	24	2	47	38	21	0
Z 2986D	5	8	14	11	20	50	3.3	21	2	48	36	22	0
AA 2982D	15	7	42	7	5	50	21.3	22	3	44	17	23	0
AB 2977B	32	23	6	23	57	55	15.4	0	4	31	10	13	0
AC 2961H	7	5	4	3	9	3	9.4	27	3	55	13	33	0
AD 2945B?	11	16	18	31	61	50	4.6	12	4	42	10	24	0
AE 2936H	4	3	24	6	25	4	9.5	47	6	48	4	33	0
AF 2931B?	6	4	3	3	6	3	9.4	33	4	51	10	32	0
AG 2925B	18	17	18	24	63	75	9.0	13	2	49	31	24	0
AH 2914B	13	16	1	7	18	82	5.7	13	2	53	27	29	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10920	(FLIGHT 17)												
AI 2906B	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 2904D	26	26	38	45	111	112	9.9	6	3	34	18	14	0
AK 2902D	24	22	38	45	111	112	9.9	9	2	39	23	17	0
AL 2899D	7	10	26	37	80	103	4.6	21	2	50	31	24	0
AM 2894B	23	16	13	20	51	33	14.4	12	2	39	30	15	0
AN 2890D	12	9	6	4	10	17	10.4	22	2	55	32	28	0
AO 2881H	1	2	1	2	2	4	-	-	-	-	-	-	0
AP 2864H	9	8	13	13	30	28	7.7	25	2	55	35	28	0
AQ 2858H	10	1	18	18	7	26	281.4	41	2	53	24	28	0
AR 2845H	4	4	3	1	2	7	0.2	0	1	56	63	37	0
AS 2785D	3	6	2	6	7	27	2.6	23	1	87	805	0	0
AT 2731S	1	2	1	2	2	3	-	-	-	-	-	-	0
AU 2710B?	6	7	8	4	3	19	4.7	25	1	60	296	11	0
AV 2707B?	5	8	9	11	3	1	3.0	9	1	55	89	18	0
AW 2669S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10930	(FLIGHT 17)												
A 1751H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1768H	6	8	7	15	6	28	4.5	28	2	60	41	31	0
C 1816H	3	1	17	1	3	35	0.1	0	1	34	42	19	0
D 1845H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1855B?	3	11	2	16	48	95	1.6	9	1	24	462	0	0
F 1870S	3	4	1	6	7	26	2.8	42	1	30	586	0	6
G 1888S?	3	5	2	4	11	17	0.6	0	1	29	244	7	0
H 1910S	1	2	1	2	2	4	-	-	-	-	-	-	0
I 1936D	17	20	11	11	28	111	6.7	3	2	38	51	9	0
J 1939D	26	15	12	14	28	111	18.9	12	2	36	25	14	0
K 1942B	6	4	30	14	10	111	7.8	37	3	41	18	20	0
L 1947D	20	15	28	27	54	170	12.5	17	4	39	10	21	0
M 1951D	20	19	28	28	59	170	9.5	17	4	42	11	24	19
N 1953B	3	2	28	23	17	97	8.2	72	3	41	15	21	0
O 1969S?	2	9	4	24	13	126	1.1	10	1	29	173	0	0
P 2000H	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2013B?	1	9	1	12	18	86	0.6	1	1	30	295	0	0
R 2031S	2	10	2	17	23	163	0.7	1	1	12	431	0	0
S 2078H	3	8	5	19	1	81	2.0	20	1	35	96	5	0
T 2083B?	9	10	15	19	4	81	5.7	26	1	41	58	13	0
U 2088D	7	7	15	3	19	27	6.2	35	2	62	44	33	0
V 2091D	8	10	9	9	22	48	4.9	28	1	56	92	22	0
W 2106D	5	9	2	1	4	2	2.8	18	1	43	93	10	0
X 2109B?	4	5	5	4	12	45	0.3	0	1	18	147	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10930	(FLIGHT	17)											
Y 2122B?	4	4	6	9	20	43	6.0	48	2	50	53	20	0
Z 2134H	12	10	1	26	61	40	9.2	21	2	39	22	18	0
AA 2143D	3	5	15	20	32	22	2.8	30	1	52	64	20	0
AB 2152H	8	3	6	4	6	15	26.6	40	2	47	33	21	0
AC 2178H	11	9	22	1	4	4	0.8	0	1	28	35	15	0
AD 2197H	6	4	6	10	26	10	8.5	35	3	49	17	27	0
AE 2212B	3	4	7	4	9	13	3.6	29	3	52	15	29	0
AF 2218H	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 2249B	29	22	44	37	24	39	13.8	0	4	35	9	18	0
AH 2262H	10	9	2	19	22	77	7.7	25	2	61	49	30	0
AI 2298H	16	7	22	16	9	47	22.4	32	3	57	15	36	0
AJ 2315H	4	7	5	2	5	19	0.2	0	1	56	111	36	0
AK 2386D	4	5	0	1	7	17	3.6	30	1	107	952	0	0
AL 2396D	3	5	0	3	7	21	3.2	26	1	77	522	4	0
AM 2477B	8	12	13	8	14	24	3.8	5	1	40	72	8	0
AN 2480B	3	10	8	19	61	78	1.7	0	1	36	104	1	0
AO 2489D	7	7	5	7	14	14	5.8	25	1	84	99	43	0
AP 2521H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10940	(FLIGHT	17)											
A 1708H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1679H	11	7	17	15	40	19	10.9	26	4	58	9	39	0
C 1661H	23	9	4	3	13	39	32.3	15	6	50	5	34	0
D 1656B?	20	11	10	23	18	82	17.2	14	5	40	5	24	0
E 1613S?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1606S?	3	9	3	13	42	51	1.6	8	1	28	317	0	0
G 1586S	2	2	1	5	14	27	5.0	61	1	43	548	0	0
H 1567S	2	3	2	10	4	53	2.8	41	1	23	467	0	0
I 1552S	1	3	0	5	15	44	1.4	36	1	38	736	0	0
J 1523B	21	11	9	8	28	90	19.6	15	5	37	7	21	0
K 1520B	33	5	50	44	12	90	129.9	17	4	39	10	21	9
L 1509B	6	2	9	3	4	39	26.9	49	1	42	115	7	0
M 1502H	1	5	2	10	24	4	1.1	15	1	35	155	0	5
N 1492D	4	4	1	6	10	42	4.4	43	1	45	250	4	0
O 1477B	7	8	3	11	20	57	5.4	28	1	49	113	14	0
P 1456S	2	9	2	17	35	123	0.9	2	1	21	255	0	0
Q 1438B	6	4	4	6	13	8	10.5	46	1	59	139	20	0
R 1400H	3	5	2	6	13	32	2.5	35	1	35	90	5	0
S 1393B	9	13	16	24	56	80	4.1	14	2	43	45	16	0
T 1391B	10	13	16	24	56	80	4.9	15	2	44	45	16	0
U 1378H	2	6	3	10	28	58	1.5	22	1	43	162	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10940	(FLIGHT	17)											
V 1369B?	5	5	5	5	16	28	6.5	42	1	63	78	29	0
W 1358D	4	5	4	8	23	17	4.0	33	1	57	82	22	0
X 1351H	6	9	14	16	47	47	3.9	20	2	50	36	23	0
Y 1346B	10	14	26	33	79	54	4.7	14	3	49	20	26	0
Z 1342B	12	15	26	33	79	54	5.6	17	2	38	35	14	0
AA 1338D	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 1334D	7	9	12	15	42	37	5.1	23	2	52	26	27	0
AC 1332D	8	8	12	15	42	37	6.5	26	2	54	24	30	0
AD 1330D	9	7	11	11	29	9	10.0	26	2	52	28	27	0
AE 1324D	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 1319D	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 1318D	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 1315D	4	6	3	5	18	19	2.8	23	2	61	52	29	0
AI 1309B	7	8	12	10	24	9	5.3	23	3	58	20	34	0
AJ 1307B	8	8	14	13	30	9	6.8	24	3	62	23	37	0
AK 1290B	11	12	8	3	12	24	7.1	10	4	50	11	30	0
AL 1284B	4	10	8	20	59	67	2.3	10	3	42	16	22	0
AM 1282B	5	12	6	20	59	67	2.4	8	3	40	17	20	0
AN 1274B	3	7	4	31	23	112	1.8	22	3	53	14	33	0
AO 1270B	10	18	26	33	81	112	3.7	14	2	53	25	30	0
AP 1259B	13	18	14	23	59	75	5.4	13	2	57	35	30	0
AQ 1254B	5	5	14	23	59	47	4.8	30	2	65	54	33	0
AR 1250B	13	11	10	11	21	47	9.3	19	2	53	52	23	0
AS 1244B?	18	13	25	26	74	32	12.0	18	3	49	19	27	0
AT 1233H	7	2	9	8	18	22	36.8	53	2	62	50	31	0
AU 1217H	6	4	11	6	15	2	10.7	39	2	67	35	37	0
AV 1209H	10	5	17	11	24	36	17.2	31	3	66	21	41	0
AW 1059B	14	15	25	27	75	59	7.6	20	2	56	27	32	0
AX 1053D	5	7	16	7	23	48	3.7	19	1	69	149	25	0
AY 1045B	2	4	3	5	9	20	1.5	23	1	70	329	16	0
LINE 10950	(FLIGHT	2)											
A 151B	1	8	2	11	34	49	0.8	4	3	53	15	32	0
B 169H	2	11	1	6	13	11	1.0	0	5	34	6	19	0
C 220H	8	4	2	7	2	4	17.1	27	3	56	20	31	0
D 262S	1	4	0	9	6	26	0.7	12	1	42	732	0	0
E 277S	1	5	3	8	27	17	1.1	12	1	37	254	0	0
F 291S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 308S?	2	12	1	16	15	110	1.0	5	1	18	520	0	0
H 330B	11	2	4	4	32	22	70.0	39	4	59	10	39	0
I 335B	1	2	1	2	2	4	-	-	-	-	-	-	40

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL	HORIZONTAL		CONDUCTIVE	MAG	
		1050 HZ		892 HZ		7323 HZ		DIKE	SHEET		EARTH	CORR	
ANOMALY/		REAL QUAD		REAL QUAD		REAL QUAD		COND DEPTH*	COND DEPTH		RESIS DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M OHM-M	M	NT
LINE 10950	(FLIGHT 2)												
J 343B		1	2	1	2	2	4	-	-	-	-	-	0
K 348D		7	7	9	8	19	11	7.1	26	1	51	84	17
L 354B		4	5	0	3	19	9	4.4	31	1	48	101	12
M 360H		5	5	5	10	11	10	6.1	33	1	42	67	11
N 368B		4	10	3	13	36	68	2.3	3	1	22	229	0
O 396H		7	4	9	30	76	124	13.8	43	1	24	91	0
P 415S?		2	8	1	8	4	58	0.9	9	1	30	303	0
Q 429S		4	9	3	6	23	87	2.5	23	1	31	151	0
R 454S		1	2	1	2	2	3	-	-	-	-	-	0
S 468H		3	4	2	8	22	48	3.1	29	1	29	113	0
T 492H		3	3	3	4	6	20	0.2	0	1	16	136	0
U 510H		3	3	3	5	12	21	5.8	46	1	47	134	8
V 524H	10	11	6	14	10	31	31	5.7	13	1	37	64	8
W 543D		6	8	5	1	3	35	3.9	19	1	37	77	6
X 555H		1	2	1	1	2	4	-	-	-	-	-	0
Y 581D		6	5	9	5	12	8	8.6	30	2	56	33	28
Z 588B		1	2	1	2	2	4	-	-	-	-	-	0
AA 596D		2	4	4	5	12	30	2.2	29	1	60	78	25
AB 607B		5	5	15	14	37	13	5.5	29	3	53	17	30
AC 612B		8	7	15	14	37	10	7.8	2	3	39	15	17
AD 617B		4	3	10	10	21	5	8.0	33	3	58	19	33
AE 634B?		1	2	1	1	2	4	-	-	-	-	-	0
AF 645D		9	6	13	9	24	28	9.9	33	2	50	25	26
AG 649D		4	8	6	6	1	30	2.3	5	3	35	15	14
AH 653D	18	17	7	19	40	42	42	8.5	11	3	39	13	20
AI 655D		3	9	7	19	40	42	1.6	14	3	45	13	26
AJ 665D		4	6	15	18	33	22	3.2	15	3	46	15	25
AK 672D	32	13	41	30	101	68	68	32.6	11	3	43	13	23
AL 675D	37	24	41	46	101	68	68	18.5	6	2	37	30	14
LINE 10951	(FLIGHT 17)												
A 613E		27	22	41	43	105	103	12.1	9	2	44	40	18
B 623D		7	4	2	3	13	21	12.4	36	1	70	75	33
C 628B		5	6	0	9	17	20	5.1	32	1	62	64	29
D 633B?		7	6	10	11	24	31	7.2	38	1	52	66	21
E 653B	11	11	19	18	42	25	25	7.2	22	2	50	34	24
F 665B	18	11	39	15	40	9	9	14.8	20	3	57	16	35
G 705S?		0	1	1	1	2	1	-	-	-	-	-	0
H 759D		4	7	3	3	1	11	2.9	0	1	65	672	0
I 765M		0	9	3	4	11	24	0.4	0	1	59	826	0
J 791H		1	2	1	2	2	4	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10951	(FLIGHT	17)											
K 841B	6	12	7	19	58	59	2.9	13	1	45	129	9	15
L 850B?	1	1	1	1	2	3	-	-	-	-	-	-	0
M 854B?	1	2	1	2	2	4	-	-	-	-	-	-	50
N 860H	5	6	3	7	20	29	5.1	32	1	77	126	35	0
LINE 10960	(FLIGHT	2)											
A 1787H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1754H	25	1	6	5	60	68	597.5	18	4	36	10	18	0
C 1722H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 1702H	6	4	11	13	17	32	10.3	28	2	47	25	22	0
E 1650S	0	1	0	2	1	4	-	-	-	-	-	-	0
F 1630S	1	2	1	1	2	4	-	-	-	-	-	-	0
G 1584H	1	2	1	2	2	4	-	-	-	-	-	-	30
H 1520B?	5	5	0	7	14	18	5.5	33	1	44	94	10	0
I 1498H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1440H	1	2	1	2	2	4	-	-	-	-	-	-	0
K 1421H	1	2	1	1	2	4	-	-	-	-	-	-	0
L 1398B?	1	2	1	2	2	3	-	-	-	-	-	-	0
M 1395B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1378S?	1	2	0	2	2	4	-	-	-	-	-	-	0
O 1371B?	1	2	1	2	2	4	-	-	-	-	-	-	5
P 1362B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 1353B?	7	7	4	10	23	40	6.0	30	1	39	67	9	0
R 1349B?	1	1	1	2	2	4	-	-	-	-	-	-	0
S 1336H	9	10	19	2	18	43	6.2	30	2	42	32	18	0
T 1331D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 1327D	1	2	1	2	2	4	-	-	-	-	-	-	0
V 1319B	9	3	10	3	11	3	23.6	42	2	53	33	27	0
W 1315B	1	2	1	2	2	4	-	-	-	-	-	-	0
X 1309B	11	9	4	9	20	5	9.2	19	2	47	25	22	0
Y 1297B?	1	2	1	2	2	4	-	-	-	-	-	-	9
Z 1280B?	9	3	12	6	14	2	25.9	35	3	56	22	31	0
AA 1270B?	3	5	8	9	20	26	2.3	28	2	56	28	30	0
AB 1256H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10961	(FLIGHT	6)											
A 2541H	23	16	46	35	78	75	13.9	8	4	36	9	19	0
B 2523H	4	3	5	4	16	14	7.2	40	1	48	102	12	0
C 2501H	7	6	14	9	22	2	7.5	10	2	49	33	20	0
LINE 10970	(FLIGHT	2)											
A 1967H	6	8	2	14	25	42	4.0	11	2	46	24	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10970	(FLIGHT 2)												
B 1980H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2009H	9	5	20	2	2	3	14.0	12	5	52	6	34	0
D 2094B	14	12	18	23	35	27	9.4	18	1	33	63	5	5
E 2096B	14	13	18	23	35	32	8.2	14	2	40	33	15	0
F 2109B	7	14	11	2	27	12	3.2	12	2	43	32	18	0
G 2118H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2134H	1	2	0	2	1	4	-	-	-	-	-	-	0
I 2159S	2	3	1	11	26	32	2.9	42	1	41	153	4	0
J 2176B?	6	9	4	11	24	31	4.0	16	1	48	116	11	0
K 2184B?	5	9	5	13	24	51	2.8	17	1	46	95	12	0
L 2198D	3	10	3	4	8	52	1.7	6	1	34	139	0	0
M 2219H	3	4	4	8	22	39	3.7	36	1	32	132	0	0
N 2233H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2273H	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2289H	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2308H	2	8	1	10	17	60	1.3	9	1	39	112	5	0
R 2326B	10	12	7	22	49	74	5.4	21	2	41	51	14	0
S 2328D	10	9	7	22	49	74	7.8	29	1	46	58	17	0
T 2338B	14	17	22	31	59	56	6.5	18	2	46	26	23	0
U 2341B	13	17	22	31	67	56	5.6	14	2	42	34	17	0
V 2349B?	6	6	8	9	16	35	6.0	30	2	46	44	18	0
W 2353B?	7	9	1	15	26	81	4.5	20	2	41	37	15	0
X 2361D	8	9	3	16	36	52	5.6	19	2	40	30	15	0
Y 2365D	11	9	12	16	36	52	9.3	22	2	46	34	20	0
Z 2373D	7	3	2	13	6	10	14.5	52	1	55	70	24	0
AA 2390H	4	7	11	12	25	24	2.6	28	2	64	28	38	0
AB 2414H	11	9	11	11	22	36	9.3	24	4	47	12	27	0
AC 2422B	5	3	8	5	14	11	9.4	41	3	48	13	28	0
AD 2425B	5	2	8	5	14	10	15.3	54	4	49	11	29	0
AE 2432B	18	1	3	6	5	10	286.0	26	3	48	14	27	0
AF 2446H	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 2474H	9	3	11	10	1	24	24.8	26	2	59	25	32	0
AH 2477B?	6	5	11	8	1	40	7.6	23	2	55	50	23	0
AI 2484H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 10971	(FLIGHT 6)												
A 2220B	21	15	24	26	60	17	13.5	0	2	47	24	22	0
B 2233B	12	5	12	16	35	32	23.2	45	2	85	29	57	0
C 2237B	12	8	7	7	20	32	11.8	38	2	76	31	49	0
D 2243B	7	5	6	6	14	38	10.2	47	2	85	41	53	0
E 2248B	13	10	15	15	14	42	9.9	33	1	74	60	41	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10971	(FLIGHT	6)											
F 2262B	9	7	1	5	18	24	10.2	40	1	67	648	2	0
G 2281S	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2308S	1	2	1	2	2	3	-	-	-	-	-	-	0
LINE 10980	(FLIGHT	2)											
A 3363H	3	2	1	3	4	9	6.0	52	2	47	37	19	0
B 3318H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3301H	10	12	1	12	28	7	5.3	0	3	36	16	15	0
D 3204H	33	30	3	14	91	49	11.5	0	4	31	8	15	0
E 3187H	8	1	17	4	13	29	49.0	42	5	61	6	44	0
F 3173H	9	9	2	11	3	59	6.7	22	2	55	31	28	0
G 3143H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3129B?	1	2	1	1	2	4	-	-	-	-	-	-	0
I 3118B	6	15	1	15	53	75	2.3	0	1	26	84	0	0
J 3088B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 3084B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 3045B?	1	2	1	2	2	4	-	-	-	-	-	-	0
M 3041B?	3	13	4	15	21	106	1.4	8	1	27	150	0	0
N 3037B?	1	2	1	2	2	4	-	-	-	-	-	-	0
O 3024H	6	14	5	26	41	130	2.3	10	1	30	86	2	0
P 3011H	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2988H	5	11	7	20	37	94	2.4	12	1	35	80	5	0
R 2971H	5	9	6	14	30	58	3.1	17	1	35	82	4	0
S 2961D	6	7	7	8	17	12	4.1	23	2	49	45	20	0
T 2959D	9	7	7	9	20	5	9.3	28	1	48	76	16	0
U 2951B	10	14	3	21	48	7	4.9	14	2	41	41	15	0
V 2945B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 2929B	8	8	4	0	2	55	6.1	22	2	45	30	20	0
X 2924D	11	8	3	10	24	3	9.2	20	2	54	34	27	0
Y 2912B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 2910B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 2891D	4	7	16	15	59	56	2.3	17	3	45	14	25	0
AB 2887B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 2879D	16	2	3	4	6	81	125.2	35	3	43	17	23	0
AD 2877B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 2871H	14	9	19	16	40	14	12.6	23	3	56	14	35	0
AF 2825H	1	2	1	2	2	1	-	-	-	-	-	-	0
AG 2792H	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 2732S	0	2	0	1	2	4	-	-	-	-	-	-	0
LINE 10981	(FLIGHT	6)											
A 941B?	7	5	13	3	6	3	9.4	6	3	106	20	75	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10981	(FLIGHT	6)											
B 937B	10	6	13	3	6	10	13.3	0	2	61	32	29	0
LINE 10990	(FLIGHT	6)											
A 94H	8	6	15	10	19	42	7.6	32	4	46	11	28	0
B 119B?	10	4	20	4	8	10	21.4	27	4	53	13	32	0
C 123H	0	6	20	4	8	34	0.2	0	1	34	32	20	0
D 144H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 157B	9	19	31	26	55	48	3.2	3	3	51	18	28	0
F 159B	18	19	31	26	55	48	8.0	10	2	57	32	31	0
G 175S	1	1	1	2	2	2	-	-	-	-	-	-	0
H 219S	1	2	0	2	2	2	-	-	-	-	-	-	0
I 238S	1	8	2	13	29	61	0.7	0	1	19	457	0	0
J 249H	6	4	9	9	10	57	8.3	43	1	58	68	26	0
K 270H	4	15	30	5	31	20	1.3	0	5	37	8	20	0
L 289H	10	9	1	8	9	72	7.0	23	2	54	41	26	30
M 327S	3	13	0	7	27	88	1.1	3	1	6	440	0	0
N 336B	7	6	2	15	57	55	8.0	30	1	23	135	0	0
O 338B	8	9	2	15	57	54	5.5	19	1	19	120	0	0
P 344B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 383S	4	4	2	7	13	39	4.8	40	1	34	302	0	0
R 397H	4	8	5	13	35	57	2.7	18	1	33	138	0	0
S 420D	4	6	2	5	20	21	3.1	33	1	38	134	5	0
T 424B	3	12	2	17	19	130	1.4	11	1	33	145	2	0
U 427B	5	15	0	18	19	130	2.1	11	1	25	169	0	0
V 432B?	5	13	6	18	47	80	2.0	9	1	26	129	0	0
W 434B?	1	2	1	2	2	4	-	-	-	-	-	-	0
X 464H	2	10	1	9	13	66	1.0	2	1	40	126	6	0
Y 482B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 541H	6	8	8	11	26	26	4.3	21	2	48	26	23	0
AA 566H	10	5	14	14	24	21	15.4	33	2	52	24	27	0
AB 625H	1	2	1	0	2	1	-	-	-	-	-	-	0
AC 663H	12	9	2	3	9	4	1.0	0	1	49	50	32	0
AD 731S	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 778B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 785D	8	8	5	8	11	5	6.6	21	1	83	307	28	0
AG 795D	7	8	1	6	22	11	5.8	26	1	72	729	0	0
AH 800B	8	6	3	7	22	3	8.9	33	1	93	237	40	0
AI 818S	1	2	0	2	2	4	-	-	-	-	-	-	0
AJ 839S	1	1	0	2	2	4	-	-	-	-	-	-	0
LINE 11000	(FLIGHT	5)											
A 7855H	5	5	4	6	2	2	5.2	20	2	38	30	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11000	(FLIGHT	5)											
B 7844H	8	5	7	5	9	6	10.4	40	2	64	26	38	0
C 7830H	1	2	1	1	2	4	-	-	-	-	-	-	0
D 7774H	1	3	0	5	10	35	0.8	8	1	70	905	0	0
E 7756H	3	6	1	4	8	61	0.1	0	1	13	312	0	0
F 7743D	1	16	42	38	94	7	0.4	0	3	33	20	11	0
G 7736B	14	31	209	128	386	71	3.6	0	6	12	4	1	0
H 7735B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 7723H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 7712H	6	8	1	6	17	20	4.9	16	1	44	238	0	0
K 7700S	1	2	1	2	2	4	-	-	-	-	-	-	0
L 7671S	4	9	1	18	51	77	2.4	12	1	22	190	0	0
M 7663S	1	2	0	1	2	4	-	-	-	-	-	-	0
N 7654S	4	7	0	9	18	55	2.6	21	1	23	353	0	0
O 7646S	3	6	3	8	13	41	2.3	23	1	39	198	0	0
P 7624S	4	9	1	2	32	82	2.3	16	1	35	154	0	0
Q 7605S	4	7	3	10	27	55	2.8	18	1	28	222	0	0
R 7565H	4	6	3	9	18	40	2.9	35	1	48	107	14	0
S 7552B	11	15	9	17	43	41	5.1	15	1	42	68	12	0
T 7546B	6	8	7	5	15	41	4.5	28	1	39	93	8	0
U 7542B?	9	8	9	10	22	13	7.3	23	2	43	53	15	0
V 7540B?	9	8	10	10	22	13	7.4	24	2	39	48	12	0
W 7536D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 7532B?	6	7	3	1	27	28	5.4	23	2	54	25	29	0
Y 7513H	6	4	4	7	12	1	7.4	36	2	67	55	34	0
Z 7463B?	7	9	6	6	16	19	4.8	4	1	61	88	22	0
AA 7440H	1	2	1	2	2	2	-	-	-	-	-	-	8
AB 7368D	10	11	17	11	22	15	6.7	12	2	105	27	74	0
AC 7363D	8	9	17	1	22	7	5.6	5	2	82	34	50	0
AD 7359D	10	7	9	4	8	8	9.6	6	1	80	89	38	0
LINE 11010	(FLIGHT	5)											
A 6525D	3	6	3	2	4	16	2.4	28	2	67	37	38	0
B 6535D	7	11	3	11	29	18	3.7	15	2	57	46	28	0
C 6557H	6	4	1	1	2	17	8.3	35	2	84	29	55	0
D 6583B?	2	3	1	2	2	15	2.0	48	1	103	680	14	0
E 6593B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 6636S	0	2	1	2	2	4	-	-	-	-	-	-	0
G 6660S	0	4	2	7	13	39	0.4	0	1	50	268	6	0
H 6686H	5	6	6	9	18	16	5.3	25	5	53	7	35	0
I 6695B	23	18	29	3	22	6	12.2	2	3	33	15	13	0
J 6698B	22	16	1	3	22	9	13.1	5	3	36	20	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11010	(FLIGHT	5)											
K 6708B?	7	9	7	2	28	52	4.3	21	1	45	102	11	0
L 6725E	0	11	1	16	21	107	0.4	0	1	20	380	0	0
M 6729S	0	10	1	15	18	107	0.4	0	1	22	317	0	0
N 6772B?	1	9	1	9	4	58	0.7	3	1	37	234	0	0
O 6776B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 6780S?	1	16	1	25	38	174	0.4	0	1	14	298	0	0
Q 6789S?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 6808S	0	2	1	2	2	4	-	-	-	-	-	-	0
S 6817S	0	7	1	14	14	69	0.4	0	1	18	492	0	0
T 6835S?	1	1	1	2	2	4	-	-	-	-	-	-	0
U 6892H	1	2	1	2	2	4	-	-	-	-	-	-	0
V 6938H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 6958H	1	2	1	2	2	4	-	-	-	-	-	-	0
X 6994H	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 7031S	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7044B	8	9	1	10	5	32	6.0	23	1	57	69	24	0
AA 7062S	5	4	2	9	18	34	5.8	41	1	42	207	3	0
AB 7085H	2	6	3	2	3	13	1.7	21	2	82	32	52	0
AC 7112S	4	5	0	1	1	8	3.8	33	1	112	1025	0	0
AD 7166S	1	2	0	2	2	4	-	-	-	-	-	-	50
AE 7196D	8	5	12	8	19	13	11.2	42	3	95	22	68	0
AF 7201D	4	3	11	3	18	14	7.8	51	2	125	27	92	0
AG 7207D	20	17	11	13	26	29	10.6	13	1	71	86	34	0
AH 7217B	10	14	6	25	64	91	4.5	20	1	40	140	6	0
AI 7220D	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 7223D	12	17	8	8	28	14	5.1	19	1	82	215	35	0
AK 7235B	9	7	3	9	20	30	10.0	33	1	71	299	21	0
LINE 11020	(FLIGHT	5)											
A 6324S	12	11	1	5	12	4	7.7	11	2	49	26	23	0
B 6300S	5	5	7	9	20	13	4.7	19	1	80	66	42	0
C 6284D	1	2	0	2	2	4	-	-	-	-	-	-	0
D 6275B?	1	2	0	1	1	4	-	-	-	-	-	-	0
E 6260B	1	2	0	2	2	4	-	-	-	-	-	-	0
F 6256B	4	6	0	1	3	4	2.9	27	1	86	952	0	0
G 6252B	4	3	0	2	3	19	7.7	38	1	68	909	0	0
H 6246B?	4	6	1	6	3	19	3.2	20	1	38	738	0	30
I 6230S	5	3	1	4	12	19	8.6	41	1	43	701	0	0
J 6218S	28	13	35	27	49	22	25.1	3	5	35	6	20	0
K 6204S	9	5	3	1	11	4	13.9	16	1	41	105	3	0
L 6199S	1	6	0	8	14	45	0.6	0	1	24	717	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11020	(FLIGHT		5)										
M 6184S	4	12	4	13	30	68	2.0	3	1	29	271	0	0
N 6174S	1	2	1	2	2	4	-	-	-	-	-	-	0
O 6154S	1	2	1	2	2	4	-	-	-	-	-	-	0
P 6138S	1	8	2	11	14	91	0.6	0	1	21	429	0	0
Q 6118S	1	2	1	2	2	4	-	-	-	-	-	-	0
R 6103S	1	2	1	2	2	4	-	-	-	-	-	-	0
S 6070S	1	2	1	1	1	4	-	-	-	-	-	-	0
T 6032S	1	2	1	2	2	4	-	-	-	-	-	-	0
U 6007H	1	1	1	0	1	4	-	-	-	-	-	-	0
V 5979B	3	5	2	7	21	19	2.6	18	1	43	126	4	14
W 5970H	5	4	6	4	10	9	8.7	24	1	61	136	17	0
X 5965H	12	6	3	3	32	14	17.2	15	2	59	26	31	0
Y 5923B?	3	4	1	1	0	1	3.2	22	1	184	1025	0	0
Z 5902H	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 5889B	1	2	1	2	2	3	-	-	-	-	-	-	0
AB 5876D	4	2	6	2	25	4	9.9	31	1	123	92	75	4
AC 5874B	6	8	4	9	21	20	4.0	11	1	82	153	34	0
LINE 11030	(FLIGHT		5)										
A 5066B	8	5	13	9	17	10	10.7	26	2	48	37	20	0
B 5077B?	10	4	11	12	5	31	21.7	42	2	64	30	37	0
C 5147S	0	3	0	5	10	23	0.4	0	1	25	597	0	0
D 5174S	2	4	1	4	3	26	2.3	40	1	60	525	2	0
E 5197S	2	5	2	5	9	26	1.3	17	1	48	164	8	0
F 5229B?	9	9	3	11	3	23	7.1	25	4	73	13	51	0
G 5233B?	12	8	1	11	22	23	11.1	26	3	66	14	44	0
H 5247H	9	5	21	17	26	33	14.2	34	5	58	6	41	0
I 5260S	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5280S	0	2	1	2	2	4	-	-	-	-	-	-	0
K 5288S	1	5	1	5	3	23	0.5	0	1	37	631	0	0
L 5304S	1	6	0	9	15	41	0.6	0	1	39	296	0	0
M 5336S	5	11	5	12	10	48	2.5	9	1	30	133	0	0
N 5349S	2	7	4	11	15	59	1.3	9	1	57	147	17	0
O 5459S	1	2	1	2	2	4	-	-	-	-	-	-	0
P 5490H	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 5529H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 5578H	14	11	1	16	34	3	10.9	14	2	52	44	22	0
S 5627B	18	17	26	14	31	28	9.5	0	2	44	41	15	0
T 5634B	2	4	5	14	9	12	1.5	14	3	45	22	21	0
U 5637B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 5638B	15	13	10	12	25	22	9.3	2	3	34	19	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11030	(FLIGHT 5)												
W 5641B	20	3	10	11	25	22	108.0	12	3	44	19	20	0
X 5647B	2	3	5	17	2	6	2.7	34	2	61	39	30	0
Y 5653B	1	2	1	2	2	1	-	-	-	-	-	-	0
Z 5662H	1	2	1	2	2	3	-	-	-	-	-	-	0
AA 5715B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 5724B?	1	2	0	0	1	4	-	-	-	-	-	-	0
AC 5741B?	6	5	5	7	14	14	6.9	36	2	98	35	65	0
AD 5751B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 5760B	10	8	7	9	3	24	8.1	22	2	91	60	54	0
LINE 11040	(FLIGHT 5)												
A 4916B?	11	8	6	4	19	7	11.1	1	2	72	27	42	0
B 4886H	2	11	2	10	26	47	1.1	0	1	24	572	0	0
C 4874B	6	11	0	10	22	64	2.9	10	1	67	874	0	0
D 4845H	13	4	5	18	19	44	39.5	34	4	68	10	48	0
E 4843B?	3	10	5	9	19	44	1.6	2	4	59	10	39	0
F 4816B?	8	10	4	13	28	75	5.0	21	2	63	41	33	0
G 4800H	8	5	15	11	19	20	10.6	25	4	58	12	37	0
H 4792H	8	10	5	10	19	42	4.9	14	1	38	135	2	0
I 4781H	5	8	2	10	30	37	3.9	20	1	23	464	0	16
J 4772S	0	4	1	7	22	28	0.4	0	1	35	582	0	0
K 4757S	2	9	2	14	25	62	1.2	2	1	40	223	0	0
L 4748S	1	2	1	2	2	4	-	-	-	-	-	-	0
M 4735S	5	10	3	14	24	76	2.3	17	1	53	182	13	0
N 4729S	4	8	2	12	22	58	2.3	17	1	46	167	8	0
O 4722S	1	2	1	2	2	4	-	-	-	-	-	-	0
P 4704S	1	5	1	3	3	24	0.6	0	1	74	824	0	0
Q 4641S	1	2	1	2	2	4	-	-	-	-	-	-	0
R 4570H	1	2	1	2	2	4	-	-	-	-	-	-	0
S 4526H	8	2	8	0	1	28	28.1	18	3	63	19	36	0
T 4488H	1	5	2	3	8	17	0.7	0	1	78	249	27	0
U 4458H	6	9	8	2	32	4	3.7	0	3	35	17	11	0
V 4411B	4	6	5	2	5	10	3.3	0	1	46	241	0	0
W 4396B?	7	5	5	5	10	6	7.7	16	2	77	51	42	0
X 4381B?	9	9	7	8	17	28	6.2	14	1	64	94	26	0
LINE 11050	(FLIGHT 5)												
A 3507B	12	12	23	24	26	24	7.0	14	2	48	34	22	0
B 3524H	13	15	22	16	55	14	6.8	8	3	48	15	26	0
C 3570H	5	11	3	1	7	48	2.4	18	2	61	37	34	0
D 3592H	9	12	1	1	29	19	5.1	6	5	38	7	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11050	(FLIGHT 5)												
E 3614B	17	17	26	22	64	26	8.8	6	6	34	4	19	0
F 3628B	16	9	29	20	50	47	15.1	21	3	50	18	28	0
G 3639D	6	10	10	17	32	51	3.2	16	1	43	120	8	0
H 3681H	6	1	12	7	5	1	53.5	53	2	58	53	27	0
I 3722S	5	15	4	28	64	143	1.7	0	1	20	186	0	0
J 3890S	2	1	1	5	5	31	5.3	83	1	64	174	20	0
K 3972H	11	6	12	5	4	3	15.4	23	3	58	19	34	0
L 4066H	14	13	4	5	13	29	8.7	0	3	33	13	12	0
M 4137M	0	6	0	4	7	12	0.4	0	1	101	1012	0	300
N 4204B	7	6	1	5	14	26	6.3	23	1	85	121	41	0
O 4270H	2	5	1	5	1	13	1.9	20	1	94	120	48	0
LINE 11060	(FLIGHT 5)												
A 3320H	7	8	12	13	27	7	5.5	7	3	50	14	27	0
B 3305H	6	3	6	5	11	19	11.4	32	3	74	18	48	0
C 3294H	4	4	2	7	13	14	4.7	31	2	64	38	34	0
D 3263H	5	3	13	6	17	6	7.4	25	3	68	15	43	0
E 3238B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3226H	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3208S	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3195S	3	7	1	9	20	45	2.0	15	1	29	676	0	0
I 3173S	3	14	13	24	47	89	1.3	0	1	40	71	10	0
J 3154S	2	8	3	14	17	69	1.1	4	1	25	286	0	0
K 3143S	0	2	1	2	2	4	-	-	-	-	-	-	0
L 3114S	2	10	1	15	27	48	0.8	0	1	15	605	0	0
M 3047S	1	2	1	2	2	4	-	-	-	-	-	-	0
N 2955H	6	6	12	1	17	1	6.8	24	2	60	42	30	0
O 2946H	11	9	17	2	4	0	9.5	15	3	53	19	30	0
P 2856H	1	10	33	8	34	12	0.4	0	5	25	8	7	0
Q 2842B	7	6	4	5	11	2	7.2	18	1	65	75	28	0
R 2770B?	3	5	2	2	7	6	2.3	17	1	79	219	27	0
S 2758B?	2	4	0	3	6	1	2.5	29	1	82	561	3	0
LINE 11070	(FLIGHT 5)												
A 1918B?	5	4	6	6	30	72	9.2	51	1	43	93	11	0
B 1932H	8	9	2	16	35	43	6.1	21	2	53	29	27	0
C 1953B?	4	5	11	5	15	20	4.1	27	2	63	32	34	0
D 1960B?	9	4	11	10	20	21	18.8	32	2	94	29	64	0
E 2012H	3	5	1	5	15	5	1.0	0	1	24	375	0	0
F 2027H	1	2	1	2	2	3	-	-	-	-	-	-	0
G 2037H	8	3	12	10	18	18	25.7	37	3	65	15	42	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11070	(FLIGHT	5)											
H 2049B	11	10	5	12	18	35	7.9	24	1	54	61	23	0
I 2061S	1	13	1	19	28	138	0.4	0	1	17	331	0	0
J 2072S	1	2	1	2	2	4	-	-	-	-	-	-	0
K 2099H	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2121H	3	3	1	7	6	32	5.6	46	1	61	163	18	0
M 2156S	1	7	1	10	9	75	0.8	4	1	35	670	0	0
N 2161S	0	6	0	13	13	93	0.4	0	1	29	681	0	0
O 2185S	1	4	1	8	11	40	0.5	0	1	42	651	0	0
P 2199S	1	12	1	21	20	21	0.5	0	1	16	506	0	0
Q 2232S	1	1	1	2	2	4	-	-	-	-	-	-	0
R 2273H	1	2	1	2	2	2	-	-	-	-	-	-	0
S 2326H	5	5	2	4	9	21	5.4	37	1	65	108	26	0
T 2367H	5	4	6	1	11	12	6.6	42	1	69	59	36	0
U 2392H	9	10	12	13	27	21	5.8	12	2	53	51	22	0
V 2404B	21	6	1	2	6	44	47.7	21	3	38	17	18	0
W 2410B	21	7	11	7	19	57	34.1	27	2	38	41	13	0
X 2413B	14	19	5	7	12	57	5.9	13	1	44	58	16	0
Y 2503B	2	8	1	3	1	2	0.2	0	1	40	190	19	0
Z 2519D	18	1	7	1	16	48	343.0	21	3	35	22	13	0
AA 2536B	11	7	19	18	40	15	12.1	14	2	88	43	54	0
AB 2544B	7	10	16	9	56	4	4.1	8	1	71	71	34	40
AC 2548H	14	14	22	9	56	5	7.5	7	2	46	30	20	0
AD 2625H	9	4	0	6	6	6	15.3	36	2	84	59	49	0
AE 2640D	3	7	10	2	37	41	1.6	14	1	75	108	35	0
AF 2645B	21	21	10	20	50	41	8.8	13	1	47	99	14	0
AG 2658B	6	5	0	3	7	24	7.1	37	1	70	205	24	0
AH 2663B	7	4	3	6	9	16	13.7	39	1	64	204	18	0
LINE 11080	(FLIGHT	5)											
A 1731H	1	4	10	5	15	2	1.0	0	1	33	60	15	0
B 1715H	11	9	2	3	23	10	10.1	0	3	58	14	34	0
C 1704H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 1682S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1657H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1647H	5	7	9	11	23	35	4.1	11	1	46	70	12	0
G 1623S	4	6	2	4	8	32	0.2	0	1	25	376	0	20
H 1602H	1	2	1	2	2	2	-	-	-	-	-	-	0
I 1587S	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1568S?	0	11	2	18	35	122	0.4	0	1	15	557	0	0
K 1545S	0	2	1	2	2	4	-	-	-	-	-	-	0
L 1515S	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11080	(FLIGHT	5)											
M 1487S	1	1	1	2	2	4	-	-	-	-	-	-	0
N 1445S	1	2	1	2	2	4	-	-	-	-	-	-	0
O 1394H	6	5	5	7	13	6	8.0	24	1	46	113	8	0
P 1383B?	6	5	2	7	17	18	8.6	18	1	46	143	4	0
Q 1375B	8	12	21	25	59	28	3.9	0	1	66	61	30	0
R 1372B	16	15	21	25	59	28	8.7	0	2	39	29	14	0
S 1366B	11	2	2	1	4	6	102.6	12	2	39	32	10	0
T 1342S	1	2	1	2	1	4	-	-	-	-	-	-	0
U 1324B?	3	4	1	1	0	4	3.7	28	1	89	835	0	0
V 1288D	4	7	17	14	31	17	3.3	24	3	120	22	90	0
W 1282B	19	6	24	21	52	25	35.4	3	3	52	15	29	0
X 1279B	14	12	24	21	52	25	9.7	0	2	50	28	22	0
Y 1260B?	6	3	3	5	12	2	12.1	37	1	129	144	75	0
Z 1227D	6	5	0	3	2	6	7.0	2	1	92	137	41	0
AA 1218H	8	5	4	5	13	4	11.3	0	2	58	53	22	0
AB 1190D?	6	4	4	4	9	2	8.5	0	1	132	77	83	0
LINE 11090	(FLIGHT	5)											
A 274H	11	5	12	5	15	8	1.0	0	1	31	50	17	0
B 294H	23	19	20	22	49	23	11.7	2	4	40	12	20	0
C 319H	10	6	4	9	16	12	12.4	36	2	69	35	41	0
D 356S	2	7	0	9	3	81	1.2	24	1	33	571	0	0
E 394H	1	2	1	1	2	4	-	-	-	-	-	-	0
F 410H	1	2	1	2	2	4	-	-	-	-	-	-	0
G 423B	9	7	2	14	32	48	8.9	31	2	49	46	21	0
H 425B	9	6	2	14	32	48	11.5	32	1	51	73	19	0
I 432H	5	3	3	6	27	32	10.0	44	1	33	152	0	0
J 461B	3	8	1	7	4	44	1.5	2	1	41	350	0	0
K 480S	1	2	1	2	2	4	-	-	-	-	-	-	0
L 494H	6	5	6	6	4	5	7.6	28	2	65	49	32	0
M 512S	3	14	3	19	22	62	1.3	2	1	32	174	0	0
N 534S	1	2	1	9	25	51	1.4	45	1	15	439	0	0
O 548S	2	6	1	9	13	64	1.0	11	1	24	537	0	0
P 587S	3	3	1	2	3	7	0.2	0	1	4	347	0	0
Q 620S?	2	5	1	7	13	37	1.2	13	1	52	247	7	0
R 642H	1	2	1	2	2	4	-	-	-	-	-	-	0
S 678H	1	2	1	2	2	3	-	-	-	-	-	-	0
T 710H	7	4	5	4	8	13	12.6	49	2	85	45	53	0
U 772B?	5	6	4	2	17	4	4.9	38	1	63	61	31	0
V 780H	6	0	8	1	21	21	1.0	0	1	34	87	17	0
W 798B	16	17	14	27	65	48	7.6	3	2	35	51	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR					
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN M	COND DEPTH .SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11090	(FLIGHT	5)											
X 808D	4	6	7	10	38	4	3.5	25	2	76	47	43	0
Y 816B	37	32	48	42	86	55	13.0	0	4	26	10	9	0
Z 830B	21	20	14	40	26	13	9.5	0	2	35	36	9	0
AA 871S	1	1	1	2	2	4	-	-	-	-	-	-	0
AB 945H	13	12	2	16	37	15	8.5	5	3	49	15	27	0
AC 956H	7	3	5	9	21	26	16.5	32	2	50	38	21	0
AD 1027B?	7	5	9	13	29	21	8.2	22	1	59	88	21	0
AE 1073D	15	20	6	11	22	9	5.6	17	1	91	120	49	0
AF 1085D	26	29	16	25	54	63	8.3	14	1	55	119	20	0
AG 1098D	6	7	6	9	4	24	4.9	38	1	51	377	7	0
LINE 11100	(FLIGHT	7)											
A 415H	26	17	29	32	68	44	16.7	1	4	29	8	12	0
B 442H	1	2	1	2	1	3	-	-	-	-	-	-	0
C 484S	1	2	1	2	2	4	-	-	-	-	-	-	0
D 523H	6	3	15	5	39	2	15.0	35	5	55	7	36	0
E 538H	7	10	10	20	19	118	4.3	23	2	51	39	24	0
F 552B?	7	1	3	11	24	73	165.4	54	1	58	68	25	0
G 558H	2	10	3	16	42	7	1.0	4	1	27	146	0	0
H 575E	3	18	5	28	26	118	0.9	0	1	8	356	0	0
I 620H	4	1	3	3	9	3	1.0	0	1	52	120	30	5
J 627S	3	7	2	11	6	72	1.9	15	1	38	242	0	0
K 658S?	1	2	0	2	2	4	-	-	-	-	-	-	0
L 687S?	0	2	1	2	2	4	-	-	-	-	-	-	4
M 690S?	0	11	3	19	58	85	0.4	0	1	14	326	0	0
N 725S	3	5	2	6	19	12	2.7	28	1	39	197	0	0
O 743S	3	6	2	12	35	16	1.8	15	1	23	228	0	0
P 848H	7	5	2	3	3	3	0.5	0	1	44	113	24	0
Q 901B	9	6	11	8	10	11	10.4	23	3	66	22	40	0
R 911D	6	7	5	13	29	23	5.2	24	1	48	70	16	0
S 920B	7	6	9	4	14	6	7.4	27	2	44	48	16	0
T 924D	7	10	10	14	35	18	4.4	13	2	44	45	16	0
U 928D	5	5	2	8	23	18	5.7	33	1	45	74	13	0
V 935B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 937D	12	18	1	2	80	13	4.6	8	2	39	35	14	0
X 944D	9	17	3	34	80	77	3.6	10	2	43	40	17	0
Y 950D	6	12	12	23	52	39	3.0	8	1	45	58	15	0
Z 957B	21	24	66	45	89	15	7.6	3	2	32	25	10	0
AA 963B	4	28	54	13	36	66	0.8	0	5	17	5	4	0
AB 966B	5	28	54	13	36	66	1.2	0	5	18	5	5	0
AC 972B	13	3	52	26	57	26	58.3	32	3	32	15	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11100	(FLIGHT	7)											
AD 981E	24	3	19	16	28	7	184.5	21	2	50	39	22	0
AE 1030S	1	2	0	2	2	4	-	-	-	-	-	-	0
AF 1095B?	6	3	2	4	8	6	13.3	0	1	67	300	0	0
AG 1109B?	4	3	0	1	4	15	7.2	50	1	129	1025	0	0
AH 1113M	1	2	0	2	2	4	-	-	-	-	-	-	170
AI 1116B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AJ 1144H	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 1223B	1	5	6	3	14	10	0.7	0	1	61	336	8	0
AL 1231D	4	9	4	11	27	6	2.3	15	1	73	153	29	0
AM 1234D	5	11	7	12	32	33	2.7	18	1	59	115	22	0
AN 1240D	7	16	5	2	32	32	2.9	20	1	47	192	11	0
AO 1251B?	0	2	0	2	2	4	-	-	-	-	-	-	0
LINE 11110	(FLIGHT	7)											
A 1867H	11	6	3	12	32	12	17.5	11	3	57	14	34	0
B 1849H	7	4	3	4	8	9	12.5	26	3	68	23	41	0
C 1838S	1	2	1	3	10	22	0.4	0	1	20	289	0	0
D 1817B	5	6	2	1	7	43	4.0	26	1	59	299	10	0
E 1813B	5	2	5	10	7	43	12.6	52	1	56	105	19	0
F 1805B?	4	4	1	6	9	34	6.0	43	2	64	26	38	0
G 1796H	14	10	26	18	42	26	12.2	20	5	55	8	37	0
H 1785H	13	14	21	25	43	73	7.5	15	3	46	21	24	0
I 1773B?	6	4	1	7	11	2	9.4	36	1	48	69	16	0
J 1757B?	4	9	6	3	34	12	2.5	10	1	24	444	0	0
K 1712S	5	4	3	8	31	51	6.3	42	1	61	160	19	0
L 1693S	1	2	1	2	2	4	-	-	-	-	-	-	0
M 1683S	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1662S	1	7	3	10	34	54	0.8	1	1	19	275	0	0
O 1639S	6	16	7	4	62	73	2.1	0	1	19	121	0	0
P 1613S	2	7	1	13	36	78	1.4	6	1	18	264	0	0
Q 1573S	1	2	1	2	2	4	-	-	-	-	-	-	0
R 1550H	6	2	6	4	8	5	17.0	47	2	82	34	51	0
S 1518B	8	13	16	19	40	16	3.8	5	2	46	30	20	0
T 1515D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 1511D	3	6	2	7	14	25	2.9	23	2	45	47	16	0
V 1506D	3	8	7	16	40	33	2.0	9	2	46	48	16	0
W 1503B?	13	16	8	19	47	33	6.5	10	2	39	49	11	0
X 1494B	14	11	16	17	44	50	10.2	8	1	34	60	4	0
Y 1493B	14	15	16	26	61	50	7.5	2	2	36	45	8	0
Z 1490B	15	16	16	26	61	40	7.6	0	2	30	31	6	6
AA 1489B	15	13	16	26	61	40	9.4	3	2	42	34	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		1050 HZ		892 HZ		7323 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	
LINE 11110	(FLIGHT	7)												
AB 1478B	26	26	90	56	63	57	9.6	0	4	22	8	6	0	
AC 1471B	11	4	23	7	6	9	27.7	12	4	35	9	15	0	
AD 1463B	11	10	20	22	8	4	8.2	4	2	48	35	19	0	
AE 1425S	1	6	1	3	2	19	0.7	14	1	141	1025	0	0	
AF 1384H	10	3	21	20	45	7	32.7	15	2	57	30	28	0	
AG 1304B?	10	7	2	8	16	2	10.0	28	1	89	80	50	0	
AH 1294B?	5	5	1	4	8	20	5.5	47	1	93	126	50	0	
AI 1288B?	4	5	1	1	6	19	4.3	43	1	100	230	48	0	
LINE 11120	(FLIGHT	7)												
A 2027H	1	2	1	2	2	4	-	-	-	-	-	-	0	
B 2095H	7	5	3	9	15	31	10.3	38	4	56	10	37	0	
C 2115H	7	2	9	3	9	25	32.3	41	3	61	16	38	0	
D 2128H	9	1	3	20	29	23	251.1	53	1	38	67	10	0	
E 2143S?	5	7	4	11	25	34	3.6	26	1	21	304	0	0	
F 2152S?	1	2	0	1	2	4	-	-	-	-	-	-	0	
G 2199S	1	2	1	2	2	3	-	-	-	-	-	-	0	
H 2210S?	1	2	1	2	2	4	-	-	-	-	-	-	0	
I 2238B?	1	2	0	2	2	4	-	-	-	-	-	-	0	
J 2249S	1	4	1	6	10	49	1.2	17	1	20	553	0	0	
K 2262S	3	17	3	27	66	141	0.9	0	1	11	279	0	0	
L 2274S	2	9	1	15	20	90	0.8	2	1	12	418	0	0	
M 2324S	1	2	1	2	0	4	-	-	-	-	-	-	0	
N 2406H	5	4	5	5	10	2	9.5	27	3	58	20	32	0	
O 2423B?	6	3	5	8	18	4	10.9	34	2	55	36	26	0	
P 2453B	5	5	8	10	12	7	4.4	25	2	43	42	15	0	
Q 2462B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
R 2469D	1	2	1	2	2	4	-	-	-	-	-	-	0	
S 2473D	5	6	5	4	9	1	5.0	16	2	44	53	13	0	
T 2480D	8	8	9	14	35	11	6.1	8	1	47	92	10	0	
U 2499B?	1	14	25	25	26	40	0.4	0	2	43	29	18	0	
V 2503D	12	11	25	25	26	40	7.5	13	3	34	20	12	0	
W 2507D	5	8	21	5	23	32	3.4	14	2	34	38	8	0	
X 2514D	17	23	27	41	101	92	5.9	3	2	35	22	14	0	
Y 2517B	27	16	62	45	97	84	19.0	7	3	32	14	13	0	
Z 2524B	27	16	63	45	97	27	19.0	3	5	26	6	11	0	
AA 2525B	29	18	63	45	97	27	18.1	5	6	30	5	16	0	
AB 2534B	12	6	2	4	9	16	19.1	24	3	43	13	23	0	
AC 2543B	5	12	3	23	42	47	2.4	7	2	34	32	10	0	
AD 2572S	1	2	1	2	1	4	-	-	-	-	-	-	0	
AE 2612S	1	1	1	2	2	4	-	-	-	-	-	-	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 11120	(FLIGHT 7)													
AF 2682D	9	16	12	14	25	28	3.6	0	3	44	17	22		0
AG 2684D	16	3	12	14	33	28	77.0	23	3	53	20	29		0
AH 2691D	4	1	13	17	39	22	49.0	65	3	72	15	48		0
AI 2693D	1	2	1	2	2	4	-	-	-	-	-	-		0
AJ 2696D	20	15	20	16	36	23	12.8	9	2	58	24	33		0
AK 2702B?	1	1	1	2	2	4	-	-	-	-	-	-		0
AL 2737H	1	1	1	1	2	4	-	-	-	-	-	-		0
AM 2773S	1	2	1	1	2	4	-	-	-	-	-	-		0
AN 2806B?	4	7	1	5	24	38	2.9	20	1	59	496	0		0
AO 2837B?	1	2	1	2	2	4	-	-	-	-	-	-		0
LINE 11130	(FLIGHT 7)													
A 3479B	10	9	18	9	25	6	8.0	7	4	70	10	48		0
B 3477B	11	11	18	9	25	6	7.6	9	4	54	9	35		0
C 3475B	10	10	18	9	25	9	6.4	10	4	62	13	40		0
D 3468H	6	5	3	10	19	39	7.4	33	2	63	39	33		0
E 3423H	11	3	22	1	16	18	47.7	44	5	64	7	46		0
F 3411B?	5	6	5	14	23	84	4.8	30	2	57	25	32		0
G 3394H	1	2	1	2	2	4	-	-	-	-	-	-		0
H 3381S	0	10	2	18	10	35	0.4	0	1	13	456	0		0
I 3366B?	1	2	1	2	2	4	-	-	-	-	-	-		0
J 3360B	2	5	2	5	18	10	1.8	15	1	52	552	0		0
K 3347S	0	15	1	26	34	148	0.4	0	1	11	499	0		0
L 3337S	2	13	2	18	23	117	0.6	0	1	16	384	0		0
M 3323S?	0	2	1	2	2	4	-	-	-	-	-	-		0
N 3319S?	0	2	0	2	2	4	-	-	-	-	-	-		0
O 3310S	0	7	1	13	14	81	0.4	0	1	12	539	0		0
P 3293S	1	10	2	15	18	80	0.5	0	1	22	284	0		0
Q 3271S	0	4	1	7	12	44	0.4	0	1	25	539	0		0
R 3232S	0	2	1	2	2	4	-	-	-	-	-	-		0
S 3170H	4	8	2	2	8	10	2.4	9	3	55	19	31		0
T 3151B	11	10	13	16	36	4	8.1	9	2	48	33	20		0
U 3149D	14	12	13	16	36	28	9.5	4	2	42	41	14		0
V 3127H	5	6	2	5	14	15	4.2	9	2	43	47	12		0
W 3118B	3	11	4	16	7	18	1.5	0	2	52	44	20		0
X 3114B	1	2	1	2	2	4	-	-	-	-	-	-		0
Y 3103B	1	2	1	2	2	4	-	-	-	-	-	-		0
Z 3100B	11	3	1	14	25	17	46.9	13	2	54	45	21		0
AA 3097D	6	7	6	9	21	17	4.6	5	2	47	28	20		0
AB 3087D	14	12	18	16	53	38	9.2	12	3	41	20	19		0
AC 3085B	14	11	18	16	53	38	10.6	13	3	34	13	15		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11130	(FLIGHT	7)											
AD 3079B	16	9	55	29	73	29	17.2	7	6	22	5	8	0
AE 3077B	14	6	55	29	73	33	21.5	14	5	27	5	12	0
AF 3015S	2	6	1	1	4	22	1.5	18	1	89	483	16	0
AG 2979H	1	2	3	1	1	6	2.2	52	4	45	10	25	0
AH 2898B?	8	4	8	4	12	5	15.2	36	2	127	55	87	0
AI 2886B?	4	5	1	6	18	25	4.0	30	1	113	415	32	0
LINE 11140	(FLIGHT	7)											
A 3618B?	3	4	14	8	6	57	4.2	53	2	69	31	42	0
B 3633H	3	5	6	6	12	25	3.5	34	2	70	47	38	0
C 3648S	2	8	1	12	13	47	1.1	11	1	46	153	9	0
D 3672B	9	1	0	3	12	4	101.5	44	6	68	4	52	0
E 3684D	7	9	7	16	33	4	5.1	20	3	59	20	36	0
F 3704S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3720S	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3750B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3765B?	2	7	0	8	9	47	1.2	14	1	28	257	0	0
J 3783S	1	7	1	13	27	77	0.4	0	1	13	398	0	0
K 3793S	1	7	1	12	23	78	0.8	0	1	23	392	0	0
L 3807S	2	6	1	9	16	49	1.1	7	1	36	331	0	0
M 3822B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 3835S	1	3	1	6	13	29	1.4	29	1	39	504	0	0
O 3859S	1	1	1	1	2	4	-	-	-	-	-	-	0
P 3949H	16	20	16	27	63	68	6.5	11	3	45	22	22	0
Q 3965H	11	10	15	14	32	24	8.0	13	3	42	21	19	0
R 3976B?	1	4	7	5	10	18	0.5	0	1	22	58	6	0
S 3983B	5	10	6	16	55	95	2.9	7	2	40	40	12	0
T 3987B	4	19	5	19	55	95	1.4	0	2	35	44	8	0
U 3998B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 4007B?	7	8	8	14	29	23	4.8	14	2	38	34	12	0
W 4015D	6	11	8	20	42	28	3.3	7	2	45	41	17	0
X 4021D	10	3	0	7	19	16	31.9	33	2	34	39	8	0
Y 4028D	11	22	16	19	56	33	3.5	2	2	24	32	1	0
Z 4032D	5	4	14	19	41	32	5.8	45	2	26	27	5	0
AA 4037D	8	1	14	19	41	32	49.0	56	2	39	26	16	0
AB 4042B?	7	8	6	24	58	55	4.9	22	2	48	38	21	0
AC 4050B?	10	15	5	9	41	47	4.3	8	2	34	44	8	0
AD 4058B?	8	13	2	16	48	39	3.8	5	1	55	77	20	6
AE 4082D	4	30	31	39	74	66	0.9	0	1	26	54	0	0
AF 4086B	3	10	58	52	97	75	1.6	9	3	22	16	4	0
AG 4090D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11140	(FLIGHT	7)											
AH 4093D	33	45	76	85	190	108	7.4	4	2	25	24	5	0
AI 4098B	42	55	76	85	190	117	8.3	0	4	23	10	8	0
AJ 4100B	42	55	76	85	190	117	8.3	0	3	26	14	9	0
AK 4106B	11	3	37	13	29	53	41.7	35	3	46	16	25	0
AL 4115B	54	44	39	13	19	82	15.4	2	6	25	4	12	0
AM 4117B	9	44	39	13	19	54	1.6	0	5	23	6	9	0
AN 4127B	14	12	5	21	3	24	9.6	6	2	37	43	9	0
AO 4157H	1	2	1	2	1	1	-	-	-	-	-	-	0
AP 4202S	2	2	0	3	1	21	3.8	77	1	113	812	14	0
AQ 4244B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 4257D	22	15	14	24	51	27	14.1	6	3	48	22	24	0
AS 4259D	21	16	14	24	51	27	12.9	8	3	53	15	31	0
AT 4273B	12	7	5	14	5	20	12.8	22	2	76	39	45	0
AU 4294D	1	2	0	2	2	4	-	-	-	-	-	-	0
AV 4320D	8	6	2	2	6	5	8.9	13	1	68	68	31	0
AW 4326B	5	3	6	8	14	7	11.5	31	2	63	34	32	0
AX 4331B	7	7	3	8	11	7	6.0	7	3	70	21	43	0
AY 4343D	14	13	16	27	59	5	8.1	6	2	68	50	35	0
AZ 4347D	13	12	16	25	59	15	8.0	13	2	51	32	25	0
BA 4355D	1	2	1	2	1	2	-	-	-	-	-	-	0
BB 4387B	1	2	1	1	2	4	-	-	-	-	-	-	0
BC 4412S	1	2	1	1	1	4	-	-	-	-	-	-	0
LINE 11150	(FLIGHT	7)											
A 5042B?	1	2	1	0	1	4	-	-	-	-	-	-	0
B 5037B?	5	6	2	4	9	7	4.0	25	2	102	64	63	0
C 5025B	6	7	3	8	15	47	4.9	23	1	125	93	78	0
D 5018D	8	5	7	8	14	31	10.7	35	1	126	89	81	0
E 5011B	10	3	21	11	29	12	35.1	44	3	107	20	79	0
F 5005D	4	2	16	3	6	7	8.8	60	5	70	6	52	4
G 4999B	15	11	19	27	56	92	10.8	23	3	53	13	33	0
H 4991H	7	6	5	12	22	32	7.9	35	2	55	23	31	0
I 4976H	5	14	2	21	26	86	1.8	3	1	27	185	0	0
J 4939S	1	2	1	2	2	4	-	-	-	-	-	-	0
K 4935S	1	2	1	2	2	4	-	-	-	-	-	-	0
L 4915S	0	2	1	2	2	4	-	-	-	-	-	-	0
M 4887S	1	2	1	1	2	3	-	-	-	-	-	-	0
N 4867S	0	16	1	26	33	188	0.4	0	1	10	462	0	0
O 4849S	0	9	2	14	1	85	0.4	0	1	11	471	0	0
P 4773S	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 4754B	14	6	1	2	10	24	21.9	22	2	44	31	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11150	(FLIGHT 7)												
R 4745B	10	9	18	5	41	25	7.0	8	3	31	16	10	0
S 4733B	12	10	15	12	25	24	9.2	6	2	33	27	9	0
T 4724B	8	14	7	17	41	46	3.7	2	2	37	45	10	0
U 4720B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 4709B	7	12	9	19	48	38	3.8	0	2	37	48	8	0
W 4707B	10	14	11	19	48	38	4.9	1	2	32	38	5	0
X 4702B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 4698D	5	11	9	19	45	47	2.8	10	2	38	49	10	0
Z 4694D	14	21	9	19	45	38	4.7	4	2	39	39	13	0
AA 4691D	13	19	8	29	68	60	5.0	6	1	40	64	10	0
AB 4675D	10	10	28	15	33	39	7.2	13	2	39	46	11	0
AC 4672D	7	10	28	15	33	63	4.3	7	3	48	22	23	0
AD 4667B	22	29	29	54	124	79	6.6	0	2	22	25	0	0
AE 4665B	18	30	29	54	124	79	5.0	0	3	26	17	6	0
AF 4662B	17	30	29	38	124	50	4.4	0	2	29	23	8	0
AG 4658B	6	4	43	31	70	42	9.4	30	2	44	25	19	0
AH 4652B	14	25	97	54	122	20	4.3	0	6	22	4	9	0
AI 4649B	7	15	97	54	122	7	2.8	1	5	29	6	14	0
AJ 4645D	5	5	32	21	84	56	6.2	28	3	36	20	14	0
AK 4628S	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 4609H	6	5	12	2	2	16	6.7	0	2	39	36	9	0
AM 4596H	1	3	4	5	14	8	1.6	22	1	88	103	43	0
AN 4572S	0	2	0	2	2	4	-	-	-	-	-	-	0
AO 4539D	21	15	37	34	78	37	12.7	0	2	39	25	14	0
AP 4535B	18	11	36	13	26	38	15.4	0	3	31	17	9	0
AQ 4518B	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 4498B	1	2	1	2	2	4	-	-	-	-	-	-	0
AS 4488B	7	7	4	2	10	5	5.8	10	1	83	89	41	0
AT 4466B?	1	2	1	1	1	4	-	-	-	-	-	-	0
LINE 11160	(FLIGHT 7)												
A 5223D	2	7	6	9	11	11	1.3	16	1	79	71	43	0
B 5247H	12	1	2	1	16	32	283.2	34	4	55	9	36	0
C 5262H	5	8	8	16	42	67	3.5	28	2	46	26	23	0
D 5282S?	3	20	3	35	58	198	0.7	0	1	15	186	0	7
E 5304B	1	2	1	2	2	4	-	-	-	-	-	-	6
F 5344S	1	4	2	8	13	51	0.8	10	1	21	452	0	0
G 5366S	1	2	0	2	2	4	-	-	-	-	-	-	0
H 5409S	1	2	1	2	2	4	-	-	-	-	-	-	0
I 5420S	0	3	1	5	9	31	0.3	0	1	7	751	0	0
J 5434S	0	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11160	(FLIGHT	7)											
K 5501H	1	2	1	2	2	4	-	-	-	-	-	-	0
L 5512H	3	5	4	8	20	19	3.1	28	2	54	55	23	0
M 5536B	20	6	14	13	26	4	38.7	26	3	42	17	21	0
N 5545D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 5549D	11	12	9	3	12	31	0.4	0	1	22	36	10	0
P 5552D	8	13	1	7	19	16	3.4	11	2	33	22	12	0
Q 5556D	8	10	12	18	46	6	5.1	19	2	31	23	10	0
R 5561D	14	18	11	18	49	34	5.8	11	2	28	34	5	0
S 5563D	14	16	3	13	44	44	6.9	15	2	28	36	5	0
T 5569D	19	23	24	35	79	65	7.0	7	2	26	26	5	0
U 5573D	27	32	21	35	90	66	8.2	2	2	28	29	6	0
V 5577D	10	14	10	17	47	30	4.7	12	2	35	31	12	0
W 5581B	7	3	2	7	20	41	16.6	48	2	38	36	13	0
X 5588B	7	17	3	20	38	90	2.6	2	2	37	35	12	0
Y 5597D	13	11	19	24	45	18	9.2	20	2	36	29	13	0
Z 5604D	11	6	16	25	60	34	17.5	34	2	43	32	18	0
AA 5608D	7	9	13	25	60	34	4.4	23	2	38	28	15	0
AB 5614D	4	9	17	34	82	71	2.1	16	2	47	33	22	0
AC 5621D	29	38	5	11	22	19	7.5	8	2	34	23	13	0
AD 5636B	7	10	11	29	65	54	4.2	29	1	57	56	28	0
AE 5639B	2	10	11	29	65	78	1.1	10	2	41	45	15	0
AF 5644B	9	16	17	25	53	49	3.6	13	2	41	33	17	0
AG 5654D	11	18	5	12	33	91	4.4	10	1	34	68	6	0
AH 5669S	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 5682B	12	6	2	12	74	49	17.9	18	2	35	35	9	0
AJ 5686B	5	3	11	17	37	33	12.1	34	2	45	27	19	0
AK 5694D	8	10	6	12	31	30	4.6	11	2	40	33	14	0
AL 5699D	9	6	26	12	31	16	9.4	22	2	46	33	19	0
AM 5705B	30	11	43	9	23	42	34.2	9	5	31	7	14	0
AN 5709B	14	0	43	4	10	3	49.0	34	5	30	5	15	0
AO 5712B	3	8	25	24	47	34	2.0	11	5	33	6	18	0
AP 5715D	27	12	25	24	47	34	28.1	17	4	30	9	14	0
AQ 5724B	1	2	3	5	6	12	2.3	70	2	37	26	14	0
AR 5783B	22	2	24	15	42	19	242.5	13	5	48	6	31	0
AS 5794B	14	3	18	10	34	4	58.8	8	3	83	16	56	0
AT 5902B	17	10	16	2	3	50	14.7	18	3	45	14	24	0
AU 5920B	7	7	15	14	30	4	5.6	23	2	90	48	56	0
AV 5977D	5	10	1	7	16	24	3.0	19	1	81	83	43	0
AW 5989D	2	3	1	1	4	2	1.8	35	1	97	187	46	0
AX 6022S	1	2	1	2	2	4	-	-	-	-	-	-	0
AY 6039D	3	7	2	6	15	46	2.1	23	1	71	830	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11170	(FLIGHT 7)												
A 6695S?	3	7	6	10	13	64	1.8	20	1	48	133	11	0
B 6686H	14	3	23	8	23	6	58.8	28	4	64	9	45	6
C 6670H	3	3	1	7	30	39	3.7	41	2	70	38	40	0
D 6646S	2	3	2	5	13	18	1.9	25	1	24	468	0	0
E 6627S	3	8	4	15	18	80	2.1	15	1	30	229	0	0
F 6592S	0	8	1	13	6	92	0.4	0	1	25	632	0	0
G 6579B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 6574S	0	2	1	2	2	4	-	-	-	-	-	-	0
I 6542S	1	2	1	2	2	4	-	-	-	-	-	-	0
J 6499S	1	2	1	2	2	4	-	-	-	-	-	-	0
K 6456H	1	0	1	2	2	4	-	-	-	-	-	-	0
L 6438H	4	5	4	5	11	24	4.8	28	2	60	46	29	0
M 6429B	4	17	9	20	51	48	1.4	0	2	50	35	22	0
N 6416B	14	11	24	20	47	32	10.8	4	3	41	22	17	0
O 6411B	8	6	16	20	47	43	9.8	18	2	50	33	22	0
P 6406B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 6403B	7	12	18	26	61	48	3.3	0	2	44	41	15	0
R 6395B	7	7	7	13	30	24	5.7	14	2	37	27	12	0
S 6391D	10	14	8	10	38	12	4.6	2	2	38	33	12	0
T 6387D	4	3	8	10	20	27	8.7	41	2	44	37	17	0
U 6381B	14	11	6	18	41	27	10.2	11	2	39	33	13	0
V 6372H	10	6	9	14	32	11	12.7	25	1	50	64	18	0
W 6356S	7	5	3	4	15	16	8.2	34	1	65	151	22	0
X 6342B	5	10	13	25	62	72	2.6	6	2	41	35	14	0
Y 6340B	14	10	13	25	59	72	12.1	12	2	42	32	16	0
Z 6334B	32	20	72	56	132	49	18.1	0	4	21	11	4	0
AA 6330B	4	23	78	64	158	48	1.0	0	5	24	6	9	0
AB 6328B	44	23	78	48	112	26	25.5	0	6	21	4	8	0
AC 6318B	5	10	6	17	40	35	2.7	6	3	27	17	7	0
AD 6316B	5	10	6	17	40	35	2.7	7	3	31	21	9	0
AE 6282S	1	2	1	0	1	2	-	-	-	-	-	-	0
AF 6257B	7	5	3	20	4	27	9.6	18	3	62	24	35	0
AG 6254B	24	11	3	2	4	5	23.0	0	6	44	5	27	0
AH 6253B	21	13	3	2	6	5	16.0	0	6	43	5	26	0
AI 6249D	6	8	27	2	28	27	4.4	8	5	61	7	42	0
AJ 6219S	1	2	0	2	2	4	-	-	-	-	-	-	0
AK 6193B	1	6	24	22	19	4	0.6	0	3	48	17	24	0
AL 6187B	5	3	1	4	65	18	11.5	33	3	40	17	17	0
AM 6146D?	7	7	3	5	14	4	6.5	19	1	74	173	27	0
AN 6137B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11180	(FLIGHT 7)												
A 6861H	14	8	1	1	20	1	16.0	29	4	59	9	40	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG	
	1050 HZ		892 HZ		7323 HZ		DIKE		SHEET	EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE 11180	(FLIGHT	7)											
B 6868B?	4	6	11	12	1	54	3.5	33	3	62	20	38	0
C 6880B?	4	0	7	4	8	12	49.0	78	2	65	30	38	0
D 6886D	5	9	5	8	1	8	2.7	9	1	57	58	24	0
E 6911S	0	6	2	11	10	86	0.4	0	1	24	273	0	0
F 6929S?	1	2	1	2	2	4	-	-	-	-	-	-	0
G 6943S	0	2	1	2	2	4	-	-	-	-	-	-	0
H 6975S	0	2	1	2	2	4	-	-	-	-	-	-	0
I 6991S	0	2	1	2	2	4	-	-	-	-	-	-	0
J 7003S	0	9	2	11	34	105	0.4	0	1	21	356	0	0
K 7025S	0	2	1	2	2	4	-	-	-	-	-	-	0
L 7081S	0	2	1	2	2	4	-	-	-	-	-	-	0
M 7098S	1	2	1	2	2	4	-	-	-	-	-	-	0
N 7117H	7	4	5	10	13	2	13.2	35	1	51	63	19	0
O 7132H	7	6	6	7	7	19	7.1	27	1	56	57	25	0
P 7143H	5	4	9	5	8	16	8.4	39	2	59	36	31	8
Q 7169D	26	34	9	37	98	96	7.1	0	3	28	18	7	0
R 7172D	11	22	15	37	98	96	3.6	0	3	20	20	1	0
S 7174D	10	22	15	37	98	96	3.4	0	3	24	17	5	0
T 7181D	9	7	10	19	37	38	9.3	24	3	25	20	5	0
U 7184B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 7187D	16	17	22	17	46	48	7.7	10	2	28	27	6	0
W 7196B	10	11	5	32	94	80	6.4	17	2	29	30	6	0
X 7199D	12	20	22	32	94	120	4.3	6	2	26	33	4	0
Y 7210D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7220B	5	6	7	9	16	9	5.3	26	2	41	38	14	0
AA 7232B	4	7	12	18	41	3	3.5	25	2	43	52	14	0
AB 7241B	12	20	6	3	11	59	4.5	3	2	26	43	1	0
AC 7260D	4	10	3	13	32	28	2.2	10	1	37	60	9	0
AD 7267D	7	5	1	16	11	27	8.6	39	1	39	67	10	0
AE 7284D	3	9	2	7	2	23	1.5	12	1	44	265	3	7
AF 7298B	4	5	4	4	6	13	3.1	33	1	60	201	16	0
AG 7314D	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 7333B?	1	2	1	1	2	4	-	-	-	-	-	-	0
AI 7353D	9	5	14	15	40	6	12.5	19	7	30	3	16	0
AJ 7356D	21	2	14	15	40	26	221.2	13	5	38	6	22	0
AK 7361B	3	11	31	26	59	26	1.5	0	3	42	14	22	0
AL 7366B	9	13	13	20	49	37	4.5	8	3	35	18	13	0
AM 7377B	24	10	10	22	19	13	26.8	9	4	32	12	13	0
AN 7385B	7	4	3	6	20	23	13.5	35	2	70	38	40	0
AO 7460B	43	25	12	44	86	40	22.0	0	5	21	6	6	0
AP 7470B	13	9	8	1	8	8	12.5	6	7	46	4	31	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11180	(FLIGHT	7)											
AQ 7486B	8	4	6	3	18	14	14.5	32	2	102	42	67	0
AR 7526B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AS 7572B	5	6	7	5	3	2	4.1	12	1	50	77	15	0
AT 7578B	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 7609B	6	4	2	7	9	3	8.7	37	1	89	439	19	0
AV 7663D	5	7	2	5	13	6	3.5	17	1	54	193	10	0
AW 7684B?	1	2	0	1	2	4	-	-	-	-	-	-	0
AX 7709B?	1	2	0	1	2	4	-	-	-	-	-	-	0
LINE 11190	(FLIGHT	7)											
A 8365H	4	7	5	10	12	52	2.8	18	1	90	78	50	0
B 8354B?	6	3	5	7	14	8	14.4	45	4	82	14	58	0
C 8330D	9	6	6	5	12	11	11.7	10	1	47	70	12	0
D 8321B?	3	4	3	6	20	58	3.1	31	1	38	179	0	0
E 8312S	4	7	2	10	20	63	2.5	17	1	25	238	0	0
F 8297S?	1	2	0	2	2	4	-	-	-	-	-	-	0
G 8292B	5	4	3	5	9	12	6.7	43	1	71	136	28	0
H 8279S	1	2	1	2	2	4	-	-	-	-	-	-	0
I 8253S	0	8	2	13	27	71	0.4	0	1	11	488	0	0
J 8235S	1	2	1	2	2	4	-	-	-	-	-	-	0
K 8144S	1	2	1	2	2	4	-	-	-	-	-	-	0
L 8123B?	5	5	3	6	15	12	5.0	28	1	50	122	12	0
M 8101H	10	15	10	8	48	14	4.2	3	2	39	50	11	0
N 8070D	8	3	15	11	9	12	19.2	36	2	64	34	34	0
O 8067B	10	1	2	33	22	36	111.7	19	3	37	19	13	0
P 8064B	20	1	7	7	22	77	357.9	6	3	24	21	2	0
Q 8060D	29	11	7	21	67	61	36.2	9	3	28	20	7	0
R 8058D	11	31	17	21	67	61	2.6	0	2	23	25	2	0
S 8052D	12	19	18	28	68	56	4.7	0	2	32	40	6	0
T 8051B	12	19	18	28	68	56	4.7	0	2	35	52	5	0
U 8046B	6	7	4	9	24	25	5.1	13	1	34	78	1	0
V 8033D	6	9	6	1	22	16	3.6	13	1	44	62	13	0
W 8030D	6	7	9	4	22	25	4.9	18	2	38	48	10	0
X 8027D	12	14	9	10	22	18	5.8	0	2	44	42	15	0
Y 8012D	7	11	9	13	29	49	3.9	14	1	56	138	17	0
Z 8009B	6	2	5	0	29	9	21.5	53	2	67	55	35	0
AA 7990B	4	14	3	3	38	12	1.5	0	2	44	41	15	0
AB 7982B	21	19	14	32	74	45	9.6	0	3	29	13	9	0
AC 7974B	9	7	13	3	8	2	9.3	10	3	45	17	22	0
AD 7969D	5	6	9	7	16	10	3.7	16	3	64	21	38	0
AE 7961B	13	12	18	22	39	38	7.7	11	2	56	29	29	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	COND DEPTH .SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11190	(FLIGHT 7)												
AF 7958E	10	13	4	22	39	38	5.2	4	1	42	71	9	0
AG 7925B	1	1	1	2	2	1	-	-	-	-	-	-	0
AH 7920B	23	12	5	5	6	5	21.6	0	5	31	8	13	0
AI 7864B?	3	6	1	4	11	17	2.3	5	1	90	822	0	0
AJ 7811D	2	6	2	7	12	6	1.3	0	1	64	190	15	0
AK 7805B	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 11200	(FLIGHT 8)												
A 611B	4	9	3	4	3	47	2.1	17	3	63	21	39	0
B 619B	6	7	6	9	2	46	4.7	27	3	50	20	27	0
C 623B	15	9	24	22	48	46	14.9	28	2	50	36	24	0
D 636D	8	5	5	4	13	9	11.2	24	1	55	135	14	0
E 654H	6	6	4	14	34	58	5.6	26	1	28	189	0	0
F 665H	9	10	14	22	54	40	5.5	21	2	38	51	11	0
G 677B	6	2	3	5	12	30	32.1	56	1	51	115	15	0
H 710S	0	2	1	2	2	4	-	-	-	-	-	-	0
I 752S	0	5	1	7	6	33	0.4	0	1	33	562	0	0
J 858B	5	7	2	2	20	30	3.9	21	1	47	160	7	0
K 866D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 870B	2	9	3	12	5	17	1.0	0	1	43	91	10	0
M 873B	4	2	3	2	3	20	19.2	61	1	44	85	11	0
N 876B	1	1	1	2	2	4	-	-	-	-	-	-	0
O 878B	8	11	9	22	49	47	4.7	21	1	37	62	9	0
P 880B	11	21	9	7	59	3	3.8	10	2	38	47	12	0
Q 882B	14	23	14	7	59	55	4.5	9	2	35	42	10	0
R 886B	1	1	1	2	2	4	-	-	-	-	-	-	0
S 890D	7	6	4	10	14	14	7.3	31	1	53	59	22	0
T 898B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 910B?	6	5	2	7	12	22	6.4	36	1	64	74	29	0
V 922D	18	13	2	26	56	11	11.6	0	2	45	26	19	0
W 927D	7	8	8	27	58	49	5.7	14	2	25	23	3	0
X 933B	4	5	10	10	18	22	3.4	24	3	25	19	4	0
Y 940B	9	7	6	19	44	6	8.7	20	2	41	53	12	0
Z 946B	9	14	10	20	50	37	4.3	10	1	35	71	5	0
AA 951B	7	11	10	20	50	37	3.6	10	1	42	60	12	0
AB 960B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 966D	6	3	5	14	16	20	11.2	37	1	30	81	0	0
AD 969D	5	10	6	14	16	20	3.0	11	1	33	59	4	0
AE 974B?	10	9	1	7	25	22	7.5	15	1	27	65	0	0
AF 978B	8	5	11	14	33	30	12.5	32	2	37	53	8	0
AG 985B	15	20	8	14	33	32	6.0	3	1	30	80	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11200	(FLIGHT	8)											
AH 993D	4	7	2	6	12	42	2.6	32	1	47	171	10	30
AI 1005D	16	17	3	34	71	64	7.6	19	2	44	44	18	0
AJ 1014D	9	9	2	19	10	20	6.1	27	2	75	27	48	0
AK 1036B	10	14	3	22	13	42	4.6	12	2	50	34	24	0
AL 1046B	19	11	1	7	12	64	16.5	1	4	25	10	7	0
AM 1054D	5	13	48	24	60	54	1.9	0	5	35	7	19	0
AN 1057D	22	20	30	7	17	54	10.1	4	3	33	15	13	0
AO 1070B	25	40	44	85	188	144	5.8	3	3	27	17	9	0
AP 1072B	28	41	44	85	188	144	6.5	3	3	31	16	12	0
AQ 1083B	2	3	21	19	41	39	2.6	50	3	63	22	39	0
AR 1092B	6	21	23	40	82	62	1.9	0	2	34	35	11	0
AS 1164B	1	10	10	5	38	4	0.4	0	3	57	19	32	0
AT 1175B	8	8	24	25	52	22	7.0	12	4	43	9	24	0
AU 1179B	11	9	24	25	52	23	8.4	11	3	39	14	19	0
AV 1187B	6	9	4	3	32	13	3.9	6	3	41	15	20	0
AW 1196B	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 1208B	3	4	3	7	17	7	2.6	28	1	54	153	12	0
AY 1271B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 1321M	0	3	0	4	7	25	0.4	0	1	116	1025	0	180
BA 1330M	0	1	0	2	2	5	0.4	0	1	72	919	0	0
BB 1339M	0	1	0	2	2	4	-	-	-	-	-	-	200
BC 1351D	1	2	1	2	2	4	-	-	-	-	-	-	0
BD 1364D	3	9	1	8	14	43	1.4	22	1	46	423	5	0
BE 1373D	4	4	2	4	2	1	1.0	0	1	52	274	27	0
BF 1407B	3	7	1	12	26	12	1.9	24	1	60	123	22	10
LINE 11210	(FLIGHT	8)											
A 2066B?	9	6	15	12	3	9	12.1	30	2	81	27	52	0
B 2056H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2043B?	7	5	2	12	20	54	9.6	35	1	52	85	18	0
D 2030H	5	10	2	6	12	50	2.7	22	1	29	198	0	0
E 2023B	10	9	3	15	47	52	8.8	29	2	45	43	18	0
F 2019B	8	7	3	22	47	48	7.0	30	2	54	26	29	0
G 2015D	11	11	5	22	45	44	7.3	18	2	45	46	17	0
H 2012D	6	9	8	11	5	44	4.0	26	1	51	76	19	0
I 2007D	7	10	0	6	16	33	3.8	15	1	46	129	9	0
J 1994B	8	9	2	20	24	50	5.7	25	1	48	89	15	0
K 1984S	1	7	1	11	8	88	0.6	3	1	23	538	0	0
L 1973S	2	10	1	17	30	95	0.6	0	1	11	514	0	0
M 1921S	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1857S	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	COND DEPTH .SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11210	(FLIGHT	8)											
O 1841D	4	3	7	6	16	24	6.7	38	1	50	92	14	0
P 1836D	5	9	3	13	26	29	2.6	10	1	44	113	8	0
Q 1834B	4	8	4	13	26	26	2.4	14	1	38	87	5	0
R 1831D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 1819D	2	8	12	5	16	12	1.2	0	2	38	41	11	0
T 1817H	4	9	4	5	16	12	2.2	1	2	36	44	8	0
U 1803B?	2	6	2	5	13	9	1.9	11	1	49	157	7	0
V 1799H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 1772D	12	14	9	4	7	1	6.3	0	2	31	32	6	0
X 1769B	11	13	4	25	12	3	6.2	0	2	29	35	4	0
Y 1767B	11	12	15	25	12	3	6.9	0	2	31	39	4	0
Z 1764B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1755H	5	3	3	6	12	11	7.4	28	1	38	112	0	0
AB 1738H	6	7	8	9	18	5	5.5	5	1	36	80	1	0
AC 1718H	16	10	21	16	37	1	13.5	5	3	55	18	31	0
AD 1696D	13	15	5	10	12	15	6.9	0	2	39	25	14	0
AE 1691B	24	11	30	2	2	16	23.2	0	4	28	12	9	0
AF 1690B	14	12	30	2	2	16	9.8	0	4	29	9	11	0
AG 1684B	14	2	29	13	28	9	108.2	5	4	27	10	8	0
AH 1681B	10	8	6	12	28	10	9.7	1	3	38	16	15	0
AI 1672B	11	11	9	13	27	13	7.2	0	3	27	20	3	0
AJ 1663B	10	12	3	20	1	27	6.0	0	2	50	46	18	0
AK 1634H	9	6	1	12	7	1	10.4	0	2	37	27	8	0
AL 1589B	4	5	0	2	1	3	4.0	30	1	152	850	22	0
AM 1558B	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 1547B	11	22	4	11	22	83	3.5	14	1	52	145	16	0
AO 1545D	11	34	7	11	52	83	2.4	3	1	46	245	8	0
AP 1509B?	1	2	0	2	1	4	-	-	-	-	-	-	0
AQ 1497M	0	2	0	1	2	1	-	-	-	-	-	-	470
AR 1486M	0	2	0	2	2	4	-	-	-	-	-	-	60
AS 1481B?	6	5	5	3	12	3	8.4	31	1	125	213	66	0
AT 1458D	6	7	0	2	5	14	4.6	24	1	85	190	35	0
AU 1449B?	5	7	2	6	14	21	3.1	16	1	77	222	26	13
LINE 11220	(FLIGHT	8)											
A 2304H	11	7	11	10	14	64	12.2	32	3	50	18	28	0
B 2327S	2	15	1	25	22	169	0.7	4	1	17	263	0	0
C 2344B	2	6	4	4	35	69	1.0	18	2	37	26	15	0
D 2351B	10	15	11	33	3	74	4.2	15	1	45	57	16	0
E 2359D	7	6	1	9	16	33	8.6	33	1	45	92	11	0
F 2366B	1	2	1	0	2	4	-	-	-	-	-	-	5

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR				
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT
LINE 11220	(FLIGHT	8)									
G 2369B?	1	2	0	2	2	4	-	-	-	-	0
H 2379B?	5	5	4	8	17	22	5.1	39	1	52	0
I 2400S?	1	2	1	2	1	4	-	-	-	-	0
J 2548H	8	5	7	7	3	3	11.6	14	1	41	0
K 2574B	7	11	1	4	7	17	3.6	3	2	42	0
L 2582D	4	6	5	9	10	10	4.0	17	1	65	0
M 2588D	1	2	0	1	2	4	-	-	-	-	0
N 2608H	8	8	1	11	24	11	6.8	0	2	34	0
O 2621B	3	9	8	10	25	27	1.4	0	1	39	0
P 2632D	5	7	3	8	20	33	3.7	17	1	47	0
Q 2641B?	1	2	0	2	2	4	-	-	-	-	0
R 2646D	5	11	3	11	27	37	2.2	2	1	34	0
S 2653B	1	2	1	2	2	4	-	-	-	-	0
T 2691D	8	17	20	14	10	79	2.9	8	3	38	0
U 2697B	15	27	24	43	149	68	4.3	1	4	30	0
V 2699B	24	22	26	43	149	68	10.5	14	3	32	0
W 2726B	3	12	27	60	129	166	1.5	3	4	14	0
X 2728B	8	7	27	60	129	166	8.7	32	4	20	0
Y 2731D	30	6	77	130	114	124	76.2	13	4	23	0
Z 2734B	30	12	4	5	16	15	31.9	7	4	27	0
AA 2743B	10	9	15	4	14	22	8.4	20	3	38	0
AB 2753D	13	17	31	40	76	78	5.7	11	3	37	0
AC 2757D	24	25	31	40	76	78	9.2	13	3	38	0
AD 2764D	15	18	11	19	47	46	6.7	17	3	47	0
AE 2768D	16	6	11	19	47	46	28.4	32	2	41	0
AF 2814H	11	1	0	12	5	17	49.0	21	3	31	0
AG 2953B	1	2	1	2	2	4	-	-	-	-	0
AH 2963B	7	23	7	5	59	153	1.9	0	1	32	0
LINE 11221	(FLIGHT	8)									
A 5469D	0	2	1	2	2	4	-	-	-	-	0
B 5454D	4	5	1	2	23	5	4.2	42	1	78	0
C 5450D	1	2	1	2	2	4	-	-	-	-	0
D 5446D	1	2	1	2	2	4	-	-	-	-	0
LINE 11230	(FLIGHT	8)									
A 4277H	1	2	1	2	2	4	-	-	-	-	0
B 4236S	1	2	1	2	2	4	-	-	-	-	0
C 4222S	1	2	1	2	2	4	-	-	-	-	0
D 4198S	1	2	1	2	2	4	-	-	-	-	0
E 4119S	1	2	1	2	2	4	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11230	(FLIGHT 8)												
F 4102B?	7	10	7	1	19	12	4.1	5	1	34	103	0	0
G 4099B?	9	6	2	7	15	18	10.0	17	1	40	57	9	0
H 4071B	6	2	5	7	16	13	40.7	35	2	44	37	16	0
I 4065B	8	9	3	11	8	17	5.2	1	2	45	40	16	0
J 4041D	7	5	6	3	14	2	9.1	17	2	63	56	28	0
K 4034B	9	7	16	15	33	11	8.7	4	2	36	25	10	0
L 4005H	1	2	1	2	2	4	-	-	-	-	-	-	0
M 3962D	3	7	4	9	8	7	2.3	1	1	81	76	41	0
N 3948B	12	13	2	6	6	30	7.2	10	2	57	38	28	0
O 3943B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 3926B	13	9	13	11	26	11	11.9	0	3	37	24	11	0
Q 3911B	6	4	4	3	7	5	9.8	8	2	48	39	17	0
R 3906B	10	15	19	23	30	28	4.6	0	3	44	23	18	0
S 3903B	10	12	19	23	30	28	5.4	0	2	34	51	3	0
LINE 11232	(FLIGHT 23)												
A 5497D	9	5	4	17	4	21	12.0	13	2	80	34	48	0
B 5491B	11	5	5	1	2	22	15.9	19	3	48	18	25	0
C 5447H	1	2	1	2	0	2	-	-	-	-	-	-	0
D 5397B?	4	6	1	4	11	50	3.0	18	1	78	187	29	0
E 5385B	12	7	17	20	49	14	13.9	20	3	45	21	22	0
F 5360S	0	2	0	2	2	4	-	-	-	-	-	-	0
G 5350B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11240	(FLIGHT 8)												
A 4537S	1	2	1	2	2	4	-	-	-	-	-	-	0
B 4561H	6	9	11	7	15	6	3.6	0	2	47	44	16	0
C 4598S	1	2	1	2	1	4	-	-	-	-	-	-	0
D 4634S	1	5	1	2	4	2	1.1	14	1	60	524	0	0
E 4681H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 4744S	1	3	2	6	4	29	0.8	17	1	39	217	1	0
G 4760B?	7	6	4	5	11	35	7.2	31	1	41	250	0	0
H 4767D	13	18	2	9	8	59	5.6	9	1	35	86	4	0
I 4772B	11	5	6	7	16	12	20.2	33	2	37	50	10	0
J 4775B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 4779B	3	4	1	0	1	45	2.8	35	1	41	61	12	0
L 4784D	3	10	3	13	27	49	1.4	6	1	40	80	9	0
M 4786D	3	7	2	11	22	49	1.9	19	1	39	79	8	0
N 4795B	8	10	13	8	16	14	5.2	15	1	40	54	11	0
O 4799B	12	7	9	7	21	17	12.4	21	2	32	45	6	0
P 4807B	10	26	7	24	58	113	2.7	0	2	33	42	8	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11240	(FLIGHT 8)												
Q 4810B	15	26	7	24	58	113	4.5	0	2	32	42	7	7
R 4827D	5	4	11	9	20	8	6.1	29	1	62	65	27	0
S 4836B	13	16	7	25	60	56	5.7	0	2	28	31	3	0
T 4838B	12	3	7	25	60	56	48.0	23	2	28	38	2	0
U 4850B	3	8	4	11	29	32	1.8	5	1	55	76	20	0
V 4870H	5	5	1	1	8	14	5.2	20	1	46	85	10	0
W 4893B?	3	6	1	1	10	7	2.7	11	1	71	281	16	0
X 4923B	6	11	27	8	17	59	3.4	13	1	56	73	22	0
Y 4934B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 4941B	10	7	14	13	32	18	9.6	18	3	53	17	30	0
AA 4956D	15	18	7	14	29	64	6.6	15	1	56	62	24	0
AB 4974B	25	33	8	11	24	31	7.1	1	2	29	22	8	0
AC 4979B	11	27	8	25	29	27	3.2	0	3	27	15	7	0
AD 4998D	10	11	5	7	18	22	6.2	9	2	45	29	19	0
AE 5006B	5	15	5	27	68	93	1.8	2	2	42	35	17	0
AF 5043B	1	1	1	2	2	4	-	-	-	-	-	-	0
AG 5047B	10	1	4	3	52	15	123.5	24	3	40	23	16	0
AH 5053B	7	8	1	1	27	10	5.4	8	3	36	22	12	0
AI 5070B	7	8	6	7	24	16	5.3	18	2	50	32	23	0
AJ 5166H	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 5178H	1	2	1	2	2	3	-	-	-	-	-	-	0
AL 5269D	5	9	1	5	3	33	2.9	18	1	78	119	36	0
LINE 11250	(FLIGHT 8)												
A 6429B?	3	3	1	4	10	9	7.0	29	1	75	109	31	0
B 6420B	1	2	0	2	2	2	-	-	-	-	-	-	0
C 6413B	1	2	1	2	2	3	-	-	-	-	-	-	0
D 6369S	1	2	1	1	2	4	-	-	-	-	-	-	0
E 6345S	3	3	2	4	8	3	4.9	52	1	66	230	20	0
F 6316S	6	6	4	7	2	27	5.2	30	1	52	99	16	0
G 6282S	1	2	0	2	2	4	-	-	-	-	-	-	0
H 6266S	1	2	1	2	2	4	-	-	-	-	-	-	0
I 6244B	5	5	1	7	15	28	6.8	37	1	40	191	1	0
J 6232B	11	14	14	20	43	42	5.7	3	1	29	53	1	0
K 6227D	11	9	15	20	50	25	9.7	14	2	44	47	15	0
L 6223B	5	3	7	2	4	3	7.4	34	2	54	54	22	0
M 6206B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 6202B	6	5	7	1	8	13	7.1	16	2	41	50	10	0
O 6197B	8	9	4	13	32	19	5.7	2	1	37	76	3	0
P 6186B	12	13	16	22	49	27	6.8	0	1	39	60	6	0
Q 6183H	12	14	16	22	38	27	6.1	0	2	27	36	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11250	(FLIGHT	8)											
R 6168H	4	6	4	1	6	2	1.0	0	1	32	71	14	0
S 6149H	4	6	2	7	21	22	2.8	11	1	29	127	0	0
T 6135H	6	8	4	10	8	26	3.8	7	1	31	198	0	0
U 6116S	3	3	4	4	16	26	0.6	0	1	22	329	0	0
V 6108B	1	2	0	2	2	4	-	-	-	-	-	-	0
W 6094B	15	19	24	45	99	95	5.8	0	2	26	44	0	0
X 6081D	19	29	23	19	80	95	5.5	7	2	51	47	23	0
Y 6076B	8	6	23	19	80	95	9.4	14	2	46	48	15	0
Z 6059B	11	8	21	17	18	18	10.1	0	3	37	23	11	0
AA 6048B	15	11	12	14	35	36	12.2	1	2	40	27	14	0
AB 6037H	3	1	20	22	22	11	33.7	58	2	40	28	14	0
AC 6005H	1	2	1	2	2	2	-	-	-	-	-	-	0
AD 5964B?	4	3	0	1	2	16	5.7	38	1	157	299	70	0
AE 5946B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 5932B	3	3	12	9	25	13	3.7	32	1	66	71	29	0
AG 5923B	5	7	16	12	28	6	4.2	0	3	46	21	20	0
LINE 11260	(FLIGHT	8)											
A 6658H	5	4	3	5	13	19	5.8	39	1	63	128	22	0
B 6668H	5	4	6	7	13	6	8.1	45	1	73	63	38	0
C 6799S	3	6	2	6	13	19	2.2	19	1	53	101	16	0
D 6811S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 6844S	1	2	1	2	2	4	-	-	-	-	-	-	0
F 6881S	4	9	2	16	9	96	2.0	15	1	28	159	0	0
G 6891S	3	7	2	8	9	54	1.9	19	1	32	137	0	0
H 6901S	3	7	2	9	16	61	2.1	18	1	28	135	0	0
I 6908B?	5	3	9	1	6	5	12.1	42	1	36	101	2	0
J 6917H	10	7	10	19	24	9	11.1	18	2	33	36	7	0
K 6930B?	1	2	1	2	2	2	-	-	-	-	-	-	0
L 6949D	4	6	5	11	5	12	3.5	19	1	43	60	11	0
M 6961B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 6974B	8	4	12	27	63	40	14.1	34	2	40	32	14	0
O 6976B?	8	2	8	16	33	20	31.2	40	2	36	25	13	0
P 6981B	7	15	19	21	18	18	3.1	2	3	36	20	15	0
Q 6987B	14	17	19	21	18	5	6.4	3	2	38	35	12	0
R 6997B	11	13	3	6	20	28	6.0	13	1	41	92	8	0
S 7011D	7	9	0	9	23	8	4.6	19	1	46	119	10	0
T 7017B	5	7	3	10	22	43	3.6	21	1	42	100	8	0
U 7026D	7	9	6	13	32	32	5.0	16	1	35	100	2	0
V 7031B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 7037B	5	9	5	5	15	16	3.1	16	1	43	62	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11260	(FLIGHT	8)											
X 7059B	9	9	4	2	34	16	6.4	10	1	42	120	4	0
Y 7074B	8	7	4	6	15	16	7.2	13	1	73	82	33	0
Z 7088B	6	6	5	8	14	23	5.6	25	2	109	39	74	0
AA 7099B	12	12	16	19	43	30	7.7	0	2	44	44	13	0
AB 7106B	5	7	14	2	8	14	4.5	23	2	82	51	48	0
AC 7121D	8	8	4	9	5	29	5.9	10	2	66	43	34	0
AD 7139B	1	25	7	11	70	52	0.4	0	4	27	9	10	0
AE 7162B	8	2	1	7	2	22	27.4	40	2	33	32	8	0
AF 7168B	4	16	14	26	61	43	1.5	0	2	37	34	13	0
AG 7177B	9	9	16	23	9	2	7.1	12	1	44	104	8	0
AH 7219B	7	10	4	14	25	62	3.9	10	1	50	82	15	0
AI 7233B?	4	3	2	5	13	1	7.7	47	2	88	46	54	0
AJ 7332B?	0	2	1	2	2	4	-	-	-	-	-	-	0
AK 7339D	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 7351B	1	2	1	1	2	4	-	-	-	-	-	-	0
AM 7358B	6	6	7	7	29	29	6.1	15	2	58	29	30	0
AN 7364B	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 7371B	5	4	1	1	3	6	7.7	21	2	100	28	67	0
AP 7503M	0	5	0	4	0	38	0.4	14	1	130	1025	0	0
LINE 11270	(FLIGHT	8)											
A 8232H	4	5	3	7	15	15	3.8	21	1	68	186	20	0
B 8221B?	4	3	8	7	13	1	7.5	38	2	74	46	40	0
C 8194H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 8170S	1	2	1	0	1	4	-	-	-	-	-	-	0
E 8126S	2	5	2	9	15	32	1.6	16	1	50	108	13	0
F 8061S	0	2	2	6	4	27	0.4	0	1	44	126	5	0
G 8055S	1	1	1	2	2	4	-	-	-	-	-	-	0
H 8032H	16	11	14	17	15	18	12.1	1	2	37	39	9	0
I 7987H	5	16	23	23	67	35	1.7	0	3	27	21	5	0
J 7977H	4	5	8	8	20	5	4.1	9	2	39	56	7	0
K 7953B?	6	3	2	4	5	4	12.0	22	1	46	96	8	0
L 7936B?	5	5	6	12	27	18	5.9	17	2	34	41	6	0
M 7926D	1	2	1	2	2	4	-	-	-	-	-	-	0
N 7921B	21	23	18	3	9	11	8.2	0	2	33	24	10	0
O 7919B	21	19	18	3	9	11	10.3	0	2	36	24	12	0
P 7912B	11	7	16	24	50	34	11.9	9	2	82	30	51	0
Q 7898B	16	4	5	18	10	12	50.2	16	2	41	48	12	0
R 7893B	2	3	17	6	2	8	2.9	27	2	33	28	7	0
S 7873D	9	6	2	10	5	2	10.8	23	2	110	28	78	0
T 7862H	18	5	6	3	32	20	52.3	2	4	24	10	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11270	(FLIGHT 8)												
U 7845B	4	4	16	19	43	18	5.1	25	2	61	47	28	0
V 7839D	22	8	16	21	50	31	33.4	5	1	35	58	4	0
W 7822B?	1	2	1	2	2	4	-	-	-	-	-	-	0
X 7792H	1	2	1	2	2	2	-	-	-	-	-	-	0
Y 7739S	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7716B	8	3	1	1	1	5	26.6	21	2	98	41	62	0
LINE 11280	(FLIGHT 9)												
A 578H	6	3	8	8	15	14	13.8	41	1	65	130	24	0
B 637H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 662S	1	2	1	2	2	4	-	-	-	-	-	-	0
D 709S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 758B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 803H	3	1	2	9	3	10	16.9	74	1	21	174	0	0
G 824D	14	10	18	15	31	22	11.7	23	1	44	88	11	0
H 827D	10	10	18	15	31	18	6.7	21	1	49	82	16	0
I 840B?	1	2	0	2	2	2	-	-	-	-	-	-	0
J 851B	13	8	12	17	104	48	12.7	27	1	29	101	0	0
K 856B	1	3	8	17	104	48	1.8	52	1	33	99	3	0
L 860D	6	9	8	3	10	7	4.0	21	1	38	54	10	0
M 863B	6	4	7	13	28	10	11.2	43	1	38	67	8	0
N 868B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 875B	1	1	1	2	2	4	-	-	-	-	-	-	0
P 883D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 903B	15	8	9	28	68	72	18.0	29	2	38	35	14	0
R 905B	15	25	9	28	68	72	4.5	10	2	35	32	13	0
S 909D	8	12	10	23	52	78	4.1	19	2	39	33	15	0
T 914D	10	10	16	30	73	47	7.1	17	2	30	23	8	0
U 917D	21	20	16	30	73	47	9.5	5	2	28	23	6	0
V 927D	3	5	1	12	1	14	3.0	30	1	34	78	3	0
W 933B	5	2	3	12	36	46	13.7	51	1	31	78	0	0
X 938B	12	15	5	17	46	33	5.3	10	1	30	101	0	0
Y 969B	5	11	4	1	2	21	2.4	16	1	41	79	11	0
Z 977B	6	8	0	21	51	5	4.7	27	1	32	66	4	0
AA 983B	6	5	6	21	51	33	7.2	41	1	45	53	17	0
AB 993B	8	7	6	8	12	33	8.5	38	1	43	78	13	0
AC 999B	3	4	3	5	13	40	0.3	0	1	28	102	11	0
AD 1005B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 1022B	2	1	3	6	14	28	8.0	84	2	40	51	12	0
AF 1026D	8	17	7	27	57	8	3.0	8	1	46	56	17	0
AG 1031D	9	15	7	27	57	8	3.9	7	1	45	56	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11280	(FLIGHT	9)											
AH 1039B	6	7	6	8	17	12	5.1	25	2	98	33	66	0
AI 1048B	1	2	1	2	2	1	-	-	-	-	-	-	0
AJ 1062B	4	3	5	6	15	14	6.9	24	2	71	43	37	0
AK 1076B	6	4	1	4	9	8	7.8	32	1	112	186	57	0
AL 1099B	3	9	3	4	23	4	1.8	0	3	49	21	21	0
AM 1111D	16	12	4	26	59	72	10.9	2	4	46	10	26	0
AN 1119D	29	35	46	73	166	124	8.0	0	3	21	12	4	0
AO 1122D	9	4	3	10	58	84	16.4	18	4	18	12	0	0
AP 1134B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 1145B?	1	2	1	1	2	4	-	-	-	-	-	-	0
AR 1156D	17	14	19	4	10	23	10.4	17	1	36	67	7	0
AS 1188S	3	4	1	3	2	21	3.2	43	1	104	192	51	0
AT 1203H	7	7	11	12	32	16	5.7	16	2	64	37	34	0
AU 1421H	1	2	1	2	2	2	-	-	-	-	-	-	0
LINE 11281	(FLIGHT	9)											
A 1662B	6	7	1	10	2	12	5.2	9	2	74	48	40	0
LINE 11290	(FLIGHT	9)											
A 2306H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2266H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2233H	3	4	3	2	4	18	3.7	43	1	44	180	6	0
D 2188H	4	10	4	5	5	15	2.1	6	1	25	141	0	0
E 2180B?	3	5	1	1	2	1	2.9	25	1	38	143	1	0
F 2168D	5	5	11	15	8	14	5.8	26	1	42	101	6	0
G 2164D	7	10	11	8	15	20	3.9	4	1	23	255	0	0
H 2151B?	0	9	6	10	20	20	0.4	0	1	35	211	0	0
I 2142B	4	0	5	11	23	22	149.3	76	1	46	127	9	0
J 2124D	17	6	9	29	65	79	31.9	20	1	31	73	1	0
K 2121B	16	2	39	41	89	36	224.2	22	2	34	34	8	0
L 2115B	21	20	19	44	97	37	9.4	0	3	22	15	3	0
M 2110B	2	2	8	4	9	12	0.7	0	1	13	21	2	0
N 2092H	8	9	7	13	30	13	5.5	10	1	31	111	0	0
O 2079B	7	9	5	11	26	25	5.0	13	1	29	169	0	0
P 2070B?	7	6	1	7	14	7	7.6	16	1	32	74	0	0
Q 2060B	10	7	3	7	10	21	10.6	14	2	38	43	9	0
R 2052B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 2047D	6	7	13	14	24	13	4.9	4	1	28	61	0	0
T 2036B?	4	10	10	25	28	58	1.8	0	2	31	41	5	0
U 2024B?	7	4	17	11	17	1	13.8	30	4	64	13	42	0
V 2018B	15	13	6	12	23	17	9.5	0	2	38	29	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11290	(FLIGHT	9)											
W 1989D	5	9	9	1	1	10	2.6	10	1	81	120	37	0
X 1975B	45	10	45	65	137	87	78.9	0	4	14	9	0	0
Y 1967B	3	12	32	21	43	13	1.1	0	3	21	14	1	0
Z 1955B	5	7	12	15	35	33	4.3	18	1	44	98	9	0
AA 1949D	15	1	12	15	35	33	413.0	31	1	35	277	0	0
AB 1834B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 1815B	12	6	4	9	21	6	17.8	2	2	51	35	21	0
AD 1803B	18	6	35	11	31	13	39.6	0	8	41	2	27	0
AE 1708H	7	7	2	7	17	22	6.6	19	1	71	106	30	0
LINE 11300	(FLIGHT	9)											
A 2563H	1	2	0	2	2	4	-	-	-	-	-	-	0
B 2588B?	6	3	6	7	14	12	14.0	55	1	54	188	14	0
C 2606H	2	2	3	8	13	22	2.6	58	1	42	287	1	0
D 2653S	1	2	1	2	2	2	-	-	-	-	-	-	0
E 2685B	5	6	5	10	2	27	4.9	34	1	37	147	2	0
F 2692B	4	5	3	10	20	11	3.8	35	1	26	342	0	0
G 2770H	5	5	3	2	11	7	5.1	28	1	30	194	0	0
H 2788H	4	8	2	8	6	40	2.2	17	1	23	180	0	0
I 2799H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 2825D	33	27	6	50	109	47	13.4	1	2	17	27	0	0
K 2829D	26	25	29	50	109	47	10.1	0	2	29	22	8	19
L 2833D	15	11	28	20	36	15	11.1	12	2	33	37	7	0
M 2843D	13	8	7	10	22	16	13.0	17	1	32	55	3	0
N 2848D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2861D	4	3	6	13	35	23	5.7	41	1	39	86	6	0
P 2868D	7	8	2	6	14	18	5.2	18	1	38	74	7	0
Q 2877B	11	9	1	1	20	12	10.1	22	1	46	99	11	0
R 2892B	1	2	1	1	1	4	-	-	-	-	-	-	0
S 2899B	5	3	2	6	10	8	8.8	35	1	33	240	0	0
T 2931B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 2940B?	7	9	6	9	3	4	4.7	18	2	50	43	21	0
V 2948B	5	2	0	0	2	2	11.5	42	2	51	49	20	0
W 2961D	13	16	3	5	8	4	6.0	6	1	29	115	0	0
X 2990S	0	2	0	2	2	4	-	-	-	-	-	-	0
Y 3011D	2	20	5	7	22	61	0.6	0	2	65	38	36	0
Z 3016D	3	4	29	11	81	61	2.7	36	2	48	28	23	0
AA 3022D	39	33	30	34	82	40	13.1	1	3	37	18	17	0
AB 3046B	28	30	38	53	117	73	8.9	0	3	20	20	0	0
AC 3058B	12	7	17	11	17	11	15.0	30	3	53	14	33	0
AD 3075B	5	4	6	8	16	13	5.6	20	2	57	32	28	10

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

B-163

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11300	(FLIGHT	9)											
AE 3093B	6	4	4	7	40	11	10.1	22	3	39	19	15	0
AF 3101B	12	11	5	22	48	28	7.7	0	2	32	28	6	0
AG 3109B	6	4	5	4	12	7	7.6	0	2	33	54	0	0
AH 3123B	6	10	3	1	30	34	3.2	2	1	43	229	0	0
AI 3146B	3	6	2	1	1	35	2.4	7	1	41	371	0	0
AJ 3215B	1	2	1	2	2	1	-	-	-	-	-	-	0
AK 3228D	6	11	4	13	33	38	2.9	3	1	40	59	9	0
AL 3236B	8	5	1	9	20	29	12.5	43	2	78	53	45	0
AM 3243B	5	10	1	3	2	4	2.5	14	1	60	75	26	0
AN 3256B	5	7	1	17	4	8	3.6	25	1	91	84	51	0
AO 3284B	19	12	39	9	8	32	14.7	1	4	41	9	22	0
AP 3289B	8	5	29	18	52	31	11.2	17	3	64	14	40	0
LINE 11301	(FLIGHT	9)											
A 5559B	17	3	26	12	31	47	111.7	13	4	56	11	35	0
B 5564D	11	8	26	12	2	9	10.0	24	2	65	37	36	0
C 5574B	4	5	2	7	10	8	4.3	30	2	77	39	46	0
D 5582D	24	13	21	5	25	15	20.1	17	3	69	14	46	0
E 5650M	0	8	0	9	5	67	0.4	8	1	77	829	5	90
F 5663M	0	2	0	2	1	4	-	-	-	-	-	-	0
G 5759B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11310	(FLIGHT	9)											
A 3957S	1	2	1	2	2	2	-	-	-	-	-	-	0
B 3894H	4	5	1	3	3	24	3.3	24	1	49	694	0	0
C 3862H	5	5	4	6	2	3	5.2	29	1	46	139	7	0
D 3841H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3826H	1	4	4	7	9	25	1.1	11	1	37	188	0	0
F 3797H	4	2	4	8	2	8	7.7	43	1	29	137	0	0
G 3783B	5	5	1	7	20	19	4.7	15	1	20	210	0	0
H 3772B	8	12	6	15	43	33	4.5	0	1	12	165	0	0
I 3765B	14	11	13	13	32	33	10.3	6	2	30	50	2	0
J 3761B	7	5	12	14	28	14	9.0	24	2	48	37	20	30
K 3752B	17	18	23	30	66	8	8.0	0	2	32	39	6	0
L 3732B	17	20	16	23	52	32	7.2	0	1	26	60	0	0
M 3716B?	3	4	1	6	11	1	3.3	21	1	44	852	0	0
N 3686H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 3670B	10	8	13	15	32	17	9.5	0	2	25	27	0	0
P 3655B	16	13	28	22	45	18	11.2	0	3	42	19	19	0
Q 3651B	16	1	28	4	45	3	234.8	17	3	44	17	21	0
R 3637B	13	6	15	11	23	2	19.8	0	3	33	21	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11310	(FLIGHT	9)											
S 3614B	1	2	1	2	2	1	-	-	-	-	-	-	0
T 3606B	12	12	14	21	43	43	7.3	5	3	35	15	14	0
U 3594B	4	10	6	6	6	41	1.9	0	1	31	333	0	0
V 3582B	2	6	2	5	3	6	1.7	10	1	83	274	28	0
W 3550B	0	5	0	5	12	36	0.3	0	1	45	421	16	0
X 3535B	2	19	5	3	79	190	0.6	0	1	23	530	0	0
Y 3484B	6	7	3	7	14	32	5.1	30	1	86	168	38	0
Z 3476B	7	7	3	6	14	25	5.9	29	1	77	100	37	0
AA 3467B	11	7	14	2	2	2	12.5	11	2	68	48	34	0
AB 3460B	7	4	6	9	6	7	12.3	39	3	83	14	59	0
LINE 11311	(FLIGHT	9)											
A 5490B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5479D	31	9	40	24	63	41	50.6	4	3	39	13	19	0
C 5473B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 5456H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 5437S	1	2	1	1	1	4	-	-	-	-	-	-	0
F 5422M	0	2	0	1	2	4	-	-	-	-	-	-	180
G 5389D	2	9	1	7	20	2	1.2	2	1	71	783	0	0
H 5363S	2	3	1	1	1	5	2.0	34	1	196	1025	0	0
LINE 11315	(FLIGHT	28)											
A 6383S	1	2	0	2	2	4	-	-	-	-	-	-	0
LINE 11320	(FLIGHT	9)											
A 4180H	5	5	4	8	9	24	6.4	39	1	46	204	5	0
B 4202H	4	6	3	7	13	30	3.5	30	1	46	201	5	0
C 4300H	4	9	7	13	26	39	2.3	11	1	39	162	2	0
D 4352H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 4370H	0	6	2	8	16	44	0.4	0	1	17	474	0	0
F 4392H	6	5	8	8	16	21	6.2	27	1	40	107	5	0
G 4431B	7	12	5	23	61	84	3.6	6	1	22	246	0	0
H 4437B	4	5	3	23	61	84	4.5	32	1	22	233	0	0
I 4452B	8	7	6	13	29	32	7.8	24	1	46	144	7	0
J 4461B	7	5	11	10	22	19	9.6	33	1	45	61	14	0
K 4482B	19	9	34	30	58	29	20.5	13	2	40	27	15	0
L 4486B	6	20	34	30	58	29	2.0	0	3	43	22	20	0
M 4497B	11	5	9	8	18	12	18.8	24	1	41	114	5	0
N 4507B	5	7	1	6	13	25	3.4	23	1	34	226	0	0
O 4520B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 4526D	17	21	29	41	81	57	6.7	1	2	32	49	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11320	(FLIGHT 9)												
Q 4530D	16	22	29	41	81	57	5.6	0	2	30	38	5	0
R 4555B	8	11	5	11	25	37	4.7	8	1	32	183	0	0
S 4575D	11	12	1	17	12	37	6.0	8	1	39	89	6	0
T 4601B	10	8	21	21	43	20	9.3	12	3	36	14	15	0
U 4621B	13	11	17	19	42	34	9.2	17	3	47	15	26	0
V 4642B	17	11	13	15	31	22	13.5	7	2	50	37	22	0
W 4668B?	7	7	8	13	31	46	6.1	20	1	58	59	25	0
X 4675B?	7	10	3	8	16	39	4.3	16	1	47	115	11	0
Y 4686B?	7	9	2	7	18	30	5.1	23	1	48	163	9	0
Z 4708B	5	6	4	13	41	64	4.5	23	1	34	192	0	0
AA 4722D	4	4	5	5	8	11	5.6	38	1	86	132	40	0
AB 4732D	5	7	6	7	5	8	4.5	10	1	79	644	0	0
AC 4745D	10	12	19	24	56	45	5.4	0	2	35	37	8	0
AD 4760B	4	12	2	17	33	105	1.8	6	1	37	170	1	0
AE 4766B	5	16	10	18	44	105	2.0	0	1	45	66	14	0
AF 4778H	3	14	15	28	16	12	1.0	0	4	30	11	11	0
AG 4811B	11	20	9	28	36	34	3.9	2	1	28	134	0	0
AH 4930B	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 4983D	7	11	14	27	61	46	3.5	12	1	79	85	40	0
AJ 4988D	10	13	14	27	61	46	5.4	3	1	68	60	32	0
AK 4995B	6	9	6	10	23	7	3.6	7	2	78	42	45	0
AL 5028B	14	5	0	19	24	27	32.7	14	3	46	18	23	0
AM 5040D	20	12	34	26	53	25	17.1	8	4	47	11	27	30
AN 5247M	0	2	0	0	0	1	-	-	-	-	-	-	230
LINE 11325	(FLIGHT 28)												
A 6098S	0	2	0	1	2	2	-	-	-	-	-	-	0
B 6114B?	0	2	1	2	2	4	-	-	-	-	-	-	0
C 6170B	7	1	2	1	2	5	128.9	47	1	30	191	0	0
D 6182B	1	2	1	1	1	4	-	-	-	-	-	-	0
E 6196B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 6210D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 6217B	1	2	1	1	2	4	-	-	-	-	-	-	0
H 6222B	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 11330	(FLIGHT 9)												
A 6439H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 6404H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 6354H	9	12	10	17	40	25	4.7	20	1	42	106	9	0
D 6336S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 6290B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11330	(FLIGHT 9)												
F 6283B	6	10	2	7	22	21	3.5	13	1	34	101	1	0
G 6276D	5	7	4	7	9	24	3.7	19	1	32	111	0	0
H 6267B	7	8	6	17	38	31	5.9	20	1	33	125	0	0
I 6261B	11	15	9	16	31	5	4.9	14	1	35	78	5	0
J 6260B	6	10	9	16	31	5	3.2	23	1	38	60	10	0
K 6255D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 6248B	13	13	2	13	22	37	8.2	18	2	36	44	10	0
M 6238D	3	3	3	4	12	5	5.0	52	2	45	48	16	0
N 6235D	6	6	6	7	14	9	5.9	30	2	47	46	18	0
O 6231B	15	3	6	6	15	13	82.7	34	2	45	42	18	0
P 6215B?	5	8	3	6	13	24	3.3	18	1	61	609	0	0
Q 6211B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 6186B	5	5	6	1	10	1	6.1	14	1	45	129	4	0
S 6180B	9	2	8	5	20	2	69.7	9	1	31	60	0	0
T 6157H	13	16	8	29	24	33	6.2	0	3	39	23	15	0
U 6141B	12	13	11	13	29	26	6.7	0	1	47	104	8	0
V 6126B	34	38	36	61	105	86	9.4	0	3	33	16	14	0
W 6116D	12	14	19	32	67	63	5.8	8	1	62	86	25	0
X 6100B	14	19	3	19	16	8	5.4	0	3	32	16	10	0
Y 6088B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 6084B	5	4	7	9	10	17	7.8	21	1	48	64	14	0
AA 6080B	6	12	21	24	64	48	2.9	1	1	50	66	16	0
AB 6076D	18	22	21	24	64	48	7.0	0	1	40	95	5	0
AC 6069B?	4	7	3	3	6	4	2.6	3	1	94	111	47	0
AD 6039H	3	6	0	3	1	1	2.1	16	1	61	852	0	0
AE 5975B	23	28	24	8	26	77	7.5	4	2	36	35	12	0
AF 5969D	25	4	24	8	25	58	100.1	2	4	44	8	25	0
AG 5965B?	9	6	10	11	13	4	13.1	19	6	81	5	63	0
AH 5957D	7	5	18	8	19	6	8.9	20	4	132	13	105	0
AI 5948B	12	7	0	14	11	6	15.0	0	4	39	10	19	0
AJ 5945B	10	5	12	10	25	4	18.5	0	6	38	4	22	0
LINE 11335	(FLIGHT 28)												
A 5952S	1	2	0	0	0	4	-	-	-	-	-	-	0
B 5923D	3	4	0	2	2	16	3.3	41	1	160	1025	0	0
C 5876H	0	2	1	2	2	4	-	-	-	-	-	-	0
D 5867B?	1	2	0	2	0	4	-	-	-	-	-	-	0
E 5856M	0	4	0	3	0	20	0.4	0	1	126	1025	0	0
F 5790B	6	27	7	36	122	157	1.5	0	1	14	139	0	0
G 5781D	3	7	4	16	43	77	2.0	17	1	32	208	0	6
H 5765B	6	20	6	14	69	108	1.9	0	1	25	201	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11340	(FLIGHT 9)												
A 6661H	3	5	3	5	9	16	2.7	33	1	45	305	2	0
B 6731B	7	12	14	23	35	36	3.8	12	1	35	136	0	0
C 6768S	0	2	1	2	2	4	-	-	-	-	-	-	0
D 6788B?	0	9	2	8	10	47	0.4	0	1	36	493	0	0
E 6806H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 6839B	7	12	6	14	34	31	3.6	10	1	31	134	0	0
G 6848D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 6854D	5	6	4	11	31	24	4.2	29	1	34	142	0	0
I 6869B	12	20	11	24	51	67	4.6	12	1	34	80	5	0
J 6876B	9	7	9	18	40	52	9.0	32	1	36	65	8	0
K 6880B	6	5	12	18	40	52	8.2	41	1	41	56	13	0
L 6884B	9	11	12	20	44	58	5.6	20	2	51	52	21	0
M 6890B	6	8	10	20	44	58	4.1	25	1	41	82	10	11
N 6905B	7	4	8	7	12	11	13.5	44	1	51	91	17	0
O 6915B	10	10	10	11	40	20	7.0	20	2	58	56	27	0
P 6918B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 6941B?	8	10	14	25	59	57	5.4	0	1	39	71	4	0
R 6947B	9	16	14	25	59	57	3.9	0	1	37	80	5	0
S 6959B	17	20	19	33	32	45	6.8	7	1	37	54	9	0
T 6970B?	1	2	1	2	2	4	-	-	-	-	-	-	0
U 6980B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 6984B	5	13	5	14	33	44	2.1	9	1	37	150	2	0
W 7002B	1	2	1	2	2	4	-	-	-	-	-	-	0
X 7008B	8	10	7	14	30	38	5.2	22	1	50	76	18	0
Y 7026B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7052H	7	5	31	28	24	7	9.3	28	2	45	26	20	0
AA 7065B?	14	16	5	31	72	28	6.8	11	1	56	60	24	0
AB 7084S	1	2	0	2	2	4	-	-	-	-	-	-	0
AC 7196B?	11	25	16	48	119	173	3.3	0	1	0	119	0	0
AD 7200B?	15	33	16	48	119	173	3.6	0	1	24	79	0	0
AE 7221D	5	8	4	6	16	25	3.3	11	1	67	131	24	0
AF 7234B	11	15	5	19	34	123	5.2	20	2	62	47	32	0
AG 7244B	16	21	15	15	30	49	6.0	12	2	57	35	30	0
AH 7254B	28	29	36	49	111	92	9.6	0	2	24	34	1	0
AI 7267B	21	3	35	3	67	24	159.0	5	3	28	18	6	0
AJ 7290D	10	5	8	15	37	15	18.7	13	1	47	206	1	0
AK 7375H	3	5	2	3	3	21	2.5	19	1	114	176	59	0
AL 7451H	15	4	23	7	7	1	37.7	0	9	56	3	42	0
AM 7477H	9	5	5	3	8	20	12.6	27	5	82	8	61	0
AN 7494H	19	11	26	22	47	6	15.6	0	5	35	8	17	0
AO 7514D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11340	(FLIGHT	9)											
AP 7522S	4	8	4	17	42	32	2.9	29	1	46	123	12	0
AQ 7578S	2	2	0	2	3	11	4.2	56	1	157	1025	0	0
LINE 11345	(FLIGHT	28)											
A 5480B?	3	11	2	15	35	106	1.1	8	1	32	670	0	0
B 5507S	1	2	0	1	1	4	-	-	-	-	-	-	0
C 5558S	1	2	0	1	3	6	2.9	52	1	138	1025	0	0
D 5594S	1	2	1	2	0	1	-	-	-	-	-	-	0
E 5653S	1	2	1	2	2	4	-	-	-	-	-	-	0
F 5686H	4	3	2	7	20	2	7.5	49	1	44	92	11	4
G 5704H	13	5	1	6	20	23	27.5	23	2	26	31	2	0
LINE 11350	(FLIGHT	9)											
A 8347H	9	13	3	6	11	24	4.1	10	2	50	52	20	0
B 8285H	10	12	4	19	6	26	5.8	6	1	29	56	1	0
C 8253H	9	10	6	11	11	31	6.0	10	2	39	53	9	0
D 8242B	11	7	7	7	15	12	10.9	15	1	44	59	12	0
E 8237B?	5	5	4	6	16	16	5.2	25	2	53	57	21	0
F 8229B	9	10	7	10	24	20	5.9	0	2	33	49	3	0
G 8214H	5	3	6	4	13	12	9.1	21	2	41	39	11	0
H 8199H	7	3	9	7	9	5	20.8	17	2	53	49	19	0
I 8163B	5	3	8	11	25	15	8.8	34	1	80	136	34	0
J 8158B	3	7	2	13	30	16	2.2	0	2	41	57	8	0
K 8151D	8	9	13	21	38	51	6.0	9	2	56	30	28	0
L 8148D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 8145B	5	27	12	51	100	60	1.0	0	3	32	17	12	0
N 8127D	5	9	3	3	11	9	3.1	17	1	85	209	34	0
O 8116B	23	4	7	45	17	3	106.6	21	2	38	38	12	0
P 8112B	22	25	7	45	112	95	7.6	0	2	22	27	0	0
Q 8096B?	5	6	3	3	7	12	5.1	31	1	67	65	32	0
R 8081B	5	24	37	19	43	44	1.3	0	3	22	15	3	0
S 8076B	23	18	7	29	51	26	11.7	0	4	26	11	7	0
T 8065B	5	10	13	5	19	29	3.1	7	1	38	75	5	0
U 8061D	1	2	1	2	2	4	-	-	-	-	-	-	0
V 8057D	8	14	15	26	17	53	3.5	6	1	34	357	0	0
W 8031B	2	8	4	8	18	37	1.2	5	1	66	208	20	0
X 8009B	1	2	1	1	2	4	-	-	-	-	-	-	0
Y 8003D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7987H	6	8	4	5	15	16	4.8	3	1	67	80	27	0
AA 7883B?	7	5	5	7	18	19	8.0	10	1	106	98	58	0
AB 7874B?	5	10	5	11	7	30	2.8	4	1	50	142	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 11350	(FLIGHT 9)													
AC 7846H	1	2	1	2	2	1	-	-	-	-	-	-	-	0
LINE 11355	(FLIGHT 28)													
A 5370B	7	12	2	10	30	54	3.8	14	1	45	414	0	0	
B 5292H	1	3	2	8	17	26	1.0	19	1	41	772	0	60	
C 5280H	2	7	3	8	23	27	1.4	10	1	37	315	0	0	
D 5265B	0	2	1	2	2	4	-	-	-	-	-	-	310	
E 5255M	1	2	0	1	0	4	-	-	-	-	-	-	360	
F 5240M	0	2	0	1	0	2	-	-	-	-	-	-	0	
G 5220S	0	2	1	2	1	2	-	-	-	-	-	-	0	
H 5167B?	5	7	2	5	8	32	3.4	24	1	55	600	0	0	
I 5139H	1	2	1	2	1	1	-	-	-	-	-	-	0	
J 5121E	1	16	2	23	30	71	0.4	0	1	31	157	0	0	
K 5108B?	9	9	1	10	28	27	6.3	15	2	38	27	14	0	
L 5100H	1	2	1	2	2	4	-	-	-	-	-	-	0	
LINE 11360	(FLIGHT 9)													
A 156H	1	2	1	2	2	4	-	-	-	-	-	-	0	
B 208H	1	1	1	1	2	4	-	-	-	-	-	-	0	
C 227B	7	13	13	23	49	59	3.0	21	1	45	132	11	0	
D 268H	1	2	0	1	2	4	-	-	-	-	-	-	0	
E 327B	24	33	16	15	43	35	6.7	2	1	19	60	0	0	
F 337B	10	8	17	9	27	25	8.4	26	1	20	88	0	0	
G 347B	5	9	3	5	13	49	2.6	18	1	20	196	0	0	
H 350B	6	4	3	5	13	49	10.4	43	1	17	202	0	0	
I 359B	4	9	2	11	29	43	2.1	10	1	19	201	0	0	
J 364B	1	2	1	2	2	4	-	-	-	-	-	-	0	
K 377B	36	42	39	59	135	89	8.9	0	2	24	34	1	0	
L 379B	37	43	39	59	135	98	9.1	0	2	25	29	3	0	
M 383B	31	20	39	59	47	54	17.4	3	2	28	37	4	0	
N 389D	19	10	14	9	53	25	17.8	13	2	25	49	0	0	
O 397D	6	8	8	13	35	22	4.4	9	1	25	53	0	0	
P 403B	1	2	1	2	2	4	-	-	-	-	-	-	0	
Q 408B	12	8	9	16	37	39	11.3	17	1	37	56	8	0	
R 418B	7	6	5	23	50	46	7.0	33	1	50	72	17	0	
S 429B	8	7	8	12	29	29	7.3	23	1	42	92	8	0	
T 432B	7	8	8	12	29	29	5.2	26	2	55	51	25	0	
U 443B	10	5	10	16	33	34	15.4	31	1	53	67	21	0	
V 452B	1	2	1	2	2	4	-	-	-	-	-	-	0	
W 464D	1	2	1	2	2	4	-	-	-	-	-	-	0	
X 475B	9	14	2	16	38	55	4.3	7	1	26	204	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG
		1050 HZ		892 HZ		7323 HZ		DIKE		SHEET	EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD		COND	DEPTH*	COND	DEPTH	RESIS	DEPTH
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE 11360	(FLIGHT	9)											
Y 487B	9	12	7	25	43	62	4.8	15	1	35	128	0	0
Z 502B?	7	9	7	14	31	38	4.6	22	1	53	203	10	0
AA 523B	16	15	25	29	66	38	9.1	0	2	32	29	7	0
AB 537B	9	7	7	9	18	12	9.0	10	2	75	48	41	0
AC 580B	18	21	18	4	32	43	7.3	0	2	35	32	10	0
AD 592B	13	14	18	18	40	20	6.7	0	3	45	22	21	0
AE 607D	40	30	63	41	98	63	15.5	0	3	31	14	11	0
AF 615B	44	21	82	36	100	22	28.3	0	8	29	2	16	0
AG 621B	36	18	81	39	100	24	25.1	0	8	30	3	18	18
AH 643B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 667D	15	6	27	10	63	34	24.0	0	4	38	11	14	0
AJ 681B	17	15	32	50	115	47	9.8	11	3	35	19	14	0
AK 699B	8	14	15	34	88	72	3.6	13	1	37	56	10	0
AL 706B	13	22	15	36	88	89	4.3	3	2	34	40	9	0
AM 713B	25	42	11	46	111	160	5.5	0	2	25	35	2	0
AN 716B	27	42	11	46	111	160	6.0	0	2	23	37	1	0
AO 721E	27	42	11	46	111	160	6.0	0	1	51	78	18	0
AP 835B	8	1	10	6	18	38	122.4	34	2	55	35	26	0
AQ 847B	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 877B?	9	8	7	8	18	13	7.0	11	2	101	37	67	0
AS 883B?	9	8	4	8	17	13	7.4	18	2	171	47	128	0
AT 913S	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 937S	1	2	1	1	2	4	-	-	-	-	-	-	0
AV 1009S?	4	2	2	14	26	79	10.8	67	1	49	209	9	0
AW 1056B	10	7	7	9	19	19	10.4	5	2	67	31	36	0
AX 1062B	11	10	16	17	35	27	8.6	1	2	54	27	27	0
AY 1065B	10	8	14	14	30	19	9.0	0	3	48	22	23	0
AZ 1079D	11	6	10	7	3	8	13.5	0	3	78	25	47	0
LINE 11365	(FLIGHT	28)											
A 4665B	8	7	8	14	40	12	7.1	4	2	54	51	21	0
B 4678D	9	12	12	13	33	33	5.0	14	1	67	102	28	0
C 4726M	0	5	0	4	4	41	0.4	1	1	94	929	4	170
D 4757H	0	2	1	2	2	2	-	-	-	-	-	-	0
E 4765M	0	1	0	3	19	1	0.5	0	1	119	1025	0	960
F 4781M	0	2	0	1	1	12	0.4	0	1	165	1025	0	0
G 4788M	0	2	0	2	2	4	-	-	-	-	-	-	270
H 4791B?	0	2	0	2	0	4	-	-	-	-	-	-	270
I 4820S	2	2	1	1	9	40	3.7	73	1	85	935	0	230
J 4866B	6	14	5	17	25	70	2.5	6	1	34	160	0	0
K 4876H	2	11	1	5	7	42	0.7	0	1	48	86	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11365	(FLIGHT	28)											
L 4911B	7	10	1	3	17	28	3.9	21	2	53	51	24	0
M 4921B	6	8	6	3	6	19	4.3	18	2	45	47	16	0
N 4929B?	1	2	1	2	2	4	-	-	-	-	-	-	0
O 4960B	22	1	4	4	22	11	429.8	10	4	31	12	11	0
P 4967H	23	1	16	13	41	4	894.5	8	4	23	9	5	7
LINE 11370	(FLIGHT	9)											
A 1988H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1974H	2	5	3	6	6	8	1.7	11	1	54	126	13	0
C 1917H	5	7	3	5	15	19	0.8	0	1	33	104	14	0
D 1905B?	6	6	4	5	11	6	4.9	16	1	40	150	0	0
E 1892B	4	7	19	23	46	30	3.1	28	1	29	70	2	0
F 1889B	9	15	19	10	58	30	3.6	8	2	26	48	1	0
G 1873D	5	11	5	12	30	42	2.7	5	1	32	91	0	0
H 1871D	6	7	4	12	30	42	4.5	21	1	39	116	4	0
I 1868B	4	3	1	3	9	12	8.6	46	1	42	124	5	0
J 1860B	9	6	12	8	21	23	11.5	21	1	35	83	2	0
K 1850B	11	7	6	10	21	12	13.4	9	1	33	58	2	0
L 1841B	20	26	18	26	21	10	6.7	0	2	32	44	6	0
M 1839B	15	2	18	26	21	10	107.4	26	2	36	34	11	0
N 1789B	6	7	6	8	19	12	4.6	12	1	50	241	3	0
O 1755B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 1749B	10	5	13	8	19	10	15.5	0	4	31	11	10	0
Q 1745B	7	3	13	8	19	12	19.2	17	3	47	17	23	0
R 1735D	2	5	11	10	3	6	1.5	5	4	42	12	21	0
S 1730B	13	10	1	16	47	22	10.7	19	3	64	21	39	0
T 1716B	57	39	25	69	82	79	19.5	0	4	28	11	10	0
U 1706B	5	4	10	5	7	7	8.3	39	3	67	23	41	0
V 1699B?	6	7	1	3	6	43	5.2	35	1	64	68	31	0
W 1686B	21	16	18	33	58	36	12.7	0	3	21	17	1	0
X 1677B	11	14	3	3	6	9	5.1	0	2	37	29	11	0
Y 1649B	7	3	9	5	9	23	20.1	32	2	41	41	13	0
Z 1642B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1623H	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 1570H	6	6	6	5	1	26	7.0	3	2	62	29	32	0
AC 1527H	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 1443H	7	1	1	12	6	1	49.0	47	3	57	16	35	0
AE 1416H	1	2	1	2	2	2	-	-	-	-	-	-	0
LINE 11375	(FLIGHT	28)											
A 4550D	3	5	1	3	10	27	2.8	27	1	135	116	84	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11375	(FLIGHT	28)											
B 4541D	3	5	2	2	10	17	2.7	31	2	153	53	110	0
C 4531B	3	4	3	4	4	7	2.4	1	2	126	69	80	0
D 4494S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 4476D	5	8	4	6	18	21	3.3	11	1	78	146	32	0
F 4467B	1	2	1	2	2	1	-	-	-	-	-	-	0
G 4433S?	1	5	3	4	11	12	0.8	0	1	30	556	0	8
H 4413M	0	2	0	1	0	4	-	-	-	-	-	-	0
I 4382S	1	2	0	2	2	4	-	-	-	-	-	-	0
J 4370S	2	3	1	5	14	18	2.1	31	1	64	624	0	0
K 4336B?	2	4	0	1	0	2	2.4	29	1	193	1025	0	0
L 4325M	0	2	0	1	0	4	-	-	-	-	-	-	0
M 4313M	2	4	0	1	4	10	2.0	30	1	199	1025	0	0
N 4288S	1	2	0	2	2	4	-	-	-	-	-	-	0
O 4260H	6	8	5	14	18	40	4.1	11	1	32	157	0	0
P 4248B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 4237H	5	7	4	16	34	36	4.6	22	1	33	119	0	0
R 4210H	1	5	4	10	42	47	0.6	2	1	29	156	0	0
S 4192H	1	2	1	2	2	4	-	-	-	-	-	-	0
T 4166H	7	4	15	20	42	27	11.1	31	3	26	17	6	0
U 4156B	6	6	9	10	23	18	5.6	19	2	31	24	8	0
LINE 11380	(FLIGHT	18)											
A 524S	2	3	1	4	12	7	1.0	0	1	37	132	17	0
B 535S	1	4	2	7	18	24	1.3	27	1	53	132	16	0
C 547B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 550B?	1	3	2	2	3	6	1.2	39	1	78	87	40	0
E 570S	1	1	1	1	1	1	-	-	-	-	-	-	0
F 605H	8	8	14	13	30	15	6.5	29	2	48	32	23	0
G 636B?	3	7	1	8	24	25	2.3	20	1	41	120	6	0
H 643D	4	5	1	4	13	9	3.9	34	1	46	150	7	0
I 653H	4	7	1	1	5	28	0.1	0	1	32	106	15	0
J 670D	5	8	5	8	5	30	3.5	24	1	58	148	18	0
K 709B	11	20	2	20	71	81	4.0	5	1	32	52	5	0
L 720B	9	9	7	12	31	18	7.1	25	2	50	42	23	0
M 729B	4	9	5	13	38	35	2.4	22	1	55	55	26	0
N 732B	8	7	6	13	37	35	7.5	38	2	53	53	24	0
O 742D	6	8	4	0	1	17	4.8	32	1	55	82	22	0
P 750B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 764B?	1	2	1	1	2	4	-	-	-	-	-	-	0
R 786B	6	10	6	4	17	10	3.5	0	1	48	71	11	0
S 790B	2	4	7	10	24	90	1.8	22	1	42	65	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11380	(FLIGHT	18)											
T 797D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 799D	14	17	4	15	33	49	6.3	11	2	37	42	11	0
V 811B	9	7	3	5	13	20	8.9	29	2	57	27	31	0
W 820B	5	5	6	8	20	8	5.3	35	2	62	27	36	0
X 826B	6	6	5	8	30	19	5.5	33	3	62	22	38	0
Y 838B	4	8	3	8	35	8	2.3	18	2	58	31	32	0
Z 847D	4	5	9	6	4	23	3.6	28	2	51	26	26	0
AA 854B	2	11	9	6	16	43	0.8	0	2	62	24	37	0
AB 893B?	3	6	1	7	7	66	2.2	33	1	109	237	55	0
AC 906B	14	12	22	30	66	56	9.0	7	3	62	19	37	0
AD 909B	2	12	23	30	66	55	0.9	0	3	46	17	23	0
AE 927B	5	13	16	2	8	39	1.9	0	2	36	32	10	0
AF 938D	28	21	4	39	58	74	13.4	2	3	32	17	11	0
AG 948B	8	5	11	5	2	6	10.0	16	2	45	24	19	0
AH 961B	4	3	12	15	18	15	6.1	35	2	39	25	14	0
AI 970B	5	6	1	4	40	18	3.9	21	2	46	30	20	0
AJ 978B	4	5	1	8	21	34	3.2	26	2	55	43	25	0
AK 981B	3	7	4	8	21	34	1.7	9	2	45	43	17	0
AL 984H	2	4	7	13	37	36	2.5	27	2	33	38	7	0
AM 996E	12	2	5	6	26	7	118.6	29	2	64	27	36	0
AN 1018E	5	11	4	24	27	67	2.3	0	1	66	75	29	0
LINE 11381	(FLIGHT	27)											
A 3174B	5	7	1	12	34	37	3.8	6	1	132	177	74	0
B 3171B	3	7	7	12	34	37	1.8	0	1	53	110	12	0
C 3142B	4	5	9	3	21	11	3.9	6	2	94	40	58	0
D 3138B	5	6	9	6	21	16	4.2	0	3	58	15	31	0
E 3030H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2996H	1	2	1	2	1	2	-	-	-	-	-	-	0
G 2989B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2983B	7	4	11	9	13	2	9.8	0	3	44	17	19	0
I 2976D	5	6	6	4	9	0	4.8	0	4	70	9	48	0
LINE 11385	(FLIGHT	28)											
A 3700S	1	1	0	2	2	1	-	-	-	-	-	-	0
B 3745D	6	6	4	4	10	7	6.3	20	2	122	62	80	0
C 3749D	10	8	8	4	14	1	9.3	13	1	104	79	61	0
D 3755D	2	7	8	6	14	14	1.3	0	1	100	372	27	0
E 3800B	6	9	16	1	5	23	0.2	0	1	31	93	12	0
F 3807B	5	9	15	21	6	24	2.6	15	1	55	69	22	0
G 3824D	1	4	0	6	13	40	0.7	13	1	74	833	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11385	(FLIGHT	28)											
H 3836D	2	4	1	2	6	10	1.6	18	1	105	886	0	0
I 3849S	1	2	1	2	2	4	-	-	-	-	-	-	0
J 3891H	4	6	6	2	2	1	3.1	10	1	42	110	4	0
K 3934B?	1	2	0	2	2	4	-	-	-	-	-	-	0
L 3963M	1	2	0	2	4	12	1.0	21	1	82	935	0	0
M 3970M	0	6	0	8	14	62	0.4	0	1	43	737	0	0
N 3986B?	1	2	0	1	1	4	-	-	-	-	-	-	0
O 4014S	1	2	0	2	2	4	-	-	-	-	-	-	0
P 4030B	4	12	1	13	13	9	1.9	0	1	38	70	7	0
Q 4033B	5	11	4	12	13	43	2.6	15	1	44	82	13	0
R 4048D	4	7	6	6	19	32	3.2	26	1	51	162	12	0
S 4075H	1	2	1	2	2	4	-	-	-	-	-	-	0
T 4091H	13	22	11	25	74	66	4.2	0	2	35	24	12	16
U 4098D	5	7	6	23	71	65	3.6	17	2	36	30	11	0
V 4103H	7	10	14	3	36	27	4.2	9	2	34	24	11	0
LINE 11390	(FLIGHT	18)											
A 1642H	7	9	8	16	35	30	4.3	25	1	54	61	23	0
B 1620H	3	9	8	15	43	27	1.6	12	1	50	71	18	0
C 1610H	4	6	2	10	27	44	3.7	37	1	52	66	21	0
D 1598D	1	1	1	2	2	4	-	-	-	-	-	-	0
E 1594B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1581H	0	6	3	1	2	47	0.1	0	1	26	228	5	0
G 1573H	3	5	3	6	20	16	3.3	36	1	53	90	19	0
H 1564B	6	10	4	21	61	41	3.4	14	1	41	59	12	0
I 1562B	7	12	4	21	61	41	3.5	10	2	34	47	7	0
J 1550B	4	6	1	2	9	21	3.9	28	1	46	56	16	0
K 1542D	8	8	2	9	23	19	6.3	19	1	41	77	9	0
L 1534D	6	8	2	10	29	25	4.6	24	1	43	96	9	0
M 1525H	3	4	1	7	23	32	3.6	36	1	48	106	12	0
N 1520D	4	4	1	2	10	13	6.2	45	1	65	91	28	0
O 1513D	8	10	6	9	30	51	4.6	21	1	46	129	10	0
P 1504B	0	2	1	2	2	4	-	-	-	-	-	-	0
Q 1495D	1	2	1	2	2	3	-	-	-	-	-	-	0
R 1484H	8	15	14	9	76	29	3.4	0	2	38	45	10	0
S 1477D	4	2	7	19	53	48	13.2	53	2	41	41	14	0
T 1474D	8	14	7	22	61	48	3.5	9	2	35	42	9	0
U 1459B	7	6	6	13	33	35	7.1	30	1	45	54	16	11
V 1458B	7	9	6	12	33	27	4.8	21	1	47	56	17	0
W 1450B	1	2	1	2	2	4	-	-	-	-	-	-	0
X 1437H	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT					
LINE 11390	(FLIGHT 18)												
Y 1410H	4	5	7	11	29	16	4.2	15	2	38	42	9	0
Z 1399H	1	2	1	1	0	3	-	-	-	-	-	-	0
AA 1382H	4	6	5	8	22	18	3.8	21	2	58	40	28	0
AB 1372D	5	10	3	5	8	30	3.0	13	2	71	54	38	0
AC 1366D	1	6	4	10	20	39	0.4	0	1	96	73	56	0
LINE 11391	(FLIGHT 27)												
A 2187D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2198B	17	24	11	39	117	128	5.7	0	2	27	41	2	0
C 2202B	8	17	10	39	117	128	2.9	0	2	26	29	2	0
D 2224B	8	9	4	6	19	20	5.1	1	2	32	24	7	0
E 2238B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2250B	24	23	28	39	90	45	9.9	0	3	26	16	6	0
G 2259B	3	4	5	7	9	6	3.2	31	3	51	20	28	0
H 2291B	10	10	28	30	7	6	6.9	14	3	54	20	30	0
I 2296B	2	14	18	30	7	6	0.6	0	2	50	53	18	0
J 2347H	3	1	5	3	16	8	14.8	60	2	34	28	10	0
K 2566B	11	8	3	3	34	11	9.7	6	4	37	9	18	0
L 2609B	4	5	5	8	3	6	4.3	27	1	92	150	44	0
LINE 11395	(FLIGHT 28)												
A 3518B	3	11	83	103	218	85	1.3	6	3	21	11	6	0
B 3502D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3475D	20	18	15	27	63	88	9.5	7	1	38	61	9	0
D 3472B	20	14	1	27	63	88	12.5	10	1	47	62	16	0
E 3386D	11	14	10	10	23	17	5.5	13	1	90	104	48	0
F 3379D	7	11	11	13	23	22	4.0	19	1	129	71	86	0
G 3335B	3	4	3	2	3	2	2.9	16	1	94	208	39	0
H 3330B?	1	2	1	1	2	4	-	-	-	-	-	-	20
I 3313D	1	9	2	7	13	41	0.4	0	1	86	557	14	20
J 3310D	3	4	1	6	13	41	3.2	44	1	102	645	13	6
K 3278B?	1	2	1	2	2	4	-	-	-	-	-	-	0
L 3242H	2	8	5	15	8	3	1.3	0	1	45	90	8	16
M 3208S	3	5	1	7	12	51	2.3	26	1	46	549	0	0
N 3182S?	2	8	3	12	39	55	1.2	0	1	14	342	0	0
O 3161B?	1	2	0	2	2	4	-	-	-	-	-	-	0
P 3150B	5	11	6	18	51	104	2.3	13	1	39	128	5	0
Q 3144H	2	5	5	10	32	33	1.8	17	1	40	106	5	0
R 3127B	4	2	1	1	17	5	1.0	0	1	22	139	4	0
S 3107B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 3097B?	8	15	4	31	101	80	3.3	13	1	39	60	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11395	(FLIGHT	28)											
U 3093B?	10	17	20	2	17	80	3.7	6	2	39	30	15	50
V 3090B	10	18	16	34	17	30	4.0	6	2	46	33	21	0
LINE 11400	(FLIGHT	18)											
A 1807H	3	4	5	6	14	11	3.4	35	1	65	85	28	0
B 1845H	5	6	8	15	27	8	4.4	31	2	44	44	16	0
C 1853H	5	10	6	17	56	66	2.7	15	1	43	58	14	0
D 1890B	9	15	8	26	41	25	3.9	9	1	32	95	1	0
E 1899B	4	6	3	11	46	62	3.1	24	1	40	83	8	0
F 1902D	1	10	6	16	46	62	0.4	0	1	33	75	4	0
G 1910D	2	11	8	15	29	61	0.9	0	1	35	50	8	0
H 1913D	2	8	2	15	29	61	1.0	6	1	39	52	12	0
I 1916D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1918D	5	5	1	3	18	17	5.3	43	1	39	80	9	0
K 1925B	6	9	2	10	31	38	3.6	24	1	36	116	3	0
L 1962H	1	2	1	2	2	2	-	-	-	-	-	-	0
M 1980S	1	2	0	2	2	4	-	-	-	-	-	-	0
N 1999H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2019B	11	14	3	18	57	75	5.3	15	1	32	69	4	0
P 2034B	6	6	5	18	48	45	6.1	38	1	60	93	25	0
Q 2043D	7	8	4	12	31	19	5.7	33	1	50	83	18	0
R 2052D	5	9	4	7	15	27	2.9	28	1	53	117	18	0
S 2063B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 2073B	7	7	5	14	46	45	6.1	34	1	35	102	5	0
U 2082D	6	11	4	13	4	6	3.2	22	1	43	123	9	0
V 2102D	6	8	5	5	14	37	3.8	18	1	44	117	8	0
W 2110B	4	8	1	13	34	43	2.7	10	1	34	65	3	0
X 2121B	11	12	2	6	42	42	6.5	18	1	50	54	20	0
Y 2128B	9	16	10	1	53	4	3.7	23	2	55	28	31	0
Z 2142D	8	17	5	19	20	14	3.0	9	2	45	36	20	0
AA 2154B	17	20	3	10	23	4	6.9	1	3	37	16	16	0
AB 2177D	5	10	2	1	4	25	2.6	10	2	76	45	44	0
AC 2183B	16	13	2	11	35	20	9.9	10	2	53	34	26	0
AD 2190D	15	13	6	18	46	31	10.2	17	3	55	23	31	0
AE 2194B	12	12	8	9	23	18	6.8	18	3	50	18	28	0
AF 2198B	4	5	36	44	23	18	4.0	40	2	52	23	28	0
AG 2206D	47	60	6	94	268	220	8.9	0	4	23	11	7	0
AH 2210D	15	3	9	27	81	214	92.0	32	5	20	7	6	0
AI 2216E	4	31	14	34	118	59	0.8	0	3	45	20	23	0
AJ 2233B	4	8	2	2	9	24	2.2	13	1	51	85	17	0
AK 2247B	3	8	30	57	33	55	1.5	10	2	25	29	3	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11400	(FLIGHT 18)												
AL 2248B	3	14	30	57	33	55	1.0	0	2	28	22	8	0
AM 2251B	2	5	30	12	41	151	1.7	25	3	34	17	14	0
LINE 11401	(FLIGHT 27)												
A 3307H	2	2	5	6	15	3	4.4	54	2	58	42	26	0
B 3327B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3332B	12	13	22	17	16	26	7.2	3	5	26	6	11	0
D 3337B	18	10	2	23	74	26	16.9	15	3	48	14	27	0
E 3345D	10	12	4	28	7	14	5.8	18	1	64	76	29	0
F 3363S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3403H	7	5	2	2	1	4	8.4	9	3	44	20	19	0
H 3448S	1	2	0	1	2	4	-	-	-	-	-	-	0
I 3581H	1	2	1	2	2	2	-	-	-	-	-	-	0
J 3610H	1	3	4	1	17	14	1.0	0	1	46	184	21	0
LINE 11405	(FLIGHT 28)												
A 2656D	35	22	22	21	95	42	18.5	0	4	32	8	14	0
B 2662B	14	17	36	43	98	55	6.3	0	4	48	10	29	0
C 2665B	29	19	36	43	98	55	16.0	0	3	25	19	4	0
D 2670B	5	13	8	13	30	47	2.3	0	2	54	27	28	0
E 2678B	12	7	9	19	49	27	14.0	23	2	61	56	29	0
F 2682D	6	3	3	19	30	27	13.4	34	1	56	96	18	0
G 2699H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2749D	3	15	3	18	52	80	1.3	7	1	47	630	0	0
I 2761D	14	11	33	25	72	46	10.5	13	3	69	24	42	0
J 2764D	18	12	33	25	72	46	12.6	7	2	56	27	30	0
K 2779B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2802D	4	12	2	9	26	40	1.6	4	1	59	600	0	0
M 2845S	1	2	0	2	1	4	-	-	-	-	-	-	0
N 2872B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2877B	5	5	3	3	12	30	0.4	0	1	28	187	7	0
P 2892D	9	14	5	5	42	47	4.5	8	1	41	111	6	0
Q 2897B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 2939S	0	2	1	2	2	4	-	-	-	-	-	-	0
S 2984B?	2	7	2	7	17	29	1.6	2	1	56	136	14	0
T 3006B?	6	6	3	1	2	4	5.9	30	1	55	82	20	0
U 3023H	2	3	1	4	10	38	0.2	0	1	24	270	0	0
V 3037H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11410	(FLIGHT 18)												
A 3012H	4	8	2	4	12	4	1.0	0	1	45	102	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M		COND DEPTH SIEMEN M		RESIS OHM-M	DEPTH M	NT
LINE 11410	(FLIGHT	18)												
B 2986H	5	0	6	2	3	2		0.9	0	1	40	56	24	0
C 2977D	7	7	7	6	18	4		6.9	28	2	52	51	22	0
D 2971B	2	11	19	21	54	16		0.7	0	2	48	25	24	0
E 2969B	8	9	19	21	54	16		5.3	22	2	48	31	23	0
F 2963B	4	5	10	1	1	5		4.6	32	1	57	74	22	0
G 2941B	4	5	7	13	37	12		4.6	30	1	52	70	19	0
H 2934B	10	12	8	24	72	61		5.7	12	1	34	68	4	0
I 2927B	1	2	1	1	2	4		-	-	-	-	-	-	0
J 2920B	10	12	8	8	41	36		5.8	9	1	29	58	1	0
K 2914B	3	4	3	26	75	8		3.4	36	1	35	79	5	0
L 2909B	8	17	9	26	75	85		3.1	11	1	41	90	10	0
M 2908B	5	12	1	26	53	71		2.4	14	1	41	108	8	0
N 2891H	2	5	4	9	25	38		2.0	30	1	45	82	13	0
O 2879H	2	8	4	17	24	48		1.4	3	1	38	65	8	0
P 2862B?	5	4	1	6	12	23		7.9	44	1	56	81	21	0
Q 2852B	6	9	5	16	50	38		3.8	12	1	35	66	5	0
R 2847B	8	10	2	2	17	20		5.0	12	1	32	60	2	0
S 2843B	9	8	4	7	24	21		8.3	19	2	35	47	8	0
T 2841B	3	18	10	7	24	21		0.7	0	2	35	51	7	0
U 2838D	7	11	10	20	43	29		3.9	11	2	45	49	16	0
V 2829H	5	6	5	8	21	12		4.4	30	1	56	63	23	0
W 2818D	4	5	1	3	9	23		3.6	31	1	60	105	22	0
X 2807B	7	10	7	11	28	15		4.1	7	2	58	53	26	0
Y 2794B?	1	2	1	1	2	4		-	-	-	-	-	-	0
Z 2784D	5	13	5	9	2	33		2.0	0	1	60	62	26	0
AA 2765H	10	22	5	31	87	38		3.2	0	3	30	16	9	9
AB 2760H	20	0	7	7	6	4		999.0	18	4	38	8	20	0
AC 2743D	12	15	22	22	60	44		6.1	7	3	54	21	30	15
AD 2740B	3	11	1	22	60	1		1.2	0	4	41	10	22	0
AE 2712B	31	55	42	83	228	91		5.5	0	1	24	48	1	0
AF 2710B	31	55	42	83	227	91		5.5	0	2	22	21	3	0
AG 2690B	12	4	12	60	42	248		27.7	39	1	35	49	9	0
AH 2671D	6	15	4	10	5	57		2.4	0	1	44	79	11	0
AI 2662B	1	2	1	2	2	4		-	-	-	-	-	-	0
AJ 2656B	6	8	10	10	31	23		4.2	16	2	42	41	15	0
AK 2649B	1	2	1	2	2	4		-	-	-	-	-	-	0
AL 2622B	25	23	24	25	74	43		10.6	1	3	34	12	15	0
AM 2617D	10	3	17	18	58	41		26.9	31	3	49	17	27	0
AN 2614B	3	14	10	6	16	5		1.1	0	4	49	12	29	0
AO 2571S?	3	6	0	2	4	26		2.2	28	1	114	1025	0	0
AP 2547D	5	11	3	7	3	25		2.7	2	2	69	41	37	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11410	(FLIGHT	18)											
AQ 2541B	6	15	6	13	13	54	2.4	0	3	45	19	22	0
LINE 11411	(FLIGHT	28)											
A 398B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 405B	12	13	33	19	51	29	6.2	0	3	52	23	26	0
C 412B	16	11	35	26	67	6	12.1	9	4	52	10	32	0
D 448S	1	2	1	2	2	4	-	-	-	-	-	-	0
E 567H	6	5	14	6	20	10	6.9	0	3	58	17	32	0
F 750S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 762H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 802H	0	2	1	2	2	4	-	-	-	-	-	-	20
I 838M	0	1	0	0	0	7	0.6	13	1	210	1025	0	0
J 888B?	3	3	2	5	6	17	3.8	29	1	105	519	13	0
K 1017B?	1	7	7	9	30	46	0.8	0	1	58	175	13	0
L 1033D	22	72	49	125	344	459	3.0	0	1	28	46	5	0
M 1036D	71	97	53	125	344	467	9.5	0	1	16	47	0	0
N 1046D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 1052D	9	11	11	23	61	89	5.6	12	2	71	42	40	0
P 1056D	15	20	11	23	61	89	5.4	3	1	45	76	13	0
Q 1072B	18	15	19	24	57	50	10.4	9	3	64	19	40	0
R 1083B	6	4	10	23	8	21	9.1	44	1	54	201	13	0
S 1129D	7	23	5	16	45	76	1.9	0	1	59	598	0	0
T 1136B	8	9	8	6	19	40	5.8	14	2	102	48	65	0
U 1143D	1	2	1	2	2	2	-	-	-	-	-	-	0
V 1148D	13	9	12	9	23	21	11.9	19	1	104	169	53	0
W 1163D	0	2	1	2	2	4	-	-	-	-	-	-	0
X 1178B	4	11	6	15	40	63	1.8	12	1	61	156	21	0
Y 1202D	0	2	1	2	2	4	-	-	-	-	-	-	0
Z 1238S	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1252B	2	9	2	15	38	74	0.8	3	1	45	269	4	0
AB 1256D	1	2	1	2	2	4	-	-	-	-	-	-	330
AC 1266D	5	17	2	15	36	107	1.6	2	1	26	486	0	0
AD 1281B	5	14	2	16	74	92	2.1	2	1	21	345	0	50
AE 1287B	10	16	22	26	74	86	4.2	0	1	34	60	4	0
AF 1300H	14	16	9	34	90	40	6.4	0	2	35	23	11	0
AG 1411H	2	5	7	8	26	30	1.3	10	2	54	53	22	0
AH 1433B	6	11	6	14	43	51	2.9	10	1	43	84	10	0
AI 1445B	13	18	25	35	101	59	5.5	7	2	34	32	10	60
AJ 1448B	9	15	25	35	101	65	3.9	8	2	46	35	20	9
AK 1456B	5	8	6	11	26	28	3.3	20	1	58	58	26	0
AL 1467B	9	12	13	21	64	75	4.7	9	2	60	37	31	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11420	(FLIGHT	18)											
A 3141H	3	1	3	6	15	3	12.7	68	1	48	68	16	0
B 3155D	6	10	5	16	52	78	3.0	15	1	38	81	7	0
C 3160B	9	5	19	16	52	78	13.5	35	2	61	30	34	0
D 3163B	13	12	19	4	10	31	8.6	21	2	53	25	29	0
E 3173D	14	17	23	27	66	36	6.1	13	2	48	34	23	0
F 3187B	5	5	4	7	18	15	5.4	19	2	46	56	14	0
G 3193B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3196B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3202B	6	3	6	17	12	56	15.8	49	1	51	73	19	0
J 3207D	1	2	1	2	2	4	-	-	-	-	-	-	0
K 3211B	6	3	6	31	27	27	11.5	49	1	54	59	23	0
L 3219B	14	17	18	31	102	86	6.4	8	2	29	39	5	0
M 3227B	8	13	18	14	51	89	3.7	15	1	30	114	0	0
N 3234D	7	14	4	15	50	84	2.7	11	1	38	89	7	0
O 3244H	5	5	6	11	34	21	5.2	31	1	37	83	5	0
P 3259D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3265H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 3279B?	6	15	6	22	64	104	2.6	3	1	41	106	6	0
S 3283B?	5	15	6	22	64	104	2.0	4	1	29	94	0	0
T 3296H	7	16	10	7	47	34	2.8	7	1	37	68	8	0
U 3320B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 3324D	11	17	12	27	71	65	4.7	1	1	34	61	4	0
W 3327D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 3336B	14	22	14	33	93	102	4.8	6	1	31	72	2	0
Y 3340B	9	25	14	35	101	144	2.6	6	1	39	62	11	9
Z 3359B	14	21	18	30	86	70	4.8	4	2	33	49	7	0
AA 3369B	5	6	14	2	7	13	0.4	0	1	32	103	14	0
AB 3379D	5	9	2	9	31	47	2.6	17	1	38	160	2	0
AC 3384D	6	6	3	9	31	47	6.6	27	1	46	151	7	0
AD 3394B	4	4	3	6	19	21	4.7	38	1	53	155	12	0
AE 3417B	5	14	6	16	19	68	2.2	0	1	35	100	1	0
AF 3422B	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 3429B	15	11	28	20	54	28	11.7	5	2	34	31	9	0
AH 3431B	16	12	28	20	54	26	11.8	8	2	37	25	13	0
AI 3435D	18	12	28	23	58	23	14.0	18	3	48	21	25	4
AJ 3449H	4	4	10	3	16	4	4.4	37	2	57	27	31	0
AK 3487B	4	4	4	1	3	10	4.2	34	1	87	78	47	0
AL 3500B	17	14	32	29	75	47	10.3	0	3	45	23	20	0
AM 3503B	16	18	32	29	75	30	7.5	0	3	39	15	18	0
AN 3515B	4	11	53	8	21	71	1.8	3	2	53	48	23	0
AO 3521B	22	23	53	40	108	44	8.8	0	3	28	15	8	13

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANCMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH* M	COND DEPTH* SIEMEN	COND DEPTH* M	RESIS OHM-M	DEPTH M	NT
LINE 11420	(FLIGHT	18)											
AP 3524B	29	27	53	40	108	48	10.3	0	4	32	9	15	0
AQ 3529B	25	23	45	38	5	38	10.4	0	4	33	10	15	0
AR 3560B	7	10	8	15	42	44	3.9	5	1	46	92	10	0
AS 3566B	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 3581D	7	7	9	5	6	31	6.3	15	2	46	39	18	0
AU 3587B	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 3593D	10	10	13	9	28	27	6.5	14	2	50	34	22	0
AW 3601D	9	4	13	10	28	43	16.8	34	2	68	37	39	0
AX 3605D	4	4	3	8	24	43	4.2	40	2	60	50	29	0
AY 3614B	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 3619D	7	15	5	15	36	86	2.8	14	2	59	51	29	0
BA 3627D	29	20	9	30	79	62	16.0	2	2	44	23	20	0
BB 3629D	29	0	9	30	79	62	999.0	7	4	26	12	7	0
BC 3633D	30	4	9	30	79	62	146.9	1	6	37	5	21	0
BD 3636D	30	20	9	42	18	77	16.1	0	4	45	10	25	0
BE 3642D	19	29	37	42	18	77	5.7	0	2	43	24	20	0
BF 3643D	20	22	37	42	18	77	7.7	4	1	46	58	16	0
BG 3702H	7	8	19	14	27	40	5.0	25	3	77	23	51	0
BH 3782H	1	4	1	5	13	33	0.5	0	1	94	710	6	0
BI 3801H	3	4	4	6	19	26	3.5	35	1	77	228	26	0
BJ 3816H	1	3	3	7	17	26	1.3	27	1	88	214	35	0
BK 3891H	5	7	6	11	58	68	4.0	20	1	35	107	1	0
BL 4141H	1	3	3	5	12	24	1.2	21	1	82	170	34	0
BM 4187M	0	1	1	0	2	4	-	-	-	-	-	-	0
BN 4231H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11421	(FLIGHT	28)											
A 2134D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2118D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2064B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2054D	16	13	18	4	29	51	10.9	7	2	50	49	19	0
E 2049B	16	2	9	4	31	51	155.8	35	1	35	100	4	0
F 2044D	20	12	26	32	70	5	16.5	21	2	46	46	19	0
G 2038D	9	18	26	32	70	54	3.1	7	2	65	27	39	0
H 2024D	15	16	7	13	32	29	7.6	10	1	62	68	28	0
I 2016D	5	5	2	3	11	13	4.8	10	2	77	36	44	0
J 1993B	8	9	21	24	56	29	5.5	0	3	41	18	16	0
K 1989B	8	9	21	11	56	15	4.9	0	2	38	24	12	0
L 1982B	7	9	18	3	10	28	0.3	0	1	35	47	19	0
M 1979B	6	2	17	3	10	28	37.0	32	1	48	95	10	0
N 1953B	4	5	5	3	12	21	3.7	35	1	143	98	95	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11421	(FLIGHT	28)											
O 1947B	1	2	1	1	2	1	-	-	-	-	-	-	4
P 1942D	8	5	2	5	3	3	10.4	6	2	99	38	63	0
Q 1932B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 1927D	5	5	10	3	8	5	5.6	17	3	146	16	115	14
S 1917B	2	6	1	2	8	14	1.7	13	1	130	165	75	0
T 1904B	6	7	15	21	52	34	4.4	20	2	98	36	65	18
U 1900D	12	12	15	21	56	34	7.7	12	2	60	57	27	4
V 1898D	10	12	15	21	37	29	5.8	15	1	77	108	35	4
W 1893D	1	5	2	8	23	2	1.0	17	1	139	184	82	0
X 1873D?	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 1868D?	2	3	1	2	5	16	2.0	38	1	164	1025	0	0
Z 1820S	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1807B	1	2	0	1	2	4	-	-	-	-	-	-	0
AB 1796B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 1786B	9	13	1	23	32	59	4.4	10	1	56	102	19	0
AD 1776H	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 1761H	6	5	3	4	10	7	8.0	3	3	64	23	36	0
AF 1702B?	1	2	0	1	0	4	-	-	-	-	-	-	0
AG 1655B?	1	2	1	2	2	4	-	-	-	-	-	-	120
AH 1640B	5	3	6	14	55	16	13.0	48	1	39	65	9	50
AI 1633B	1	2	1	0	2	4	-	-	-	-	-	-	0
AJ 1626D	3	5	2	14	45	59	3.4	35	1	56	72	23	0
AK 1616B	12	26	24	45	117	126	3.4	1	2	38	34	13	0
AL 1613B	13	22	24	45	117	126	4.2	3	3	43	19	21	0
AM 1598H	5	3	8	6	12	2	12.7	44	3	68	18	43	0
AN 1587L	11	5	6	13	35	51	16.3	24	2	66	34	37	0
AO 1582D	8	16	7	13	35	53	3.1	0	2	38	42	10	0
AP 1578D	7	12	4	11	30	53	3.4	0	2	31	38	4	0
LINE 11422	(FLIGHT	28)											
A 2310S	0	2	1	2	2	1	-	-	-	-	-	-	0
B 2245B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2239B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2231B	1	2	0	2	2	1	-	-	-	-	-	-	0
LINE 11430	(FLIGHT	20)											
A 8854D	6	7	3	11	7	17	5.4	34	1	39	184	3	0
B 8847D	4	8	3	6	23	23	2.9	23	1	38	144	3	0
C 8837H	3	5	2	8	27	25	2.9	34	1	33	135	0	0
D 8823D	2	4	14	2	35	30	2.5	40	2	47	41	20	0
E 8821D	12	10	34	36	35	30	9.1	23	2	47	41	20	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11430	(FLIGHT 20)												
F 8816B	26	22	50	40	113	57	12.0	13	3	35	16	16	0
G 8813B	26	23	50	46	109	48	11.1	10	2	30	28	8	0
H 8803B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 8792B	6	12	5	14	41	49	2.8	9	1	43	84	10	0
J 8782H	1	2	1	2	2	4	-	-	-	-	-	-	0
K 8772D	19	29	14	30	77	105	5.6	3	1	31	73	3	0
L 8769D	9	16	14	30	77	105	3.7	9	1	48	56	19	0
M 8762D	5	15	6	7	27	47	2.0	0	1	39	94	6	0
N 8758B	9	13	3	8	12	22	4.5	13	1	39	91	7	0
O 8727H	3	8	4	10	32	24	1.7	4	1	43	81	10	0
P 8708D	3	11	1	8	19	63	1.3	0	1	40	179	2	0
Q 8701D	9	12	2	12	32	33	4.6	9	1	44	91	10	0
R 8692H	7	12	2	6	13	14	3.7	3	2	35	48	7	0
S 8663B?	6	9	0	7	17	40	3.5	18	1	45	170	6	0
T 8655B	7	4	2	1	3	3	12.0	29	1	57	110	17	0
U 8650D	7	15	8	16	44	55	2.8	1	1	50	111	13	0
V 8635B	3	20	16	17	18	47	0.8	0	1	40	121	5	0
W 8627D	16	14	8	24	37	35	9.5	6	2	30	28	7	0
X 8625D	16	14	2	9	27	21	10.0	8	2	35	26	12	4
Y 8622D	3	5	9	9	27	21	2.8	28	2	32	25	10	0
Z 8621D	1	17	9	16	41	12	0.4	0	2	30	23	9	0
AA 8619B	6	18	9	16	41	12	2.0	0	2	29	25	7	0
AB 8616D	13	3	17	5	22	7	44.0	26	2	31	35	6	0
AC 8612D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 8608D	5	8	10	14	33	45	3.2	13	2	55	41	25	0
AE 8604D	7	6	25	26	63	38	8.2	19	2	48	26	22	0
AF 8600B	18	15	27	30	75	43	10.3	4	3	33	18	12	0
AG 8598B	18	15	9	19	75	43	10.6	4	3	39	15	18	0
AH 8596D	11	9	10	13	31	43	8.6	11	3	41	16	19	0
AI 8589B	9	13	8	12	29	57	4.6	7	2	49	26	24	0
LINE 11431	(FLIGHT 27)												
A 1993B	13	18	26	33	82	69	5.3	1	3	31	17	10	0
B 1981D	6	12	6	19	43	108	2.7	14	2	50	38	23	0
C 1976D	5	12	7	19	43	108	2.4	13	2	54	34	28	0
D 1968B	44	35	79	62	158	115	14.7	0	3	27	19	7	0
E 1960B	32	19	66	31	66	31	19.3	1	5	27	6	12	0
F 1947B	16	11	23	41	121	96	13.0	15	2	29	31	6	0
G 1934H	1	4	3	5	15	29	1.2	10	1	45	78	11	0
H 1905H	10	10	2	3	8	32	7.4	0	2	35	29	9	0
I 1897B?	4	6	14	10	23	14	3.6	12	2	49	40	20	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11431	(FLIGHT 27)												
J 1882D	8	10	43	28	65	34	4.8	9	1	62	67	27	0
K 1875B	22	18	43	28	65	33	11.8	0	4	26	10	7	0
L 1872B	22	18	43	28	65	33	11.3	0	5	33	6	16	0
M 1869B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1805B?	3	4	1	3	7	5	3.4	17	1	87	377	15	0
O 1780B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 1770B?	3	4	0	2	3	9	3.9	34	1	104	1025	0	0
Q 1703B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 1634H	2	5	1	4	7	24	0.2	0	1	32	197	8	0
S 1612H	2	2	3	6	16	21	5.7	59	2	80	46	47	0
T 1594H	3	3	8	7	16	13	5.8	47	3	86	23	58	0
U 1567H	9	7	16	15	43	20	9.0	0	4	49	11	27	0
V 1479H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 1447S	0	2	1	2	2	4	-	-	-	-	-	-	0
X 1258S?	1	2	1	2	1	0	-	-	-	-	-	-	0
Y 1206S	2	4	1	1	1	11	2.0	22	1	187	971	27	0
Z 1172B?	2	1	5	7	4	11	13.0	30	2	58	51	21	0
AA 1159B	9	9	2	6	13	11	7.4	3	2	42	54	10	0
AB 1150B	12	10	3	13	29	24	9.5	2	2	63	27	34	0
AC 1139B	15	9	16	12	4	14	14.6	0	3	54	19	28	0
AD 1096B	16	11	29	17	43	9	12.8	0	5	35	8	15	0
AE 1071B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 1053B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 1025B	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 1013D	4	6	2	6	15	10	3.5	4	2	122	53	81	0
AI 867H	7	7	1	11	1	13	5.9	0	3	60	22	33	0
AJ 752H	5	10	15	17	49	38	2.4	0	2	39	26	13	0
AK 720H	4	16	14	24	76	91	1.3	0	1	37	64	7	0
AL 706H	5	3	3	5	13	7	1.0	0	1	42	80	23	0
AM 693D	6	7	7	8	24	23	4.8	10	2	53	32	25	0
AN 683B	8	9	19	23	58	21	5.2	6	2	44	31	17	0
AO 679B	13	12	19	23	58	31	8.3	0	3	32	19	9	0
AP 674B	9	10	19	17	46	31	5.6	0	2	32	30	6	13
LINE 11440	(FLIGHT 18)												
A 5299B	20	14	32	21	75	63	13.5	15	1	42	54	13	0
B 5304B	20	29	32	53	159	93	5.8	2	2	26	38	3	0
C 5314H	6	8	9	16	47	16	3.9	30	1	46	75	15	0
D 5322B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 5326B	9	14	9	20	60	73	4.1	9	1	33	77	3	0
F 5332B	7	8	10	16	48	41	5.3	24	1	46	87	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

B-185

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11440	(FLIGHT		18)										
G 5344D	11	11	10	14	39	38	7.8	21	1	47	83	15	0
H 5350D	9	10	10	15	41	39	5.9	19	1	45	83	12	0
I 5374B	9	15	12	23	64	87	4.1	5	1	36	66	6	0
J 5380B	5	12	12	22	59	87	2.3	10	1	37	159	2	0
K 5384B?	5	12	11	22	59	87	2.1	7	1	46	267	4	0
L 5396H	3	3	4	5	12	9	3.8	53	1	55	119	18	0
M 5413B	4	7	5	10	29	24	2.5	19	1	40	115	5	0
N 5419B	6	9	6	14	48	64	3.4	20	1	46	116	11	0
O 5428D	10	16	7	19	57	83	4.3	13	1	40	114	6	0
P 5443B	3	7	5	8	20	38	2.1	10	1	48	132	9	0
Q 5464H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 5476B	12	17	10	39	107	80	4.9	6	1	35	56	7	0
S 5480B	22	29	10	39	107	98	6.9	4	2	35	40	10	0
T 5482B	22	29	10	5	107	7	6.9	13	2	44	42	18	0
U 5493B	8	7	10	19	42	34	6.4	32	1	55	65	23	0
V 5516B	12	19	10	21	58	65	4.7	4	1	34	76	4	0
W 5532B	13	22	15	29	75	66	4.4	0	1	38	64	8	0
X 5536D	14	21	15	29	75	65	5.0	8	1	45	61	15	0
Y 5542B	5	6	7	29	75	65	5.0	27	1	62	93	25	0
Z 5551B	3	6	1	21	67	93	2.8	28	1	62	168	20	0
AA 5559B	6	14	15	24	67	93	2.6	4	1	36	71	6	0
AB 5566B	26	30	38	33	90	54	8.0	0	2	29	22	8	0
AC 5576B	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 5589D	15	16	22	28	72	50	7.5	19	2	57	44	29	0
AE 5622D	4	9	13	19	7	48	2.3	21	2	58	48	29	0
AF 5628D	16	24	13	30	88	121	5.3	9	1	37	73	8	0
AG 5651B	10	22	14	22	50	91	3.3	0	2	42	50	13	0
AH 5658D	20	23	17	25	55	42	7.7	6	2	25	29	4	0
AI 5663D	13	26	10	25	55	42	3.6	0	2	29	30	6	0
AJ 5670D	28	9	10	9	18	37	41.2	12	4	36	9	19	0
AK 5675D	28	12	19	9	16	39	29.2	16	4	40	11	22	0
AL 5682B	48	25	19	52	140	59	25.8	0	6	21	4	8	17
AM 5684D	9	29	19	52	140	30	2.2	0	7	24	3	12	0
AN 5689B	22	41	124	16	54	72	4.7	0	7	22	3	10	0
AO 5710B	4	8	13	14	34	39	2.9	18	2	47	44	18	0
AP 5717D	2	4	13	14	34	26	2.2	37	1	58	89	22	0
AQ 5726B	3	17	10	26	78	121	0.9	0	1	29	84	0	0
AR 5731B	1	2	1	2	2	4	-	-	-	-	-	-	0
AS 5737B	8	8	13	14	35	35	5.8	19	2	44	51	15	0
AT 5754B	7	11	8	18	57	63	3.7	12	2	44	54	15	0
AU 5766B	8	12	13	15	36	48	4.6	13	1	40	82	8	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 11440	(FLIGHT	18)											
AV 5772D	17	14	48	26	66	93	10.4	17	2	48	31	23	0
AW 5776D	32	28	48	48	121	93	11.9	6	3	39	13	21	0
AX 5778D	32	28	48	48	121	93	11.9	5	3	36	14	17	0
AY 5782D	50	36	55	12	29	5	18.1	4	5	35	7	20	0
AZ 5787D	28	28	55	38	101	84	9.9	6	5	40	6	25	0
BA 5793B	2	17	77	38	125	84	0.7	0	4	47	10	28	0
BB 5796B	1	1	1	2	2	4	-	-	-	-	-	-	0
BC 5807B?	8	11	18	17	52	28	4.7	12	1	55	57	23	0
BD 5825B?	2	5	3	5	14	19	0.8	0	1	14	583	0	0
BE 5903S	3	9	1	18	57	65	1.5	2	1	14	381	0	0
BF 5946S	4	6	3	11	31	58	3.1	31	1	31	245	0	0
BG 6002H	1	2	1	2	2	4	-	-	-	-	-	-	0
BH 6045B	9	7	7	41	26	41	10.4	29	6	20	4	8	0
BI 6050B	73	46	55	26	253	41	23.6	0	7	21	3	9	0
BJ 6052B	73	46	55	26	253	51	23.6	0	7	20	3	8	0
BK 6056B	73	46	55	26	253	18	23.6	0	6	18	5	4	0
BL 6059D	49	36	55	58	253	37	16.8	0	4	20	12	2	0
BM 6066B	9	3	90	15	50	74	22.7	27	1	32	78	0	0
BN 6076D	7	9	2	8	37	38	4.4	12	1	61	554	0	0
BO 6098B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 6146B?	3	5	0	6	16	21	2.9	4	1	78	1025	0	60
BQ 6310B	3	8	5	9	25	22	1.6	0	1	58	148	14	0
BR 6317B	1	1	1	2	2	4	-	-	-	-	-	-	0
BS 6326B	17	12	23	22	62	17	12.7	0	3	38	14	17	0
BT 6328B	18	12	23	25	67	28	13.3	6	4	46	11	26	0
BU 6334D	16	12	21	22	67	21	11.7	15	3	57	21	33	0
BV 6346H	3	6	3	9	20	28	1.9	17	1	67	63	33	0
LINE 11441	(FLIGHT	27)											
A 134B	28	24	40	14	36	8	11.9	2	4	35	10	17	0
B 154B	9	5	6	4	1	3	12.5	1	1	57	140	11	0
C 178B	4	3	5	7	19	18	5.9	36	1	77	78	38	0
D 198B	9	2	10	4	10	8	47.9	28	2	71	39	39	0
E 357H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 375H	7	8	7	15	16	3	5.2	14	2	42	54	11	0
G 392H	4	3	4	2	7	18	7.5	41	2	51	52	20	0
H 528H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 559H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 586H	16	23	27	25	59	2	5.2	0	2	19	24	0	0
K 593B	11	18	18	19	42	8	4.6	0	2	27	23	4	0
L 596B	6	4	18	19	42	1	9.0	30	3	24	19	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11450	(FLIGHT		18)										
A 8071B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 8059D	10	22	14	31	92	101	3.1	2	1	36	54	9	0
C 8042D	3	7	6	9	28	47	1.5	14	1	54	197	12	0
D 8031D	10	14	12	20	65	67	4.7	4	1	36	66	6	0
E 8018B	5	8	7	2	33	8	1.0	0	1	29	77	11	0
F 8008B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 7977D	1	4	3	7	22	37	0.6	0	1	46	87	11	0
H 7952H	9	17	11	26	76	58	3.7	2	1	39	58	9	0
I 7934H	3	6	2	5	22	23	2.0	8	1	64	85	25	0
J 7916H	7	13	12	22	57	54	3.0	0	2	37	46	9	0
K 7895H	4	13	8	19	56	59	1.8	1	1	50	78	17	0
L 7862B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 7856D	12	22	17	24	67	65	3.9	0	2	49	39	21	0
N 7846B	13	15	24	28	76	56	6.7	12	3	52	20	29	0
O 7844B	13	18	24	28	76	56	5.5	5	2	42	23	19	0
P 7825B	17	18	30	35	97	95	7.6	0	3	28	20	6	0
Q 7815B	7	18	27	42	99	108	2.4	0	2	34	26	12	0
R 7799D	17	27	76	70	197	93	5.1	0	2	38	23	16	0
S 7795B	35	35	76	70	197	91	10.5	0	4	27	8	11	0
T 7793B	36	39	76	72	207	108	9.6	0	4	28	11	10	0
U 7790B	41	36	67	65	176	98	12.9	3	4	33	11	16	0
V 7772H	4	8	7	15	44	37	2.5	10	1	37	76	5	0
W 7764H	3	8	4	12	38	58	2.0	8	1	40	96	6	0
X 7746B	15	24	29	40	124	101	4.5	0	2	31	25	8	0
Y 7742D	12	20	12	40	124	101	4.4	3	3	45	22	22	0
Z 7739H	14	11	12	4	13	60	10.4	13	3	43	13	23	0
AA 7728B	10	17	15	23	72	56	3.8	3	2	38	43	11	0
AB 7711B	14	15	59	34	91	41	7.7	8	3	37	22	15	0
AC 7706B	35	32	59	62	149	88	11.6	0	4	31	8	15	0
AD 7700B	26	12	5	71	200	65	23.9	11	3	27	14	9	0
AE 7697B	28	25	2	62	200	65	11.1	0	3	29	14	10	0
AF 7669S	0	2	1	2	2	4	-	-	-	-	-	-	0
AG 7636S	0	5	2	4	22	14	1.0	0	1	31	222	7	0
AH 7610B	45	41	133	89	244	85	12.7	0	4	27	7	12	0
AI 7608B	58	41	133	89	244	85	18.5	0	7	23	3	11	0
AJ 7582S	0	7	6	14	42	39	0.4	0	1	37	110	0	0
AK 7544S	1	2	1	2	2	4	-	-	-	-	-	-	0
AL 7530H	1	8	2	13	35	29	0.7	0	1	53	167	11	0
AM 7497B	10	9	13	13	40	60	7.6	19	3	82	22	54	0
AN 7448D	10	15	13	22	60	58	4.7	10	1	42	103	7	0
AO 7438D	3	5	4	4	11	20	2.2	17	1	73	662	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11450	(FLIGHT	18)											
AP 7421H	3	7	5	10	27	26	2.4	16	1	57	175	14	0
AQ 7365D	6	12	7	17	45	64	2.7	11	1	32	383	0	0
AR 7353D	2	4	1	3	10	15	1.4	27	1	75	555	6	0
AS 7334D	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 7332D	25	19	29	16	113	17	12.8	7	2	49	35	22	0
AU 7329D	25	25	29	16	113	17	9.4	1	2	33	38	8	0
AV 7324B	21	24	34	27	77	57	7.5	4	2	43	48	15	0
AW 7322D	13	23	34	54	147	57	4.0	3	3	50	22	26	0
AX 7320B	39	32	36	54	147	84	13.7	4	3	34	18	14	0
AY 7308B	30	28	55	65	160	85	10.6	0	3	21	16	3	0
AZ 7298B	1	8	18	13	44	39	0.6	0	2	66	29	38	0
BA 7292H	11	5	9	4	20	26	17.7	20	3	59	21	33	0
BB 7278H	0	4	1	4	13	18	0.8	0	1	26	251	2	0
BC 7269D	6	8	12	12	26	19	4.5	5	2	76	62	38	0
BD 7260B?	1	2	1	2	2	3	-	-	-	-	-	-	0
BE 7246B?	8	6	13	6	25	13	8.4	17	3	89	23	60	0
BF 7236M	0	2	1	2	2	4	-	-	-	-	-	-	60
BG 7204B	6	9	20	20	41	49	3.4	13	1	75	113	33	0
BH 7196B	8	8	20	19	41	49	6.2	0	3	46	19	20	0
BI 7182B	10	8	18	9	26	13	9.0	1	4	72	12	48	0
BJ 7167B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11451	(FLIGHT	28)											
A 7972H	1	1	1	1	1	1	-	-	-	-	-	-	0
B 7955D	1	2	1	1	2	1	-	-	-	-	-	-	0
C 7948B	4	23	18	19	39	130	1.0	0	1	35	121	3	0
D 7945B	11	10	19	19	39	85	8.5	21	2	36	46	9	0
E 7937B	6	22	19	32	95	129	1.9	0	2	27	39	3	0
F 7930B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 7924B	4	11	8	8	29	41	2.0	7	1	61	88	25	0
H 7923B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 7913B	8	13	20	25	72	50	4.0	9	1	46	55	16	0
J 7909B	7	16	20	25	72	6	2.8	0	2	37	43	10	0
K 7902D	3	8	14	3	55	14	2.0	5	1	75	211	24	0
L 7820E	4	7	5	15	9	47	2.5	25	1	56	642	0	0
M 7812H	15	7	11	9	16	7	19.4	22	2	49	23	25	30
N 7792H	6	1	10	9	17	6	35.4	50	2	30	36	5	8
O 7754H	4	3	9	8	15	15	5.9	44	3	76	21	49	0
P 7742H	4	8	9	11	25	20	2.8	14	2	67	33	38	0
LINE 11460	(FLIGHT	19)											
A 467H	7	10	20	18	6	38	4.0	20	2	36	40	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11460	(FLIGHT	19)											
B 501H	4	6	6	7	19	42	3.8	20	1	31	92	0	0
C 514B?	5	8	1	19	52	72	3.7	30	1	43	118	10	0
D 558H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 567B?	3	2	1	2	21	6	7.3	43	1	62	67	27	0
F 587D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 601D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 606D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 610D	4	6	1	4	18	4	3.2	28	1	52	124	15	0
J 616B	5	8	1	3	16	33	2.9	15	1	41	144	4	0
K 640H	1	2	1	2	2	4	-	-	-	-	-	-	0
L 668D	7	11	12	14	33	35	3.8	22	2	54	44	26	0
M 677B?	1	2	1	2	2	4	-	-	-	-	-	-	10
N 689B	7	10	1	7	19	39	4.3	21	1	50	112	14	0
O 697B	4	6	4	13	6	38	3.8	23	1	60	82	24	0
P 718B	6	10	4	8	9	17	3.4	14	1	66	63	32	0
Q 732H	8	9	7	16	42	34	5.5	12	2	41	49	12	0
R 748B	1	2	1	2	2	4	-	-	-	-	-	-	0
S 754B	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11461	(FLIGHT	24)											
A 1836B	2	4	8	11	29	27	1.8	19	2	47	53	15	0
B 1845D	5	7	7	12	12	15	3.9	14	2	57	30	29	4
C 1867H	17	9	22	24	71	37	17.8	5	2	30	28	6	0
D 1879H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1896D	10	10	8	12	37	32	6.6	7	2	37	52	7	0
F 1901B?	1	2	1	0	2	4	-	-	-	-	-	-	0
G 1910D	3	3	8	11	19	11	3.6	26	1	43	111	5	0
H 1918B	8	8	11	8	39	12	6.2	2	2	41	35	13	0
I 1945B	10	3	15	7	20	4	28.9	30	3	86	15	60	0
J 1955B?	1	2	1	2	2	4	-	-	-	-	-	-	0
K 1984H	4	5	10	6	16	3	4.5	0	3	66	18	39	0
L 2048S	1	4	1	4	11	19	0.6	0	1	35	383	6	0
M 2080S	1	4	1	4	10	15	0.6	0	1	30	269	4	0
N 2107H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2114B	7	6	5	7	19	27	8.2	15	2	45	57	13	0
P 2124B	7	5	3	11	27	31	9.0	19	2	51	48	20	0
Q 2227E	6	6	1	16	27	24	6.1	0	1	63	92	19	0
R 2256H	1	2	1	2	2	4	-	-	-	-	-	-	0
S 2323H	2	4	5	4	18	8	1.0	0	1	37	79	18	0
LINE 11462	(FLIGHT	25)											
A 397B	4	9	4	11	23	46	2.3	19	1	47	163	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

B-190

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11462	(FLIGHT	25)											
B 404B	3	7	10	18	45	57	1.6	13	1	48	104	13	0
C 409B?	7	9	7	18	45	57	5.2	13	1	36	72	4	0
D 414D	11	4	16	2	28	16	29.2	24	1	42	58	11	0
E 424B	13	8	20	22	49	29	14.0	32	2	47	29	23	0
F 436B	8	11	13	22	48	68	4.6	28	1	48	51	20	0
G 441B	7	11	13	22	48	57	4.0	28	1	50	82	19	0
H 443B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 463B	13	34	92	127	155	211	3.1	0	2	34	48	9	0
J 471B	51	42	97	67	165	209	15.1	1	3	17	13	1	0
K 474B	35	42	97	67	165	209	8.6	0	3	20	12	4	12
L 479B	34	36	97	67	22	19	9.9	9	3	31	15	13	0
M 491B	27	27	62	55	167	159	9.7	12	2	25	31	5	0
N 498B	3	5	1	92	292	267	2.6	38	1	36	54	10	9
O 507B	32	111	83	151	410	319	3.2	0	2	11	32	0	0
P 511B	54	111	83	154	427	439	5.9	0	2	15	19	0	0
Q 541B	61	12	126	112	174	29	108.7	7	5	21	6	7	0
R 546B	5	13	32	45	69	141	2.0	4	4	22	7	7	0
S 553B	10	29	32	45	69	141	2.6	0	4	24	8	9	0
T 557B	49	29	23	5	14	138	22.4	0	4	22	8	7	0
U 590B	6	13	13	25	65	71	2.7	0	1	36	101	1	0
V 622B	8	27	16	51	140	162	2.1	0	1	23	52	0	0
W 633B	14	23	21	8	33	103	4.8	11	1	25	60	0	0
X 642B	13	24	21	8	89	84	4.0	10	1	37	56	10	0
Y 658B	12	16	28	36	81	63	5.5	20	2	58	45	30	0
Z 663B	11	16	28	36	81	63	4.8	20	3	46	21	24	0
AA 674B	12	26	9	42	123	124	3.3	8	2	33	33	11	0
AB 681B	26	27	65	46	122	119	8.7	8	3	35	14	17	0
AC 686B	36	18	65	35	95	119	24.5	1	6	30	4	16	0
AD 689B	36	16	56	35	95	18	28.4	3	5	31	6	16	0
AE 711B	41	40	82	82	207	143	11.4	0	5	25	7	11	0
AF 726B	5	7	20	14	30	12	3.7	17	5	36	7	20	0
AG 732B	6	21	21	19	69	31	1.9	0	4	49	9	31	0
AH 737B	21	21	64	32	69	62	9.2	8	3	37	14	18	0
AI 741B	26	28	64	54	135	55	8.7	1	4	31	9	14	0
AJ 744B	23	20	64	54	135	48	10.5	4	4	34	12	15	0
AK 766B	7	23	8	36	98	157	2.0	0	2	36	41	11	0
AL 778B	53	38	121	99	239	79	18.1	4	5	22	6	9	0
AM 782B	40	18	121	99	239	79	31.4	11	5	32	7	17	0
AN 787B	38	17	90	40	119	96	30.5	11	6	32	5	18	0
AO 791B	36	32	90	64	119	96	12.0	6	4	38	10	21	0
AP 808D	2	5	5	5	22	26	1.1	23	1	73	58	41	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT					
LINE 11462	(FLIGHT	25)											
AQ 816D	4	9	37	18	32	18	2.6	18	2	57	46	27	0
AR 827B	20	6	39	35	33	45	42.2	16	3	39	14	19	0
AS 839B	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 924S	1	2	0	2	2	4	-	-	-	-	-	-	0
AU 1019H	5	3	1	3	7	1	9.7	35	1	134	1025	0	0
AV 1232H	4	6	7	8	25	19	2.8	0	1	47	81	9	0
AW 1287H	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 1346H	5	6	2	4	12	6	5.1	0	2	84	36	49	0
AY 1367B	5	9	10	11	29	29	3.2	5	2	68	39	37	0
AZ 1375D	5	6	6	14	40	29	3.7	12	1	53	100	14	0
BA 1391B	6	10	13	33	82	53	3.7	12	1	40	118	5	0
BB 1396D	12	18	13	33	82	68	4.9	7	1	36	58	8	0
BC 1402B	2	13	14	2	9	48	0.6	0	1	46	99	12	6
BD 1404B	2	13	4	2	9	48	0.6	0	1	46	92	13	0
BE 1412D	12	18	13	10	55	48	4.9	8	1	48	174	9	0
BF 1422D	1	2	1	2	2	4	-	-	-	-	-	-	0
BG 1445D	5	8	1	6	17	38	3.7	21	1	75	909	0	0
BH 1457D	8	5	3	7	15	23	9.8	27	1	128	1025	0	0
BI 1538B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BJ 1544B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BK 1550D	9	3	3	6	27	14	24.5	28	1	56	102	18	0
BL 1557B	12	11	2	12	30	24	8.2	8	1	47	57	15	0
LINE 11470	(FLIGHT	19)											
A 1108B	4	14	7	20	60	91	1.8	0	1	25	116	0	0
B 1105B	4	13	4	20	60	89	1.9	3	1	24	197	0	0
C 1093B	8	15	5	17	61	70	3.5	6	1	35	64	5	0
D 1071B?	5	12	12	24	56	84	2.6	14	1	50	144	12	0
E 1059H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1047H	6	7	4	8	23	11	5.1	21	1	46	114	9	0
G 1030D	4	5	1	6	15	21	3.8	18	1	50	202	5	0
H 1024H	3	6	4	8	17	4	2.2	14	1	50	116	12	0
I 997B	7	7	7	9	16	15	6.8	23	2	58	56	25	0
J 982B	4	5	4	7	17	9	5.1	24	1	38	131	0	0
K 977B?	4	5	5	1	4	11	5.1	25	1	43	133	3	0
L 972D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 958H	4	9	8	2	3	3	0.8	0	1	27	72	11	0
N 938B	4	12	3	15	37	63	1.7	2	1	39	199	0	0
O 935D	5	5	7	1	3	63	6.2	31	1	46	93	11	0
P 926B	12	17	13	31	81	78	4.7	3	1	31	54	3	0
Q 921B	8	22	13	30	81	33	2.5	0	1	32	53	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11470	(FLIGHT 19)												
R 919B	5	21	19	15	82	33	1.5	0	2	32	46	4	0
S 917B	17	4	19	15	82	6	59.1	17	1	31	53	2	0
T 905B?	3	7	1	11	34	26	1.7	7	1	58	162	15	0
U 886D	4	5	1	10	24	22	3.6	27	1	55	138	15	0
V 863B	3	12	4	21	52	33	1.5	0	1	45	132	8	0
W 850H	11	5	2	8	1	11	16.0	31	2	68	39	38	0
LINE 11471	(FLIGHT 24)												
A 2753B	21	2	29	10	33	10	298.0	20	3	33	20	12	0
B 2719B	5	4	1	1	2	11	7.8	23	1	104	200	48	0
C 2707D	7	9	10	7	17	18	5.4	10	2	64	48	31	0
D 2704B	4	5	10	7	17	5	4.0	22	2	65	38	34	0
E 2692B	21	31	44	50	134	96	5.8	0	2	30	22	8	0
F 2690D	24	16	44	50	134	96	14.7	6	2	37	24	14	0
G 2687D	5	7	8	41	110	96	3.9	16	2	70	36	39	0
H 2678D	12	9	24	21	53	19	10.7	16	2	76	42	44	0
I 2675D	8	10	24	21	53	8	4.7	8	3	67	17	42	7
J 2669D	6	11	8	23	59	36	3.1	2	1	48	66	15	0
K 2664B	17	17	51	61	147	3	8.3	1	2	32	39	5	11
L 2660B	32	30	59	65	154	50	11.2	0	4	26	8	10	0
M 2658B	32	30	59	65	154	50	11.2	0	4	35	10	17	0
N 2651B	57	43	112	123	290	121	17.3	0	4	24	9	8	0
O 2638S	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2583B	8	8	7	11	30	22	6.3	15	1	56	59	23	0
Q 2573H	1	2	1	2	2	4	-	-	-	-	-	-	5
R 2557H	2	5	2	6	12	21	1.5	13	2	58	54	25	0
S 2522S	1	2	1	2	2	4	-	-	-	-	-	-	0
T 2508B	8	4	4	14	13	11	18.3	18	1	39	63	6	0
U 2497H	1	2	0	2	2	4	-	-	-	-	-	-	0
V 2477H	3	5	3	6	15	23	2.3	13	1	59	61	24	5
W 2454H	5	3	4	4	9	12	12.1	28	2	64	43	31	0
X 2439H	2	6	6	9	16	18	1.6	0	2	59	51	25	0
LINE 11472	(FLIGHT 28)												
A 8924B	12	18	20	15	14	25	4.6	0	2	37	24	14	0
B 8902B	17	23	11	8	88	23	5.7	0	2	34	25	11	7
C 8899B	28	13	12	10	12	23	25.4	4	4	30	8	13	0
D 8896B	27	17	12	16	31	23	16.6	2	4	29	8	13	0
E 8886D	11	7	16	8	15	21	11.7	26	2	51	53	21	13
F 8880D	6	11	16	14	40	40	2.9	4	2	45	53	15	0
G 8867D	6	19	9	26	77	100	1.8	0	1	29	72	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11472	(FLIGHT 28)												
H 8865D	3	8	11	19	43	100	1.6	3	2	47	37	19	0
I 8856H	16	4	8	9	18	20	63.8	26	4	34	11	16	0
J 8844B	20	24	38	30	81	81	7.1	12	3	42	14	23	0
K 8838B	44	8	131	132	333	191	109.3	15	4	22	8	7	0
L 8835B	42	62	131	132	333	165	7.5	0	5	13	5	0	0
M 8824D	9	10	11	31	83	115	5.7	21	2	32	24	11	0
N 8821B	9	17	12	2	119	12	3.2	4	2	28	22	7	0
O 8815B	16	23	26	33	100	96	5.5	9	2	25	37	3	0
P 8813B	16	13	26	33	100	96	10.5	20	2	30	39	7	0
Q 8806B	10	2	10	3	8	16	88.5	46	2	37	47	10	0
R 8796D	3	5	2	5	7	53	2.9	27	1	50	70	17	0
S 8789D	1	2	1	2	2	4	-	-	-	-	-	-	0
T 8783B	4	6	4	3	1	35	0.1	0	1	35	135	15	0
U 8752D	9	14	2	3	7	67	3.9	13	2	59	30	33	0
V 8746B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 8741B	1	2	2	13	31	66	1.0	25	2	63	31	36	0
X 8732B	50	60	102	134	335	210	9.8	0	4	19	9	4	0
Y 8724B	4	16	17	5	20	15	1.4	0	3	42	20	21	0
Z 8705B	13	8	13	17	20	6	13.6	17	3	59	15	36	0
AA 8682B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 8674B	20	10	10	30	26	38	21.2	6	3	47	15	26	0
AC 8670B	20	16	10	30	26	38	10.8	0	4	37	9	19	0
AD 8641B	17	2	19	4	20	1	234.4	20	3	49	18	25	0
AE 8599S	0	2	0	2	2	4	-	-	-	-	-	-	0
AF 8575S	1	4	2	3	5	10	0.3	0	1	28	311	1	0
AG 8505B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AH 8393H	3	4	2	6	4	23	3.3	44	1	71	524	8	0
AI 8274D	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 8254B	3	5	1	2	7	23	3.1	30	1	136	1025	0	0
AK 8205H	1	2	1	0	2	2	-	-	-	-	-	-	0
AL 8189D	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 8184D	6	9	2	12	28	31	4.0	16	1	57	118	18	0
AN 8179B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 8176B	1	2	1	1	2	3	-	-	-	-	-	-	0
AP 8170B	10	11	0	7	18	17	6.3	0	1	49	67	14	0
LINE 11480	(FLIGHT 19)												
A 1182H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1231B	8	14	5	20	67	66	3.8	9	1	32	132	0	0
C 1239B	4	3	1	1	17	3	6.4	47	1	50	104	14	0
D 1242B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11480	(FLIGHT	19)											
E 1247B	1	2	1	2	2	1	-	-	-	-	-	-	0
F 1266B	2	10	2	12	6	28	0.8	0	2	44	48	15	0
G 1269D	12	15	2	12	6	28	5.4	12	2	41	36	16	0
H 1273D	9	17	11	2	16	8	3.2	7	2	41	33	16	0
I 1277B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1289B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 1300B	7	13	4	12	39	44	3.5	11	1	41	63	11	0
L 1302B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 1308B	3	8	13	3	19	20	1.7	9	1	46	71	15	0
N 1320B	8	9	5	11	29	32	5.6	19	1	50	72	17	0
O 1322B	9	10	5	11	29	32	5.9	20	1	48	81	15	0
P 1330B	3	6	1	9	20	20	2.4	28	1	57	148	17	0
Q 1335B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 1348H	1	2	1	2	2	4	-	-	-	-	-	-	0
S 1384B	5	7	7	8	17	22	4.6	12	2	51	43	20	0
T 1398B	10	13	13	22	57	44	5.3	14	1	46	54	17	0
U 1401B	7	10	13	22	57	44	3.9	21	2	53	40	25	0
V 1431B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 1436D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 1442B	9	9	6	10	29	34	7.0	16	1	50	61	18	0
LINE 11481	(FLIGHT	24)											
A 3148D	8	8	7	5	6	17	6.4	14	2	70	57	35	0
B 3155D	8	11	13	26	64	29	4.6	23	2	47	48	19	0
C 3161D	12	26	9	15	41	45	3.5	4	1	47	76	16	0
D 3192H	7	3	7	3	9	4	16.8	0	3	50	24	20	0
E 3208H	3	3	6	8	12	9	4.2	29	2	62	51	28	0
F 3239H	4	5	1	8	20	5	3.9	34	1	63	133	22	0
G 3263D	7	6	7	11	28	35	6.7	24	2	50	53	19	0
H 3272B	23	12	46	43	104	49	20.7	1	4	34	9	16	0
I 3275B	7	19	46	43	104	49	2.3	0	4	35	12	16	0
J 3285B	5	4	24	29	54	31	8.3	33	1	38	58	7	0
K 3291B	2	8	29	30	56	3	1.1	0	3	26	17	5	0
L 3295B	15	10	2	26	49	6	12.4	12	5	46	6	29	0
M 3302D	10	5	23	6	30	2	18.3	26	5	67	7	47	0
N 3312B	25	12	56	28	42	11	24.5	3	6	39	5	24	0
O 3315B	19	10	36	28	42	7	19.5	4	7	31	4	17	0
P 3324B	31	23	40	32	116	55	15.1	2	3	34	19	13	0
Q 3327D	16	17	40	32	116	48	7.3	7	2	55	34	28	0
R 3377S	1	2	0	1	2	4	-	-	-	-	-	-	0
S 3409H	7	13	1	32	78	5	3.0	0	2	36	29	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11481	(FLIGHT	24)											
T 3422D	8	9	8	15	15	4	5.0	10	2	38	41	10	0
U 3430D	8	11	11	14	37	5	4.9	5	2	30	26	6	0
V 3435B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 3443B	13	13	23	26	66	34	7.6	7	2	35	53	6	0
X 3460B	4	8	4	15	44	63	2.3	9	1	26	187	0	0
Y 3474H	6	5	2	10	17	12	6.2	31	2	64	56	32	0
Z 3502H	3	5	3	5	11	20	2.3	26	1	58	100	21	10
AA 3523H	6	6	4	13	38	41	6.0	17	1	36	85	2	4
AB 3549H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11482	(FLIGHT	30)											
A 187D	4	11	4	7	13	37	1.7	3	1	48	110	12	0
B 193B	6	3	2	5	2	31	18.2	31	1	47	89	10	0
C 199D	9	10	4	9	25	26	6.1	4	1	38	66	6	0
D 202B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 208B	12	8	3	12	22	33	12.5	24	2	46	48	17	0
F 214B	1	1	1	2	2	4	-	-	-	-	-	-	0
G 220B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 233B	4	6	4	20	56	15	3.7	43	1	39	105	9	0
I 235B	2	4	8	18	50	158	2.7	52	1	40	88	11	0
J 240B?	8	9	15	13	50	142	5.5	10	2	31	32	6	0
K 246D	6	7	4	10	23	16	5.2	33	2	53	41	26	0
L 252D	6	10	24	27	9	14	3.4	25	1	49	59	20	0
M 260D	24	27	18	19	114	59	8.1	14	2	35	22	15	30
N 265D	17	29	16	48	114	110	4.5	10	3	34	15	16	0
O 275B	16	17	8	43	104	156	7.3	19	3	33	17	14	0
P 279B	1	16	7	43	104	83	0.4	0	2	31	32	9	0
Q 284B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 288D	9	17	3	11	19	30	3.5	12	1	46	90	13	20
S 293D	3	6	3	7	11	39	2.3	16	1	47	85	13	0
T 300B	3	10	5	12	44	28	1.5	1	1	40	210	0	0
U 306B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 323B	1	1	17	16	11	42	3.1	52	1	36	63	3	0
W 331B	13	10	6	10	26	11	9.9	0	3	28	16	5	0
X 343B	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 347B	9	10	8	1	2	28	5.6	0	3	32	18	8	0
Z 353B	4	8	3	7	16	13	2.7	0	2	29	25	5	15
AA 357B	6	2	17	25	58	39	25.5	43	2	41	24	17	0
AB 364D	3	16	4	8	24	21	0.9	0	3	32	21	11	0
AC 367D	16	7	4	2	24	37	24.1	24	2	33	30	10	0
AD 382H	4	5	5	6	13	16	3.8	39	1	46	84	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESLS OHM-M	DEPTH M	NT
LINE 11482	(FLIGHT	30)											
AE 434D	11	1	14	2	18	56	526.9	33	2	46	36	18	0
AF 439D	3	7	20	0	13	56	2.1	16	2	40	27	16	0
AG 442D	11	15	22	5	13	56	4.8	1	3	40	16	19	0
AH 446D	17	11	22	23	52	15	13.8	5	3	38	20	15	0
AI 459D	4	10	10	20	72	87	2.1	10	2	49	43	21	0
AJ 462D	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 469D	8	21	10	22	65	95	2.5	0	1	35	54	7	0
AL 476B	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 479B?	2	5	9	10	23	38	1.2	11	2	47	26	22	0
AN 493B	8	5	3	16	39	15	12.7	31	3	45	20	22	0
AO 496B	7	7	15	16	39	4	6.2	23	3	56	16	34	0
AP 503B	2	6	0	12	31	2	1.8	25	3	66	23	41	0
AQ 512B	7	7	16	16	7	28	5.8	34	2	46	29	22	0
AR 524D	2	14	15	3	25	82	0.8	0	1	53	86	20	0
AS 540D	6	8	6	9	25	13	4.8	21	3	59	23	34	0
AT 551B	4	13	2	24	68	72	1.5	0	2	39	52	11	0
AU 561D	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 582B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 597B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 629S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AY 754S	4	4	1	1	4	4	4.3	35	1	150	1025	0	0
AZ 867B?	4	5	1	6	8	20	3.9	30	1	80	245	28	0
BA 977B	1	2	1	2	2	3	-	-	-	-	-	-	0
BB 1125B	2	7	2	3	8	12	0.6	0	1	36	98	15	0
BC 1135B	9	8	4	11	28	48	6.9	19	1	57	83	22	0
LINE 11490	(FLIGHT	19)											
A 1822H	1	5	6	9	21	27	1.1	13	2	65	56	32	0
B 1808B	6	2	14	12	6	32	33.0	52	1	59	67	26	0
C 1802B	5	4	16	45	15	123	5.8	46	2	41	40	15	7
D 1795E	6	21	19	45	3	114	2.0	1	1	42	157	6	0
E 1786B?	3	6	2	5	19	29	2.1	13	1	60	125	18	0
F 1776B	9	11	5	3	44	19	5.2	5	1	35	69	3	0
G 1772D	1	6	6	3	18	20	0.8	0	1	48	84	13	0
H 1764D	2	7	3	2	8	5	1.0	0	1	59	96	21	0
I 1760D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 1732B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 1725B	1	2	1	1	2	4	-	-	-	-	-	-	0
L 1715B	8	7	13	10	32	36	8.0	18	2	38	43	10	0
M 1700D	3	6	1	9	26	16	2.2	18	1	40	180	1	0
N 1686B	2	8	4	3	6	10	0.4	0	1	24	102	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11490 (FLIGHT 19)													
O 1683B	2	10	4	6	14	10	1.0	2	1	37	110	5	0
P 1665D	9	20	4	20	20	74	3.1	8	1	44	144	8	0
Q 1660D	8	10	10	9	24	33	4.9	14	1	51	56	20	0
R 1651B	6	5	6	11	17	29	8.2	27	2	45	54	14	0
S 1636B	5	12	4	13	37	72	2.2	7	1	46	117	10	0
T 1632B	1	2	1	2	2	1	-	-	-	-	-	-	0
U 1627B	4	6	2	8	19	19	3.6	16	1	57	96	18	0
LINE 11491 (FLIGHT 24)													
A 4032D	10	6	10	14	7	16	12.8	16	1	47	75	12	0
B 4024D	1	2	0	1	2	4	-	-	-	-	-	-	0
C 4020D	6	10	3	11	9	16	3.3	5	1	71	80	33	0
D 4016D	6	9	2	11	28	3	4.3	0	1	56	69	19	0
E 3987B	4	6	3	4	18	19	3.1	9	1	73	296	17	0
F 3967B	4	7	2	2	9	23	3.3	17	1	84	439	13	0
G 3949B	6	24	20	60	162	137	1.7	0	3	32	19	11	0
H 3944B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3935B	26	1	39	17	40	42	754.8	9	4	36	10	18	0
J 3920B	17	14	52	42	5	29	11.3	3	3	38	21	14	0
K 3917B	24	4	4	2	5	2	132.2	8	4	30	8	13	0
L 3912B	22	13	8	5	2	7	16.3	1	4	39	10	20	0
M 3901D	1	2	1	2	2	2	-	-	-	-	-	-	0
N 3813H	6	4	1	7	16	5	10.2	19	1	75	77	35	0
O 3797B?	7	7	5	11	28	28	5.6	5	2	42	46	11	0
P 3781H	2	3	3	4	11	9	1.0	0	1	49	59	31	0
Q 3755H	7	11	9	18	48	46	3.8	6	2	38	51	9	0
R 3738H	2	7	5	11	23	46	1.3	0	1	39	74	6	30
S 3728H	4	11	2	16	12	69	2.2	6	1	45	96	10	0
T 3699H	2	3	3	6	15	20	2.8	13	1	43	81	5	0
U 3681B?	7	9	2	10	26	13	4.3	0	1	42	110	3	0
LINE 11492 (FLIGHT 30)													
A 1941B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1936B?	9	3	4	3	8	9	22.3	23	2	59	47	26	0
C 1923H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 1915B	9	9	12	15	7	17	7.3	1	2	48	38	18	0
E 1902B	7	7	14	15	7	16	5.7	13	2	63	27	35	0
F 1892B?	3	12	2	11	38	84	1.5	0	2	43	49	13	0
G 1887B	3	4	19	27	60	49	4.4	30	2	41	30	15	0
H 1884D	3	11	20	27	60	49	1.4	0	2	50	54	18	0
I 1840B?	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11492	(FLIGHT 30)												
J 1824D	18	30	21	50	97	119	4.9	0	3	29	16	9	0
K 1814D	10	6	6	15	33	27	14.4	14	3	32	14	11	0
L 1810D	4	6	6	15	33	27	3.1	17	4	42	12	21	0
M 1806D	9	8	11	20	50	40	7.6	10	3	33	15	12	0
N 1803B?	6	8	11	20	50	40	3.9	14	3	33	14	13	40
O 1799B	6	9	11	15	3	40	4.2	8	3	32	15	11	30
P 1757H	2	4	7	7	15	20	1.9	7	2	62	34	32	0
Q 1736D	6	10	4	5	8	3	3.3	10	1	52	88	16	0
R 1719B	4	8	13	7	8	13	2.5	0	5	50	8	30	0
S 1691H	10	8	5	6	12	14	8.4	1	3	43	19	18	0
T 1671D	6	7	8	15	32	37	5.1	21	3	64	19	39	0
U 1655D	13	3	6	11	21	54	47.8	42	2	44	37	19	0
V 1649D	9	17	34	65	153	136	3.7	19	2	38	36	15	0
W 1642D	14	6	34	65	153	136	24.1	37	2	34	25	13	0
X 1625B	5	8	9	12	3	62	3.4	26	2	52	45	24	0
Y 1619B	3	7	3	20	49	47	2.3	22	2	49	28	24	0
Z 1612D	8	10	8	13	27	51	4.7	19	3	41	22	18	0
AA 1607B	10	4	22	13	27	49	24.6	37	3	47	14	26	0
AB 1580H	1	2	6	3	2	12	0.9	7	2	49	24	24	0
AC 1563S	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 1498S	4	4	0	3	1	30	5.2	53	1	116	1025	0	0
AE 1384B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 1312B?	2	4	2	2	3	5	1.4	0	1	175	48	169	0
AG 1246B?	1	2	1	1	2	4	-	-	-	-	-	-	0
AH 1220B	1	6	1	0	3	11	0.5	8	1	212	1025	0	0
LINE 11500	(FLIGHT 19)												
A 2060H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2069H	10	5	14	6	37	65	14.7	36	1	41	61	12	0
C 2072E	8	12	12	28	73	68	3.8	15	1	39	149	3	0
D 2082B	3	11	3	16	49	83	1.5	1	1	32	160	0	0
E 2086D	6	4	5	16	41	9	11.8	41	1	39	113	5	0
F 2090D	5	13	6	8	23	14	2.5	9	1	42	101	8	0
G 2107B	4	9	3	14	39	45	2.3	18	1	43	122	8	0
H 2123D	8	10	7	9	27	31	4.5	12	1	45	83	11	0
I 2127B?	5	10	8	8	27	31	2.8	12	1	40	70	10	0
J 2133B	7	8	1	10	28	33	5.2	25	1	47	94	13	0
K 2151B	6	14	9	18	52	62	2.5	7	1	39	85	8	0
L 2171D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 2177B	2	6	6	13	34	35	1.3	6	1	43	99	8	0
N 2180D	5	7	6	13	34	35	4.2	23	1	57	144	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL	HORIZONTAL	CONDUCTIVE		MAG		
	1050 HZ		892 HZ		7323 HZ		DIKE	SHEET	EARTH		CORR		
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE 11500	(FLIGHT	19)											
O 2196D	7	13	10	22	63	66	3.0	8	1	36	141	1	0
P 2223B	7	15	4	17	45	89	2.8	3	1	32	124	0	0
Q 2236D	5	15	6	16	42	50	1.8	0	1	44	89	11	0
R 2247B	6	8	5	13	41	34	4.5	25	1	44	68	13	0
S 2250D	7	10	3	9	41	34	4.4	23	1	46	61	16	0
T 2255B	12	13	1	19	53	22	7.3	11	2	30	48	4	5
U 2262D	6	9	5	3	6	23	4.0	26	1	45	106	12	0
V 2267B	4	2	2	4	0	12	13.6	63	1	48	103	14	0
W 2270B	5	3	2	6	19	11	13.9	49	1	40	88	8	0
LINE 11501	(FLIGHT	24)											
A 4185B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 4190D	7	6	3	6	22	30	6.0	19	1	58	76	22	0
C 4203B	5	5	4	4	11	17	5.4	9	2	56	35	26	0
D 4207D	6	6	6	4	11	15	6.0	12	1	50	60	16	0
E 4214D	7	9	5	13	35	31	5.1	11	1	45	119	7	0
F 4251B	3	5	1	6	21	7	2.3	20	1	53	186	9	0
G 4286B	18	16	11	6	63	22	10.1	0	3	36	20	13	0
H 4290B	1	2	1	2	2	4	-	-	-	-	-	-	0
I 4295B	10	9	3	1	2	17	7.8	3	2	37	24	12	0
J 4301B	9	9	13	2	5	5	6.4	7	3	59	17	35	0
K 4303B	9	5	9	2	36	5	14.4	11	3	57	16	33	0
L 4317B	14	6	3	17	5	12	19.7	0	3	43	16	18	0
M 4322B	26	13	12	3	14	9	22.6	0	6	19	5	4	0
N 4442B	4	5	3	4	12	16	0.8	0	1	45	140	22	0
O 4454B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 4459B	1	2	1	2	2	4	-	-	-	-	-	-	140
Q 4465D	2	3	0	4	12	9	2.5	36	1	56	102	18	0
R 4478B	8	10	3	18	54	51	5.5	17	1	43	57	13	0
S 4493B	8	8	10	8	25	27	6.6	17	2	52	27	26	0
T 4497D	7	11	11	8	25	27	3.8	12	3	46	21	23	0
U 4502D	7	3	13	3	2	47	17.4	41	2	51	26	26	0
V 4508D	3	9	3	6	17	59	1.5	13	1	48	67	18	0
W 4516B	8	19	13	33	81	75	2.8	0	1	25	61	0	20
X 4530B	2	3	3	2	3	66	2.4	30	2	46	38	17	30
Y 4533B	2	10	2	13	39	70	1.1	0	1	37	56	8	0
Z 4539B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 4549H	4	10	4	6	9	32	1.8	9	1	40	126	5	0
AB 4585B	15	29	18	54	157	168	4.1	2	1	19	56	0	0
AC 4604H	5	9	4	13	40	48	2.8	2	1	35	118	0	0
AD 4629S	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11501	(FLIGHT	24)											
AE 4652H	3	3	2	4	10	21	0.4	0	1	39	294	14	0
LINE 11502	(FLIGHT	30)											
A 2073B	6	6	4	2	11	24	5.2	19	1	43	59	11	0
B 2083D	4	5	3	2	15	9	4.5	42	1	68	66	34	0
C 2097H	2	3	2	4	10	13	0.7	0	1	37	189	14	0
D 2107H	2	4	4	7	8	3	1.9	24	2	70	49	37	0
E 2127B	7	6	1	6	16	5	8.2	14	2	69	40	37	0
F 2132D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 2142B	49	33	38	6	22	1	19.1	0	5	18	5	4	0
H 2149B	4	3	5	38	45	22	7.2	60	4	35	8	19	0
I 2217D	7	10	2	17	27	28	4.1	2	2	52	34	23	0
J 2223B	11	10	6	11	31	15	8.5	10	2	41	34	14	0
K 2233B	8	4	31	20	21	6	14.0	33	3	36	17	15	0
L 2238D	1	1	1	1	2	4	-	-	-	-	-	-	0
M 2242D	8	8	27	11	32	37	6.9	8	5	30	8	13	0
N 2255B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 2259B	21	11	9	53	48	85	20.1	14	4	25	10	8	0
P 2265B	24	20	30	33	73	29	11.4	7	5	30	7	14	0
Q 2269B	20	14	30	28	73	16	14.0	11	4	26	8	10	40
R 2274B	6	8	17	3	5	28	3.9	20	4	34	11	16	0
S 2276B	20	14	17	3	12	28	14.0	8	3	31	13	12	20
T 2279B	18	12	31	11	24	28	13.0	9	3	27	12	9	0
U 2286D	4	6	26	17	23	33	3.5	27	2	41	30	17	0
V 2294B	9	11	5	15	7	2	5.7	21	2	50	30	25	0
W 2315B	2	12	14	7	20	42	0.7	0	2	52	34	23	0
X 2324D	3	16	24	17	49	71	0.9	0	3	53	15	31	0
Y 2329B	5	2	39	39	90	43	27.4	55	5	62	8	43	0
Z 2336D	36	35	47	61	147	108	11.1	0	4	25	10	8	0
AA 2339D	27	35	45	57	146	108	7.1	0	4	28	8	12	0
AB 2350B	11	3	28	8	24	2	34.2	12	6	24	4	10	0
AC 2354B	1	11	28	6	12	31	0.4	0	4	36	11	18	0
AD 2369D	6	5	5	4	7	4	7.0	40	1	56	74	24	0
AE 2429B	6	9	1	11	11	15	3.6	0	2	48	59	14	0
AF 2434B	6	2	1	11	11	15	20.8	20	2	35	31	8	0
AG 2442B	11	8	8	14	32	10	10.7	7	2	34	23	10	0
AH 2446B	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 2450B	5	6	15	16	37	20	4.1	17	3	38	16	17	0
AJ 2457D	1	6	12	0	3	10	0.5	0	3	61	19	36	0
AK 2463B	6	5	13	8	21	26	5.7	24	3	62	23	36	0
AL 2476B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11502	(FLIGHT	30)											
AM 2511H	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 2731H	0	2	1	2	2	3	-	-	-	-	-	-	0
AO 2785H	1	3	4	5	19	15	1.7	28	1	84	105	41	0
AP 2829H	1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 2845H	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 2998D	3	7	6	10	13	21	1.8	0	1	57	90	18	0
AS 3005B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11510	(FLIGHT	19)											
A 2639H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 2613B	1	2	0	2	2	4	-	-	-	-	-	-	0
C 2608D	7	6	4	7	21	8	6.4	27	1	39	92	6	0
D 2603D	3	4	1	7	23	33	2.9	36	1	41	100	7	0
E 2600D	3	6	2	7	21	33	1.9	15	1	37	96	4	0
F 2597D	4	5	5	6	21	33	4.2	29	1	43	85	9	0
G 2593B	6	6	4	11	9	14	4.9	19	1	41	63	10	0
H 2590B	6	6	1	10	24	25	5.7	31	1	48	84	15	0
I 2569B?	5	5	1	1	2	0	6.3	12	1	32	63	0	0
J 2561B?	9	5	8	3	19	38	15.6	20	1	33	61	2	0
K 2541H	5	3	6	9	21	16	8.3	25	1	45	61	11	0
L 2528B	2	8	2	11	33	6	1.3	1	1	51	115	13	0
M 2526D	5	12	4	6	33	34	2.4	2	1	48	126	10	0
N 2519B	1	2	0	2	2	1	-	-	-	-	-	-	0
O 2493D	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2488D	6	12	5	12	30	39	2.9	9	1	52	102	16	0
Q 2483B	0	1	1	1	0	4	-	-	-	-	-	-	0
LINE 11511	(FLIGHT	24)											
A 5192B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5186B	5	7	6	9	26	23	3.9	6	1	49	84	12	0
C 5182D	10	7	6	9	16	12	10.3	9	1	66	148	20	0
D 5176B	1	2	1	2	1	4	-	-	-	-	-	-	0
E 5096B	13	4	22	21	54	24	34.4	17	3	50	24	25	0
F 5088B	6	9	0	21	3	24	3.7	7	4	57	12	35	0
G 5079B	19	7	30	13	40	8	28.7	0	6	31	4	15	0
H 5070B	8	4	7	7	9	5	13.1	11	3	61	19	35	0
I 5063B	2	7	7	10	9	2	1.1	0	3	81	19	53	0
J 5031B?	6	4	0	1	2	18	10.2	36	1	121	1025	0	0
K 4885B	12	18	15	4	21	60	4.8	0	1	24	62	0	0
L 4881B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 4875D	9	6	1	2	23	11	11.3	22	1	60	105	20	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11511	(FLIGHT 24)												
N 4867B	4	6	3	4	9	9	2.9	5	1	57	66	21	80
O 4858H	13	17	3	31	77	66	5.6	2	2	35	35	10	0
P 4847H	4	6	7	11	30	30	3.0	18	3	40	21	17	70
Q 4838H	1	2	1	2	2	4	-	-	-	-	-	-	30
R 4820H	2	9	3	11	30	55	0.7	0	1	44	71	12	0
S 4791B?	5	8	1	9	20	29	3.5	18	1	40	238	0	0
T 4762B?	9	15	2	23	24	105	3.8	8	1	35	189	0	0
U 4736S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11513	(FLIGHT 30)												
A 3695B	44	31	44	7	27	34	16.9	0	5	39	7	22	0
B 3687D	9	8	5	7	14	14	7.5	3	4	39	9	20	0
C 3679B	15	10	26	17	48	22	12.9	6	5	42	6	25	0
D 3677B	18	11	25	17	48	26	14.8	1	6	32	5	17	0
E 3674B	1	2	1	2	2	3	-	-	-	-	-	-	0
F 3646D	3	7	1	13	45	58	1.8	21	1	34	51	8	0
G 3639B	6	12	9	20	56	54	2.9	16	2	28	47	4	0
H 3633D	13	10	9	20	56	39	10.5	24	2	32	45	7	0
I 3626B	6	5	6	7	9	39	8.2	35	2	44	32	18	0
J 3599H	1	1	1	2	2	4	-	-	-	-	-	-	0
K 3581B	12	12	16	18	42	5	7.5	3	2	34	29	9	0
L 3579D	12	15	16	18	42	36	5.8	0	3	33	16	11	0
M 3576D	12	11	16	18	42	4	8.3	0	3	41	20	17	0
N 3570B	1	2	1	1	2	2	-	-	-	-	-	-	0
O 3557D	4	5	7	6	14	13	3.7	28	2	93	49	57	0
P 3540B	5	2	4	1	1	2	14.5	15	2	66	34	33	0
Q 3527H	1	2	1	2	2	3	-	-	-	-	-	-	0
R 3515D	13	21	15	32	75	67	4.8	13	2	43	44	17	0
S 3501B	19	5	22	31	75	57	57.4	25	3	41	18	20	0
T 3486B	3	5	8	12	29	17	2.4	14	1	47	79	12	0
U 3483B	6	5	9	12	29	17	7.6	27	1	56	64	22	0
V 3466D	5	6	3	5	8	21	5.0	32	1	85	485	15	0
W 3392S?	1	2	0	1	1	2	-	-	-	-	-	-	0
LINE 11514	(FLIGHT 32)												
A 207B	10	9	8	17	38	41	7.1	9	1	42	65	10	0
B 221B	1	2	1	1	1	4	-	-	-	-	-	-	0
C 224B	6	6	7	2	1	3	5.4	21	1	40	66	9	0
D 228D	6	8	6	8	21	20	4.2	9	1	36	61	5	0
E 239B	1	2	1	1	2	4	-	-	-	-	-	-	0
F 246D	6	3	7	1	5	5	11.4	48	1	54	101	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 11514		(FLIGHT 32)													
G	256D	13	10	14	8	52	34	11.0	24	2	55	53	25		0
H	259D	18	10	17	21	52	34	17.5	15	2	36	32	11		0
I	267D	9	6	8	13	36	28	9.2	22	2	35	28	11		0
J	270D	5	6	8	13	36	28	3.7	29	2	41	28	18		0
K	274B?	1	2	1	2	2	3	-	-	-	-	-	-		0
L	276D	14	16	19	23	10	45	6.8	16	2	51	26	27		0
M	300B?	22	20	16	4	17	28	9.9	6	3	45	22	22		0
N	306B	4	5	9	42	78	19	4.1	36	4	33	8	17		0
O	322D	2	9	3	5	5	71	1.1	14	1	45	435	3		0
P	337B?	1	2	0	2	2	4	-	-	-	-	-	-		0
Q	357S	2	5	3	8	21	41	1.9	18	1	39	311	0		14
R	368B	22	5	17	13	74	76	71.9	28	2	28	24	7		0
S	374B?	9	12	20	40	109	100	4.5	19	2	23	37	1		0
T	381B	4	7	16	27	75	20	3.1	24	1	32	57	5		0
U	388B	3	10	16	20	54	46	1.2	0	2	38	28	14		0
V	394B	6	21	10	29	88	184	1.9	0	2	32	31	9		0
W	400D	15	4	29	30	77	183	42.3	26	3	57	17	34		0
X	404B	15	14	32	44	113	61	9.0	12	4	36	11	18		0
Y	407D	18	16	26	44	113	61	9.9	10	3	31	13	12		0
Z	413B?	13	16	67	57	122	56	5.7	17	5	28	6	14		0
AA	416B	30	16	24	22	56	56	20.7	18	5	37	5	23		8
AB	419B	26	17	24	22	56	36	15.2	14	5	29	5	15		0
AC	420B?	9	23	43	44	111	36	2.7	0	5	29	5	15		0
AD	423B	39	23	43	44	111	33	20.7	10	5	27	5	14		0
AE	427B?	11	13	58	37	96	156	6.1	22	4	39	11	21		0
AF	437B	37	42	83	70	194	135	9.3	7	4	23	8	9		0
AG	442B	3	7	83	68	188	123	2.1	24	5	32	7	17		0
AH	446B	11	5	52	61	151	22	19.1	39	4	30	8	15		0
AI	452B	16	3	7	36	99	8	74.4	35	2	37	27	15		0
AJ	464B	3	11	1	32	79	78	1.7	6	1	61	72	27		0
AK	479B	5	14	7	20	51	61	2.2	0	2	36	37	8		0
AL	486B	5	2	11	10	23	15	21.5	47	4	99	14	73		0
AM	495B	9	1	9	0	14	2	49.0	0	5	47	7	27		0
LINE 11520		(FLIGHT 19)													
A	2715H	1	2	1	2	2	4	-	-	-	-	-	-		0
B	2726B	1	2	1	2	2	4	-	-	-	-	-	-		0
C	2729B	1	2	1	2	2	4	-	-	-	-	-	-		0
D	2732B	4	2	2	7	18	23	12.0	55	1	46	152	8		0
E	2742B	10	19	18	57	155	158	3.6	9	1	34	59	7		0
F	2745B	11	27	18	57	155	158	3.0	1	1	25	78	0		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FTD/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11520	(FLIGHT 19)												
G 2755D	11	20	8	30	86	108	4.0	4	1	25	165	0	0
H 2759D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 2763B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 2771D	4	6	0	6	19	18	2.9	24	1	44	185	4	0
K 2779D	5	7	3	0	1	4	3.6	24	1	48	121	11	0
L 2827B	6	3	1	3	8	10	11.1	25	1	46	165	3	0
M 2837B	8	5	1	7	15	27	12.4	27	1	38	197	0	0
N 2846B?	1	2	0	2	2	2	-	-	-	-	-	-	0
O 2865B	5	6	3	6	20	20	4.9	16	1	46	117	7	0
P 2879B	1	2	0	2	2	4	-	-	-	-	-	-	0
Q 2887B	8	8	7	18	47	22	6.6	10	2	36	39	8	0
R 2893B	6	6	8	18	17	3	5.5	30	1	44	62	13	0
S 2922B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 2930B	13	11	10	21	7	3	8.5	11	2	38	49	10	0
U 2932B	14	13	3	21	7	3	8.2	8	2	35	45	7	0
V 2938B	8	10	7	19	51	11	4.5	18	2	37	48	11	0
W 2941B	12	17	11	19	51	52	5.2	15	2	40	39	15	0
X 2944B	8	14	11	22	39	52	3.3	16	2	49	31	24	0
Y 2952B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 2959B	27	23	30	37	88	47	11.2	7	3	38	15	18	0
AA 2978B	17	28	11	18	39	7	5.0	3	3	31	15	12	0
AB 2983B	5	2	11	18	41	28	25.2	59	3	36	15	17	0
LINE 11521	(FLIGHT 24)												
A 5409D	7	5	3	4	12	11	10.1	9	2	49	37	19	0
B 5414D	6	5	7	8	21	8	6.9	22	2	58	49	26	0
C 5420D	14	12	6	21	26	22	8.6	18	1	52	71	20	0
D 5425D	2	8	2	21	26	22	0.8	0	1	73	97	34	0
E 5479B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 5532D	4	3	12	14	34	26	7.8	33	6	35	5	19	11
G 5536B	21	18	10	16	41	25	10.6	0	5	23	7	6	0
H 5539B	2	10	1	16	41	25	1.0	0	5	31	7	13	0
I 5547B	2	13	4	21	5	28	0.6	0	4	48	12	27	0
J 5562B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 5687S	1	2	0	2	2	4	-	-	-	-	-	-	0
L 5721S	1	2	0	2	2	4	-	-	-	-	-	-	0
M 5778B?	1	2	1	2	2	2	-	-	-	-	-	-	0
N 5796D	6	3	1	20	54	44	18.1	45	1	51	185	9	20
O 5802B	5	10	7	20	54	50	2.7	6	1	28	108	0	40
P 5847D	11	16	14	32	11	103	4.7	8	1	36	90	4	0
Q 5852B	8	13	1	32	11	103	3.7	6	1	33	61	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11521	(FLIGHT	24)											
R 5861B	6	13	4	14	35	41	2.8	15	1	35	65	7	12
S 5883H	5	7	1	13	6	11	4.1	11	3	37	22	14	0
T 5895H	2	5	6	7	15	42	1.5	12	2	46	54	15	0
U 5907H	3	10	8	18	31	50	1.5	2	1	44	59	14	10
V 5940S	1	3	1	9	10	9	1.1	18	1	19	330	0	0
W 5963S	2	5	0	4	29	37	1.0	0	1	22	152	3	0
X 6011S	1	3	2	5	14	18	0.8	0	1	23	208	1	0
Y 6033S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11522	(FLIGHT	30)											
A 9152H	8	7	12	13	4	1	7.4	0	3	41	25	13	0
B 9142S	6	12	2	16	49	54	2.8	0	1	10	142	0	0
C 9104H	1	2	1	2	2	4	-	-	-	-	-	-	0
D 9079H	6	10	13	19	5	29	3.1	0	2	35	49	5	0
E 9055H	8	8	3	14	35	4	6.6	6	2	50	34	20	0
F 9039B	5	10	11	16	47	65	2.9	6	1	33	204	0	0
G 9034B	2	5	8	22	55	7	1.2	0	1	18	64	0	0
H 9030B	7	6	8	22	55	47	7.4	13	2	37	23	13	0
I 9023B	12	29	10	30	88	122	3.2	0	2	34	36	9	0
J 9008B	19	16	30	33	91	39	10.1	0	5	43	6	26	4
K 9007B	6	16	30	26	91	39	2.1	0	5	35	6	19	0
L 8985B?	12	18	6	16	45	59	4.9	0	2	51	32	24	0
M 8978D	18	14	30	24	64	34	10.7	4	4	51	9	31	0
N 8975B	2	13	30	24	64	34	0.9	0	4	38	8	20	0
O 8960D	7	15	6	12	30	30	3.0	9	2	42	30	18	0
P 8951D	1	2	1	2	2	3	-	-	-	-	-	-	0
Q 8939D	7	4	11	15	36	21	9.8	36	2	45	33	19	0
R 8929B	6	1	9	6	12	8	197.8	41	2	50	33	21	0
S 8915B	6	3	0	0	0	1	12.4	20	2	63	58	27	0
T 8893H	1	2	1	1	2	1	-	-	-	-	-	-	0
U 8862B?	4	3	6	6	6	8	7.2	21	2	91	45	54	0
V 8858B?	6	4	1	5	7	2	9.7	13	2	81	32	49	0
W 8828B?	4	3	1	0	2	5	5.9	27	1	127	69	82	0
X 8790H	4	3	5	4	2	2	5.4	0	2	77	29	43	0
Y 8680B?	3	4	0	0	1	1	3.4	16	1	173	1025	0	0
Z 8625S	1	5	3	9	2	2	0.7	0	1	32	444	0	0
AA 8567S	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 8555S	1	2	0	2	2	4	-	-	-	-	-	-	0
AC 8526B?	0	2	1	2	2	4	-	-	-	-	-	-	0
AD 8504S?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11530	(FLIGHT	19)											
A 3308H	2	3	5	8	20	31	3.1	38	1	47	66	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11530	(FLIGHT	19)											
B 3295B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3286H	5	12	6	23	58	82	2.3	12	1	40	92	9	0
D 3278B?	8	9	17	19	49	33	5.7	16	2	49	36	22	0
E 3276B?	9	11	17	19	38	33	5.2	11	2	44	39	16	0
F 3275B?	9	10	17	19	38	33	5.6	12	2	43	53	13	0
G 3265H	5	11	4	9	27	38	2.2	0	1	34	120	0	0
H 3251D	11	9	12	17	38	50	8.5	18	1	51	61	19	0
I 3248D	8	11	12	2	23	22	4.9	17	2	57	48	27	0
J 3243B	6	13	8	4	23	22	2.5	7	1	38	90	6	0
K 3236B	11	14	8	23	67	45	5.8	3	1	26	56	0	0
L 3226D	8	4	5	7	31	6	16.2	42	1	60	59	28	0
M 3221D	7	10	5	6	27	35	4.4	18	1	59	60	27	0
N 3215B	1	2	1	1	2	4	-	-	-	-	-	-	0
O 3211B	3	7	1	5	16	22	0.8	0	1	37	118	17	0
P 3190B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3173B	3	5	4	10	32	20	3.1	25	1	60	84	23	0
R 3169D	1	2	1	2	2	4	-	-	-	-	-	-	0
S 3153D	6	7	4	1	14	44	4.3	23	1	56	118	18	0
T 3141D	15	27	9	29	78	76	4.4	3	2	40	45	14	0
U 3133D	11	13	9	13	37	24	5.7	6	2	40	51	11	0
V 3128B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 3124D	4	5	0	2	7	15	3.7	32	1	59	102	22	0
X 3116H	5	5	5	9	18	26	6.1	37	1	58	63	25	0
Y 3102H	7	10	4	13	30	4	4.3	15	1	57	94	21	0
Z 3087B	6	12	3	12	30	22	2.8	0	1	60	66	24	0
AA 3082B	7	8	2	13	2	11	5.4	0	3	45	23	19	0
AB 3078B	3	7	3	2	4	17	2.1	4	2	70	37	38	0
AC 3059B	19	13	22	2	4	29	12.8	0	4	41	12	21	0
AD 3057B	22	1	24	16	40	50	444.2	6	5	39	8	21	0
AE 3054B	8	9	24	16	40	52	6.3	15	4	35	10	17	0
AF 3050B	5	8	24	16	40	52	3.1	17	3	45	16	24	0
LINE 11531	(FLIGHT	24)											
A 6577B	1	2	1	2	2	4	-	-	-	-	-	-	4
B 6572B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 6565B	5	6	7	9	27	17	4.3	9	2	46	57	14	0
D 6555B	8	11	4	8	38	14	4.1	0	2	62	41	30	0
E 6497S?	1	4	1	4	9	11	0.7	0	1	36	340	6	0
F 6476H	1	2	1	2	2	1	-	-	-	-	-	-	0
G 6443S	1	2	1	2	2	4	-	-	-	-	-	-	180
H 6331S	1	2	0	1	1	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11531	(FLIGHT	24)											
I 6248B	7	8	1	7	20	28	5.8	6	1	55	142	12	130
J 6216H	5	5	7	9	22	5	5.9	8	2	46	34	16	150
K 6193H	1	6	2	7	23	37	0.4	0	2	56	31	28	0
L 6171S	4	8	3	16	3	6	2.6	17	1	25	192	0	9
M 6130S	1	2	3	5	13	14	2.1	28	1	50	190	3	0
LINE 11532	(FLIGHT	30)											
A 7546B	19	15	14	8	29	34	11.2	13	3	49	20	26	0
B 7555B	27	10	27	100	248	181	33.4	22	4	35	11	18	0
C 7559B	41	31	27	100	97	195	15.7	13	3	27	18	9	0
D 7587B?	1	9	0	11	22	69	0.4	0	1	53	768	0	0
E 7639S?	0	1	1	2	2	2	-	-	-	-	-	-	0
F 7676S	1	1	0	1	2	4	-	-	-	-	-	-	0
G 7689S?	1	22	0	30	34	292	0.4	0	1	5	445	0	0
H 7697B?	2	7	1	4	16	56	0.3	0	1	29	299	5	0
I 7713B	18	4	20	15	35	6	60.8	3	5	42	7	24	0
J 7716B	7	8	20	15	35	26	5.7	6	4	36	9	17	7
K 7724B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 7730B	6	4	11	5	13	1	9.2	11	4	40	9	20	0
M 7747B	10	12	7	18	64	53	6.1	18	3	44	20	22	0
N 7750B	9	9	14	18	64	53	6.8	21	2	46	25	22	0
O 7761D	10	32	39	57	151	215	2.4	0	2	26	25	5	0
P 7769B	5	6	4	17	70	64	4.4	12	4	20	10	3	0
Q 7772D	8	17	19	40	106	100	2.9	0	4	26	10	9	0
R 7774D	8	17	19	40	106	100	2.9	2	3	23	12	6	0
S 7788B	6	5	13	2	7	27	7.2	34	2	54	42	25	0
T 7799B	4	8	11	5	16	42	2.4	0	2	45	43	16	0
U 7807B?	6	4	12	12	35	13	9.9	39	1	86	68	49	0
V 7819D	4	9	1	13	17	87	2.5	11	1	42	136	5	0
W 7843B	9	7	17	10	26	24	9.7	6	4	41	11	20	0
X 7852B	7	5	14	10	29	8	9.6	33	1	75	67	39	0
Y 7862B	5	5	8	2	5	9	6.4	22	2	61	58	27	0
Z 7871B	23	13	42	14	23	26	18.4	17	4	50	10	31	0
AA 7878D	8	7	3	21	10	2	7.8	30	2	71	29	44	0
AB 7899D	15	14	10	14	34	38	8.6	9	1	53	63	20	0
AC 7937B	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 7947B	3	2	4	6	15	14	6.0	55	1	89	106	46	0
AE 7969B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 7999B	6	4	2	7	7	8	10.2	36	1	63	110	23	0
AG 8016B	4	4	7	4	4	16	0.2	0	1	36	95	18	0
AH 8055S	1	2	0	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT					
LINE 11532 (FLIGHT 30)													
AI 8170D	3	6	2	4	12	12	2.4	17	1	89	227	35	0
AJ 8177D	6	11	5	10	26	32	2.9	5	1	60	108	21	0
AK 8229H	0	3	2	5	10	15	0.6	0	1	50	275	22	0
LINE 11540 (FLIGHT 19)													
A 3465B	4	6	5	6	17	29	3.0	18	1	43	89	9	0
B 3475H	10	13	16	26	73	50	5.3	7	2	33	39	7	0
C 3485B?	5	3	1	1	4	8	9.3	35	1	36	134	0	0
D 3492B	6	11	11	17	39	44	2.8	15	1	55	143	16	0
E 3505B	6	7	3	1	3	47	5.1	29	1	50	199	9	0
F 3518H	1	4	1	6	23	18	1.1	19	1	39	116	5	0
G 3526H	1	2	1	2	2	1	-	-	-	-	-	-	0
H 3546B	4	7	8	4	13	40	3.1	20	1	44	79	11	0
I 3549B	3	3	3	4	7	34	0.2	0	1	31	97	13	0
J 3552B	4	2	5	14	7	3	10.8	57	1	48	114	12	0
K 3555D	3	9	4	14	37	49	1.4	4	1	50	173	9	0
L 3576B	1	2	1	1	2	4	-	-	-	-	-	-	0
M 3586B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 3592B	6	10	3	15	47	49	3.2	18	1	37	111	5	0
O 3593B	5	7	3	15	47	49	3.7	29	1	37	104	5	0
P 3615D	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3630D?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 3638B	9	14	15	22	47	50	4.1	4	2	36	39	10	0
S 3643B	8	12	11	17	41	56	4.5	13	1	41	73	10	0
T 3650B	5	6	3	17	59	88	3.8	19	1	43	63	12	0
U 3654B	6	16	3	17	59	88	2.2	9	1	41	77	11	0
V 3659B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 3666B	4	11	7	15	41	48	2.0	6	1	46	61	16	0
X 3667B	4	10	7	15	41	48	2.2	10	1	44	62	14	0
Y 3671B	4	5	2	10	41	27	3.7	30	1	49	87	15	0
Z 3678B	5	4	6	11	28	20	7.2	34	1	50	81	16	0
AA 3682B	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 3693B	5	6	5	7	22	24	4.5	28	1	50	84	16	0
AC 3712D	6	9	3	13	34	32	3.9	13	1	70	67	34	0
AD 3716B	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11541 (FLIGHT 24)													
A 6802H	0	2	1	2	2	2	-	-	-	-	-	-	0
B 6905B	5	9	10	14	34	28	3.1	8	2	62	45	31	0
C 6915D	5	7	4	12	30	28	4.0	9	1	74	73	35	0
D 6920D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11541	(FLIGHT 24)												
E 6925D	11	12	6	13	35	33	6.0	4	1	50	64	16	0
F 6936D	18	19	8	66	91	101	7.7	11	2	52	39	25	0
G 6938D	26	33	33	121	249	193	7.4	3	2	41	24	19	0
H 6941B	45	60	33	121	249	194	8.4	0	3	22	16	5	0
I 6944D	12	41	33	121	249	194	2.4	0	2	29	22	9	0
J 7018S	1	1	1	2	2	4	-	-	-	-	-	-	0
K 7045B	3	6	2	7	19	30	2.5	1	1	49	457	0	0
L 7223B	2	6	2	8	13	50	1.6	17	1	43	566	0	40
M 7229D	5	3	4	10	19	16	8.3	35	1	77	560	0	0
N 7254B	6	12	4	10	20	74	3.0	10	1	20	621	0	190
O 7264B	8	6	7	7	15	13	9.2	9	1	39	139	0	0
P 7267B	7	6	1	8	17	12	6.9	5	1	39	68	5	0
Q 7286H	3	3	9	7	18	11	4.8	29	3	52	22	26	0
R 7312D	6	11	5	12	22	17	2.9	0	2	49	32	21	0
S 7317B	1	2	1	2	2	4	-	-	-	-	-	-	6
T 7329B	8	10	20	20	48	21	5.0	0	2	40	27	14	0
U 7351H	2	4	4	7	13	21	2.0	22	1	48	138	8	0
V 7389H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 7439H	2	4	2	4	2	44	0.1	0	1	17	145	0	0
LINE 11542	(FLIGHT 30)												
A 7447H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 7430D	2	5	0	2	5	19	1.8	13	1	187	1025	0	0
C 7317D	4	6	5	9	23	9	3.0	6	1	132	779	7	0
D 7309B	8	7	2	1	38	21	1.0	0	1	21	75	3	0
E 7302B	16	8	10	17	48	35	19.2	3	2	33	24	9	0
F 7290B	22	26	31	39	100	81	7.8	0	3	28	16	8	0
G 7287B	14	25	31	39	100	81	4.3	0	3	35	14	14	0
H 7281D	13	16	12	10	28	18	6.1	0	4	53	12	31	0
I 7271B	7	6	20	21	47	27	7.4	16	4	69	9	48	0
J 7261B	11	20	22	14	13	16	3.9	0	3	38	21	15	0
K 7252D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 7248D	2	4	10	9	20	11	1.4	5	3	38	16	16	0
M 7244B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 7239B	2	4	18	21	48	30	2.3	19	3	38	15	17	0
O 7224B	3	1	3	9	28	11	12.2	64	1	37	65	5	0
P 7211B	4	11	2	16	47	50	1.9	0	1	33	58	4	0
Q 7173B	2	15	3	5	13	52	0.7	0	3	43	16	22	0
R 7165B	16	8	27	15	41	7	20.2	10	4	52	10	32	0
S 7157D	1	2	1	2	2	4	-	-	-	-	-	-	0
T 7112H	1	2	1	2	2	3	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

B-210

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11542	(FLIGHT	30)											
U 7055H	1	2	1	2	2	2	-	-	-	-	-	-	0
V 7018B	8	3	2	4	7	1	22.8	41	2	70	31	42	0
W 7005D	13	9	8	8	16	25	12.2	27	3	68	13	46	0
X 6995B	9	10	3	7	14	11	5.4	2	3	44	18	21	0
Y 6992B	9	11	25	7	14	9	5.2	0	2	59	39	28	0
Z 6839B?	1	2	1	2	2	3	-	-	-	-	-	-	0
LINE 11550	(FLIGHT	19)											
A 4438B	6	5	7	13	32	33	6.8	27	1	51	88	16	0
B 4429B	6	13	4	18	42	67	2.9	11	1	52	95	17	0
C 4414B	5	16	3	22	54	109	1.9	4	1	32	119	1	0
D 4407B	4	4	12	15	46	7	6.0	42	1	58	87	23	0
E 4401B	10	12	21	12	69	36	5.9	13	2	41	35	15	0
F 4398B	18	15	21	12	69	36	10.0	11	2	35	38	10	0
G 4395D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 4390D	8	10	6	13	33	36	4.9	10	1	42	102	6	0
I 4375H	2	9	11	16	37	28	1.0	0	1	35	57	4	0
J 4363H	5	7	13	13	28	21	3.6	20	2	56	28	30	0
K 4353B	1	2	0	2	2	4	-	-	-	-	-	-	0
L 4349B	3	3	2	16	26	57	5.5	45	1	43	94	8	0
M 4298B?	5	13	3	11	36	36	2.1	0	1	36	104	2	0
N 4289B	2	2	1	5	15	27	2.7	57	1	60	120	21	0
O 4276B	7	12	2	18	52	90	3.1	14	1	36	143	2	0
P 4258B	9	20	11	29	80	19	3.0	1	1	46	65	15	0
Q 4255B	10	18	11	29	80	19	3.6	0	1	39	59	9	0
R 4244D	5	3	2	2	4	8	11.6	42	1	61	78	25	0
S 4237D	6	11	2	7	18	44	2.8	10	1	52	78	18	0
T 4233D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 4222D	7	8	1	10	26	24	5.5	13	1	39	71	7	0
V 4208B	1	2	1	2	2	4	-	-	-	-	-	-	0
W 4193D	9	25	17	1	23	11	2.6	1	1	50	63	20	0
X 4188B	9	13	3	1	23	11	4.7	0	2	50	33	22	0
Y 4174B	17	18	18	29	59	42	8.0	2	2	46	28	20	0
Z 4171B	10	14	18	25	59	42	4.4	0	3	37	21	14	0
AA 4156B	15	10	1	17	12	3	13.4	0	6	34	5	18	0
AB 4152B	17	7	29	15	44	10	26.1	0	6	31	5	15	0
LINE 11551	(FLIGHT	24)											
A 8129M	0	3	0	3	4	19	0.4	2	1	186	1025	0	0
B 8102B?	4	5	5	8	23	14	3.5	3	1	52	90	13	0
C 7995H	6	2	1	3	3	4	36.2	17	2	58	52	23	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT
LINE 11551	(FLIGHT	24)											
D 7914B?	1	7	1	2	2	28	0.4	0	1	76	446	8	0
E 7839B?	2	3	1	2	6	6	1.9	11	1	172	987	15	0
F 7794S	1	5	1	6	15	31	0.7	0	1	53	658	0	0
G 7751S	1	3	2	9	29	29	0.7	0	1	24	360	0	0
H 7720D	5	10	4	3	32	23	3.0	0	1	38	234	0	0
I 7702B	4	7	3	7	15	27	3.1	14	1	36	220	0	180
J 7698D	4	5	4	3	15	27	3.7	24	1	42	209	0	0
K 7686B	6	5	7	6	19	31	7.4	27	1	54	183	10	0
L 7667B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 7655B	8	8	14	14	34	16	6.7	2	3	43	22	18	40
N 7639H	2	11	4	16	44	79	0.9	0	1	30	190	0	0
O 7620H	1	1	1	2	2	3	-	-	-	-	-	-	0
P 7587H	0	5	3	6	1	14	0.4	0	1	32	160	0	0
Q 7566H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11552	(FLIGHT	30)											
A 6174D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 6306B	1	5	1	3	4	0	0.4	0	1	74	660	0	0
C 6323D	6	7	4	5	2	12	4.9	3	2	58	51	24	0
D 6330B	1	11	35	7	13	11	0.5	0	3	30	14	9	0
E 6333D	1	3	9	4	10	20	0.4	0	1	22	17	11	0
F 6337D	16	9	9	14	45	58	18.0	13	5	45	8	27	0
G 6352D	36	71	15	95	294	333	5.4	0	1	19	44	0	0
H 6356D	4	12	18	95	294	219	1.6	9	2	27	24	7	0
I 6359D	9	37	18	62	181	219	1.8	0	3	35	20	15	0
J 6371B	16	49	16	48	80	213	2.8	0	2	37	22	17	8
K 6376B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 6380B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 6390B	24	10	1	40	80	20	29.2	9	6	40	5	25	0
N 6396B	15	9	53	63	81	18	14.5	16	3	29	15	10	0
O 6408B	6	4	11	10	24	28	10.0	38	3	59	16	36	0
P 6414B	8	2	7	5	12	23	38.9	27	5	53	8	34	0
Q 6424B	6	8	11	3	6	15	4.4	3	4	37	10	18	0
R 6429B	6	5	10	9	15	7	8.6	22	4	50	13	29	0
S 6443D	7	8	17	9	2	3	5.2	25	2	57	28	31	0
T 6455D	6	4	1	1	11	29	8.0	43	1	72	100	33	0
U 6481D	3	8	6	11	37	53	2.0	6	1	50	213	6	0
V 6487B	1	2	1	2	2	2	-	-	-	-	-	-	0
W 6492B?	1	2	1	2	2	1	-	-	-	-	-	-	0
X 6495D	7	6	6	8	15	1	7.7	21	1	68	100	28	0
Y 6502B	4	8	6	19	8	55	2.2	15	1	51	74	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT					
LINE 11552 (FLIGHT 30)													
Z 6509D	9	7	6	19	39	4	8.6	40	1	64	103	28	0
AA 6515D	2	8	2	15	42	39	1.1	13	1	59	128	22	0
AB 6527D	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 6540B?	1	2	0	1	2	4	-	-	-	-	-	-	0
AD 6559S	1	2	1	2	2	2	-	-	-	-	-	-	0
AE 6589H	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 6609D	2	13	7	27	18	54	0.9	0	2	61	51	29	0
AG 6613B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 6618B?	15	4	33	36	80	36	45.5	25	4	47	8	28	0
AI 6633B	7	2	1	3	6	7	29.4	44	5	82	8	62	0
AJ 6642B	1	1	1	2	2	4	-	-	-	-	-	-	0
AK 6650B	3	1	10	15	41	31	14.8	58	1	46	73	12	0
AL 6677S	0	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11560 (FLIGHT 19)													
A 4524B	7	26	29	48	91	6	1.9	0	2	34	22	13	0
B 4528D	26	19	29	30	62	34	13.3	6	2	25	32	2	0
C 4532B	2	9	20	29	24	57	1.1	2	1	41	64	11	0
D 4535B	6	9	12	8	26	57	3.7	20	1	38	118	4	0
E 4541B	5	13	5	20	62	66	2.2	10	1	43	81	12	0
F 4561B	1	2	1	2	2	3	-	-	-	-	-	-	0
G 4581B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 4592H	1	1	1	1	2	4	-	-	-	-	-	-	0
I 4600H	1	2	1	2	2	2	-	-	-	-	-	-	0
J 4620H	4	10	3	11	35	8	2.0	7	1	49	113	12	0
K 4637D	5	11	4	5	17	27	2.5	1	1	51	168	8	0
L 4644B	4	7	3	8	24	43	2.4	17	1	46	172	6	0
M 4651D	5	6	3	9	25	29	4.1	28	1	50	131	12	0
N 4660B?	7	7	0	3	14	18	6.6	24	1	50	104	14	0
O 4690D	6	9	3	7	19	31	3.3	12	1	59	104	20	0
P 4698B?	6	11	9	13	34	38	2.8	8	2	49	52	19	0
Q 4720H	5	12	8	17	49	62	2.2	6	1	39	64	9	0
R 4756H	18	11	14	21	17	5	16.5	19	2	27	24	6	0
S 4761B	4	5	3	5	24	32	4.3	33	2	30	29	7	0
T 4766D	11	13	35	27	69	38	5.9	13	2	30	31	7	11
U 4769D	17	15	39	35	70	38	10.0	17	3	29	19	10	0
V 4772D	20	33	39	35	70	21	5.2	4	3	37	15	18	0
W 4775D	19	33	39	35	70	21	4.9	0	3	40	19	19	0
X 4790B	23	9	15	15	25	1	30.8	9	5	32	7	16	0
Y 4792B	18	9	15	15	25	12	20.8	13	5	42	7	25	0
Z 4796B	8	6	7	5	11	9	8.9	27	5	45	6	29	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11560	(FLIGHT 19)												
AA 4801B	8	7	8	5	6	6	7.2	22	4	41	9	23	0
AB 4816D	7	14	16	4	33	55	3.0	12	1	55	171	15	0
AC 4834S	1	2	1	2	1	4	-	-	-	-	-	-	0
LINE 11561	(FLIGHT 25)												
A 2049B	12	11	18	8	10	4	7.8	0	1	37	59	5	0
B 2056D	4	3	0	24	74	60	8.0	39	2	50	46	20	0
C 2060B	8	14	4	24	74	60	3.6	5	1	33	52	5	0
D 2070D	4	6	4	11	6	30	2.9	19	1	69	132	26	0
E 2084B	5	3	1	2	7	1	10.7	29	1	87	250	30	0
F 2124S	2	5	1	7	20	5	1.7	11	1	51	608	0	0
G 2181D	1	14	24	31	89	44	0.4	0	2	33	52	4	0
H 2186D	22	20	24	3	17	30	10.3	0	2	32	34	7	0
I 2192D	10	2	3	12	4	26	54.4	39	2	49	47	20	0
J 2209D	4	6	0	6	5	18	2.9	19	1	67	240	17	0
K 2220D	1	2	1	1	1	2	-	-	-	-	-	-	0
L 2273B?	2	5	3	9	24	21	1.6	0	1	53	230	4	0
M 2287B?	3	6	1	8	21	49	2.4	20	1	24	376	0	0
N 2291B?	1	2	1	1	2	1	-	-	-	-	-	-	0
O 2313D	5	7	5	7	14	8	4.0	2	1	44	179	0	0
P 2400S	1	2	1	1	1	4	-	-	-	-	-	-	0
Q 2427S	1	2	1	0	1	4	-	-	-	-	-	-	0
R 2451M	0	4	0	1	0	1	0.4	0	1	191	1025	0	0
S 2503B	10	11	4	1	6	22	5.9	18	1	31	215	0	0
T 2510B	4	12	1	12	25	91	1.9	12	1	35	140	3	40
U 2516D	8	14	13	38	115	105	3.7	7	1	36	108	2	0
V 2519D	9	14	13	38	115	105	4.3	8	1	17	123	0	0
W 2529D	1	2	1	2	2	4	-	-	-	-	-	-	740
X 2537D	6	10	4	13	41	63	3.6	13	1	31	260	0	0
Y 2570H	7	6	6	28	37	35	8.0	33	2	35	23	13	0
Z 2583B	6	10	2	17	46	62	3.1	11	3	42	20	20	50
AA 2706S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11562	(FLIGHT 30)												
A 5959D	5	13	2	3	16	23	2.4	5	1	15	406	0	0
B 5950D	1	2	1	1	2	4	-	-	-	-	-	-	0
C 5938D	10	3	13	21	54	54	37.8	25	4	35	10	17	0
D 5931D	11	9	13	19	44	8	9.6	22	3	37	13	18	0
E 5922D	14	22	21	32	83	121	4.8	8	2	39	29	15	5
F 5911D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 5896B	13	34	7	14	28	62	3.0	0	5	25	7	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR				
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH* SIEMEN M	RESIS OHM-M	DEPTH M	NT
LINE 11562	(FLIGHT	30)									
H 5893B	1	2	1	2	2	4	-	-	-	-	0
I 5890B	44	13	90	40	113	7	55.8	6	10	26	30
J 5888B	22	4	90	41	113	38	95.2	22	10	25	30
K 5881B	6	5	17	2	8	31	7.6	30	7	34	0
L 5878B	5	2	11	6	15	0	24.0	47	7	27	0
M 5873B	6	12	40	14	27	23	2.9	3	6	28	0
N 5858H	6	7	13	14	39	26	5.0	9	4	33	0
O 5845B?	3	4	5	2	2	16	3.5	3	3	36	0
P 5840B	10	9	3	2	5	6	8.3	0	3	61	0
Q 5830B?	6	4	4	1	3	2	10.6	0	3	84	0
R 5811B	1	2	1	2	2	2	-	-	-	-	0
S 5799B	5	5	5	1	3	6	5.2	13	1	71	0
T 5791B	1	2	1	2	2	4	-	-	-	-	0
U 5767B	4	8	3	11	20	29	2.5	11	1	58	0
V 5761D	5	6	3	6	19	45	3.8	14	1	62	0
W 5739B?	1	2	0	2	2	4	-	-	-	-	0
X 5699B?	3	6	2	8	26	19	2.7	28	1	43	0
Y 5691B?	1	2	1	2	2	4	-	-	-	-	0
Z 5670H	2	1	2	6	16	20	16.1	102	1	84	0
AA 5613H	7	5	4	8	23	11	9.3	0	4	51	0
LINE 11570	(FLIGHT	19)									
A 5301B?	1	2	1	2	2	4	-	-	-	-	0
B 5284D	7	10	8	17	46	43	4.1	13	2	32	0
C 5281D	11	5	15	17	46	43	18.0	28	2	38	0
D 5279D	11	3	1	17	46	30	32.9	31	2	42	0
E 5272D	6	13	6	1	2	43	2.7	3	1	43	0
F 5265B	5	7	1	4	13	35	4.3	22	1	58	0
G 5254B	1	2	1	1	1	4	-	-	-	-	0
H 5236B	2	6	5	7	13	25	1.6	18	1	61	0
I 5224B?	1	2	1	2	2	4	-	-	-	-	0
J 5211H	1	10	5	10	27	14	0.4	0	1	35	0
K 5187D	6	13	4	6	53	23	2.5	8	1	43	0
L 5180D	10	10	2	9	26	15	7.1	5	1	37	0
M 5175B	1	2	1	2	2	4	-	-	-	-	0
N 5171D	1	2	1	2	2	4	-	-	-	-	0
O 5164D	5	7	2	7	17	23	4.3	13	1	53	0
P 5145H	1	2	1	2	2	4	-	-	-	-	0
Q 5132B?	2	4	3	5	15	25	1.8	30	1	60	0
R 5126D?	4	4	4	5	12	4	4.9	40	1	62	0
S 5112B	6	7	7	4	4	4	5.9	27	1	47	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11570	(FLIGHT 19)												
T 5108D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 5080H	6	8	18	16	43	31	4.5	17	2	40	25	16	0
V 5062B	6	2	7	6	14	7	19.2	32	2	62	28	33	0
W 5050B	21	13	53	33	84	50	15.6	0	4	44	8	25	0
X 5048B	22	17	53	33	84	50	12.1	0	5	30	8	13	0
Y 5005S	0	2	0	2	2	4	-	-	-	-	-	-	0
LINE 11571	(FLIGHT 25)												
A 3644D	1	2	1	1	2	4	-	-	-	-	-	-	0
B 3637B	22	9	6	8	3	15	27.7	16	4	47	10	28	0
C 3633B	18	12	6	3	3	30	13.5	13	5	52	7	34	0
D 3627B	9	3	35	28	73	30	22.6	32	2	59	35	30	0
E 3618D	5	4	3	3	9	12	7.8	34	1	69	113	28	0
F 3606H	6	7	4	15	24	0	4.6	11	1	50	75	14	0
G 3580S?	3	4	2	3	16	17	1.0	0	1	26	207	0	0
H 3358B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 3352H	7	3	10	8	22	5	19.2	4	2	30	38	0	0
J 3328M	0	2	0	2	1	4	-	-	-	-	-	-	0
K 3263S	2	1	0	5	20	3	1.0	0	1	28	280	5	0
L 3251B?	6	4	0	1	2	2	12.1	20	1	45	867	0	0
M 3245B?	1	2	0	2	2	4	-	-	-	-	-	-	0
N 3200D	1	2	0	2	2	4	-	-	-	-	-	-	0
O 3192B?	1	2	0	1	1	4	-	-	-	-	-	-	0
P 3145B?	4	5	0	5	5	26	4.0	36	1	62	829	0	0
Q 3143B?	5	7	0	1	5	26	0.2	0	1	16	612	0	0
R 3121M	0	2	0	1	0	4	-	-	-	-	-	-	0
S 3089D	4	3	0	0	0	13	5.7	35	1	80	977	0	0
T 3066D	6	7	2	6	2	4	4.5	7	1	14	577	0	0
U 3059B	1	2	1	1	2	4	-	-	-	-	-	-	0
V 3051D	3	7	4	3	16	23	1.9	7	1	62	101	23	0
W 3047D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 3033D	9	18	3	20	49	101	3.3	6	1	19	282	0	0
Y 3025B	4	3	2	2	18	37	6.7	28	1	32	476	0	360
Z 3017D	5	7	4	10	2	7	3.9	19	1	32	293	0	0
AA 3003B	8	3	2	3	3	51	17.3	34	1	46	63	14	0
AB 2995H	8	5	7	13	10	18	9.5	23	2	39	26	15	0
AC 2980H	6	11	10	18	46	42	3.0	9	2	46	23	22	0
AD 2898S	4	2	0	2	2	1	12.6	55	1	50	352	1	0
LINE 11572	(FLIGHT 30)												
A 5149S	1	2	0	1	1	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11572 (FLIGHT 30)													
B 5226B?	1	2	1	2	1	4	-	-	-	-	-	-	0
C 5242B?	1	2	0	2	2	4	-	-	-	-	-	-	0
D 5260B	15	12	29	27	68	82	9.7	14	4	36	10	18	0
E 5262B	15	12	29	27	68	82	9.7	18	4	47	12	28	0
F 5273B	16	12	44	38	98	53	11.0	19	5	43	7	26	50
G 5275B	15	22	44	38	98	65	5.3	4	5	32	6	18	0
H 5277B	5	8	44	38	98	65	3.5	17	5	28	5	14	0
I 5302D	8	29	1	24	39	119	1.8	2	1	38	68	11	0
J 5310B	15	22	9	24	70	82	5.1	0	2	16	40	0	0
K 5313B	7	18	23	24	70	79	2.4	0	2	25	26	3	0
L 5320B	17	9	23	26	65	94	16.5	23	2	34	25	12	0
M 5330B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 5336B	4	2	6	15	5	43	15.6	61	2	32	24	10	0
O 5346B	4	1	11	17	43	1	49.0	69	2	38	45	11	0
P 5356B	1	1	1	2	2	4	-	-	-	-	-	-	0
Q 5372D	7	10	12	18	55	52	4.2	22	2	36	36	12	0
R 5376D	3	19	10	23	63	66	0.9	0	2	34	36	11	0
S 5384D	1	5	1	17	41	65	1.0	19	2	46	43	20	0
T 5388D	1	16	1	17	41	65	0.4	0	2	44	49	17	0
U 5423B	2	7	1	9	30	57	1.5	8	1	43	296	0	0
V 5438H	2	4	1	5	13	34	0.4	0	1	24	499	0	0
W 5472H	1	6	7	4	39	43	1.0	0	1	28	112	10	0
X 5488B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Y 5500D	1	3	0	5	11	33	0.9	26	1	85	792	4	0
Z 5561H	14	10	24	25	35	24	12.0	15	3	58	18	34	0
LINE 11580 (FLIGHT 19)													
A 5452B	1	2	1	2	1	4	-	-	-	-	-	-	0
B 5468D	9	8	5	17	15	6	7.8	16	1	40	64	9	0
C 5475B	7	7	7	19	30	11	6.1	18	1	34	78	2	0
D 5480D	5	10	11	16	30	51	2.5	19	1	58	68	26	0
E 5498B	9	19	8	25	50	99	3.1	8	2	34	48	8	0
F 5501B	5	13	5	25	50	99	2.2	10	1	34	59	7	0
G 5509B	0	7	8	15	7	27	0.4	0	1	47	56	18	0
H 5515B	6	7	10	2	3	7	5.1	32	1	60	92	24	0
I 5527B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5535B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 5561B	4	9	2	4	2	9	0.1	0	1	19	91	2	0
L 5568B	7	9	2	5	20	22	4.6	18	1	44	74	12	0
M 5576B	1	2	1	1	2	4	-	-	-	-	-	-	0
N 5585D	6	7	1	3	24	10	4.4	18	1	57	101	19	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11580 (FLIGHT 19)													
O 5592B	7	16	5	3	13	22	2.5	2	1	41	90	8	0
P 5620B	5	9	7	13	31	41	2.7	18	1	53	68	21	0
Q 5626B	7	0	6	4	6	41	326.8	57	1	53	76	20	0
R 5659H	5	5	3	6	18	15	6.8	22	1	45	59	12	0
S 5676H	5	5	5	12	27	25	6.8	35	2	45	52	16	0
T 5693D	5	7	1	9	29	36	3.4	24	1	45	127	8	0
U 5707H	18	12	33	49	73	35	12.8	18	2	33	23	12	0
V 5727B	11	2	25	19	45	4	100.9	37	2	53	28	28	0
W 5733B	10	14	18	25	62	39	4.9	8	3	39	22	16	0
X 5740B	5	2	27	18	45	3	20.0	35	3	40	19	16	0
Y 5744B	16	8	49	25	23	12	20.5	9	4	33	8	16	0
Z 5747B	27	9	49	17	23	12	42.2	7	4	37	12	18	0
LINE 11581 (FLIGHT 25)													
A 3966D	24	19	12	8	21	44	12.3	1	2	36	26	12	0
B 3978B	17	4	6	4	10	7	49.3	15	4	29	11	11	0
C 3981D	13	3	6	4	13	8	45.4	26	4	38	10	19	0
D 4025B	0	5	3	9	27	20	0.4	0	1	41	328	0	0
E 4049B	1	3	3	5	10	4	1.0	0	1	57	410	26	0
LINE 11582 (FLIGHT 25)													
A 4261H	1	2	1	2	2	1	-	-	-	-	-	-	0
B 4334S	1	2	1	2	2	4	-	-	-	-	-	-	0
C 4366H	1	5	5	10	4	31	0.8	0	1	53	159	10	0
D 4375B	8	12	10	18	30	26	4.0	0	1	34	92	0	0
E 4377B	5	11	10	18	30	26	2.5	2	1	47	142	7	0
F 4389M	0	2	0	2	2	4	-	-	-	-	-	-	640
G 4391M	0	2	0	2	2	4	-	-	-	-	-	-	0
H 4435H	0	4	2	3	3	11	0.2	0	1	28	207	6	0
I 4464S	1	2	1	2	2	4	-	-	-	-	-	-	0
J 4484D	3	10	0	3	6	23	1.3	2	1	41	756	0	0
K 4504S?	0	2	0	2	2	4	-	-	-	-	-	-	0
L 4551B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 4561B	1	2	1	2	2	2	-	-	-	-	-	-	7
N 4566B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 4603S	1	1	0	2	2	2	-	-	-	-	-	-	0
P 4651B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 4661B	5	9	10	13	40	18	3.1	5	1	30	168	0	0
R 4665D	7	10	11	12	37	23	3.6	13	1	37	94	4	0
S 4677D	1	2	0	2	2	4	-	-	-	-	-	-	0
T 4689D	4	10	0	10	17	44	2.1	2	1	34	758	0	320

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11582	(FLIGHT	25)											
U 4697D	5	5	4	8	19	17	5.1	8	1	53	156	7	0
V 4703D	1	2	1	2	2	4	-	-	-	-	-	-	0
W 4725B	8	15	18	23	66	66	3.4	9	2	38	44	11	0
X 4739B	1	11	2	13	14	34	0.5	0	2	48	34	21	16
Y 4814S	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 11583	(FLIGHT	30)											
A 4775D	4	8	11	9	42	68	2.3	23	1	45	94	12	0
B 4755D	4	23	13	40	102	21	1.1	0	3	36	14	17	7
C 4751B	5	19	13	40	102	120	1.7	0	5	43	6	27	0
D 4745B	36	38	133	81	176	84	9.9	0	7	26	3	14	0
E 4743B	41	38	133	81	176	84	12.0	0	7	22	3	10	0
F 4719D	7	11	1	4	4	38	3.7	16	1	54	100	18	0
G 4705D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 4700D	14	13	11	14	9	36	9.2	1	3	64	24	36	0
I 4684B	4	7	8	14	33	3	3.0	2	2	45	34	17	0
J 4674D	9	11	13	27	60	47	5.7	11	1	37	55	8	0
K 4665B	7	6	1	28	79	96	7.1	22	1	45	56	15	0
L 4657B	10	23	2	59	159	224	3.2	2	1	20	47	0	0
M 4650B?	7	7	2	8	6	9	5.6	0	3	25	22	1	0
N 4647B	5	8	2	8	6	19	3.0	2	2	39	39	11	0
O 4640D	7	9	10	13	36	35	4.5	15	1	48	62	16	0
P 4630S?	5	2	1	19	35	109	17.6	59	1	10	485	0	0
Q 4559H	6	10	2	1	4	14	0.2	0	1	18	146	0	0
LINE 11590	(FLIGHT	19)											
A 6249D	4	9	2	13	35	51	2.1	13	1	48	81	15	0
B 6245D	3	8	5	12	33	51	2.0	7	1	40	61	9	0
C 6243D	5	5	5	12	33	51	5.9	24	1	43	70	10	0
D 6235B	12	21	17	42	109	102	4.1	6	1	33	58	6	0
E 6231D	18	27	4	42	109	119	5.4	5	2	36	39	11	0
F 6227B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 6222B	5	8	2	17	6	40	3.9	14	2	41	50	12	0
H 6202H	4	8	9	10	16	55	2.3	18	2	64	49	33	0
I 6180B?	4	8	1	3	3	22	2.5	6	1	60	119	19	0
J 6172B	7	11	2	17	48	37	3.5	0	1	40	65	8	0
K 6167B	6	7	0	17	48	37	5.0	8	1	37	67	4	0
L 6151D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 6129B	3	6	3	4	25	35	0.9	0	1	28	145	8	0
N 6123D	3	6	1	2	10	37	2.4	26	1	57	103	21	0
O 6101B?	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11590	(FLIGHT 19)												
P 6093B?	7	11	4	11	27	54	4.1	16	1	48	137	10	0
Q 6090B?	5	7	7	7	27	54	3.2	15	1	50	62	18	0
R 6062D	6	9	2	10	24	39	4.0	13	1	50	77	15	0
S 6050B?	7	9	4	11	37	39	4.8	17	1	48	70	15	0
T 6045H	3	8	14	17	41	44	1.7	7	2	40	37	13	0
U 6035H	1	2	1	2	2	4	-	-	-	-	-	-	0
V 6021B	13	13	24	22	53	22	8.0	0	3	32	20	9	0
W 6011B	14	1	10	6	13	2	213.0	8	3	46	14	23	0
LINE 11591	(FLIGHT 25)												
A 5518B?	7	4	6	6	13	22	10.4	39	1	47	247	4	0
B 5507B?	3	3	0	3	3	7	5.0	49	1	95	433	22	0
C 5431S?	0	3	2	5	3	23	0.4	0	1	88	179	36	0
D 5410B?	0	3	2	5	7	24	0.4	0	1	82	251	28	0
E 5398B?	1	2	1	3	9	10	1.8	42	1	179	683	43	0
F 5377D	10	18	6	15	45	62	3.7	5	1	32	379	0	0
G 5367B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 5363B	1	2	1	1	2	4	-	-	-	-	-	-	0
I 5360D	9	6	11	16	51	6	10.9	16	1	35	138	0	0
J 5318B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 5306B?	4	10	2	13	31	74	2.0	6	1	33	371	0	0
L 5260B?	4	4	1	1	4	4	4.6	0	1	113	153	56	0
M 5207B?	1	2	1	1	2	1	-	-	-	-	-	-	0
N 5192B?	1	2	1	2	1	4	-	-	-	-	-	-	0
O 5160B	1	2	0	2	2	4	-	-	-	-	-	-	30
P 5095H	3	4	3	5	15	9	3.0	1	1	45	164	0	0
Q 5081B?	1	2	1	2	2	3	-	-	-	-	-	-	380
R 5076B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 5057B	7	8	1	5	7	19	5.0	19	1	66	70	30	100
T 5040B	6	8	4	8	24	28	4.4	2	2	51	52	18	60
U 5032B	8	10	5	13	20	40	4.7	9	1	53	64	20	0
V 4991S	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 11592	(FLIGHT 25)												
A 5885S	3	7	5	13	29	51	2.2	15	1	55	115	17	0
B 5763D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5758B	1	1	11	11	30	13	2.2	72	2	65	41	35	0
D 5753B	12	9	11	11	20	24	10.4	3	3	42	14	20	0
E 5736B?	3	4	1	0	13	1	3.5	24	2	121	57	79	0
LINE 11593	(FLIGHT 30)												
A 4317D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11593	(FLIGHT 30)												
B 4334B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 4339D	12	4	7	11	23	65	34.0	29	2	61	32	33	0
D 4342D	15	21	11	11	23	65	5.3	3	1	44	71	12	0
E 4350D	5	6	0	1	19	15	4.7	31	1	100	146	51	0
F 4366H	1	2	1	2	2	4	-	-	-	-	-	-	0
G 4379B	1	2	0	2	2	4	-	-	-	-	-	-	0
H 4396B	2	5	1	10	22	32	1.8	20	1	48	83	14	0
I 4405B	1	2	1	2	1	4	-	-	-	-	-	-	0
J 4413D	1	2	1	2	2	4	-	-	-	-	-	-	0
K 4418D	4	9	10	10	25	31	2.1	10	1	34	55	7	0
L 4426D	2	1	10	4	5	32	7.3	88	1	41	139	5	0
M 4453S	2	3	2	5	12	3	1.0	0	1	31	302	5	0
N 4466S	0	4	3	5	18	19	1.0	0	1	33	299	7	0
LINE 11600	(FLIGHT 19)												
A 6334H	8	13	3	14	44	56	4.0	7	1	32	84	0	0
B 6341D	4	7	0	16	51	48	2.8	23	1	49	83	15	0
C 6346D	10	20	6	33	92	11	3.4	6	1	33	73	5	0
D 6349B	14	18	4	9	83	6	6.0	10	2	32	38	7	0
E 6355D	2	3	3	9	83	19	3.0	44	2	30	42	4	0
F 6362B	8	12	13	8	24	13	4.5	18	1	45	76	14	0
G 6372B	8	13	7	20	52	73	3.9	15	1	44	63	15	0
H 6375D	10	16	9	20	52	73	4.1	14	2	46	49	19	0
I 6390B	6	8	0	16	45	59	3.7	23	1	63	144	22	0
J 6398D	7	17	9	12	40	60	2.4	0	1	33	74	3	0
K 6405B	6	7	4	8	22	24	4.6	28	1	51	64	20	0
L 6412B	4	8	8	13	10	64	2.7	27	1	43	82	12	0
M 6419B	7	7	2	17	44	53	6.1	34	1	49	176	10	0
N 6441B	5	10	1	4	21	59	2.5	20	1	54	170	15	0
O 6444B	5	12	5	7	21	59	2.5	13	1	48	162	10	0
P 6471H	6	17	2	14	42	93	2.0	6	1	32	163	0	0
Q 6481B	3	21	8	23	63	81	0.7	0	1	38	72	8	0
R 6502H	3	8	3	9	20	66	2.1	11	1	38	128	3	0
S 6513B?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 6517B	11	8	13	1	7	2	10.5	14	1	40	63	9	0
U 6525B	11	13	7	38	105	60	5.8	13	2	30	35	6	0
V 6526B	11	13	7	38	105	60	6.2	14	2	29	32	6	0
W 6529B	11	19	7	38	105	60	3.8	5	2	23	35	0	0
X 6533B?	1	1	1	2	2	4	-	-	-	-	-	-	0
Y 6535D	3	3	17	24	62	39	4.2	50	1	36	59	8	0
Z 6538D	5	3	3	5	13	14	8.3	49	1	29	81	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11600	(FLIGHT	19)											
AA 6543B	1	3	1	3	11	23	1.4	32	1	33	73	4	0
AB 6545B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 6551D	7	11	7	16	47	45	3.8	16	1	29	63	2	0
AD 6557D	7	5	3	18	45	6	8.8	38	1	28	49	3	0
AE 6560B?	9	16	3	18	45	6	3.5	9	2	28	30	6	0
AF 6565D	14	13	10	3	12	23	8.7	11	2	27	29	4	0
AG 6580B	3	9	31	25	50	17	1.8	4	3	30	20	9	0
AH 6590B	5	6	14	7	14	6	5.3	25	2	57	31	30	0
AI 6596B	7	5	0	1	3	1	11.0	20	4	51	11	30	0
AJ 6605B	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 6620S?	2	2	2	4	4	39	0.1	0	1	13	390	0	0
LINE 11601	(FLIGHT	25)											
A 6000D	8	12	8	15	15	54	4.2	14	1	55	77	22	0
B 6013D	6	6	1	4	7	13	5.3	27	1	85	131	40	0
C 6109H	1	2	1	2	0	1	-	-	-	-	-	-	0
D 6132B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 6159B	7	6	5	11	33	28	7.8	10	1	67	100	25	0
F 6180D	8	7	1	3	26	11	8.7	9	2	49	37	20	0
G 6270H	2	3	3	5	15	11	1.0	0	1	38	171	13	0
H 6288B?	1	2	0	1	2	4	-	-	-	-	-	-	4
I 6399D	1	2	0	2	2	4	-	-	-	-	-	-	0
J 6410D	3	7	4	11	18	30	2.2	5	1	40	397	0	0
K 6433H	5	5	6	3	3	1	5.7	0	1	35	109	0	0
L 6485H	7	3	5	6	11	13	16.2	35	1	33	191	0	0
M 6495H	1	2	1	2	2	4	-	-	-	-	-	-	19
N 6554S	2	3	1	4	5	13	0.2	0	1	21	157	1	0
O 6614S	1	2	0	2	2	4	-	-	-	-	-	-	0
P 6672S	4	6	0	6	0	3	3.6	23	1	50	821	0	4
Q 6713D	9	9	1	5	29	31	6.0	11	1	19	478	0	0
R 6720D	6	7	2	5	16	20	4.8	19	1	22	526	0	0
S 6745H	5	6	3	6	3	1	4.7	0	1	47	104	5	0
T 6763B	10	10	10	4	29	13	6.8	12	1	36	77	4	0
U 6776H	3	3	4	5	14	8	5.0	29	1	52	73	16	0
V 6784H	1	2	1	1	2	4	-	-	-	-	-	-	0
W 6822S	1	2	0	2	1	0	-	-	-	-	-	-	0
LINE 11602	(FLIGHT	31)											
A 447H	3	4	8	8	17	37	3.0	26	3	84	22	56	0
B 460H	1	4	3	8	1	47	0.6	10	1	46	265	5	0
C 597S	1	2	0	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11602	(FLIGHT	31)											
D 671D	13	5	15	6	66	51	23.8	27	1	38	121	3	0
E 675D	9	4	0	32	28	101	18.2	34	1	44	55	14	0
F 679B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 694B?	1	2	1	1	2	4	-	-	-	-	-	-	0
H 703D	7	4	2	8	6	12	11.1	10	2	68	32	37	0
I 713B	12	4	12	7	21	11	29.0	17	3	53	15	30	0
J 717B	11	6	16	13	30	8	14.9	6	3	39	14	17	0
K 724B	5	6	1	7	8	25	4.1	23	2	71	41	40	0
L 743S	1	1	1	2	2	4	-	-	-	-	-	-	0
M 759S	1	1	1	2	2	4	-	-	-	-	-	-	0
N 808S	3	8	1	23	31	110	1.9	24	1	30	204	0	0
O 841H	3	11	3	16	16	97	1.5	11	1	39	156	5	0
LINE 11610	(FLIGHT	19)											
A 7221B	3	4	76	103	268	100	4.1	36	4	26	12	8	0
B 7217B	49	51	76	103	268	100	11.2	0	3	19	13	3	0
C 7209B?	9	10	1	35	95	53	6.4	26	1	48	72	17	0
D 7206B	9	23	16	39	106	86	2.9	3	1	31	56	5	0
E 7202B	9	11	16	39	106	86	5.6	16	1	29	57	2	0
F 7194B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 7188D	9	16	14	29	76	57	3.7	11	1	33	65	5	0
H 7184D	11	18	14	32	83	59	4.3	10	1	33	59	6	0
I 7183D	9	16	14	9	62	53	3.5	10	1	35	64	6	0
J 7180D	3	10	5	1	45	67	1.0	0	1	19	64	4	0
K 7171H	1	2	1	2	2	2	-	-	-	-	-	-	0
L 7150B	1	11	7	10	59	22	0.5	0	1	54	125	15	0
M 7148B	4	10	8	21	59	22	2.2	1	1	38	89	4	0
N 7116H	1	2	0	0	2	4	-	-	-	-	-	-	0
O 7106D	5	8	1	13	39	49	3.6	12	1	50	113	12	0
P 7101D	4	8	5	15	1	49	2.4	19	1	60	109	22	0
Q 7085D	4	11	4	1	3	19	2.1	0	1	50	105	13	0
R 7079B?	4	3	1	0	8	6	7.2	35	2	51	52	19	0
S 7070D	9	15	16	26	66	31	4.0	6	2	40	43	13	0
T 7068B	12	14	16	26	66	39	5.9	11	2	35	36	10	0
U 7066B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 7038H	2	7	8	10	27	20	1.4	1	2	38	45	10	0
W 7015B	16	9	2	10	28	17	15.9	0	4	32	13	11	0
X 7010B	20	4	31	15	38	2	64.5	0	6	21	5	5	0
Y 6990D	7	18	5	28	79	126	2.4	0	1	40	64	9	0
Z 6979D	7	7	15	21	54	55	7.0	16	2	57	27	30	0
AA 6972D	6	8	3	21	54	55	3.8	4	3	39	15	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11610	(FLIGHT	19)											
AB 6967D	11	2	15	4	0	4	94.4	1	4	35	12	13	0
AC 6962B	1	2	1	1	2	4	-	-	-	-	-	-	0
AD 6954B	2	7	11	11	9	7	1.2	0	1	77	71	37	0
AE 6899S	0	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11611	(FLIGHT	25)											
A 7785D	4	7	3	4	14	22	3.1	14	1	81	355	19	0
B 7764B	8	13	6	4	13	68	3.7	0	2	52	52	20	0
C 7752B	14	10	4	13	34	25	10.7	1	2	70	31	40	0
D 7731H	3	2	1	6	16	5	9.6	33	1	45	180	0	0
E 7695D	5	8	1	6	15	41	3.4	6	1	36	525	0	0
F 7684D	5	4	1	2	11	10	8.7	30	1	91	267	33	0
G 7668H	3	3	3	9	23	38	3.7	38	1	57	131	16	0
H 7655D	7	14	3	9	27	83	2.9	8	1	47	179	7	0
I 7637H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 7599B?	6	6	5	3	9	1	6.0	16	1	45	129	5	0
K 7578H	2	3	1	5	13	13	2.6	29	1	50	317	0	0
L 7547B?	7	5	0	3	7	12	10.2	35	1	153	1025	0	0
M 7532H	0	4	3	6	18	2	0.4	0	1	50	205	4	0
N 7495B	8	5	5	12	29	23	9.7	13	2	67	59	31	0
O 7491B	9	10	6	12	29	19	5.7	13	2	63	44	32	0
P 7319D	5	6	1	3	9	7	4.7	29	1	106	907	0	0
Q 7290B	7	5	8	11	28	25	8.8	13	1	47	78	11	0
R 7287B	5	10	11	10	23	12	2.8	0	1	35	65	1	0
S 7271B	5	5	0	4	8	23	5.7	36	1	197	1025	0	0
T 7238B	6	6	0	3	2	5	5.8	20	1	57	867	0	0
U 7217H	1	2	1	2	2	4	-	-	-	-	-	-	0
V 7180S	1	2	0	2	1	3	-	-	-	-	-	-	0
W 7165S	1	2	0	2	2	4	-	-	-	-	-	-	0
X 7066H	6	6	1	6	5	12	5.9	1	1	34	263	0	30
Y 7051B	9	2	14	4	6	5	44.5	33	1	25	88	0	0
Z 7048B	6	12	14	25	7	61	2.7	0	1	29	61	0	0
AA 7036B	8	5	6	11	22	5	10.3	0	1	27	61	0	0
AB 6996S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11612	(FLIGHT	31)											
A 1110B	3	11	2	12	36	7	1.3	0	1	53	349	5	0
B 1105B	1	10	2	12	36	31	0.4	0	1	30	106	0	0
C 1102B	1	2	0	2	2	4	-	-	-	-	-	-	0
LINE 11620	(FLIGHT	19)											
A 7375B	4	4	5	50	115	3	4.7	35	4	29	10	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH* SIEMEN	RESIS DEPTH OHM-M	NT
LINE 11620 (FLIGHT 19)							
B 7378B	24	27	2	14	130	45	8.3
C 7395B	1	2	1	2	2	4	3
D 7408B	7	20	12	30	86	99	4
E 7418B	3	13	8	29	80	86	2.2
F 7421B	1	2	1	2	2	4	0
G 7426B	1	2	1	2	2	4	4
H 7432B	6	8	4	13	34	34	1
I 7434B	8	12	8	13	34	34	25
J 7440B	5	6	10	9	18	13	4.1
K 7446B	12	6	11	12	31	16	16.3
L 7450B	1	2	1	2	2	4	21
M 7461B	4	6	1	6	16	22	3.7
N 7468B	9	17	5	25	66	51	25
O 7470B	10	9	11	25	66	51	14
P 7491B	6	8	4	12	9	31	30
Q 7497B	1	2	8	1	1	72	23
R 7500B	8	16	6	12	4	72	53
S 7521H	2	10	3	10	2	41	8
T 7527D	9	15	1	7	40	33	1
U 7548H	5	6	7	9	24	18	0.6
V 7555B	7	15	12	13	34	65	4.1
W 7557B	6	15	12	13	34	65	17
X 7573H	1	2	0	1	2	4	2
Y 7587B	6	13	8	2	14	12	5.1
Z 7591B	5	11	6	16	48	85	26
AA 7602B	1	2	1	2	2	4	1
AB 7606B	1	1	1	2	2	4	2
AC 7611B	8	7	15	18	34	15	2
AD 7620D	14	24	15	36	93	88	28
AE 7638B	6	2	3	3	20	0	2
AF 7643B	2	1	1	7	28	13	47
AG 7668B	12	24	37	45	86	94	40
AH 7690S	1	7	1	8	21	46	2
AI 7707B?	1	2	1	1	2	4	39
LINE 11621 (FLIGHT 25)							
A 7881B	5	10	20	32	79	55	0
B 7886B?	14	2	23	13	82	2	2.6
C 7894B	9	3	4	22	39	33	0
D 7909H	4	10	1	21	53	96	24
E 7956H	2	9	1	14	30	86	32.7
							41
							1.9
							15
							14
							1
							44
							144
							10

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11621	(FLIGHT	25)											
F 8019H	3	2	2	2	12	34	0.3	0	1	32	383	6	0
G 8052H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 8095H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 8167H	0	1	1	2	2	4	-	-	-	-	-	-	0
J 8196B?	6	5	5	9	21	23	6.0	31	1	66	92	28	0
K 8293S	2	7	2	6	18	53	1.6	7	1	35	241	0	0
L 8324H	1	2	1	2	2	4	-	-	-	-	-	-	0
M 8391H	5	2	2	7	3	31	26.3	50	1	64	136	22	0
N 8431M	1	2	0	2	1	4	-	-	-	-	-	-	250
O 8440S	2	4	1	5	1	23	0.1	0	1	25	275	1	0
P 8465S	3	2	0	2	5	12	7.3	53	1	117	1025	0	0
Q 8508S	4	2	1	2	3	13	9.8	54	1	124	1025	0	0
R 8528S?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 8549M	0	1	0	2	2	4	-	-	-	-	-	-	520
T 8591S	2	1	0	4	10	22	0.4	0	1	25	391	0	0
U 8610B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 8627B	9	5	2	15	35	10	13.4	19	1	32	130	0	0
W 8631H	5	7	2	15	35	1	3.9	5	2	26	50	0	0
X 8651B?	5	5	13	3	5	52	5.3	17	2	44	57	12	0
Y 8721S	1	2	0	1	2	2	-	-	-	-	-	-	0
LINE 11622	(FLIGHT	31)											
A 1331S	2	3	4	9	21	18	2.2	35	1	32	262	0	0
B 1357S	1	2	1	2	2	4	-	-	-	-	-	-	40
C 1386B?	1	2	0	2	1	4	-	-	-	-	-	-	0
D 1509B	0	4	0	1	14	27	0.4	0	1	60	803	0	0
E 1531D	4	17	15	4	64	127	1.2	0	1	28	143	0	0
F 1540B?	9	6	3	8	33	11	11.8	18	2	28	38	2	0
G 1557B	17	30	15	45	128	124	4.5	0	2	25	28	2	0
H 1568B	15	11	25	30	71	57	11.2	20	3	35	15	16	0
LINE 11630	(FLIGHT	19)											
A 8250H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 8225B	4	10	6	13	26	63	2.3	13	1	49	71	17	0
C 8218B	4	6	1	7	18	16	3.2	19	1	36	62	6	0
D 8201H	4	8	2	8	19	27	2.3	15	1	64	89	27	0
E 8188B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 8185B	4	12	5	17	48	68	1.7	0	1	38	56	8	0
G 8172B	23	15	39	35	85	39	14.9	16	3	46	16	25	0
H 8168B	21	13	30	35	85	54	16.0	16	3	46	20	24	0
I 8161B?	7	15	3	18	53	65	3.0	6	1	34	76	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11630	(FLIGHT 19)												
J 8159B?	8	10	3	18	53	65	5.7	19	1	28	102	0	0
K 8148B	10	5	11	9	26	8	15.0	18	2	35	42	7	0
L 8144B	7	7	6	4	11	14	6.6	15	1	41	70	8	0
M 8135H	9	11	2	4	11	4	5.3	2	2	43	42	14	0
N 8118H	4	9	5	11	32	36	2.5	7	1	55	68	21	0
O 8100B	1	2	12	36	46	68	2.1	48	2	36	46	8	4
P 8097B	15	20	18	31	22	12	6.1	3	2	33	37	8	5
Q 8094B	13	10	5	31	22	23	9.7	16	2	35	39	9	0
R 8050D	16	15	19	8	12	2	8.7	9	2	37	24	14	0
S 8047D	8	23	19	8	12	17	2.5	0	2	28	27	6	0
T 8041D	6	10	8	18	42	4	3.9	5	2	45	27	19	0
U 8026H	15	7	2	4	5	6	20.7	9	5	37	6	20	0
V 8022H	15	8	27	19	47	5	15.9	2	5	31	6	14	0
W 8011H	16	12	15	26	62	27	11.9	0	4	38	9	19	0
X 7990B?	14	14	29	29	69	58	7.9	2	2	48	27	22	0
Y 7975D	11	13	2	18	27	34	6.3	0	5	34	7	16	0
Z 7970B	7	5	8	4	28	34	9.8	0	3	64	18	37	0
AA 7964B	5	6	3	5	5	12	4.7	0	2	85	38	50	0
LINE 11631	(FLIGHT 26)												
A 432H	3	2	1	2	7	21	10.3	64	1	50	400	2	0
B 446S	1	6	2	4	2	2	0.3	0	1	21	259	0	0
C 522H	1	1	1	2	2	4	-	-	-	-	-	-	0
D 600S	0	2	1	2	2	4	-	-	-	-	-	-	0
E 680S	0	2	1	2	1	2	0.4	0	1	107	361	32	0
F 724H	3	2	5	7	2	33	8.5	56	2	91	54	55	0
G 753S	1	2	1	2	2	4	-	-	-	-	-	-	0
H 775H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 796H	1	2	1	2	2	4	-	-	-	-	-	-	0
J 815H	1	2	1	2	2	4	-	-	-	-	-	-	0
K 852S	1	2	1	2	2	4	-	-	-	-	-	-	0
L 955S?	1	2	1	1	2	4	-	-	-	-	-	-	0
M 1022B?	6	5	3	9	24	22	7.1	22	1	36	170	0	0
N 1039B?	6	9	4	5	12	13	4.0	9	1	35	87	2	0
LINE 11632	(FLIGHT 31)												
A 2152B?	3	5	1	5	1	27	3.1	39	1	74	610	5	0
B 2132B?	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2117B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2103D	5	9	2	9	19	50	3.1	21	1	59	75	25	0
E 2095B	31	30	63	44	129	66	10.9	0	3	25	16	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11632	(FLIGHT 31)												
F 2091B	7	30	63	9	27	43	1.7	0	5	27	7	11	0
G 2087B	2	16	8	28	63	67	0.5	0	3	31	12	13	0
H 2036H	3	5	4	9	27	30	2.3	10	2	38	52	7	0
I 1971S	1	2	1	2	2	2	-	-	-	-	-	-	0
J 1933S	1	6	1	9	25	14	0.9	6	1	31	411	0	0
LINE 11640	(FLIGHT 20)												
A 874B?	5	8	2	6	13	33	3.1	29	1	46	90	14	0
B 912B?	6	10	2	0	9	5	3.3	7	1	39	56	9	0
C 957H	10	20	4	5	15	58	3.4	3	2	29	38	5	0
D 972H	3	7	2	16	5	5	1.9	25	1	49	55	21	0
E 989B?	5	6	6	7	22	15	4.8	30	1	60	90	23	0
F 996B?	6	8	1	5	22	2	4.4	29	1	78	76	42	0
G 1020B	10	10	4	21	51	40	7.7	19	2	41	48	13	0
H 1027D	6	13	5	14	41	17	2.6	11	1	49	79	17	0
I 1030B	7	15	5	20	53	39	2.8	10	1	42	65	12	0
J 1037D	9	7	1	0	1	18	10.2	36	2	46	43	20	0
K 1048B	11	12	15	19	50	57	6.4	17	2	35	32	12	0
L 1055B?	6	5	15	2	7	17	6.4	38	2	45	30	21	0
M 1057B?	4	3	2	14	36	85	5.7	51	2	44	39	18	0
N 1062B?	2	10	5	14	37	60	0.7	4	1	36	57	9	0
O 1070D	5	8	0	11	27	47	3.9	25	1	43	59	14	0
P 1078B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 1089D	7	8	12	12	33	19	5.8	27	2	49	43	21	0
R 1102B?	2	5	5	10	26	18	2.0	26	2	54	40	26	0
S 1121H	4	8	5	19	51	62	2.8	16	1	37	60	8	0
T 1174H	4	6	4	13	37	24	2.7	19	3	41	16	20	0
U 1196H	18	3	23	4	11	1	89.4	12	6	31	5	16	0
V 1212H	13	5	16	1	6	11	26.6	26	5	37	6	21	0
LINE 11641	(FLIGHT 26)												
A 1929H	2	2	3	2	1	4	2.4	0	2	61	55	23	0
B 1879S	1	2	1	2	2	4	-	-	-	-	-	-	0
C 1777H	0	2	1	2	1	4	-	-	-	-	-	-	0
D 1670S	0	2	1	2	2	1	-	-	-	-	-	-	0
E 1628S	0	3	2	2	3	2	1.0	0	1	34	375	6	0
F 1608D	3	6	1	4	9	30	2.1	17	1	125	939	5	0
G 1488B?	4	4	5	7	22	30	3.8	34	1	54	154	13	0
H 1477H	3	6	7	6	15	34	2.7	23	1	45	107	9	0
I 1438S	1	2	1	0	2	3	-	-	-	-	-	-	0
J 1349H	6	5	1	3	8	19	7.0	22	1	51	344	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11641 (FLIGHT 26)													
K 1300H	5	8	3	6	8	14	3.3	0	1	46	76	9	0
LINE 11642 (FLIGHT 31)													
A 2390H	7	5	13	3	4	3	9.0	18	2	69	27	40	0
B 2410B?	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2487S	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2532B	7	7	16	8	12	120	5.6	28	1	37	79	7	0
E 2547B	4	57	3	6	25	162	0.6	0	5	20	7	6	0
F 2551D	20	42	10	3	10	98	4.1	0	5	20	6	6	0
G 2571B	14	17	48	23	70	36	6.3	13	3	21	14	4	0
H 2576B	9	18	44	14	42	169	3.5	4	2	32	27	9	0
I 2582B	14	33	15	70	178	321	3.3	3	2	22	41	0	0
J 2586B	9	31	15	70	178	321	2.0	0	2	34	27	13	0
K 2594B	5	13	1	31	89	198	2.3	5	3	25	20	6	0
L 2605B	24	29	36	60	132	95	7.4	7	4	29	10	13	0
M 2609D	7	12	0	18	101	76	3.1	21	3	29	16	11	0
N 2613D	6	9	13	4	92	13	3.7	31	3	35	18	16	0
O 2616D	2	12	6	38	67	90	0.6	2	2	36	22	16	0
P 2631D	9	11	11	21	52	62	5.7	20	2	43	49	16	0
Q 2644D	29	55	19	57	173	275	5.0	3	2	30	45	7	9
R 2654D	1	12	4	22	68	116	0.4	0	1	30	61	4	0
S 2657D	2	12	1	4	19	92	0.2	0	1	19	74	4	0
T 2662D	10	20	5	2	23	15	3.2	3	1	29	94	0	0
U 2700H	4	3	4	12	37	41	7.2	52	1	38	186	0	0
V 2750H	4	17	5	19	46	123	1.5	1	1	36	89	6	0
LINE 11650 (FLIGHT 20)													
A 1867H	3	8	1	5	13	24	0.5	0	1	29	151	8	0
B 1842H	5	8	6	10	1	73	3.2	16	1	43	58	13	0
C 1835B	4	6	5	6	2	9	3.1	18	1	52	66	18	0
D 1794H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1770B?	1	2	1	2	2	4	-	-	-	-	-	-	0
F 1766D	5	5	3	6	17	30	4.3	25	1	85	121	40	0
G 1751B	9	15	11	20	18	47	4.1	15	1	86	97	46	0
H 1746B	8	15	11	20	18	47	3.6	3	1	49	57	17	0
I 1730B?	5	3	1	5	11	14	11.3	63	1	96	109	54	0
J 1722B?	7	6	3	14	32	63	7.4	41	1	100	109	57	0
K 1702B	7	19	0	22	58	111	2.3	0	1	37	78	7	0
L 1694B	6	10	2	6	15	33	3.0	10	2	47	51	17	0
M 1685B	5	7	6	11	30	30	4.6	19	1	39	64	8	0
N 1674D	6	9	11	14	34	27	3.4	11	2	44	48	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11650	(FLIGHT	20)											
O 1670B	9	8	10	7	15	2	7.6	13	2	42	35	15	0
P 1666B	9	4	10	7	15	27	20.2	26	2	40	34	13	0
Q 1618D	11	10	5	1	5	2	7.9	9	2	41	44	12	0
R 1612B	1	2	1	2	2	4	-	-	-	-	-	-	0
S 1610D	10	9	3	15	37	21	8.1	11	2	31	31	6	0
T 1593H	1	2	1	2	2	4	-	-	-	-	-	-	0
U 1580H	8	11	19	3	5	3	1.0	0	1	25	23	14	0
V 1555H	22	16	1	4	5	39	12.9	4	4	30	8	13	0
W 1548H	5	6	33	14	37	2	3.8	18	7	27	3	14	0
LINE 11651	(FLIGHT	26)											
A 2061H	5	5	1	8	18	34	5.4	37	1	51	196	9	0
B 2080S	2	4	3	8	25	37	1.4	11	1	47	142	7	0
C 2113S	2	4	2	5	15	16	2.0	25	1	47	170	6	0
D 2138H	1	1	1	2	2	2	-	-	-	-	-	-	0
E 2178H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 2240H	1	2	1	2	2	2	-	-	-	-	-	-	0
G 2275H	0	3	0	8	14	70	0.4	0	1	41	509	0	0
H 2327D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 2348D	8	9	7	14	27	23	5.2	19	1	54	127	16	0
J 2408S	1	2	1	2	2	4	-	-	-	-	-	-	0
K 2447S	0	2	1	2	2	3	-	-	-	-	-	-	0
L 2547B?	5	3	0	1	15	28	12.9	33	1	89	566	1	0
M 2570B?	1	2	1	2	1	4	-	-	-	-	-	-	0
N 2624H	1	2	0	2	2	4	-	-	-	-	-	-	0
O 2698S	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2722B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 2760S	6	10	3	14	21	63	3.1	11	1	15	246	0	0
LINE 11652	(FLIGHT	29)											
A 7410H	22	12	56	32	84	11	17.9	0	6	32	5	16	0
B 7391H	2	28	15	21	56	72	0.5	0	4	22	8	6	0
C 7354B	7	1	8	16	28	45	76.1	38	1	43	123	5	0
D 7329H	1	4	2	9	24	1	0.9	0	1	35	108	0	0
E 7310B?	11	11	18	22	52	43	7.4	4	3	27	16	6	0
F 7299B	19	40	51	74	186	232	3.9	0	3	28	18	9	0
G 7289B	2	11	15	15	46	78	1.0	0	2	26	43	0	0
H 7283B	6	15	17	14	30	27	2.6	0	2	23	33	0	0
I 7278B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 7274B	1	3	0	4	20	47	0.5	0	1	18	46	5	0
K 7266B	18	21	20	35	103	131	7.2	3	3	27	16	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11652	(FLIGHT 29)												
L 7260B	10	8	8	16	40	85	9.5	8	5	25	7	9	0
M 7257B	16	9	7	16	40	40	18.2	8	4	26	9	8	0
N 7250B	3	7	4	31	74	102	2.2	18	3	43	17	22	0
O 7245D	10	20	20	31	74	103	3.2	4	2	38	42	12	17
P 7235B	15	24	27	40	118	150	4.9	0	2	29	24	7	0
Q 7232B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 7228B	2	3	6	17	27	60	2.3	27	2	44	29	18	0
S 7225B	8	4	6	8	27	61	16.3	29	2	35	49	7	0
T 7219B	6	11	4	4	9	9	2.8	3	1	46	58	15	0
U 7211B	6	10	2	7	8	18	3.6	0	1	58	107	17	0
V 7174B?	5	1	15	3	61	16	49.6	68	1	43	127	8	0
W 7141H	1	4	6	7	11	16	0.9	0	1	62	71	24	0
LINE 11660	(FLIGHT 20)												
A 2004B	6	14	4	22	67	80	2.5	8	1	31	151	0	0
B 2005B	6	17	8	22	67	80	2.0	0	1	37	97	5	0
C 2013B	4	6	8	18	45	5	3.5	26	1	44	56	15	0
D 2027H	3	5	7	11	30	27	2.6	21	1	47	65	15	0
E 2048H	1	5	2	9	12	7	1.0	27	1	58	154	20	0
F 2087B	4	0	6	1	10	28	49.0	71	2	39	52	12	0
G 2093B	6	13	3	17	12	27	2.6	11	2	47	42	20	0
H 2130H	5	6	1	9	23	53	4.6	38	1	46	166	9	0
I 2136D	5	5	1	9	19	36	4.9	39	1	64	89	28	0
J 2142B?	7	10	15	1	35	11	4.2	19	2	48	41	21	0
K 2171B?	1	2	1	1	2	4	-	-	-	-	-	-	0
L 2178B	5	5	7	9	24	13	5.8	19	2	45	54	13	0
M 2180B	6	4	4	6	18	13	9.0	28	1	52	63	18	0
N 2192B	4	11	1	15	40	63	2.1	9	1	51	72	19	0
O 2202D	5	7	4	6	15	25	4.5	19	2	57	55	24	0
P 2206B	3	3	5	6	14	23	4.1	45	2	54	53	23	0
Q 2211D	4	4	5	7	1	3	4.7	31	1	52	75	18	0
R 2215D	2	9	7	18	45	39	1.2	0	2	43	55	12	0
S 2226D	8	4	5	5	35	38	15.0	42	2	50	43	23	0
T 2260B	4	10	5	13	37	42	2.1	0	1	33	60	2	0
U 2265B	6	6	10	27	66	67	5.1	22	2	48	45	19	0
V 2269B	9	15	14	32	84	70	4.0	8	2	36	39	11	0
W 2273B	3	9	14	32	84	8	1.4	8	2	36	48	10	0
X 2276B	3	7	4	19	58	48	1.9	19	1	47	56	18	0
Y 2289B	15	9	1	10	22	10	14.3	27	2	31	23	10	0
Z 2294D	1	9	22	29	10	12	0.5	0	3	35	18	16	0
AA 2299D	9	13	23	30	74	3	4.4	15	2	39	23	17	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT
LINE 11660	(FLIGHT	20)												
AB 2320H	9	5	16	12	31	15	12.3	31	3	46	14	26		0
AC 2347H	1	2	1	2	2	4	-	-	-	-	-	-		0
LINE 11661	(FLIGHT	26)												
A 3431B	6	7	5	11	33	23	4.6	15	1	80	83	40		0
B 3409H	1	2	1	2	2	4	-	-	-	-	-	-		0
C 3360S	1	7	2	11	3	52	0.8	3	1	38	286	0		0
D 3304B	5	6	1	7	20	32	3.7	19	1	63	262	13		0
E 3293B	7	7	5	6	16	26	6.0	20	1	65	79	28		0
F 3287B	6	3	0	6	16	26	14.6	33	1	57	74	21		0
G 3264H	6	8	6	12	31	38	4.1	7	2	43	50	13		0
H 3254H	3	6	3	4	5	25	0.1	0	1	40	183	18		0
I 3185S	0	2	0	2	2	4	-	-	-	-	-	-		0
J 3125S	1	2	1	2	2	4	-	-	-	-	-	-		0
K 3073H	3	6	7	8	21	7	1.8	0	2	67	60	31		0
L 3010S	1	2	0	2	2	4	-	-	-	-	-	-		0
LINE 11662	(FLIGHT	29)												
A 6663H	8	3	7	8	11	3	26.3	37	2	45	29	19		0
B 6671D	5	9	8	17	60	67	3.1	17	2	46	34	20		0
C 6680B	13	13	35	36	68	48	7.2	17	3	35	16	16		0
D 6682B	15	11	35	36	68	48	10.7	22	3	38	15	19		0
E 6694H	21	23	38	38	97	69	7.8	2	4	29	10	12		0
F 6712H	6	5	30	6	23	4	8.4	21	10	34	2	23		0
G 6721H	7	19	28	38	90	55	2.2	0	5	30	5	16		0
H 6731B	41	26	81	57	136	65	19.4	2	7	24	3	12		0
I 6743B	7	6	19	9	35	109	7.7	36	1	37	52	10		0
J 6750D	12	20	1	34	46	35	4.3	8	1	38	58	10		0
K 6786E	16	30	55	79	195	148	4.2	0	1	16	124	0		0
L 6789B	26	43	56	79	108	113	5.5	0	2	18	23	0		0
M 6795B	18	28	56	71	191	201	5.4	3	2	17	37	0		0
N 6808B	8	5	9	16	41	22	11.6	5	3	39	18	15		0
O 6819D	7	2	19	21	55	36	36.8	14	4	31	10	10		0
P 6823D	3	3	12	55	103	31	3.6	35	4	37	11	18		0
Q 6829B	75	87	95	135	314	201	11.6	0	4	21	11	6	14	
R 6841B	15	27	29	53	132	93	4.2	1	3	23	15	5		0
S 6847B	1	2	1	2	2	3	-	-	-	-	-	-		0
T 6852B	1	2	1	2	2	4	-	-	-	-	-	-		0
U 6869B	14	6	47	89	227	222	21.8	30	2	38	22	16		0
V 6874B	39	61	48	108	275	241	6.7	0	2	16	22	0		0
W 6889D	8	6	12	32	88	179	8.7	37	1	28	65	2		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FTID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11662	(FLIGHT	29)											
X 6894D	18	11	12	23	100	72	15.6	25	1	23	62	0	0
Y 6949B?	10	11	4	14	12	14	6.2	13	2	72	35	42	0
Z 6971H	5	12	24	19	10	12	2.4	0	4	50	11	30	0
AA 6992E	5	9	14	12	59	66	2.9	21	1	73	258	24	0
AB 7033H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11670	(FLIGHT	20)											
A 3011H	4	4	6	3	10	8	1.0	0	1	25	68	8	0
B 2935H	8	10	7	5	30	5	1.0	0	1	28	67	10	0
C 2917D	4	10	1	2	2	4	1.9	2	1	66	132	24	0
D 2904B	9	14	2	19	47	28	3.9	0	2	51	35	22	0
E 2878H	5	0	0	4	1	2	0.4	0	1	28	95	9	0
F 2862B	5	8	2	9	21	45	3.1	26	1	46	120	11	0
G 2850D	6	12	3	5	31	25	2.7	9	1	51	100	15	0
H 2832D	3	6	5	9	25	14	2.0	12	1	65	84	27	0
I 2827D	4	5	5	9	25	14	3.7	20	1	50	66	17	0
J 2822D	4	4	1	9	22	17	4.1	25	1	51	101	12	0
K 2813B?	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2801D	6	8	5	10	30	31	4.6	19	1	43	68	11	0
M 2797D	5	6	5	10	30	17	3.9	26	1	40	76	9	0
N 2793B	5	2	3	4	14	20	15.9	55	1	42	100	8	0
O 2790B	5	5	1	4	14	25	6.0	39	1	40	100	7	0
P 2784B?	7	4	7	5	21	29	12.1	39	1	38	80	7	0
Q 2780B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 2776B	7	8	15	23	53	32	4.8	21	1	35	67	6	0
S 2773B	4	4	12	22	51	32	5.9	41	1	45	84	12	0
T 2765B	8	9	10	11	35	15	5.5	16	2	39	50	10	0
U 2743H	8	13	23	33	75	32	4.2	8	2	32	24	9	0
V 2733B	7	9	12	19	46	23	5.0	20	2	40	26	17	0
W 2728D	7	11	7	19	46	48	3.6	15	3	46	22	23	0
X 2718B	12	8	21	20	44	23	11.2	16	4	39	12	20	0
Y 2711B	15	6	8	8	18	14	25.3	10	4	32	11	12	0
Z 2695D	21	10	27	12	32	14	22.2	14	3	52	15	30	0
AA 2684B	10	13	10	18	45	51	5.6	0	3	32	13	12	0
LINE 11671	(FLIGHT	29)											
A 4990B?	10	25	6	34	47	101	2.9	3	1	25	71	0	0
B 4998B	4	13	6	22	69	69	1.9	1	1	36	97	4	0
C 5013B	10	19	2	39	98	76	3.7	4	2	36	43	10	0
D 5031H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 5107B?	12	29	17	18	178	234	3.0	0	1	8	125	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11671	(FLIGHT	29)											
F 5159H	1	1	1	2	2	4	-	-	-	-	-	-	0
G 5230H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 5268H	2	5	3	4	5	8	1.8	22	1	51	255	6	0
I 5302H	9	16	2	21	57	53	3.5	1	1	31	73	1	0
J 5475H	1	2	0	1	1	4	-	-	-	-	-	-	0
K 5506H	1	2	1	2	2	4	-	-	-	-	-	-	4
LINE 11672	(FLIGHT	31)											
A 3005E	9	17	12	16	66	12	3.6	7	1	25	82	0	-6
B 2959B	8	2	23	16	37	91	37.2	55	3	47	21	25	0
C 2950B	2	12	9	3	4	68	0.7	5	2	43	23	22	0
D 2941B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 2933E	13	17	16	47	124	135	5.9	20	2	65	32	38	-4
F 2924D	4	8	18	17	19	31	2.5	8	2	36	34	10	0
G 2919D	8	7	18	18	31	23	6.5	26	1	32	51	5	-5
H 2914D	5	6	1	7	23	10	3.9	30	1	32	110	0	0
I 2908D	1	2	1	2	2	4	-	-	-	-	-	-	-5
J 2900D	1	0	1	2	2	4	-	-	-	-	-	-	-5
LINE 11673	(FLIGHT	31)											
A 3268B	5	10	2	14	2	1	2.4	0	3	60	20	33	0
B 3257D	3	7	18	13	2	27	2.3	0	3	34	13	13	0
C 3252B	7	4	12	8	18	6	9.8	12	6	21	4	6	0
D 3202S?	1	6	2	5	9	21	0.4	0	1	25	395	0	0
E 3156D	26	9	46	25	65	48	40.7	0	2	27	45	0	0
F 3149B	11	8	10	31	85	72	10.8	10	3	51	15	28	0
G 3136B	4	12	22	32	79	47	1.9	0	2	50	27	24	0
H 3131B	12	15	23	32	79	47	6.3	0	3	35	18	14	0
I 3120D	7	5	9	6	19	13	8.6	3	2	47	27	19	0
J 3109B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 3106D	3	18	14	28	45	42	0.9	0	2	37	49	8	0
L 3063H	4	12	4	22	59	102	2.0	1	1	33	75	3	0
LINE 11680	(FLIGHT	20)											
A 3214H	6	10	9	8	12	29	3.7	13	1	38	62	8	0
B 3275H	9	13	2	13	35	41	4.6	13	2	45	27	21	0
C 3283D	4	5	6	6	22	26	4.0	27	2	57	52	25	0
D 3289B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3295B?	1	2	1	1	2	4	-	-	-	-	-	-	0
F 3328D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3340H	6	9	4	2	11	10	3.5	25	1	41	94	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11680	(FLIGHT	20)											
H 3360B?	5	7	1	4	14	24	3.8	19	1	53	95	16	0
I 3382B?	8	15	5	14	39	67	3.5	14	1	51	76	19	0
J 3415H	4	6	2	5	15	33	2.9	32	1	52	76	20	0
K 3428D	3	14	3	13	52	40	1.2	0	1	37	78	7	0
L 3435D	3	6	3	1	4	10	2.3	21	1	39	76	8	0
M 3468D	9	6	5	10	28	18	9.7	21	2	42	50	12	0
N 3483B	20	23	16	12	28	79	7.8	2	2	29	38	4	0
O 3489B	15	17	16	16	6	6	6.8	11	2	32	42	7	0
P 3498D	4	5	5	4	10	12	4.0	32	2	40	29	16	0
Q 3501D	3	6	3	4	14	25	2.2	22	2	40	26	17	0
R 3504D	4	7	5	14	36	25	2.5	22	2	43	28	19	0
S 3511B?	3	3	4	22	32	2	4.9	50	2	42	25	19	0
T 3550B	19	10	9	5	59	56	18.3	27	4	40	11	23	0
U 3552B	7	9	9	5	10	56	4.5	25	4	37	9	21	0
V 3556B	1	2	0	2	1	4	-	-	-	-	-	-	0
W 3562D	2	15	6	3	12	32	0.7	0	2	51	26	27	0
X 3594B	14	31	6	39	111	271	3.6	4	1	41	51	15	0
Y 3601B	2	28	40	39	111	271	0.5	0	3	44	13	24	0
Z 3609B	39	38	93	81	192	110	11.5	3	4	27	9	12	0
LINE 11681	(FLIGHT	29)											
A 6491H	17	1	25	9	11	21	49.0	13	5	29	7	12	0
B 6477H	7	10	10	15	32	21	4.1	0	5	30	7	13	0
C 6452H	9	15	16	33	90	90	3.9	7	2	40	43	13	0
D 6410H	6	12	3	21	67	14	3.1	0	3	42	20	17	0
E 6379H	5	13	18	10	11	48	2.4	0	2	29	32	5	0
F 6357H	7	11	6	21	53	40	4.0	0	2	29	42	2	0
G 6348H	3	7	2	8	23	16	1.8	0	2	34	26	9	10
H 6336D?	10	20	8	9	23	60	3.4	3	2	54	44	25	0
I 6305D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 6298B?	2	3	3	1	17	17	1.7	30	1	56	299	7	0
K 6278D	3	14	10	25	31	168	1.0	3	1	42	223	4	0
L 6271B?	20	2	42	42	146	53	158.6	22	2	27	26	5	0
M 6238H	1	2	1	2	2	4	-	-	-	-	-	-	0
N 6206B?	6	10	2	12	33	64	3.2	4	1	52	245	5	0
O 6162D	6	21	5	26	73	99	1.7	3	1	73	849	0	0
P 6146B	4	7	1	11	28	39	2.4	24	1	51	631	0	0
Q 6140B	1	2	1	2	1	4	-	-	-	-	-	-	0
R 6126B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 6122D	6	14	5	10	19	21	2.4	2	1	39	121	4	0
T 6101S	3	5	1	7	10	42	2.3	36	1	46	642	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11681	(FLIGHT 29)												
U 6080S	5	5	1	3	1	19	6.4	24	1	51	315	1	0
V 6028H	7	1	2	0	0	28	56.2	39	1	60	77	23	0
W 5956S	1	2	0	1	0	2	-	-	-	-	-	-	0
X 5803B	5	2	3	15	40	30	18.2	37	1	35	160	0	0
Y 5798B	4	1	5	3	8	30	18.8	53	1	42	108	5	0
Z 5791B	11	14	3	21	59	52	5.2	5	1	27	160	0	0
AA 5756H	1	1	1	2	2	4	-	-	-	-	-	-	0
LINE 11690	(FLIGHT 20)												
A 4201B	5	9	5	8	22	55	3.1	13	1	49	143	10	0
B 4177H	3	5	5	8	23	13	3.3	19	1	52	72	16	0
C 4139B?	5	11	3	8	22	36	2.3	10	1	69	235	22	0
D 4121B	12	19	2	16	19	7	4.5	7	1	52	75	19	0
E 4117B	13	13	3	1	4	7	7.5	5	2	51	54	19	0
F 4106D	4	9	2	9	25	37	2.1	2	1	49	96	13	0
G 4061H	3	8	4	17	50	68	2.1	13	1	40	81	8	0
H 4029D	6	10	1	7	20	35	3.1	21	1	53	106	18	0
I 4017B	6	9	0	7	18	58	3.7	23	1	46	127	10	0
J 4013B?	3	11	6	7	18	58	1.7	1	1	50	75	17	0
K 3997B	5	7	3	2	23	4	3.7	22	1	57	99	20	0
L 3985D	1	2	1	2	2	4	-	-	-	-	-	-	0
M 3982B	1	10	4	14	38	20	0.4	0	1	38	104	5	0
N 3959H	8	13	8	17	46	46	4.1	8	1	34	71	4	0
O 3944B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 3934B	28	9	44	21	52	4	43.3	1	4	36	10	17	0
Q 3926B	7	8	29	6	51	15	5.4	11	3	45	14	24	0
R 3915H	7	6	11	11	30	14	6.1	12	3	42	19	18	0
S 3898H	11	12	17	14	51	25	5.9	6	4	41	9	23	0
T 3886H	10	15	28	32	86	61	4.2	0	3	33	15	13	0
U 3855H	6	7	9	7	19	19	5.8	11	4	30	10	12	0
V 3846H	18	15	42	12	37	41	10.3	0	5	29	7	12	0
W 3829H	6	7	17	14	30	38	5.1	12	4	28	10	10	0
X 3817B	13	13	4	8	25	19	7.2	10	3	27	21	6	0
Y 3814B	6	1	37	8	25	73	49.0	57	3	31	17	11	0
Z 3779B?	4	5	1	5	2	8	3.9	35	1	143	159	87	0
LINE 11691	(FLIGHT 31)												
A 3631H	5	19	10	34	16	9	1.6	0	1	26	94	0	0
B 3683B?	4	4	12	8	7	12	4.6	39	3	93	22	65	0
C 3695B	29	24	74	34	74	61	12.0	0	5	36	5	21	16
D 3696B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11691	(FLIGHT	31)											
E 3705B	19	14	22	22	48	26	12.2	2	4	30	12	11	0
F 3725B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 3734B	5	10	32	64	153	16	2.5	9	2	50	35	22	0
H 3738B	14	27	37	65	153	79	4.0	0	2	23	24	2	60
I 3740B	10	27	37	65	153	79	2.8	0	2	29	26	7	0
J 3743B	4	3	37	65	153	77	7.8	41	2	50	29	24	0
K 3746B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 3755H	3	7	2	12	33	55	2.3	16	2	42	25	19	0
M 3774B	9	8	18	10	20	26	7.3	18	3	59	15	37	0
N 3793H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 3826H	4	4	5	6	15	13	5.2	28	3	67	17	42	0
P 3917H	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3970D	6	5	4	5	8	27	6.1	35	1	100	111	56	0
R 4003H	1	5	6	1	20	2	1.0	0	1	36	186	13	0
S 4026B?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 4046B?	1	2	1	2	2	4	-	-	-	-	-	-	0
U 4116B	6	5	1	8	25	18	7.1	32	1	63	130	22	0
V 4128B	1	1	1	2	2	4	-	-	-	-	-	-	0
W 4164S	1	2	0	2	2	4	-	-	-	-	-	-	0
X 4279S	2	3	1	0	1	7	2.8	46	1	145	387	53	0
Y 4295H	3	2	1	2	4	4	0.6	0	1	29	83	9	0
Z 4306B?	6	12	5	11	33	26	2.9	0	1	54	121	13	0
AA 4341S	1	2	1	2	1	4	-	-	-	-	-	-	0
LINE 11700	(FLIGHT	20)											
A 4375B	6	7	1	10	2	40	5.2	32	1	59	150	19	0
B 4392H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 4409B	-1	2	1	2	2	4	-	-	-	-	-	-	0
D 4435B	11	17	8	17	49	93	4.6	16	1	35	126	3	0
E 4443B	1	2	1	2	2	1	-	-	-	-	-	-	0
F 4452B?	3	4	5	6	17	2	3.2	42	1	62	76	29	0
G 4457D	1	2	1	2	1	4	-	-	-	-	-	-	0
H 4485H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 4508B?	5	8	3	1	7	30	3.7	2	1	50	65	15	0
J 4544B	9	16	6	13	29	81	3.6	3	1	41	67	10	0
K 4547B	4	17	6	14	17	49	1.5	0	1	39	61	10	0
L 4549B	9	12	2	14	17	50	4.7	14	1	39	72	8	0
M 4570B	5	4	6	4	8	2	7.4	44	1	55	80	20	0
N 4580D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 4584B	4	7	1	9	30	45	2.8	25	1	43	92	11	0
P 4600B?	6	8	8	14	30	26	4.3	22	1	39	86	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11700 (FLIGHT 20)													
Q 4610B	4	4	2	3	11	10	5.7	37	1	51	102	14	0
R 4622B	7	9	4	10	25	8	4.2	18	2	60	27	34	0
S 4630B	4	2	11	6	15	9	11.3	47	3	92	18	65	0
T 4641D	5	2	9	5	9	18	12.2	46	2	81	44	47	0
U 4655B	6	7	18	13	32	18	5.3	27	3	64	17	41	0
V 4662B?	1	2	1	2	2	4	-	-	-	-	-	-	0
W 4669B	34	25	46	54	120	97	15.2	1	3	30	12	12	0
X 4681B	29	11	19	25	48	14	32.5	8	5	30	5	15	0
Y 4684D	12	10	19	25	48	14	8.9	24	4	35	8	20	0
Z 4688B	22	3	4	2	4	36	129.3	28	4	41	9	24	20
AA 4690B	22	20	4	2	4	36	10.6	14	4	43	11	24	0
AB 4721B	11	12	20	5	9	16	5.9	9	2	48	25	23	0
AC 4727B	4	11	11	8	25	85	2.0	2	3	39	20	17	0
AD 4734B	4	8	36	36	99	87	2.7	19	4	47	10	28	0
AE 4739D	23	28	44	46	69	87	7.3	4	4	32	9	16	0
AF 4743B	17	14	44	46	69	39	10.5	21	4	49	9	31	0
AG 4751B	13	12	6	21	52	61	8.1	23	3	54	18	32	0
AH 4765B	7	18	8	9	23	83	2.4	6	2	42	50	14	0
AI 4773B?	12	19	41	56	131	86	4.4	15	2	29	27	8	0
LINE 11701 (FLIGHT 31)													
A 5132B	10	19	12	7	16	45	3.7	0	3	44	17	22	0
B 5128D	2	6	19	24	62	48	1.2	10	2	52	35	25	0
C 5125B	6	6	19	24	62	47	5.6	30	2	40	30	16	0
D 5119B	20	25	34	53	144	142	7.1	10	2	33	30	11	0
E 5110D	6	6	3	6	25	8	5.2	25	2	55	56	23	0
F 5099H	6	17	7	26	57	124	2.1	1	1	35	65	7	0
G 5089B?	3	11	10	13	24	77	1.5	4	1	50	67	18	0
H 5084B	8	5	9	27	45	110	11.3	36	2	46	45	19	0
I 5068B	16	15	1	23	61	32	8.8	14	2	43	43	16	0
J 5056B?	4	9	13	21	70	37	2.3	13	2	34	45	8	0
K 5048B	3	13	17	22	53	129	1.0	3	1	38	57	11	8
L 5043B	17	16	34	34	77	124	8.4	13	3	34	21	13	0
M 5038B	2	4	15	13	73	75	1.4	13	3	41	21	18	4
N 5036B	12	17	15	13	73	75	5.1	2	3	39	19	17	0
O 5020B	21	25	15	40	111	110	7.7	1	3	28	14	9	0
P 5010D	34	25	61	50	139	73	15.5	4	5	28	5	14	7
Q 5001D	28	24	22	39	64	50	11.6	4	5	24	6	10	0
R 4996D	53	15	68	29	32	107	64.8	6	7	31	3	18	0
S 4992B	13	7	68	6	24	109	17.0	30	4	35	8	19	0
T 4988D	10	12	40	95	238	220	5.4	24	3	39	13	21	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11701	(FLIGHT 31)												
U 4986D	0	10	40	95	238	220	0.4	0	3	31	14	13	0
V 4983D	23	43	40	95	238	220	4.6	0	3	29	17	10	0
W 4980B	19	43	26	95	238	220	3.8	0	4	34	10	17	0
X 4974D	39	30	87	54	127	47	15.3	0	6	29	4	16	0
Y 4972D	30	22	87	54	127	47	14.4	0	6	32	5	17	0
Z 4967B	17	11	41	12	24	13	13.4	14	3	46	14	25	0
AA 4961B	9	12	69	54	129	54	4.8	12	4	51	9	32	0
AB 4958D	53	31	69	54	129	54	23.9	1	5	32	5	17	0
AC 4955B	31	22	69	54	129	54	15.7	5	5	37	6	22	0
AD 4936H	4	8	7	5	16	37	2.4	14	1	46	84	13	0
AE 4905S	1	1	1	2	2	4	-	-	-	-	-	-	0
AF 4853H	1	2	1	2	2	1	-	-	-	-	-	-	0
AG 4843B	5	9	11	14	28	15	2.8	5	2	65	49	32	0
AH 4791B	1	5	6	5	12	23	0.6	0	2	98	57	59	0
AI 4773D	4	9	1	12	13	76	1.9	13	1	43	637	0	0
AJ 4754D	5	7	0	3	3	20	3.6	25	1	78	909	0	0
AK 4728S	3	6	4	11	31	28	2.0	11	1	43	207	0	0
AL 4668D	7	11	5	10	16	53	3.9	25	1	47	336	5	0
AM 4644H	4	7	6	13	7	23	2.4	5	1	35	113	0	0
AN 4592S	4	5	0	4	8	6	3.1	26	1	124	1025	0	0
AO 4555B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AP 4517S?	1	2	0	1	2	2	-	-	-	-	-	-	0
AQ 4483H	2	3	5	4	14	1	1.0	0	1	53	373	23	0
AR 4434H	3	3	1	2	20	10	1.0	0	1	36	163	14	15
AS 4425B	6	7	2	7	20	4	4.7	16	1	53	180	9	0
LINE 11710	(FLIGHT 20)												
A 5279H	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5256H	6	3	9	13	34	18	13.0	21	1	27	58	0	0
C 5245B	5	8	7	13	10	5	3.4	3	1	47	88	10	0
D 5239D	6	11	7	9	38	11	3.2	8	1	45	259	1	0
E 5195B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 5170H	3	11	6	14	43	45	1.5	2	1	41	92	8	0
G 5162B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 5157D	1	2	0	2	2	4	-	-	-	-	-	-	0
I 5152B	8	17	8	25	49	102	3.1	10	1	43	131	8	0
J 5147B	6	19	8	19	49	102	1.9	0	1	45	87	12	0
K 5140B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 5132B	6	10	5	11	29	22	3.7	10	1	66	92	28	0
M 5118D	7	9	11	11	31	30	4.1	13	1	45	68	12	0
N 5113B	10	14	10	2	4	8	4.5	8	1	43	67	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11710	(FLIGHT	20)											
O 5096H	5	7	5	12	30	37	3.7	22	1	47	98	12	0
P 5075H	6	7	5	12	33	18	5.6	14	1	31	100	0	0
Q 5061B	8	7	4	1	9	5	8.0	22	1	44	94	10	0
R 5057D	3	4	3	3	9	16	3.7	38	1	47	68	15	0
S 5051B	15	8	3	5	49	2	16.0	18	2	47	25	22	0
T 5042B	5	4	12	2	8	26	7.0	35	3	37	21	15	0
U 5035D	13	15	23	16	47	35	6.2	4	4	30	12	11	0
V 5032D	10	12	23	20	52	35	5.4	7	4	31	12	12	0
W 5026D	3	7	18	10	26	26	1.9	8	3	38	19	16	0
X 5018B	26	12	30	20	51	20	25.0	3	4	35	12	15	0
Y 4991D	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 4982B	22	11	45	51	132	37	20.1	5	5	38	7	20	0
AA 4979B	17	22	45	51	132	37	6.0	0	6	23	5	9	0
AB 4969D	11	10	22	19	41	28	8.3	17	4	32	8	15	0
AC 4949B	33	19	72	38	97	30	20.1	8	8	27	3	15	0
AD 4941B	23	21	36	44	120	59	10.3	10	5	28	6	14	0
AE 4919B	10	11	11	21	43	15	6.7	21	3	33	20	13	0
AF 4912B	5	12	8	17	27	65	2.4	15	3	35	19	15	0
AG 4904B	5	5	18	19	45	38	6.5	35	5	38	7	21	0
AH 4894B	1	29	34	21	43	24	0.4	0	4	20	11	3	0
LINE 11711	(FLIGHT	31)											
A 5255D	14	44	5	57	190	356	2.7	2	1	11	130	0	0
B 5273D	9	33	10	55	189	238	1.9	0	1	8	194	0	0
C 5280D	4	17	2	11	26	63	1.4	0	1	33	83	2	0
D 5294S?	17	46	12	89	252	350	3.2	0	1	12	72	0	0
E 5314D	1	10	0	8	22	83	0.4	0	1	54	807	0	0
F 5336B	15	15	5	24	23	35	7.6	4	2	39	28	14	0
G 5348B?	6	11	6	16	34	64	2.8	16	1	56	248	12	0
H 5359D	9	12	2	10	20	9	4.8	16	1	48	70	17	0
I 5370B	22	12	26	21	47	167	20.5	15	3	45	17	23	0
J 5375D	7	39	27	39	95	173	1.3	0	1	42	54	15	0
K 5393D	14	19	23	27	93	73	5.5	10	1	51	128	14	0
L 5405B	42	34	35	37	102	72	14.2	1	4	31	11	14	0
M 5410B	11	11	15	31	129	92	7.3	15	3	36	16	16	0
N 5412D	21	28	15	52	129	92	6.7	1	3	28	20	8	0
O 5417D	18	18	36	52	129	90	8.1	4	2	41	33	16	0
P 5439E	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 5488H	4	6	11	5	13	5	3.0	12	2	55	39	25	0
R 5500H	2	4	3	6	16	7	1.7	6	1	33	90	0	0
S 5521H	4	3	8	1	3	2	1.0	0	1	27	73	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11711	(FLIGHT 31)												
T 5526E	2	10	5	2	5	2	1.1	0	1	56	86	19	0
U 5573H	1	2	1	1	2	4	-	-	-	-	-	-	0
V 5601H	0	4	2	3	15	6	1.0	0	1	20	182	0	0
W 5652B	4	8	9	16	12	37	2.3	17	1	35	293	0	0
X 5660B	6	7	6	9	23	10	4.4	25	1	54	69	21	0
Y 5666B	1	3	20	9	18	9	0.9	16	2	50	40	22	0
Z 5672B	1	10	20	7	17	77	0.4	0	2	50	50	22	0
AA 5676B	5	6	12	19	17	77	5.0	37	1	51	115	16	0
AB 5704B	10	18	27	40	62	2	3.7	0	1	29	54	2	0
AC 5722B?	1	4	2	3	13	37	0.5	2	1	51	231	9	0
AD 5746H	3	8	10	10	25	19	1.6	1	1	45	96	9	0
AE 5783S	0	5	1	7	9	20	0.4	0	1	46	571	0	0
AF 5809H	8	5	13	7	15	27	12.2	37	3	82	24	54	0
LINE 11720	(FLIGHT 20)												
A 5418H	1	2	1	0	2	4	-	-	-	-	-	-	0
B 5452D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5485D	5	10	5	15	8	6	2.8	20	1	44	507	0	0
D 5534H	15	24	2	51	75	103	5.0	4	2	32	38	7	0
E 5566B?	1	4	0	4	8	16	1.2	36	1	76	258	29	0
F 5591H	3	4	3	11	29	43	2.9	43	1	58	111	21	0
G 5620B	5	8	4	7	18	33	3.8	25	1	62	77	27	0
H 5634B	7	10	2	9	23	10	3.7	4	2	46	40	18	0
I 5640D	1	2	1	0	2	4	-	-	-	-	-	-	0
J 5682B	4	15	2	39	107	39	1.3	4	1	32	79	4	0
K 5686B	6	17	5	39	107	39	2.2	8	1	39	62	11	0
L 5696B	1	2	1	2	2	4	-	-	-	-	-	-	0
M 5707D	1	2	1	2	2	4	-	-	-	-	-	-	0
N 5730H	4	3	0	8	5	35	8.4	55	1	60	135	21	0
O 5751B	1	13	9	26	52	36	0.4	0	1	45	54	16	0
P 5763B	4	40	8	9	43	96	0.6	0	3	30	11	14	0
Q 5769B	18	20	45	48	106	21	7.4	8	3	26	12	9	0
R 5781H	8	13	2	6	20	45	3.8	15	3	28	16	10	0
S 5801B?	5	11	35	33	29	68	2.8	9	2	54	33	27	0
T 5807D	12	41	16	68	176	100	2.2	0	3	25	14	7	0
U 5814D	7	13	11	24	12	74	2.9	5	6	28	4	15	0
V 5815D	25	31	8	24	60	77	7.3	0	6	28	4	15	0
W 5817D	35	32	56	55	131	77	11.7	0	6	25	5	12	0
X 5827B?	14	10	52	31	82	24	12.4	13	7	34	4	21	0
Y 5834B	6	10	18	28	61	35	3.7	8	4	36	9	18	0
Z 5841B	5	1	6	2	5	2	49.0	57	3	45	15	24	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 11720	(FLIGHT 20)													
AA 5859B	16	3	32	43	108	79	67.3	21	2	30	30	6	0	
LINE 11721	(FLIGHT 31)													
A 6527B	21	19	3	48	128	89	10.0	8	2	25	22	5	0	
B 6520H	5	12	2	3	8	37	0.2	0	1	24	22	12	0	
C 6507H	3	4	6	10	27	25	4.0	29	3	38	16	16	0	
D 6491H	7	10	1	8	22	25	3.9	0	2	33	33	6	0	
E 6454S?	0	3	2	8	33	4	0.4	0	1	15	587	0	0	
F 6427S	0	2	0	2	1	4	-	-	-	-	-	-	0	
G 6347S?	2	30	0	8	24	223	0.5	0	1	3	320	0	0	
H 6305B	4	6	32	31	10	36	3.4	23	1	40	61	10	0	
I 6290B	31	26	65	55	144	116	12.6	0	6	28	5	14	70	
J 6282B	23	21	26	42	63	39	10.5	0	4	30	9	12	0	
K 6232B	13	16	28	38	97	58	5.8	1	1	31	58	2	0	
L 6223B	4	5	14	16	40	26	4.3	23	2	53	48	22	0	
M 6212H	1	2	1	2	2	4	-	-	-	-	-	-	0	
N 6184B	33	10	85	70	172	36	50.7	12	5	29	6	14	0	
O 6180B	21	17	77	43	90	41	10.8	8	3	29	18	9	0	
P 6170B	13	10	19	19	49	37	10.0	17	1	36	60	7	0	
Q 6153H	7	11	12	24	63	50	3.4	3	1	36	65	5	0	
R 6112B	3	2	3	2	6	22	9.5	71	1	94	94	53	0	
S 6103B	6	3	6	2	2	5	10.6	40	1	53	91	17	0	
T 6087H	1	6	4	6	13	15	0.5	0	1	64	71	25	0	
U 6044B?	2	5	0	2	2	19	2.1	30	1	132	1025	0	0	
V 5983B	5	5	1	3	15	21	6.1	37	1	122	774	14	0	
W 5974D	6	7	3	11	24	15	5.2	14	1	54	102	16	0	
X 5941H	3	8	8	15	39	30	1.5	9	1	43	77	11	0	
Y 5926B	7	11	16	25	64	28	3.9	10	1	41	83	8	0	
Z 5910S	1	2	0	2	2	4	-	-	-	-	-	-	0	
LINE 11730	(FLIGHT 20)													
A 6525B?	5	7	3	7	3	18	3.3	0	1	71	120	25	0	
B 6494B	5	9	4	1	17	29	3.0	7	1	49	78	15	0	
C 6453B?	1	2	1	2	2	3	-	-	-	-	-	-	0	
D 6442B?	8	6	4	7	19	19	8.0	35	1	62	94	26	0	
E 6432H	6	7	13	16	42	28	4.8	17	2	46	31	20	0	
F 6419D	5	8	6	2	4	5	3.2	4	1	58	122	16	0	
G 6381D	7	4	5	10	12	19	12.5	26	1	64	302	11	0	
H 6370B	7	16	4	20	52	59	2.6	0	1	32	57	3	0	
I 6335H	1	2	1	2	2	4	-	-	-	-	-	-	0	
J 6282D	6	11	3	2	6	68	2.8	15	1	50	167	11	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11730	(FLIGHT	20)											
K 6280D	6	9	3	2	6	19	4.1	22	1	51	112	15	0
L 6264H	5	9	0	10	30	70	2.6	17	1	25	205	0	0
M 6257B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 6241H	4	7	5	9	26	54	2.5	14	1	36	63	6	0
O 6229D	5	9	11	16	27	31	3.4	1	2	42	26	16	0
P 6217B	17	14	22	31	73	47	10.8	5	3	35	18	13	0
Q 6210B	5	6	22	27	61	38	4.2	19	3	58	20	33	0
R 6193H	8	6	3	10	25	28	8.7	17	2	56	43	25	0
LINE 11731	(FLIGHT	31)											
A 6651B	0	5	3	7	21	54	0.4	0	1	61	259	13	0
B 6664S	4	7	2	23	64	120	2.6	21	1	20	255	0	0
C 6669B?	5	4	4	1	64	116	6.3	33	1	48	289	1	0
D 6697D	2	7	0	10	8	25	1.5	7	1	77	929	0	0
E 6811B?	5	3	4	4	17	16	9.7	16	1	58	69	21	0
F 6828B	6	6	11	10	26	11	5.6	1	2	56	29	26	0
G 6854B	4	4	5	14	33	38	5.7	28	2	43	49	12	0
H 6858B	3	3	1	10	26	38	5.1	45	1	48	60	17	0
I 6863B	6	1	18	25	60	43	40.1	52	2	71	40	40	4
J 6868D	37	24	78	65	163	96	17.8	7	3	34	18	14	0
K 6874B	25	31	78	54	70	147	7.2	3	3	50	18	28	0
L 6894S	1	1	0	2	2	4	-	-	-	-	-	-	0
M 6917H	4	4	9	8	13	22	4.2	43	2	92	26	63	0
N 6960H	6	4	5	16	49	26	10.1	36	2	61	28	34	0
O 7011B	5	4	4	4	9	3	7.4	36	2	84	58	47	0
P 7019B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 7025D	9	6	0	13	14	1	11.4	23	3	67	19	42	0
R 7094S	1	2	1	2	1	1	-	-	-	-	-	-	0
S 7154H	1	2	1	2	2	2	-	-	-	-	-	-	0
T 7207H	4	6	5	7	4	17	4.1	16	1	68	93	27	0
U 7233H	3	7	4	5	16	15	2.0	13	1	72	126	29	0
V 7249H	1	6	2	11	26	6	0.8	1	1	63	90	26	0
LINE 11740	(FLIGHT	20)											
A 6656H	4	3	4	2	4	28	7.8	57	1	54	91	20	0
B 6700B	0	10	1	7	19	62	0.4	0	1	62	154	22	0
C 6705B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 6716D	4	11	3	8	10	29	1.6	4	1	59	138	19	0
E 6736B	10	3	2	10	26	99	28.6	49	2	34	32	12	0
F 6757D	4	11	7	4	20	35	1.6	8	1	59	157	19	0
G 6778S	0	4	1	7	21	5	0.4	0	1	44	272	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11740	(FLIGHT	20)											
H 6803H	8	8	2	2	5	38	0.1	0	1	31	58	17	0
I 6851B?	2	10	7	15	47	18	1.1	0	1	48	72	15	0
J 6949H	1	2	1	2	1	2	-	-	-	-	-	-	0
K 6979H	0	5	1	14	38	91	0.4	0	1	31	181	0	0
L 7001H	0	6	2	10	29	4	0.4	0	1	46	125	10	0
M 7022D	17	6	5	40	107	43	30.2	24	2	29	46	4	0
N 7026D	7	14	2	9	32	43	2.8	8	2	35	47	9	0
O 7032D	8	6	5	9	26	88	8.9	36	2	44	40	18	0
P 7034D	9	10	14	26	66	91	6.2	27	2	46	31	22	0
Q 7036D	7	18	18	26	66	91	2.5	7	2	45	23	23	0
R 7051B	1	2	1	2	2	4	-	-	-	-	-	-	0
S 7055B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 7076B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 7086D	21	22	38	16	77	47	8.2	0	3	33	18	12	0
V 7090B	24	26	38	1	77	42	8.9	3	3	32	14	13	0
W 7101B	13	14	17	23	56	23	7.0	2	3	38	18	16	0
X 7105B	13	14	17	23	56	26	7.0	0	2	30	26	6	0
Y 7112B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 7122B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 7206H	2	6	1	6	14	43	1.3	0	1	18	232	0	0
LINE 11741	(FLIGHT	31)											
A 7560B	4	3	7	5	9	1	1.0	0	1	57	264	29	0
B 7541H	15	11	29	8	14	15	11.0	6	3	40	13	20	0
C 7504B	5	11	8	10	25	41	2.2	2	1	68	79	31	0
D 7478B	8	7	3	6	19	26	7.6	8	2	73	43	39	0
E 7422E	5	4	3	0	2	13	7.8	40	1	86	172	38	0
F 7415H	1	2	1	2	2	1	-	-	-	-	-	-	0
G 7375B	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11742	(FLIGHT	34)											
A 6421S?	2	10	5	3	21	13	1.0	0	1	10	121	0	0
B 6279B	25	30	44	56	110	23	7.7	0	1	19	50	0	0
C 6277B	17	6	38	56	110	23	32.1	11	3	21	18	0	0
D 6194D	6	9	15	12	4	15	3.6	19	1	71	84	34	0
E 6185B	8	8	1	5	8	26	5.9	26	2	56	34	29	0
F 6155S	1	2	1	1	0	3	-	-	-	-	-	-	19
G 6111S	0	2	1	1	2	4	-	-	-	-	-	-	0
H 6092B?	1	2	0	2	2	4	-	-	-	-	-	-	0
I 6086D	1	2	1	2	2	4	-	-	-	-	-	-	0
J 6066H	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11750	(FLIGHT	20)											
A 7725H	1	10	4	6	18	34	0.5	0	1	44	70	10	0
B 7657B	6	3	2	5	5	13	13.3	36	1	73	118	30	0
C 7652B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 7597H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 7569B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 7553B	5	8	2	4	24	8	3.1	3	1	61	109	20	0
G 7523B?	4	7	3	8	22	31	3.2	10	1	154	667	26	0
H 7481H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 7445D	5	12	6	5	6	33	2.4	0	1	40	102	5	0
J 7441D	1	2	1	2	2	4	-	-	-	-	-	-	0
K 7425B	10	6	5	2	7	18	12.6	10	2	46	32	18	0
L 7421B	6	4	5	2	7	4	8.7	15	3	45	16	22	0
M 7408B?	8	3	29	23	60	16	21.0	27	3	51	16	28	0
N 7402B	27	23	33	30	73	37	11.9	0	3	32	13	12	0
O 7382B?	8	5	14	1	14	8	11.1	7	4	61	11	39	0
P 7375B	7	7	10	11	23	14	5.9	0	4	44	13	22	0
Q 7368B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 7352D	7	6	1	5	13	22	6.7	0	2	72	58	34	0
S 7333D	10	7	5	5	2	6	10.5	0	2	76	49	37	0
LINE 11751	(FLIGHT	34)											
A 3988D	4	4	1	4	11	13	4.3	0	2	87	39	49	0
B 3976B	8	4	4	14	12	25	13.4	12	2	54	45	21	0
C 3967B	5	8	1	4	11	36	3.3	0	2	32	33	5	0
D 3961B	14	17	12	10	59	48	6.5	0	3	42	19	18	9
E 3957B	12	10	12	10	59	48	8.4	0	2	32	40	3	0
F 3947S	2	2	3	6	28	29	4.0	31	1	35	300	0	0
G 3831D	7	23	8	40	77	131	2.0	0	1	41	343	0	0
H 3824D	5	12	27	20	77	131	2.3	10	1	37	57	9	0
I 3821D	15	6	27	20	127	115	23.6	32	3	69	14	47	0
J 3815D	6	16	13	17	58	83	2.1	6	3	52	19	30	0
K 3795B	8	5	17	6	10	20	10.9	27	3	75	24	48	0
L 3789B	5	4	10	16	35	24	6.6	27	3	41	21	17	0
M 3759B?	2	5	1	1	2	12	1.7	23	1	185	1025	0	0
N 3734H	0	5	3	6	16	2	0.4	0	1	78	147	30	0
O 3675S	1	1	1	1	2	1	-	-	-	-	-	-	0
P 3597H	2	4	1	5	15	25	0.6	0	1	24	332	0	0
Q 3544H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 3500B	5	2	8	12	5	2	21.7	39	1	93	158	42	0
S 3469H	1	2	3	4	7	8	0.8	0	1	42	228	14	0
LINE 11760	(FLIGHT	23)											
A 1061H	9	6	9	11	24	12	11.4	34	2	58	35	30	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11760	(FLIGHT	23)											
B 1083B	4	3	5	8	15	31	5.7	56	1	53	122	17	0
C 1091B	2	13	3	3	27	76	0.7	0	1	50	173	12	0
D 1140H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1189H	4	3	2	3	12	11	7.8	35	1	56	111	16	0
F 1212B?	1	2	1	2	2	4	-	-	-	-	-	-	0
G 1223B?	7	15	6	17	51	69	3.0	0	2	34	43	7	0
H 1234B	9	4	1	3	9	11	20.1	33	2	51	28	25	0
I 1266D	3	2	10	12	28	19	9.1	59	2	74	46	42	0
J 1275B	1	2	1	2	2	4	-	-	-	-	-	-	0
K 1329H	4	4	1	13	41	33	4.3	40	1	56	104	19	0
L 1340H	1	2	1	2	2	4	-	-	-	-	-	-	0
M 1360B?	9	7	13	8	2	3	9.7	26	2	60	25	34	0
N 1371B	4	5	5	0	2	15	4.8	41	1	81	64	45	0
O 1387B	9	4	8	13	14	7	18.0	28	3	42	19	19	0
P 1391D	20	21	15	13	48	7	8.3	3	3	28	20	7	0
Q 1396D	4	9	9	34	48	7	2.0	8	3	35	22	13	0
R 1407B	11	11	10	16	31	32	7.7	13	2	33	23	11	0
S 1428B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 1510B?	5	22	13	61	143	302	1.4	6	1	28	54	5	0
U 1532B	8	3	5	26	77	92	27.7	46	1	20	58	0	0
V 1556B	6	10	12	20	49	41	3.8	0	2	46	46	15	0
W 1560B	3	10	12	20	49	41	1.7	0	2	58	32	28	10
X 1579H	32	7	42	35	95	49	73.8	0	5	25	5	9	0
LINE 11761	(FLIGHT	34)											
A 6863H	12	9	7	3	5	28	10.3	0	4	32	9	13	17
B 6905H	0	6	3	6	22	37	0.4	0	1	48	316	0	0
C 6985B	11	8	30	17	30	17	9.6	0	2	65	28	35	0
D 6989B	15	6	30	17	30	17	23.1	1	4	89	14	63	0
E 6995D	8	6	7	9	24	26	8.9	4	2	71	57	35	0
F 7005B	1	2	0	2	2	4	-	-	-	-	-	-	0
G 7013D	10	8	13	11	28	22	8.9	8	2	85	35	53	0
H 7023B	5	7	4	10	23	23	3.8	14	1	126	101	78	0
I 7067B	14	16	13	36	69	31	6.7	7	1	33	138	0	0
J 7070B	12	16	13	36	69	51	5.2	6	2	43	52	13	0
K 7092S	1	2	0	2	1	1	-	-	-	-	-	-	60
L 7179S	0	2	0	2	1	3	-	-	-	-	-	-	0
M 7213H	1	2	2	6	4	2	1.3	30	1	38	351	0	0
N 7232H	0	6	3	6	17	16	0.4	0	1	46	208	0	0
O 7271B?	5	3	4	2	1	8	9.1	0	2	82	37	46	0
P 7314B	1	2	0	0	1	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11761 (FLIGHT 34)													
Q 7327B	4	4	1	11	30	60	4.5	48	1	30	408	0	0
LINE 11770 (FLIGHT 23)													
A 2489B?	6	10	13	23	23	26	3.2	20	1	47	57	18	0
B 2506D	6	10	7	12	31	29	3.5	13	1	48	82	14	0
C 2510D	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2516D	9	6	6	6	15	30	11.4	25	2	39	50	11	0
E 2523B	4	13	2	11	44	68	1.8	0	1	33	57	5	0
F 2531D	3	7	2	8	11	9	1.9	19	2	46	43	18	0
G 2540B	7	15	2	1	10	18	2.8	10	1	29	64	3	0
H 2578D	4	20	2	21	3	191	1.1	2	1	20	536	0	0
I 2597D	4	8	3	11	20	39	2.5	16	1	56	720	0	0
J 2620H	2	1	7	5	14	22	5.3	79	1	36	74	7	0
K 2633D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2640B?	1	2	1	2	2	4	-	-	-	-	-	-	0
M 2647B?	2	4	2	4	20	9	1.8	33	1	41	238	1	0
N 2655B	9	11	10	3	23	39	4.9	10	1	33	124	0	0
O 2659H	5	7	11	3	23	3	1.0	0	1	21	64	6	0
P 2665D	1	2	1	1	2	4	-	-	-	-	-	-	0
Q 2676H	6	7	2	6	14	9	4.4	30	1	48	61	18	0
R 2688D	5	5	2	0	7	2	5.1	32	2	60	57	28	0
S 2711H	5	6	14	16	4	21	4.1	24	2	51	27	26	0
T 2733B	5	8	1	6	13	43	3.0	26	1	71	122	31	0
U 2747B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 2756B?	1	2	1	2	2	4	-	-	-	-	-	-	0
W 2786B	1	2	1	1	2	4	-	-	-	-	-	-	0
X 2808D	6	7	9	9	20	22	5.3	22	1	55	67	21	0
Y 2819B	1	2	1	2	2	0	-	-	-	-	-	-	0
Z 2830B	5	16	6	31	94	128	1.7	0	1	21	107	0	0
AA 2841B	7	17	26	39	85	55	2.8	0	2	28	48	2	0
AB 2844B	13	23	20	39	85	57	4.2	0	2	24	39	0	0
AC 2861D	7	12	7	9	22	37	3.3	23	1	54	61	24	0
AD 2875D	18	22	6	32	97	145	7.1	16	1	32	62	6	0
AE 2886B?	1	2	1	2	2	3	-	-	-	-	-	-	0
AF 2906H	4	10	7	13	29	44	1.8	13	1	47	76	16	0
AG 2931B	9	20	9	23	70	115	3.0	1	1	39	65	10	0
AH 2939B	12	5	1	6	7	7	20.3	26	3	75	14	51	0
AI 2946H	12	6	17	11	6	1	15.6	16	5	52	8	33	0
AJ 2964B	64	84	129	19	56	61	9.6	0	5	14	6	2	0
LINE 11771 (FLIGHT 35)													
A 6874H	5	5	6	9	18	6	5.5	0	1	29	62	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11771	(FLIGHT	35)											
B 6906B	7	9	8	8	12	3	4.6	10	2	51	56	19	0
C 6930H	5	2	3	14	30	8	15.2	60	1	52	98	17	0
D 6970B	4	3	3	9	20	31	6.1	31	1	105	97	59	0
E 7010H	2	2	2	2	5	1	1.0	0	1	25	15	15	0
LINE 11772	(FLIGHT	35)											
A 7184B	5	4	10	1	41	35	6.3	0	2	78	29	45	0
B 7189B?	5	8	10	16	5	16	2.9	0	2	38	47	7	0
C 7198D	6	10	5	9	12	42	3.6	6	1	40	60	9	0
D 7206D	1	2	1	2	2	4	-	-	-	-	-	-	0
E 7239B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 7245B	11	63	20	106	290	375	1.4	0	2	15	42	0	0
G 7256B	21	62	29	109	292	371	3.2	0	2	14	33	0	0
H 7264D	6	4	38	56	142	105	8.9	22	2	43	25	17	0
I 7268B	25	34	41	61	156	111	6.7	0	3	25	16	7	0
J 7269B	6	34	41	61	156	111	1.2	0	3	28	15	9	0
K 7275B	12	2	1	3	9	28	66.7	37	3	44	17	23	0
L 7281B	3	10	12	3	8	73	1.5	0	4	47	13	25	0
M 7287B?	13	2	12	11	30	10	76.6	4	5	56	8	36	0
N 7299D	1	2	1	1	2	3	-	-	-	-	-	-	0
O 7307D	1	2	1	2	2	4	-	-	-	-	-	-	6
P 7332D	10	6	1	1	22	10	12.4	0	3	96	20	64	0
Q 7386D	5	6	5	6	11	16	4.2	4	1	74	386	4	0
R 7430S	0	3	2	3	1	12	0.4	0	1	103	270	45	0
S 7669D	6	10	8	13	20	36	3.0	0	1	68	195	19	0
T 7711B	15	6	18	4	33	27	24.0	7	3	39	14	17	0
LINE 11780	(FLIGHT	23)											
A 3447H	2	5	2	7	5	38	2.2	32	1	68	174	24	0
B 3430H	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3389D	5	8	1	4	13	33	3.3	2	1	71	232	19	0
D 3374B	2	4	3	2	8	8	1.8	0	1	85	67	43	0
E 3360H	2	2	2	6	20	19	3.8	43	1	56	169	10	0
F 3343B	6	7	4	8	15	19	4.3	21	1	68	84	30	0
G 3331B	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3278B	6	4	1	3	6	23	12.2	39	1	97	263	40	0
I 3265B?	8	4	0	4	1	7	14.0	36	1	65	140	23	0
J 3218H	2	5	4	3	8	2	1.0	0	1	41	144	18	0
K 3187D	1	1	1	2	2	4	-	-	-	-	-	-	0
L 3179D	9	10	3	18	10	99	6.2	19	1	56	102	19	0
M 3167H	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE			MAG
	1050 HZ		892 HZ		7323 HZ		DIKE		SHEET	EARTH			CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11780	(FLIGHT	23)											
N 3134B?	7	10	2	12	33	65	4.0	17	1	32	242	0	0
O 3114H	6	9	12	17	46	25	3.3	0	2	36	30	10	0
P 3097B	9	2	13	9	33	21	47.3	28	2	57	51	24	0
Q 3094B	8	6	14	17	42	22	8.7	17	2	51	33	22	0
R 3090B	1	2	1	2	2	4	-	-	-	-	-	-	0
S 3080B	4	8	7	11	29	30	2.5	4	2	64	51	31	0
LINE 11781	(FLIGHT	35)											
A 8360H	5	2	5	5	12	1	18.2	26	2	64	61	27	0
B 8345B?	6	7	1	0	3	20	4.5	4	1	51	523	0	0
C 8308S	1	2	1	2	2	4	-	-	-	-	-	-	0
D 8281B	4	1	9	6	14	1	25.4	57	1	52	66	18	0
E 8263B	22	4	45	16	39	39	84.0	0	8	16	3	2	0
F 8244B	24	17	19	21	58	31	14.1	0	5	36	7	19	0
G 8230B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 8214D	2	2	11	16	41	16	5.3	52	1	58	98	19	5
I 8206D	8	11	12	13	35	1	4.2	0	2	51	34	22	0
J 8193D	10	13	16	20	43	31	5.1	0	3	62	17	37	0
K 8190D	30	12	31	20	43	32	31.4	0	4	51	10	31	0
L 8175H	8	1	16	18	41	28	149.2	40	3	58	16	34	0
M 8076S	4	3	0	1	2	4	5.8	37	1	125	1025	0	0
N 7903S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11790	(FLIGHT	23)											
A 3584B?	2	1	1	9	22	25	6.7	67	1	40	56	10	0
B 3592D	8	13	6	3	11	26	3.7	0	1	43	69	10	0
C 3612B	2	2	1	2	7	62	7.6	87	1	53	91	21	0
D 3631B?	3	5	6	11	22	58	3.0	40	1	47	163	10	0
E 3636B?	6	4	1	6	20	24	8.1	41	1	32	233	0	0
F 3648D	5	5	4	5	12	2	5.1	35	1	61	79	26	0
G 3665H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 3693D	5	2	5	2	8	21	17.0	47	1	38	283	0	0
I 3704H	1	2	1	1	2	4	-	-	-	-	-	-	0
J 3720B?	3	2	4	4	7	2	1.0	0	1	28	149	10	0
K 3776D	11	10	7	4	9	17	7.7	15	1	54	75	20	0
L 3786D	11	15	11	17	40	22	5.5	5	2	27	40	2	0
M 3796D	13	29	1	8	47	75	3.4	0	1	29	63	2	0
N 3810D	1	2	1	2	2	4	-	-	-	-	-	-	0
O 3822D	4	7	3	3	7	18	2.8	26	1	64	142	23	0
P 3876H	2	5	6	6	14	21	2.1	5	2	67	51	32	0
Q 3913B?	7	4	5	5	2	1	9.8	3	2	64	39	31	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11790	(FLIGHT	23)											
R 3924B	10	8	5	5	3	10	8.5	2	2	47	35	18	0
S 3941D	9	6	15	15	16	11	10.6	4	2	56	41	24	0
T 3947D	10	5	15	15	14	4	16.9	19	2	49	28	22	0
U 3958B	7	11	10	23	60	63	3.9	13	2	47	45	19	0
V 3972B	7	14	4	8	49	42	3.2	10	2	41	44	14	0
W 3983D	13	13	12	16	45	48	7.4	13	2	33	39	7	0
X 3999H	4	4	10	6	18	14	6.9	46	3	61	20	37	0
Y 4036B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 4050B	4	13	4	18	49	65	1.4	0	2	52	46	22	0
AA 4059B	7	11	21	39	114	114	3.9	19	1	42	70	12	0
AB 4079H	14	12	24	25	58	37	9.0	18	4	47	12	27	0
LINE 11791	(FLIGHT	35)											
A 8686H	9	4	12	9	23	11	15.1	9	2	52	25	24	0
B 8809D	1	10	0	6	17	5	0.4	0	1	33	744	0	0
C 8852B?	8	10	10	16	42	8	5.3	0	2	34	37	6	0
D 8875B	9	7	5	6	18	23	9.3	6	3	50	19	25	70
E 8890B?	7	5	0	20	43	31	10.1	35	1	72	71	36	0
F 8911B?	6	9	5	16	30	61	3.8	8	1	21	347	0	0
G 8936D	4	5	4	8	25	14	5.1	30	1	89	345	26	40
H 8956H	3	4	1	6	20	12	3.2	15	2	57	32	27	0
I 8961B?	5	5	8	10	23	22	4.9	27	3	83	25	54	4
J 8969B?	18	8	9	1	38	20	24.8	10	3	52	17	29	0
K 8973H	2	10	9	16	38	13	0.6	0	4	39	11	20	0
L 9003B	7	17	5	16	27	82	2.5	0	1	17	525	0	60
M 9040D	5	7	2	1	6	5	3.5	22	1	100	690	7	0
N 9118S	0	4	2	5	15	26	0.4	0	1	74	557	0	0
O 9292S	1	2	1	1	2	4	-	-	-	-	-	-	0
LINE 11800	(FLIGHT	23)											
A 4527H	5	4	7	3	9	10	6.6	19	2	46	55	13	0
B 4511B	8	11	4	3	7	8	4.3	6	2	59	55	26	0
C 4501B	9	17	10	27	62	62	3.4	13	1	53	66	22	0
D 4497B	10	5	9	27	59	62	16.3	34	1	53	56	22	0
E 4481B	5	7	6	9	14	25	3.6	34	2	77	46	45	0
F 4469D	5	11	8	12	33	40	2.7	14	2	68	58	35	0
G 4462B	8	6	4	11	30	25	7.9	19	1	67	110	25	0
H 4456B	6	16	9	22	62	51	2.2	0	1	43	71	11	0
I 4438H	2	9	7	2	2	8	0.1	0	1	25	132	6	0
J 4408S	4	3	0	3	12	4	6.1	30	1	46	218	0	0
K 4383B?	3	5	0	1	6	15	3.1	11	1	83	93	40	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11800	(FLIGHT	23)											
L 4377D	5	6	2	3	3	5	5.1	21	1	72	124	29	0
M 4367B	4	4	2	3	3	7	3.8	29	1	68	292	15	0
N 4323B?	9	5	12	10	28	26	11.4	38	2	59	45	30	0
O 4317B	11	15	6	13	34	37	5.3	0	2	50	46	20	0
P 4306B	6	7	7	2	5	20	4.7	29	2	77	44	45	0
Q 4294B?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 4251B?	4	6	9	11	29	25	3.6	16	2	44	37	16	0
S 4240B?	4	7	5	12	31	32	3.0	12	2	51	35	23	0
T 4231B?	10	7	18	17	6	20	9.8	12	3	50	16	26	0
U 4219B?	6	4	9	7	18	10	10.2	21	3	50	21	25	0
V 4203H	16	11	3	22	53	23	12.3	0	4	25	10	6	0
LINE 11801	(FLIGHT	34)											
A 2583S?	4	1	4	17	43	104	26.6	59	2	81	51	46	0
B 2589S?	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2644D	3	6	1	0	4	10	2.4	1	1	50	191	4	0
D 2679B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 2683D	3	5	1	3	11	9	2.2	22	1	77	143	32	0
F 2693B	5	7	5	8	20	22	4.0	14	1	56	70	21	0
G 2703D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 2714D	13	14	26	18	45	33	7.4	3	3	67	21	41	0
I 2758B	3	9	4	9	26	23	1.3	0	1	53	199	6	16
LINE 11802	(FLIGHT	35)											
A 9583S	1	2	0	1	1	1	-	-	-	-	-	-	0
B 9521S	1	2	0	2	2	3	-	-	-	-	-	-	0
C 9474S	1	2	0	1	2	4	-	-	-	-	-	-	0
LINE 11810	(FLIGHT	29)											
A 1830D	4	9	1	3	17	10	2.1	23	1	49	130	14	0
B 1842D	6	6	4	8	15	5	5.4	21	1	55	82	19	0
C 1851D	3	8	1	7	15	50	1.6	13	1	56	107	19	0
D 1860D	11	8	10	9	70	60	10.4	27	1	42	84	10	0
E 1862D	12	18	10	9	70	60	4.9	9	1	40	153	4	0
F 1887D	5	8	3	5	18	11	3.1	8	1	33	247	0	0
G 1893B	2	2	2	1	18	14	4.1	65	1	53	161	11	0
H 1906H	5	7	9	12	30	2	3.7	19	1	41	76	8	0
I 1956H	4	12	6	11	34	116	1.6	6	1	38	134	4	0
J 1976H	1	8	6	14	34	28	0.4	0	1	53	127	14	0
K 2011D	1	2	1	2	2	4	-	-	-	-	-	-	0
L 2016B	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11810	(FLIGHT	29)											
M 2023D	4	8	2	9	8	4	2.7	16	1	69	182	23	0
N 2042B?	1	1	1	2	2	4	-	-	-	-	-	-	0
O 2052B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 2057B	8	5	28	48	101	91	9.3	47	2	39	30	17	0
Q 2061B	1	16	28	48	101	3	0.4	0	3	33	18	14	0
R 2074B	11	6	23	10	15	35	15.8	33	5	41	7	25	0
S 2077B	15	9	23	10	15	41	15.7	22	4	34	10	17	0
T 2082D	24	17	57	50	130	65	13.3	9	2	35	24	13	0
U 2092B	26	16	61	44	121	47	17.4	6	4	40	10	22	0
V 2095B	28	21	61	44	121	49	14.0	5	3	37	14	17	0
W 2105D	6	9	17	21	52	42	3.8	23	1	41	277	0	0
X 2111D	1	2	0	2	2	4	-	-	-	-	-	-	0
Y 2150D	15	17	10	16	32	66	7.1	8	1	72	73	36	0
Z 2157B?	2	4	8	15	32	66	1.4	22	1	41	243	0	0
AA 2162B?	1	2	0	1	2	4	-	-	-	-	-	-	0
AB 2201B	11	9	2	15	8	1	9.7	0	2	41	28	14	0
AC 2205B	12	9	2	15	39	41	10.6	20	2	50	36	23	0
AD 2213B	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 2219B	7	7	1	0	14	16	6.2	31	1	64	110	26	0
AF 2236B	9	11	1	3	25	35	0.9	0	1	27	51	12	0
AG 2241B	4	4	12	20	9	6	4.5	34	3	35	17	14	0
AH 2246D	16	12	8	16	33	43	11.0	12	2	58	32	31	0
AI 2260D	16	24	18	34	81	47	5.1	8	1	42	142	7	0
AJ 2263D	16	22	18	34	37	30	5.5	11	1	46	81	15	0
AK 2293D	5	7	0	3	13	14	3.9	24	1	71	891	0	0
AL 2371B?	1	2	0	2	2	4	-	-	-	-	-	-	0
AM 2448D	2	4	0	6	10	7	1.4	7	1	103	1025	0	0
LINE 11820	(FLIGHT	31)											
A 11591B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 11580B	6	17	6	26	66	135	2.0	3	1	40	160	5	0
C 11570B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 11563B	8	7	9	43	81	145	7.2	22	1	49	142	10	0
E 11540H	4	7	2	7	21	28	3.0	14	1	43	142	4	0
F 11519D	7	8	6	5	26	27	4.8	10	1	44	249	0	0
G 11484H	2	6	8	6	16	21	1.8	0	1	44	97	4	0
H 11472H	5	9	7	11	31	35	2.6	3	1	54	100	16	0
I 11463B?	5	4	3	11	22	29	7.6	27	1	88	336	24	0
J 11424D	1	2	1	2	1	4	-	-	-	-	-	-	0
K 11401H	4	5	4	10	24	42	4.2	30	2	53	38	25	0
L 11384B	13	16	34	18	21	9	6.5	0	2	40	38	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT
LINE 11820	(FLIGHT	31)									
M 11330B	1	2	1	2	2	4	-	-	-	-	0
N 11310B	5	10	8	13	37	34	2.7	6	1	46	0
O 11299B	1	2	1	2	2	4	-	-	-	-	0
P 11287D	2	6	1	7	20	13	1.4	6	1	89	0
Q 11279B	6	4	1	10	26	23	9.8	24	2	56	0
R 11270B	19	13	2	27	10	2	14.2	10	2	56	0
S 11256D	4	7	3	8	17	31	3.3	16	1	66	0
LINE 11830	(FLIGHT	31)									
A 10555B	1	2	1	2	2	4	-	-	-	-	0
B 10569B	5	5	1	1	2	12	4.9	0	1	67	0
C 10579B?	7	8	7	7	36	24	4.9	11	1	48	0
D 10610B?	3	13	5	17	37	100	1.0	2	1	35	0
E 10642B?	4	11	6	14	8	36	2.2	1	1	51	0
F 10662H	4	7	5	5	14	51	3.2	32	1	53	0
G 10676H	6	5	7	9	7	11	6.7	20	2	36	0
H 10691B?	5	7	2	1	33	3	3.7	20	1	57	0
I 10706D	2	6	2	7	18	49	1.7	21	1	64	0
J 10734H	8	11	8	24	59	50	4.3	25	3	47	0
K 10743B	6	6	17	26	58	62	6.0	40	2	61	0
L 10749B	8	14	17	27	65	81	3.7	20	2	42	0
M 10753D	20	31	35	75	186	86	5.4	8	2	43	0
N 10756D	16	30	35	75	186	86	4.1	7	1	36	0
O 10801D	1	2	1	2	2	4	-	-	-	-	40
P 10806D	8	9	5	6	6	24	6.2	15	1	123	0
Q 10814H	6	3	2	0	1	9	11.7	31	4	107	0
R 10833D	1	2	1	2	2	4	-	-	-	-	0
S 10852B	5	3	1	2	8	9	9.0	44	1	66	15
T 10856D	1	1	1	2	2	4	-	-	-	-	0
U 10872B?	6	5	9	11	27	3	7.2	20	3	56	0
V 10877B	1	2	1	2	2	4	-	-	-	-	0
W 10883D	6	6	4	16	25	16	6.5	27	1	55	0
X 10887D	12	5	4	16	25	16	22.2	24	1	52	0
Y 10910S	1	2	1	2	1	4	-	-	-	-	0
Z 10930D	14	11	10	7	14	22	10.0	10	1	50	0
AA 10939B	5	6	3	2	5	15	4.4	31	1	80	0
AB 10998D	3	5	0	3	13	7	2.6	31	1	118	0
LINE 11840	(FLIGHT	31)									
A 10404H	2	3	1	7	24	45	1.6	19	1	44	0
B 10387D	4	12	3	14	30	42	1.7	0	1	49	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN M	COND DEPTH .SIEMEN M	RESIS OHM-M	DEPTH M	NT
LINE 11840	(FLIGHT	31)									
C 10336B?	1	2	1	2	2	4	-	-	-	-	0
D 10331H	4	7	4	7	21	19	2.6	0	1	53	0
E 10314H	3	3	5	6	1	28	4.4	34	1	50	0
F 10286B?	1	2	1	2	2	4	-	-	-	-	0
G 10249B	4	8	4	3	3	18	2.7	0	2	107	0
H 10244B	7	9	13	14	35	21	4.4	0	2	43	0
I 10239B	1	2	1	2	2	4	-	-	-	-	0
J 10232E	5	8	15	7	17	33	3.0	2	1	75	0
K 10162D	4	2	3	4	7	5	1.0	0	1	46	0
L 10159D	5	9	6	9	26	21	2.8	12	1	90	0
M 10151D	3	10	3	8	27	62	1.5	5	1	69	0
N 10150B	1	2	1	2	2	4	-	-	-	-	0
O 10134B	1	2	1	2	2	4	-	-	-	-	0
P 10108B?	1	2	1	2	2	4	-	-	-	-	0
Q 10100H	6	5	2	5	13	13	6.6	7	1	43	0
R 10095D	8	9	7	14	36	20	6.0	0	1	50	0
S 10084B	4	6	2	11	26	25	3.2	20	1	89	0
T 10047D	3	4	4	6	5	12	3.5	14	1	73	0
LINE 11850	(FLIGHT	31)									
A 9387H	3	9	2	1	2	32	0.1	0	1	34	0
B 9411D	7	11	5	11	31	36	3.9	5	1	53	0
C 9420B?	6	15	5	16	43	87	2.4	11	1	38	0
D 9446B?	2	9	4	5	18	24	0.8	0	1	35	0
E 9472B?	1	2	1	2	2	4	-	-	-	-	0
F 9487D	7	12	14	10	32	75	3.3	0	2	49	0
G 9500B	7	11	9	19	43	97	3.7	26	1	46	0
H 9508B	5	8	5	6	6	38	3.4	28	1	51	0
I 9534H	2	5	2	8	27	4	1.9	26	1	42	0
J 9622D	1	1	0	2	2	4	-	-	-	-	0
K 9630D	3	9	8	14	36	55	1.8	11	1	47	0
L 9634D	6	5	8	20	68	85	6.4	34	1	40	0
M 9638B	7	13	8	20	68	23	3.1	10	1	59	0
LINE 11851	(FLIGHT	31)									
A 9719B?	1	2	1	2	2	4	-	-	-	-	0
B 9726B?	1	2	1	2	2	4	-	-	-	-	0
C 9729B?	4	5	10	34	45	83	4.2	35	1	41	0
D 9814H	1	5	1	7	4	2	1.1	4	1	58	0
E 9841D	4	11	5	11	31	31	2.1	5	1	68	0
F 9846B	12	5	1	3	14	14	22.0	27	1	59	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11851	(FLIGHT	31)											
G 9859D	9	8	3	13	32	30	8.2	21	2	54	54	23	0
H 9865B	10	7	3	26	46	56	10.3	24	1	39	70	8	0
I 9892D	4	10	1	12	30	46	2.1	1	1	79	169	31	0
J 9896B	6	3	3	12	0	46	18.6	52	1	65	182	21	0
LINE 11860	(FLIGHT	31)											
A 9253B	4	6	5	15	46	57	3.5	25	1	45	251	2	0
B 9192D	5	6	4	5	16	9	5.3	34	1	97	263	42	0
C 9168H	2	3	5	7	18	19	2.1	25	2	49	57	17	0
D 9161B	3	4	3	1	16	1	4.7	17	1	53	73	16	0
E 9149B	4	4	6	5	14	8	4.8	26	1	50	179	6	0
F 9136H	3	5	2	8	22	37	2.8	26	1	47	182	6	0
G 9126D	1	2	1	2	2	4	-	-	-	-	-	-	0
H 9117B?	1	2	1	2	2	4	-	-	-	-	-	-	0
I 9113H	3	5	10	10	27	14	2.8	13	2	61	46	29	0
J 9096H	4	5	8	8	9	12	4.9	13	3	50	24	23	0
K 9082B	11	9	15	17	42	35	8.8	16	2	60	29	33	0
L 9061B	22	37	22	55	143	85	5.3	0	2	26	38	2	0
M 9046B	4	7	2	5	22	26	2.9	18	1	30	544	0	0
N 9032D	7	14	7	12	38	58	3.0	10	1	26	483	0	0
O 9025B	1	2	1	2	2	4	-	-	-	-	-	-	0
P 9020D	6	7	5	6	17	15	5.3	14	1	50	147	9	0
Q 8992B	9	5	6	6	13	7	13.0	25	2	86	61	49	0
R 8982D	6	7	5	6	15	16	5.0	0	1	47	171	1	0
LINE 11870	(FLIGHT	31)											
A 8734B?	4	6	3	12	30	70	3.7	24	1	87	600	4	0
B 8754B?	5	4	11	17	13	26	7.2	34	1	68	100	29	0
C 8775B?	8	9	6	20	47	76	5.9	27	2	47	47	19	0
D 8795B	4	5	4	9	26	3	3.2	23	1	48	103	12	0
E 8819B	14	2	1	7	17	3	75.1	39	2	56	48	27	0
F 8826B	9	9	1	6	19	24	6.1	25	1	54	66	23	0
G 8831B?	7	10	2	5	13	9	4.5	10	1	49	65	16	0
H 8835B	5	9	7	4	3	31	0.1	0	1	33	128	14	0
I 8856H	1	5	3	6	23	23	0.9	7	1	49	276	4	0
J 8899D	12	23	14	5	16	77	3.6	2	1	40	66	10	0
K 8903B	11	24	14	24	67	78	3.4	5	2	46	52	17	0
L 8905D	14	24	14	24	67	78	4.4	12	1	43	78	13	0
M 8913B	4	13	4	34	84	118	1.6	15	1	43	150	10	0
N 8916B	9	25	6	34	84	118	2.5	6	1	39	126	7	0
LINE 11880	(FLIGHT	31)											
A 8345B?	1	3	2	3	8	10	0.7	0	1	40	279	12	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT		
LINE 11880	(FLIGHT 31)												
B 8324B	5	15	15	7	16	70	1.8	0	1	46	141	8	0
C 8311H	9	9	11	20	49	58	6.2	16	2	42	30	17	0
LINE 19010	(FLIGHT 28)												
A 7544H	5	13	9	13	8	4	2.0	0	1	26	59	0	0
B 7520H	6	8	9	14	27	11	4.2	31	1	56	55	26	0
C 7494H	4	3	0	1	9	24	9.4	56	1	44	87	12	0
D 7472H	6	8	4	10	19	47	4.6	30	1	37	149	3	0
E 7423H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 7380S	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 19020	(FLIGHT 28)												
A 6655H	4	6	3	11	4	33	3.1	18	1	45	243	0	0
B 6678S	4	4	0	4	4	24	5.6	48	1	93	964	0	0
C 6718B	6	6	3	12	24	3	5.3	16	1	39	123	1	80
D 6740M	0	2	1	2	2	4	-	-	-	-	-	-	0
E 6763B	1	2	1	2	2	2	-	-	-	-	-	-	0
F 6847H	10	15	10	25	67	83	4.1	5	2	39	41	12	0
G 6865H	12	13	15	20	54	7	7.2	12	2	44	26	19	0
H 6884M	0	2	0	1	1	4	-	-	-	-	-	-	0
I 6901M	0	2	0	2	4	12	0.4	0	1	147	1025	0	0
J 6916S	1	2	0	1	2	4	-	-	-	-	-	-	40
K 6988M	0	2	0	1	2	4	-	-	-	-	-	-	15
L 7018S	1	2	0	2	2	4	-	-	-	-	-	-	0
M 7026M	0	1	0	1	2	4	-	-	-	-	-	-	240
N 7031M	0	1	0	3	23	23	0.4	0	1	52	770	0	440
O 7040B?	4	7	1	5	38	28	2.7	26	1	36	578	0	0
P 7064D	5	9	2	11	31	24	3.0	19	1	37	341	0	0
Q 7083B?	6	5	4	10	9	19	6.5	31	1	46	150	7	0
R 7088B?	1	2	1	1	2	4	-	-	-	-	-	-	70
S 7093B?	8	18	3	28	85	125	2.7	4	1	21	165	0	0
T 7106B?	6	2	0	4	10	50	19.8	62	1	54	158	16	0
U 7124H	3	5	4	7	19	19	2.4	9	1	45	118	5	0
LINE 19030	(FLIGHT 29)												
A 3559H	0	6	6	8	19	2	0.4	0	2	59	55	25	0
B 3523H	1	1	2	4	10	16	0.6	0	1	44	253	18	0
C 3501H	2	3	3	3	9	3	1.0	0	1	30	157	9	8
D 3465B	11	12	3	2	74	76	6.6	24	2	46	51	18	0
E 3457B	4	9	2	4	4	14	2.5	26	4	66	12	46	0
F 3412B?	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19030	(FLIGHT	29)											
G 3402B	15	2	21	27	35	11	120.9	23	2	35	26	11	0
H 3401B	15	18	21	27	35	11	6.7	0	3	32	17	11	0
I 3365H	0	5	5	6	15	26	0.4	0	1	74	97	31	0
J 3330S?	1	2	0	2	2	4	-	-	-	-	-	-	0
K 3280M	2	3	5	2	12	2	1.9	36	1	122	1025	0	0
L 3199S	0	2	0	2	1	4	-	-	-	-	-	-	140
M 3162B	4	13	13	10	86	87	1.6	2	1	30	102	0	0
N 3153B	5	13	5	1	20	38	2.2	0	1	48	56	17	0
O 3132D	5	7	3	4	11	11	3.9	8	1	71	79	32	0
P 3100S	0	2	1	2	0	4	-	-	-	-	-	-	0
Q 3076S	0	2	1	2	2	4	-	-	-	-	-	-	0
R 3042B?	3	3	4	2	4	19	0.1	0	1	37	275	12	0
S 3033B?	5	10	1	8	28	45	2.8	18	1	53	172	12	0
T 3011B?	5	6	2	8	21	36	5.3	36	1	76	140	33	0
U 2992B?	1	2	1	2	2	4	-	-	-	-	-	-	0
V 2961S	0	5	4	8	18	13	0.4	0	1	78	98	36	0
W 2916H	5	3	13	3	23	8	10.8	23	2	59	31	29	0
X 2905D	3	7	3	5	14	39	1.8	13	1	64	104	25	0
Y 2898B?	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 2890B?	4	7	4	3	3	10	2.7	1	1	66	104	24	0
LINE 19040	(FLIGHT	29)											
A 3849D	3	10	2	8	20	26	1.4	5	1	77	489	10	0
B 3927B	5	5	3	7	12	2	5.9	25	1	49	697	0	0
C 4010S	1	2	0	2	0	4	-	-	-	-	-	-	0
D 4084B	6	6	5	1	21	21	5.4	12	1	60	88	22	0
E 4145S	1	5	2	7	17	39	0.6	0	1	50	596	0	0
F 4235B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 4245B?	5	8	2	7	15	24	3.0	12	1	59	93	21	0
H 4267B?	4	6	0	2	4	38	3.4	32	1	78	905	0	0
I 4273B?	1	2	0	2	2	4	-	-	-	-	-	-	0
J 4290H	4	8	2	5	18	19	2.6	15	1	33	304	0	0
K 4298D	4	5	2	2	1	9	3.7	35	1	47	394	0	0
L 4306D	3	8	0	2	7	10	1.8	16	1	94	970	0	0
M 4350H	10	17	1	6	40	127	4.1	0	1	30	64	0	0
N 4387D	5	18	4	13	25	77	1.8	0	1	39	182	2	0
O 4399D	7	7	4	3	26	17	7.0	12	1	61	121	19	0
P 4415B?	6	10	10	11	24	26	3.0	0	2	76	42	43	0
Q 4429B?	2	5	2	6	21	24	1.3	0	1	75	831	0	0
R 4532B?	0	2	1	2	2	4	-	-	-	-	-	-	0
LINE 19050	(FLIGHT	34)											
A 5564B?	1	2	1	1	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19050	(FLIGHT	34)											
B 5522D	1	2	0	2	2	4	-	-	-	-	-	-	0
C 5502D	1	1	1	2	2	4	-	-	-	-	-	-	0
D 5496B	24	4	28	30	60	39	104.3	0	4	31	9	12	0
E 5457B	14	8	5	5	4	39	15.8	20	3	65	17	41	0
F 5453B	10	2	22	5	2	39	81.9	28	2	44	51	14	0
G 5408H	1	2	1	2	2	4	-	-	-	-	-	-	0
H 5367H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 5316H	2	4	3	6	15	12	1.5	10	1	73	176	25	0
J 5293B	4	10	9	15	18	17	2.1	0	1	48	61	15	0
K 5282D	5	9	6	7	17	35	3.5	23	1	67	162	24	0
L 5252B?	2	5	2	7	2	4	1.2	10	1	40	226	0	0
M 5240B	5	3	2	6	16	14	8.0	42	1	63	193	18	0
N 5229B?	3	9	2	3	20	17	1.8	0	1	45	73	10	0
O 5212H	6	1	4	7	19	14	48.7	34	1	54	69	18	0
P 5146D	5	11	7	7	26	28	2.8	0	1	66	136	22	0
Q 5131B	1	2	1	2	2	4	-	-	-	-	-	-	0
R 5123D	10	6	7	19	47	23	13.4	27	2	53	54	22	0
S 5115D	13	16	19	13	36	42	6.2	4	2	49	38	21	0
T 5111B	13	14	1	13	36	42	7.3	6	1	50	74	16	0
U 5108B	10	14	2	11	24	55	5.0	13	1	61	73	27	0
V 5100D	22	9	11	9	23	36	27.7	3	3	62	22	35	60
W 5091D	12	9	14	15	33	29	9.6	5	2	39	44	10	0
X 5087B	7	8	3	20	27	28	5.8	0	2	54	59	18	0
Y 5065S	3	6	5	16	9	20	2.2	0	1	3	262	0	0
Z 5053M	1	2	0	2	2	4	-	-	-	-	-	-	0
AA 4940D	4	17	25	44	107	71	1.2	0	1	23	148	0	0
AB 4933B	10	2	2	27	63	51	55.3	38	2	26	30	3	0
AC 4921B	25	2	12	13	36	46	325.7	20	3	40	13	21	0
AD 4916B	25	18	12	33	86	6	14.5	5	4	46	12	26	0
AE 4885S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AF 4846D	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 4838H	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 4806H	0	5	1	5	12	5	1.0	0	1	25	373	0	0
LINE 19060	(FLIGHT	33)											
A 2874H	4	4	2	6	6	5	4.4	29	2	76	28	47	0
B 2806B	13	10	21	14	24	14	11.1	18	4	77	13	54	0
C 2783B	14	4	2	5	9	1	46.7	0	3	49	15	25	0
D 2757H	1	2	1	2	0	4	-	-	-	-	-	-	0
E 2679B	11	8	2	3	4	5	10.8	4	3	64	20	37	0
F 2668B	13	9	18	8	4	18	12.2	2	3	46	17	22	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19060	(FLIGHT	33)											
G 2653B	7	4	16	6	60	29	14.0	29	3	71	18	45	0
H 2651B	8	11	16	28	61	29	5.0	8	4	68	13	45	0
I 2649B	18	14	29	28	62	29	11.9	2	3	39	17	17	0
J 2621B?	7	6	3	2	20	40	6.6	14	2	42	25	16	0
K 2608H	9	2	16	8	19	9	39.5	23	5	43	7	24	0
L 2598B?	11	13	16	22	57	59	6.0	2	3	33	15	13	0
M 2588B	6	8	1	5	19	32	4.8	18	2	50	25	25	0
N 2581D	7	8	3	7	21	18	5.5	24	3	65	19	40	0
O 2560B	17	21	49	57	147	14	6.4	0	4	21	12	4	0
P 2547D	5	10	8	14	33	35	2.9	17	3	57	22	33	0
Q 2541D	1	2	1	2	2	4	-	-	-	-	-	-	0
R 2533B	8	7	3	8	20	19	7.6	19	3	51	15	29	0
S 2530B	13	4	3	7	19	1	30.4	18	4	48	12	27	0
T 2356B	1	2	1	2	2	4	-	-	-	-	-	-	0
U 2336B	12	2	14	13	7	20	66.4	31	11	32	1	22	0
V 2329B	3	1	30	12	21	18	12.4	73	5	35	5	20	0
W 2326B	15	10	7	12	21	19	13.1	20	5	34	6	19	0
X 2324B	1	1	1	2	2	4	-	-	-	-	-	-	0
Y 2318B?	12	7	17	19	23	4	14.6	23	5	38	7	22	0
Z 2301B?	9	10	10	17	40	28	5.8	0	4	36	13	15	0
AA 2286B	17	15	11	15	28	40	9.6	0	4	33	11	14	0
AB 2283B	12	13	11	15	28	40	6.6	0	4	34	10	15	0
AC 2280B	8	10	31	13	23	10	5.4	0	3	41	18	17	0
AD 2269B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 2259B	6	14	9	19	54	61	2.5	0	2	46	24	22	0
AF 2256B	17	12	9	17	44	61	12.2	1	3	34	19	11	0
AG 2246B	4	4	10	3	9	5	4.9	26	2	44	52	13	0
AH 2241H	4	7	7	12	9	3	2.5	12	2	36	44	9	0
AI 2175B?	6	2	2	4	12	22	26.0	26	1	101	103	53	0
AJ 2165B?	2	3	1	1	1	27	4.1	48	1	117	109	69	0
AK 2118B	5	5	1	1	0	8	5.0	30	1	102	217	47	0
LINE 19070	(FLIGHT	30)											
A 9904B?	7	13	8	14	33	27	3.4	13	2	31	39	7	0
B 9896B	15	25	5	48	115	42	4.9	0	3	32	15	13	17
C 9888B	11	6	3	6	14	7	13.5	16	4	50	10	30	0
D 9855H	1	2	1	1	2	0	-	-	-	-	-	-	0
E 9798H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 9780B?	4	5	7	6	13	24	4.7	23	1	57	425	0	0
G 9757B	22	20	4	48	117	91	10.2	5	4	43	11	23	0
H 9752B	25	32	34	48	117	91	7.2	4	3	34	19	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19070	(FLIGHT		30)										
I 9744B	4	6	4	8	22	17	2.8	15	2	43	33	16	0
J 9734D	8	16	10	29	79	82	3.0	5	2	36	35	11	0
K 9730D	12	10	10	29	79	82	8.8	9	2	39	42	11	0
L 9686H	1	2	1	2	2	3	-	-	-	-	-	-	0
M 9648B	3	7	3	1	18	49	2.1	13	1	60	119	20	0
N 9633D	5	8	3	10	23	49	3.2	15	1	69	124	27	0
O 9629D	2	9	5	10	8	49	1.3	0	1	52	91	14	0
P 9624B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 9600B?	1	4	0	1	12	3	1.0	12	1	99	856	0	0
R 9594B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 9578H	6	6	6	9	1	21	5.2	12	1	52	131	10	0
T 9540H	4	6	6	11	26	24	2.9	12	1	48	108	10	0
LINE 19071	(FLIGHT		31)										
A 12226D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 12217D	5	5	2	4	22	31	6.6	42	1	100	82	59	0
C 12202B?	3	3	2	4	12	8	1.0	0	1	50	187	26	0
D 12199B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 12100H	1	2	1	2	2	4	-	-	-	-	-	-	0
F 12084B	22	12	34	19	66	13	19.9	5	5	48	6	30	0
G 12065H	9	3	1	7	18	2	28.3	0	8	46	3	32	0
H 12029H	6	6	4	5	11	12	1.0	0	1	55	71	35	0
I 12006B	14	10	3	12	9	21	11.1	10	2	57	27	30	0
J 12002D	10	10	6	2	9	21	7.5	0	2	61	55	26	0
K 11977B	1	2	1	2	2	4	-	-	-	-	-	-	0
L 11957B	8	7	7	7	23	24	7.3	9	1	61	73	23	0
LINE 19080	(FLIGHT		22)										
A 230H	9	7	6	10	6	8	8.6	15	3	70	24	42	0
B 290H	5	5	8	5	14	6	5.7	2	2	88	60	48	0
C 306M	1	3	2	4	5	26	0.9	12	1	88	970	0	140
D 362D?	0	2	1	2	2	4	-	-	-	-	-	-	20
E 398H	5	7	10	8	32	9	3.5	7	2	59	49	26	0
F 483S	1	2	1	2	2	4	-	-	-	-	-	-	0
G 545S	1	2	0	2	2	4	-	-	-	-	-	-	0
H 582S	1	2	0	2	2	4	-	-	-	-	-	-	0
I 770S	1	2	1	1	2	4	-	-	-	-	-	-	0
J 899M	0	2	0	1	1	4	-	-	-	-	-	-	320
K 967H	7	9	10	17	45	34	4.8	10	2	54	55	22	0
L 982H	14	15	30	32	83	49	7.7	1	2	48	34	20	0
M 1002B	7	5	2	5	13	14	8.2	42	2	117	37	83	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19080	(FLIGHT 22)												
N 1032H	1	2	1	2	2	4	-	-	-	-	-	-	0
O 1144H	25	21	39	30	74	37	11.7	0	7	33	3	19	0
P 1249D	30	34	45	68	161	116	8.8	0	2	27	25	6	0
Q 1261B	10	11	12	28	77	80	6.7	3	2	68	58	33	0
R 1313H	17	13	31	28	62	22	11.8	5	4	40	12	20	0
S 1353S	1	2	1	2	2	4	-	-	-	-	-	-	0
T 1384B	6	5	3	6	24	2	8.4	28	2	84	38	51	0
U 1393B	5	4	4	8	11	23	5.8	41	2	81	42	49	0
V 1414H	17	12	29	25	47	45	12.2	12	3	45	17	23	0
W 1436B	5	5	9	11	21	20	6.2	39	2	49	28	24	0
X 1454B	11	10	4	21	60	99	8.0	28	2	46	32	21	0
Y 1465B	8	11	10	49	186	233	4.9	26	1	25	114	0	0
Z 1477B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 1539H	25	34	48	62	158	109	6.9	0	3	27	15	8	0
AB 1567H	4	6	5	12	39	57	3.3	9	2	39	36	11	0
AC 1581H	9	7	17	16	39	22	8.6	17	3	46	16	23	0
AD 1632H	6	9	8	16	41	36	3.8	5	2	34	53	4	0
AE 1674H	3	6	8	13	17	22	2.2	10	1	49	58	17	0
AF 1749D	6	6	5	9	23	28	6.2	27	1	71	152	26	0
AG 1782H	1	2	1	2	2	4	-	-	-	-	-	-	9
AH 1874H	3	7	2	6	15	17	2.2	9	1	45	100	9	0
AI 1912H	9	12	16	11	30	33	5.0	10	2	50	40	22	0
AJ 1971H	7	3	13	12	27	17	18.2	32	2	38	33	11	0
AK 2004H	2	23	23	17	26	125	0.5	0	2	41	36	17	0
AL 2015D	8	10	3	13	29	53	5.1	29	1	65	89	29	0
AM 2078H	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 19090	(FLIGHT 21)												
A 558H	3	3	8	9	27	24	4.6	35	4	50	12	29	0
B 630H	9	1	17	5	3	6	113.2	36	6	95	6	76	0
C 674S	9	19	19	28	141	166	3.1	0	1	17	102	0	0
D 683D	22	6	25	6	14	9	46.4	8	2	39	39	11	0
E 694B	11	11	34	27	71	54	7.3	11	3	35	21	13	0
F 697B	18	11	34	27	71	54	16.0	14	3	36	14	16	0
G 708B	8	17	16	28	66	39	3.2	0	3	27	13	8	0
H 718H	1	2	1	2	2	4	-	-	-	-	-	-	0
I 736B	4	6	5	8	21	17	3.1	32	1	71	334	20	0
J 784H	0	2	1	2	2	2	-	-	-	-	-	-	0
K 832H	8	10	12	19	2	13	4.8	0	1	28	76	0	0
L 890H	9	13	18	14	65	45	4.4	5	2	26	43	0	0
M 928H	3	3	14	16	41	26	5.0	27	1	42	163	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19090	(FLIGHT	21)											
N 977H	10	11	2	12	50	61	6.0	14	2	33	47	6	0
O 988H	12	14	33	13	33	13	6.3	0	3	33	19	11	0
P 1007S	0	2	0	2	2	4	-	-	-	-	-	-	0
Q 1212S	0	1	0	2	0	27	0.6	0	1	129	1025	0	0
R 1259H	15	20	34	40	101	57	6.0	0	3	28	22	6	0
S 1268B	15	6	20	26	11	8	26.5	6	3	37	16	15	0
T 1276B	5	5	7	6	11	30	4.9	23	2	41	42	13	0
U 1303H	1	2	1	2	2	4	-	-	-	-	-	-	0
V 1332H	8	8	17	20	47	48	6.0	5	2	45	25	19	0
W 1341H	9	6	13	18	41	48	11.7	21	2	36	47	8	0
X 1354H	17	15	38	33	77	23	9.3	7	3	39	15	19	0
Y 1382H	5	9	5	16	39	70	2.9	19	1	36	126	3	0
Z 1440H	2	4	2	7	19	36	2.5	39	1	26	511	0	0
AA 1537H	4	4	3	6	24	19	4.8	40	1	43	123	7	0
AB 1557H	2	4	6	8	20	29	2.3	23	1	40	90	6	0
AC 1583H	11	5	40	22	53	26	19.6	35	2	27	25	6	0
AD 1602B	10	17	27	66	174	85	3.9	15	2	25	29	5	0
AE 1606B	16	12	4	11	36	24	11.4	25	2	28	24	8	0
AF 1610B	16	14	8	30	67	203	9.9	22	2	28	26	8	0
AG 1614B	18	41	8	30	67	203	3.6	0	2	20	24	0	0
AH 1642B	6	7	6	12	28	55	5.2	35	1	54	111	18	0
AI 1655B?	5	8	4	7	36	39	3.4	33	1	40	238	3	0
AJ 1677B	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 1691D	9	16	21	23	62	74	3.6	8	1	30	64	2	0
AL 1698D	7	8	17	32	62	58	6.0	28	1	35	61	7	0
AM 1712B	4	14	12	38	99	136	1.7	13	1	32	75	6	0
AN 1731D	3	15	8	42	55	77	1.1	0	1	38	86	7	0
AO 1738B	8	18	19	42	121	134	2.9	9	1	23	156	0	0
AP 1775H	7	14	9	14	45	70	3.0	10	1	22	144	0	0
AQ 1795H	4	4	3	13	35	58	4.4	44	1	28	137	0	0
AR 1907H	6	8	7	17	57	44	4.5	31	1	40	116	7	0
AS 1969H	7	6	9	16	47	27	6.5	28	1	39	149	2	0
AT 2032H	6	7	1	10	34	47	4.7	30	1	53	72	21	0
LINE 19100	(FLIGHT	21)											
A 2910H	13	14	26	31	74	50	7.4	15	3	35	18	14	0
B 2966D	7	8	19	22	53	32	4.5	12	2	48	30	22	0
C 2978H	3	8	15	18	39	39	2.0	8	2	40	24	16	0
D 2997H	5	8	16	24	58	59	3.4	21	2	39	24	16	0
E 3026H	3	6	12	18	46	34	2.2	22	2	35	28	12	0
F 3044H	5	11	11	24	66	69	2.3	8	2	34	35	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		1050 HZ		892 HZ		7323 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH	
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT
LINE	19100	(FLIGHT	21)											
G	3089H	3	10	8	19	46	72	1.7	7	1	47	141	10	0
H	3121E	1	2	1	2	2	4	-	-	-	-	-	-	0
I	3129D	59	58	24	106	279	148	12.8	0	4	28	8	12	0
J	3136D	3	15	9	12	85	59	1.3	2	4	29	10	13	0
K	3138D	3	17	9	12	85	59	0.9	0	4	28	10	12	150
L	3154B	16	21	35	50	141	160	6.1	17	2	33	22	13	0
M	3156B	6	19	35	39	141	163	1.9	9	2	37	26	16	30
N	3160B	8	14	11	46	130	182	3.4	16	3	36	17	17	0
O	3174B	15	34	48	83	214	234	3.5	0	2	21	22	2	0
P	3179B	8	7	48	83	214	234	8.2	33	2	39	31	16	0
Q	3186B	17	29	47	72	194	230	4.8	6	3	28	17	9	0
R	3188B	21	35	47	64	180	230	5.2	3	2	29	22	9	0
S	3205B	2	8	13	28	82	100	1.2	7	2	38	42	11	4
T	3207B	2	11	13	28	82	100	0.7	0	2	28	39	4	0
U	3211B	4	13	13	34	92	81	1.4	0	2	28	32	6	0
V	3226H	1	5	6	17	45	65	0.5	0	2	43	25	20	0
W	3239B	17	15	38	33	84	40	9.3	5	3	29	14	10	0
X	3241B	17	18	38	35	90	40	8.0	2	4	29	10	12	0
Y	3244B	11	20	43	41	101	38	3.8	0	4	29	11	11	0
Z	3259B	12	17	21	36	92	72	5.3	10	3	27	12	10	0
AA	3261B	13	17	21	36	92	72	5.6	11	3	28	13	11	0
AB	3268B	7	6	20	11	24	61	6.4	30	3	30	13	12	0
AC	3278D	18	15	38	41	106	60	10.3	16	3	30	12	13	0
AD	3284B	20	22	38	41	106	55	7.9	11	4	26	10	10	0
AE	3295B	37	30	56	59	148	81	13.3	3	5	28	6	14	0
AF	3313B	26	32	40	76	200	192	7.7	8	4	28	11	12	0
AG	3318B	17	35	45	71	192	142	4.0	0	4	30	10	14	0
AH	3324B	17	13	53	41	117	208	12.2	21	3	37	14	18	0
AI	3336B	8	14	17	35	102	122	3.6	8	2	34	33	10	0
AJ	3364H	1	2	1	2	2	4	-	-	-	-	-	-	0
AK	3391H	8	18	26	37	100	55	2.9	5	2	40	22	18	40
AL	3412H	5	10	2	14	44	77	2.7	13	2	39	35	15	0
AM	3455H	23	32	43	69	186	162	6.4	3	3	29	15	11	0
AN	3492H	9	18	18	43	112	93	3.3	10	2	31	23	10	0
AO	3504H	18	26	17	22	37	64	5.5	5	3	31	19	11	0
AP	3511B	15	34	29	63	178	139	3.5	5	2	34	25	14	0
AQ	3550B	3	14	7	67	183	168	1.1	1	3	26	12	9	0
AR	3552B	24	35	40	67	183	168	6.1	7	3	25	14	8	0
AS	3586H	23	52	41	89	94	333	4.1	2	2	22	19	5	0
AT	3597D	5	15	18	6	21	126	1.9	4	2	30	31	7	0
AU	3633H	16	17	27	33	90	21	7.4	9	3	28	16	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19100	(FLIGHT 21)												
AV 3654B	3	5	14	1	6	64	2.8	40	2	38	34	14	0
AW 3660B	5	10	65	37	101	42	2.6	24	2	39	29	17	0
AX 3665B	17	41	65	95	221	180	3.6	1	3	34	13	16	0
AY 3689H	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 3715B	13	13	11	3	7	57	7.3	12	3	52	15	31	0
BA 3723D	10	12	11	28	73	27	5.8	13	4	41	10	22	0
BB 3731D	13	11	26	19	55	30	10.1	18	3	47	14	27	0
BC 3764H	9	6	11	12	24	36	10.8	32	2	62	27	36	0
BD 3790H	1	2	1	2	2	4	-	-	-	-	-	-	0
BE 3808H	5	11	5	16	39	54	2.8	17	1	47	57	18	0
BF 3824H	6	8	10	15	35	45	4.1	17	2	53	39	24	0
BG 3845H	4	10	8	19	46	68	1.9	4	1	41	71	10	0
BH 3881H	2	5	3	9	13	62	1.1	16	1	50	104	15	0
BI 3938S	1	4	1	9	11	70	0.4	0	1	42	678	0	0
BJ 3986S	4	10	4	16	56	57	1.8	5	1	19	299	0	0
BK 3998S	1	2	1	2	2	4	-	-	-	-	-	-	0
BL 4027S	2	4	0	7	14	50	1.4	21	1	44	772	0	0
BM 4119H	1	2	1	2	2	4	-	-	-	-	-	-	0
BN 4158H	1	2	1	2	2	4	-	-	-	-	-	-	0
BO 4202H	1	2	1	2	2	4	-	-	-	-	-	-	0
BP 4272H	3	5	5	7	15	12	3.4	34	1	56	105	19	0
LINE 19110	(FLIGHT 21)												
A 5712H	6	6	13	16	42	23	6.0	21	2	53	35	25	0
B 5673H	5	4	4	5	12	11	6.8	23	1	71	112	28	0
C 5648H	14	10	23	21	53	36	11.6	15	3	55	21	31	0
D 5640D	7	10	22	14	40	24	4.6	15	2	65	52	33	0
E 5636D	7	8	14	14	46	14	5.7	21	1	69	162	24	0
F 5621M	0	2	0	3	23	28	0.4	0	1	54	818	0	0
G 5614M	0	2	0	2	2	4	-	-	-	-	-	-	160
H 5593H	0	4	0	8	30	34	0.4	0	1	28	730	0	0
I 5546M	1	2	0	2	2	4	-	-	-	-	-	-	0
J 5531B	21	17	31	38	98	47	11.6	2	2	35	26	11	0
K 5509H	23	15	33	32	84	44	15.7	0	3	43	15	22	0
L 5488H	5	7	7	13	30	45	3.1	17	1	59	98	21	0
M 5466B	64	54	131	103	287	125	15.6	0	6	29	5	16	0
N 5460B	56	45	131	103	287	57	15.9	2	5	33	7	18	0
O 5457B	49	42	15	33	81	25	14.0	3	5	36	7	20	0
P 5450B	37	40	70	83	213	53	9.9	1	4	25	9	9	0
Q 5447B	36	36	70	83	213	105	10.6	3	4	29	8	14	0
R 5438B?	4	5	65	72	190	38	3.5	40	3	67	14	45	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19110	(FLIGHT		21)										
S 5433B	17	13	40	35	91	29	11.0	14	4	44	8	26	0
T 5425B	14	18	33	31	81	18	5.9	4	4	39	12	20	0
U 5402B	10	7	13	10	26	24	9.6	24	3	57	17	34	0
V 5397B	19	11	30	21	58	36	16.2	7	4	46	9	27	0
W 5390B	12	9	30	16	51	20	9.4	0	4	49	11	28	0
X 5361B?	3	7	3	3	26	58	2.3	10	2	54	49	23	0
Y 5356D	7	10	10	23	64	58	4.0	11	1	43	77	10	0
Z 5352D	8	16	10	23	64	65	3.3	4	1	40	56	11	0
AA 5336B	5	7	11	13	34	37	4.2	14	1	48	70	15	0
AB 5328B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 5298H	9	9	18	18	50	18	7.1	1	2	44	33	16	0
AD 5275H	9	14	11	22	56	55	4.2	5	2	41	49	13	0
AE 5247D	5	8	5	12	31	42	3.0	19	1	48	114	12	0
AF 5237B?	11	5	10	8	20	20	18.3	32	2	47	49	18	0
AG 5227B	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 5222B	8	6	16	14	29	25	9.2	30	3	50	23	27	0
AI 5218B	17	12	29	28	74	25	13.6	22	3	56	20	33	0
AJ 5211B	16	16	29	28	74	61	8.1	10	2	41	29	16	0
AK 5198B?	5	3	2	2	5	11	11.0	40	1	50	85	14	0
AL 5178B?	8	11	10	19	40	50	4.9	22	2	49	52	20	0
AM 5175B?	7	13	10	19	60	69	3.0	13	2	45	50	17	0
AN 5171B?	8	15	8	24	60	107	3.3	13	1	39	70	10	0
AO 5164B?	3	14	10	15	24	107	1.2	3	1	34	78	6	0
AP 5161D	8	7	10	15	28	107	6.7	31	1	44	74	14	0
AQ 5155B	12	24	13	45	116	108	3.5	4	1	27	69	1	0
AR 5152B	11	22	13	45	116	108	3.6	7	1	31	73	3	0
AS 5132H	6	9	7	15	44	24	3.9	9	1	44	78	10	0
AT 5093B	8	6	9	10	26	25	9.1	32	1	48	103	13	0
AU 5091B	7	5	9	10	26	25	8.8	37	1	58	69	25	4
AV 5070H	3	9	2	12	30	13	1.4	6	1	25	234	0	0
AW 5030H	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 5013H	1	4	1	6	17	34	1.1	15	1	27	560	0	0
AY 4982S	2	3	2	5	8	27	0.3	0	1	32	351	7	0
AZ 4956H	8	7	23	17	42	35	7.8	21	3	52	22	28	0
BA 4942H	6	4	4	8	18	28	9.4	33	2	57	45	26	0
BB 4899H	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 4876H	8	14	10	30	64	150	3.7	12	1	35	95	4	0
BD 4846H	1	2	1	2	2	4	-	-	-	-	-	-	0
BE 4817S	2	7	0	11	19	94	1.3	11	1	22	643	0	0
BF 4804S	1	7	0	4	18	76	0.3	0	1	15	671	0	0
BG 4768S	2	5	2	8	21	37	1.5	14	1	40	480	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ	COPLANAR 892 HZ	COPLANAR 7323 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19110	(FLIGHT	21)											
BH 4754S	0	4	0	6	12	34	0.4	0	1	39	818	0	0
BI 4717S	2	6	1	10	29	45	1.4	7	1	28	688	0	0
BJ 4690S	2	7	0	10	30	60	1.0	1	1	32	737	0	0
BK 4673S	1	2	0	2	2	4	-	-	-	-	-	-	0
BL 4653S	0	4	2	7	17	27	0.4	0	1	21	468	0	0
LINE 19120	(FLIGHT	21)											
A 6147H	3	2	7	21	57	45	9.5	70	1	32	59	5	0
B 6282H	4	14	6	18	41	127	1.6	3	1	30	100	0	0
C 6308B	9	8	18	8	18	52	8.2	27	2	61	34	33	0
D 6395H	5	10	5	16	18	56	2.7	14	1	30	154	0	0
E 6421H	5	15	4	26	62	129	1.8	6	1	29	161	0	0
F 6455B	2	6	24	16	31	38	1.6	15	2	62	33	34	0
G 6459B	12	7	24	16	31	49	14.7	27	3	64	20	39	0
H 6468H	5	1	6	2	5	35	30.0	54	7	65	3	50	0
I 6486H	13	11	14	22	46	67	9.1	17	4	51	9	33	5
J 6527H	14	5	26	9	9	8	25.1	26	5	59	8	40	0
K 6555H	19	8	9	18	51	24	23.6	15	5	47	6	31	0
L 6568B?	13	7	22	13	38	47	16.2	22	3	45	13	25	19
M 6580H	15	15	26	28	75	42	8.0	10	4	45	10	27	0
N 6651H	32	20	19	31	116	43	18.4	6	6	44	5	29	0
O 6705H	7	7	13	13	34	21	7.3	20	3	65	17	41	0
P 6736H	11	11	21	23	58	52	7.4	10	3	50	18	27	0
Q 6756H	1	2	1	2	2	4	-	-	-	-	-	-	0
R 6791H	3	5	8	9	25	16	2.3	15	1	62	60	28	0
S 6867B?	4	6	5	5	11	9	3.1	26	1	81	166	34	0
T 6905S	1	7	1	12	33	73	0.4	0	1	28	558	0	0
U 6943S	1	5	2	7	25	37	0.9	17	1	50	344	5	0
V 7096H	1	2	1	2	2	4	-	-	-	-	-	-	0
W 7135H	22	3	12	30	17	52	123.0	17	5	50	7	32	0
LINE 19130	(FLIGHT	21)											
A 7745H	14	5	16	10	31	26	25.8	25	5	52	6	35	0
B 7728H	14	5	12	4	4	23	25.1	24	4	44	8	26	0
C 7692H	8	8	17	14	26	45	6.5	26	4	55	9	36	0
D 7672H	7	8	2	14	39	94	5.1	21	4	54	10	34	0
E 7618H	6	6	3	1	1	40	6.4	9	2	56	28	27	0
F 7469D	5	5	1	2	1	5	7.0	30	1	191	1025	0	0
G 7420H	2	7	20	13	42	12	1.1	0	6	40	4	25	0
H 7405H	17	13	24	26	63	32	10.9	4	4	39	9	20	0
LINE 19210	(FLIGHT	22)											
A 1868D	1	3	4	14	33	35	1.2	31	2	62	54	31	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

621 A; EUREKA, ALASKA

	COAXIAL 1050 HZ		COPLANAR 892 HZ		COPLANAR 7323 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19210	(FLIGHT 22)												
B 1886B	7	6	10	12	34	43	6.7	28	2	43	32	18	0
C 1894B	8	4	6	4	5	6	12.6	36	3	57	18	34	0
D 1907B	20	15	18	25	63	50	12.0	11	3	43	14	23	0
E 1932B	5	4	14	17	49	32	7.4	52	2	61	26	36	0
F 1942B	4	9	4	8	21	22	1.9	17	2	54	40	27	0
G 2096M	0	2	1	1	2	4	-	-	-	-	-	-	220
H 2109H	2	1	5	37	16	14	10.1	78	3	38	14	18	0
I 2202B?	7	4	2	2	4	8	13.8	28	2	68	42	36	0
LINE 19220	(FLIGHT 22)												
A 948B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 916S	1	1	1	2	2	4	-	-	-	-	-	-	0
C 886S	1	2	0	2	2	4	-	-	-	-	-	-	0
D 870D	1	2	0	2	2	4	-	-	-	-	-	-	0
E 866M	0	2	2	3	2	28	0.4	0	1	34	758	0	1320
F 857B	12	9	17	6	20	17	10.4	11	1	44	115	6	0
G 852B	1	10	17	1	2	12	0.1	0	1	33	76	15	0
H 836B	7	12	25	43	118	53	3.4	15	1	53	143	14	0
I 828B	28	6	24	15	64	45	86.5	18	3	29	13	11	0
J 826B	12	12	24	15	64	45	7.5	14	4	32	9	15	0
K 802H	6	6	8	9	26	16	5.8	17	4	35	11	16	0
L 771H	20	2	15	24	8	3	248.2	6	6	29	4	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.