

March 11, 1997 Price: \$6.00

Division of Geological & Geophysical Surveys

PUBLIC-DATA FILE 97-23

**PORTFOLIO OF AEROMAGNETIC AND RESISTIVITY
MAPS OF THE EXTENDED COVERAGE OF THE
RAMPART-MANLEY MINING DISTRICT**

by

Laurel E. Burns

March 1997

**THIS REPORT HAS NOT BEEN REVIEWED FOR
TECHNICAL CONTENT (EXCEPT AS NOTED IN TEXT) OR FOR
CONFORMITY TO THE EDITORIAL STANDARDS OF DGGS.**

Released by

**STATE OF ALASKA
DEPARTMENT OF NATURAL RESOURCES
Division of Geological & Geophysical Surveys
794 University Avenue, Suite 200
Fairbanks, Alaska 99709-3645**

Portfolio of aeromagnetic and resistivity maps of the extended coverage of the Manley- Rampart mining district, Alaska.

This portfolio contains page-size illustrations of aeromagnetic and electromagnetic data of the Manley-Rampart mining area in Alaska acquired for the Division of Geological & Geophysical Surveys (DGGS) in 1995 and 1996. The 1995 survey area covered about 700 sq. miles. These data were released in the winter of 1995-1996. The new survey adds about 300 sq. miles to the earlier survey. The data sets have been combined and are being released in the winter of 1996-1997.

The airborne geophysical data includes aeromagnetic and 900 Hz and 7200 Hz resistivity data. Included in this portfolio are color maps of the aeromagnetic and resistivity data, two shadow maps of the aeromagnetic maps, and an acetate overlay of the topography.

A brief description of the aeromagnetic and electromagnetic data is also presented in this Public-data File (PDF). Interpretation of the data and a more complete description of the processing is included in PDF 96-6 for the 1996 data and PDF 97-24 for the 1997 data. Both data sets were acquired and processed by DIGHEM, a division of CGG Canada Ltd.

The acetate with topography that is included with this portfolio should be used only for generalized locations. For accurate locations, the other geophysical maps or the computer files all released by DGGS should be used.

Any of the maps in this portfolio or customized maps are available at more useable scales from the Alaska Division of Geological & Geophysical Surveys, 794 University Ave., Suite 200, Fairbanks, Alaska, 99709. Phone: (907) 451-5020. FAX: (907) 451-5050. Custom plots of the data are available from the DGGS office.

The area surveyed includes parts of the Kantishna River D-2, D-3, Livengood A-6, B-6, C-6, and Tanana A-1, A-2, A-3, B-1, B-2, C-1 Quadrangles, Alaska.

Survey history, instrumentation, & data processing

The following indented section describing the instrumentation and processing is taken from the maps produced by WGM and DIGHEM, the contractor and subcontractor, in conjunction with the DGGS.

The airborne geophysical data for the Manley-Rampart mining area has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys, and WGM, Mining and Geological Consultants, Inc. Airborne geophysical data for the area was acquired by DIGHEM, a division of CGG Canada Ltd., in 1996.

Geophysical data were acquired with a DIGHEM Electromagnetic (EM) system, a Scintrex cesium CS2 magnetometer, and a Herz VLF system installed in an AS350B-1 Squirrel helicopter. In addition, the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors, and a video camera. Flights were performed at a mean terrain clearance of 200 feet along survey flight lines with a spacing of a quarter of a mile. Tie lines were flown perpendicular to the flight lines at intervals of approximately three miles.

A Sercel Real-Time Differential Global Positioning System (RT-DGPS) was used for both navigation and flight path recovery. The helicopter position was derived every 0.5 seconds using both real-time and post-processing differential positioning to a relative accuracy of less than 10 m. Flight path positions were projected onto the Clarke 1866 (UTM) spheroid, 1927 North American datum using a central meridian (CM) of 147 degrees, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

Total Field Magnetics:

The magnetic total field contours were produced using digitally recorded data from a Scintrex cesium CS2 magnetometer, with a sampling interval of 0.1 seconds. The magnetic data were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) leveled to the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF, 1985 updated to October 1996) was removed from the leveled magnetic data.

Resistivity:

The DIGHEM^V EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 900 and 5000 Hz while three horizontal coplanar coil-pairs operated at 900, 7200, and 56,000 Hz. EM data were sampled at 0.1 second intervals. For the 900 and 7200 Hz resistivity maps, the resistivity is generated from the inphase and quadrature component of the coplanar 900 and 7200 Hz respectively using the pseudo-layer half space model. The data were interpolated onto a regular 25 m grid using a modified Akima (1970) technique.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures: *Journal of the Association of Computing Machinery*, v. 17, no. 4, p. 589-602.

Magnetic data

The magnetometer measures how magnetic the rocks are. Minerals that yield strong magnetic signals (measured in nanoteslas or nT) include most iron-rich minerals. The main magnetic minerals are magnetite, ilmenite, and pyrrhotite. These minerals commonly occur in mafic volcanic rocks (such as basalt), mafic and ultramafic plutonic rocks (such as serpentinite, clinopyroxenite, and gabbro), some skarns, and in other geologic units. Rocks that commonly have little iron and tend to have little variation in the magnetic signal include silicic volcanic rocks (rhyolites), silicic plutonic rocks (granites), and most sedimentary rocks (for example, limestone, sandstone, and shale).

Figure 1 shows the aeromagnetic data for the Manley-Rampart area. The high magnetic values (in nanoteslas) are shown in purple and orange and indicate appreciably magnetic rocks. The low values show up as blues and greens. A gradual change in the magnetic reading (shown here by color) indicates a gradual change in the magnetic strength of the rocks. Conversely, an abrupt change in color indicates an abrupt change in the magnetic strength. Faults can commonly be deduced from aeromagnetic maps as linear or curvilinear features composed of discontinuous aeromagnetic highs or lows. Commonly, an abrupt change of color in an aeromagnetic map occurs some place along a fault.

Figures 2 and 3 show the aeromagnetic data presented as “shadow” maps. These maps are produced as if a light source is shining on the data, displayed as a three-dimensional map. The higher data points appear bright like the top of mountain ranges when struck by sunlight. The light source can be rotated in a complete circle from 0° (north) clockwise to 180° (south) and back to 360° (north.) Figure 2 has an illumination (or azimuth) of 351° (apparent light source almost due north). Figure 3 is an enlargement showing the new area on the east and west. The illumination in Figure 3 is 45° (northeast). Shadow maps can enhance structures, such as faults, intrusions, and the trend of stratigraphic layers.

Different types of ore deposits have different magnetic signatures. A bedrock gold deposit associated with the top of a granitic pluton would likely be an aeromagnetic low whereas a magnetite-bearing gold skarn would be an aeromagnetic high. A gold deposit hosted by a low-angle (thrust) fault has a different signature than one hosted by a high-angle fault.

Resistivity data

The electromagnetic (EM) system measures how resistive the rocks below it are by sending out electromagnetic signals at different frequencies and recording the signals that are returned from the earth. The high values (measured in ohm-m) are indicative of resistive (low conductivity) rocks, such as quartzite. Low resistivity (high conductivity) values are present for bedrock conductors, conductive overburden (water-saturated zones), and cultural sources. Some of the main mineral conductors include graphite, most sulfides, (but not sphalerite), and water-saturated clays. Because they can contain clays, many hydrothermally altered rocks also are conductive. Some faults will show up very

clays, many hydrothermally altered rocks also are conductive. Some faults will show up very well on the resistivity maps, either because of water-saturated zones within the fault zone or because discontinuous linear zones of highs or lows, separate rocks with markedly different electromagnetic properties.

Several ways to use the EM data are possible. The EM anomalies shown on Report of Investigations RI 97-9 and PDF 97-25G, H, J, and K are based on a near-vertical, half plane model. This model emphasizes "discrete" bedrock conductors. These anomalies are too numerous to place in this portfolio. The anomalies are so numerous we had to have the maps produced at two scales. RI 97-9 is produced at a scale of 1:63,360 and has simplified anomaly symbols. PDF 97-25G, H, J, and K are produced at a scale of 1:31,680 and show detailed anomaly symbols.

The EM data are also processed to produce resistivity maps, shown in figures 4 and 5. In this case, the maps are produced using a calculated model that emphasizes horizontal and flat-lying conductive units. The depth is variable depending on the type of rocks. The 900 Hz resistivity maps look deeper into the ground than the 7200 Hz. Although the color bars in these figures differ, each figure has the most conductive rocks shown as purple and orange.

More detailed discussions of the EM data are present in PDF 96-6 and PDF 97-24.

The topographic map is included as figure 6. This can be used as an overlay for the data in figures 1, 2, 4, and 5.

Existing geologic maps:

Chapman, R. M., Yeend, Warren, Brosge', W.P. , and Reiser, H.N., 1982,
Reconnaissance geologic map of the Tanana Quadrangle, Alaska: U. S.
Geological Survey Open-file Report 82-734, 1 sheet, scale 1:250,000.

Weber, F.R., Wheeler, K.L., Rinehart, C.D., Chapman, R.M., and Blodgett, R.B., 1992,
Geologic map of the Livengood Quadrangle, Alaska: U. S. Geological Survey
Open-file Report 92-562, 20 p., 1 sheet, scale 1:250,000.

List of some corresponding publications by DGGS:

AEROMAGNETIC MAPS

RI 97-9. Extended coverage of the total field magnetics and electromagnetic anomalies of the Manley-Rampart mining district, Alaska. 1 sheet, 3 colors, **scale 1:63,360**. Electromagnetic anomalies on this map show only the location and strength of the anomaly. See PDF 97-25 G, H, J, and K

RI 97-10. Extended coverage of the total field magnetics of the Manley-Rampart mining district, Alaska. 1 sheet, **full color**, scale 1:63,360. This takes the same aeromagnetic data shown in RI 97-9 and portrays it in color. The electromagnetic anomalies are not on this version.

PDF 97-25G. Extended coverage of the total field magnetics and **detailed** electromagnetic anomalies of the Manley-Rampart mining district, Alaska (Tanana A-2 and B-2 areas). 1 sheet, **scale 1:31,680**. Electromagnetic anomalies are coded so that the probable source is given (i.e. cultural, thin bedrock conductor, etc.) as well as the strength of the anomaly.

PDF 97-25H. Extended coverage of the total field magnetics and **detailed** electromagnetic anomalies of the northeast Manley-Rampart mining district, Alaska (Tanana B-1 area). 1 sheet, **scale 1:31,680**. Electromagnetic anomalies are coded so that the probable source is given (i.e. cultural, thin bedrock conductor, etc.) as well as the strength of the anomaly.

PDF 97-25K. Extended coverage of the total field magnetics and **detailed** electromagnetic anomalies of the southeast Manley-Rampart mining district, Alaska (Livengood B-6 area). 1 sheet, **scale 1:31,680**. Electromagnetic anomalies are coded so that the probable source is given (i.e. cultural, thin bedrock conductor, etc.) as well as the strength of the anomaly.

PDF 97-25K. Extended coverage of the total field magnetics and **detailed** electromagnetic anomalies of the Manley-Rampart mining district, Alaska (Livengood B-5 area). 1 sheet, **scale 1:31,680**. Electromagnetic anomalies are coded so that the probable source is given (i.e. cultural, thin bedrock conductor, etc.) as well as the strength of the anomaly.

RESISTIVITY MAPS

RI 97-11. Extended coverage of the **900 Hz** resistivity contours of the Manley-Rampart mining district, Alaska. 1 sheet, **full color**, scale 1:63,360.

RI 97-12. Extended coverage of the **7200 Hz** resistivity contours of the Manley-Rampart mining district, Alaska. 1 sheet, **full color**, scale 1:63,360.

PDF 97-19. Extended coverage of the **900 Hz** resistivity contours of the Manley-Rampart mining district, Alaska. 1 sheet, **blueline**, scale 1:63,360.

PDF 97-20. Extended coverage of the **7200 Hz** resistivity contours of the Manley-Rampart mining district, Alaska. 1 sheet, **blueline**, scale 1:63,360.

DIGITAL FILES, PROJECT REPORT, PORTFOLIO, FLIGHT LINES AND LAND STATUS MAPS

PDF 97-17. Extended flight line coverage of the Manley-Rampart mining district, Alaska. 1

sheet, blueline, scale 1:63,360.

PDF 97-21. CD-ROM digital archive files of 1995 and 1996 survey data for Manley-Rampart mining district, Alaska. The two years worth of data are merged together. Includes profile data, extraction program, and grids. Grids are compatible with Geosoft program and may be used for viewing the data on a computer imaging program and (or) plotting maps. The CD-ROM is useful for someone who wants to manipulate the processed line data.

PDF 97-22. Three disks containing gridded files and section lines of 1995 and 1996 geophysical survey data for Manley-Rampart mining district, Alaska. The two years worth of data are merged together. Compatible with Geosoft program. Useful for someone who wants to view the data on a computer imaging program and(or) plot maps. Grids are slightly less refined than those on the CD-ROM.


PDF 97-23. Portfolio of aeromagnetic and resistivity maps of the Manley-Rampart mining district, Alaska (this publication).

PDF 96-6. Project report of the airborne geophysical survey for the Manley-Rampart mining district, Alaska. Includes discussion of 1995 survey data. Discussion of 1996 survey data in **PDF 97-24**.

PDF 97-24. Project report for the extended coverage of the airborne geophysical survey for the Manley-Rampart mining district, Alaska. Includes discussion of 1996 survey data. Discussion of 1995 survey data in **PDF 96-6**.

PDF 97-34. Land status and mining claims for the Rampart geophysical area, Alaska, version 1.1, 1 sheet, scale 1:125,000. Produced by DNR's Land Record Information Section (LRIS). Version numbers and scale will change with updates.

Profile data for each channel on paper. Each sheet contains several flight lines.

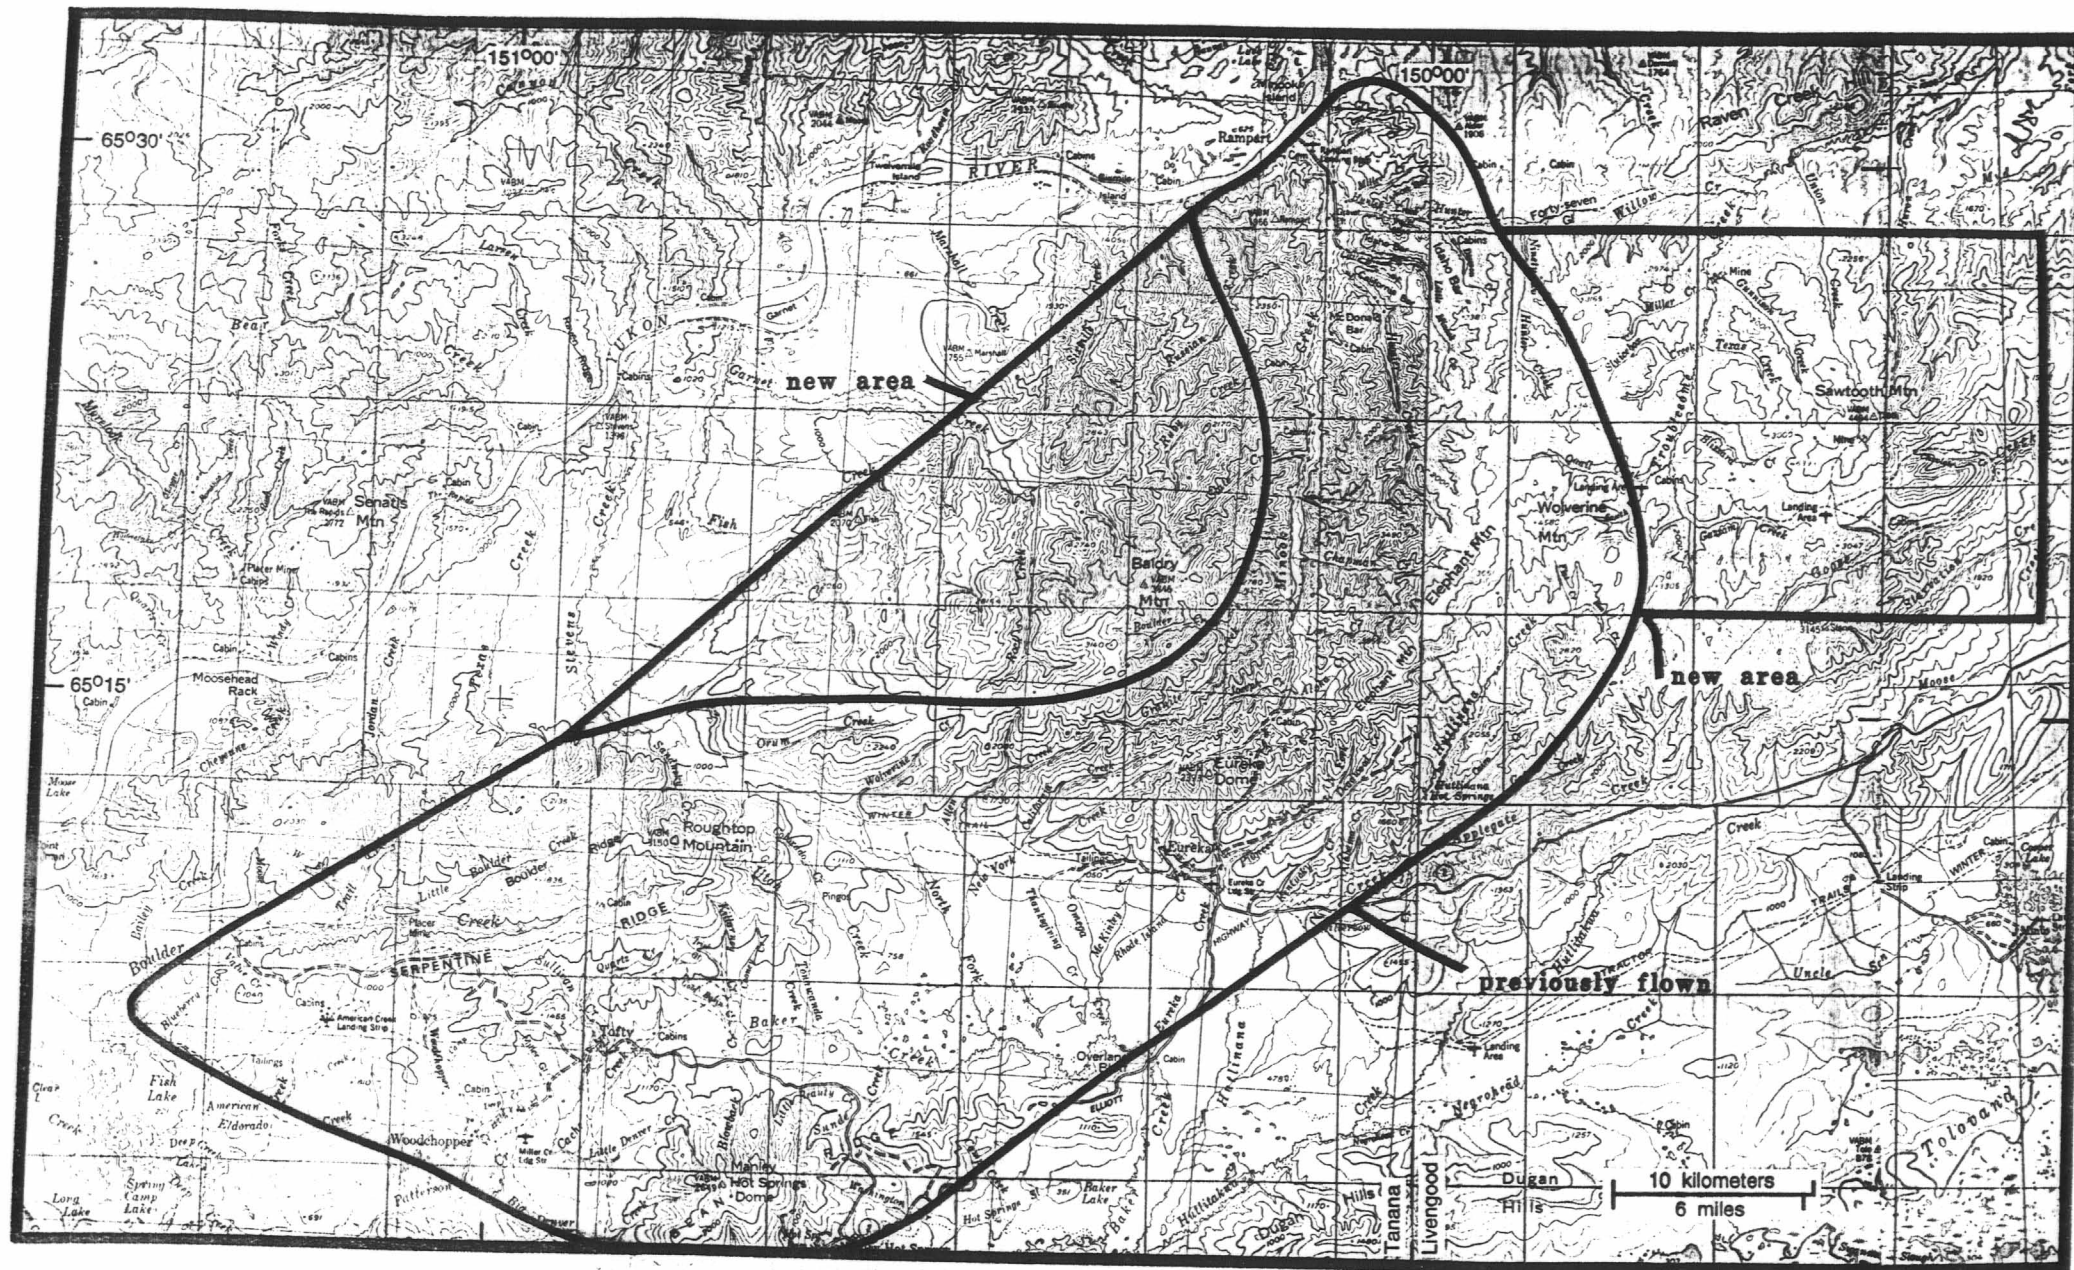

Rampart-Manley Survey Area:



Figure 1: Total field magnetics of the Rampart-Manley mining area. Magnetic units are in nT.

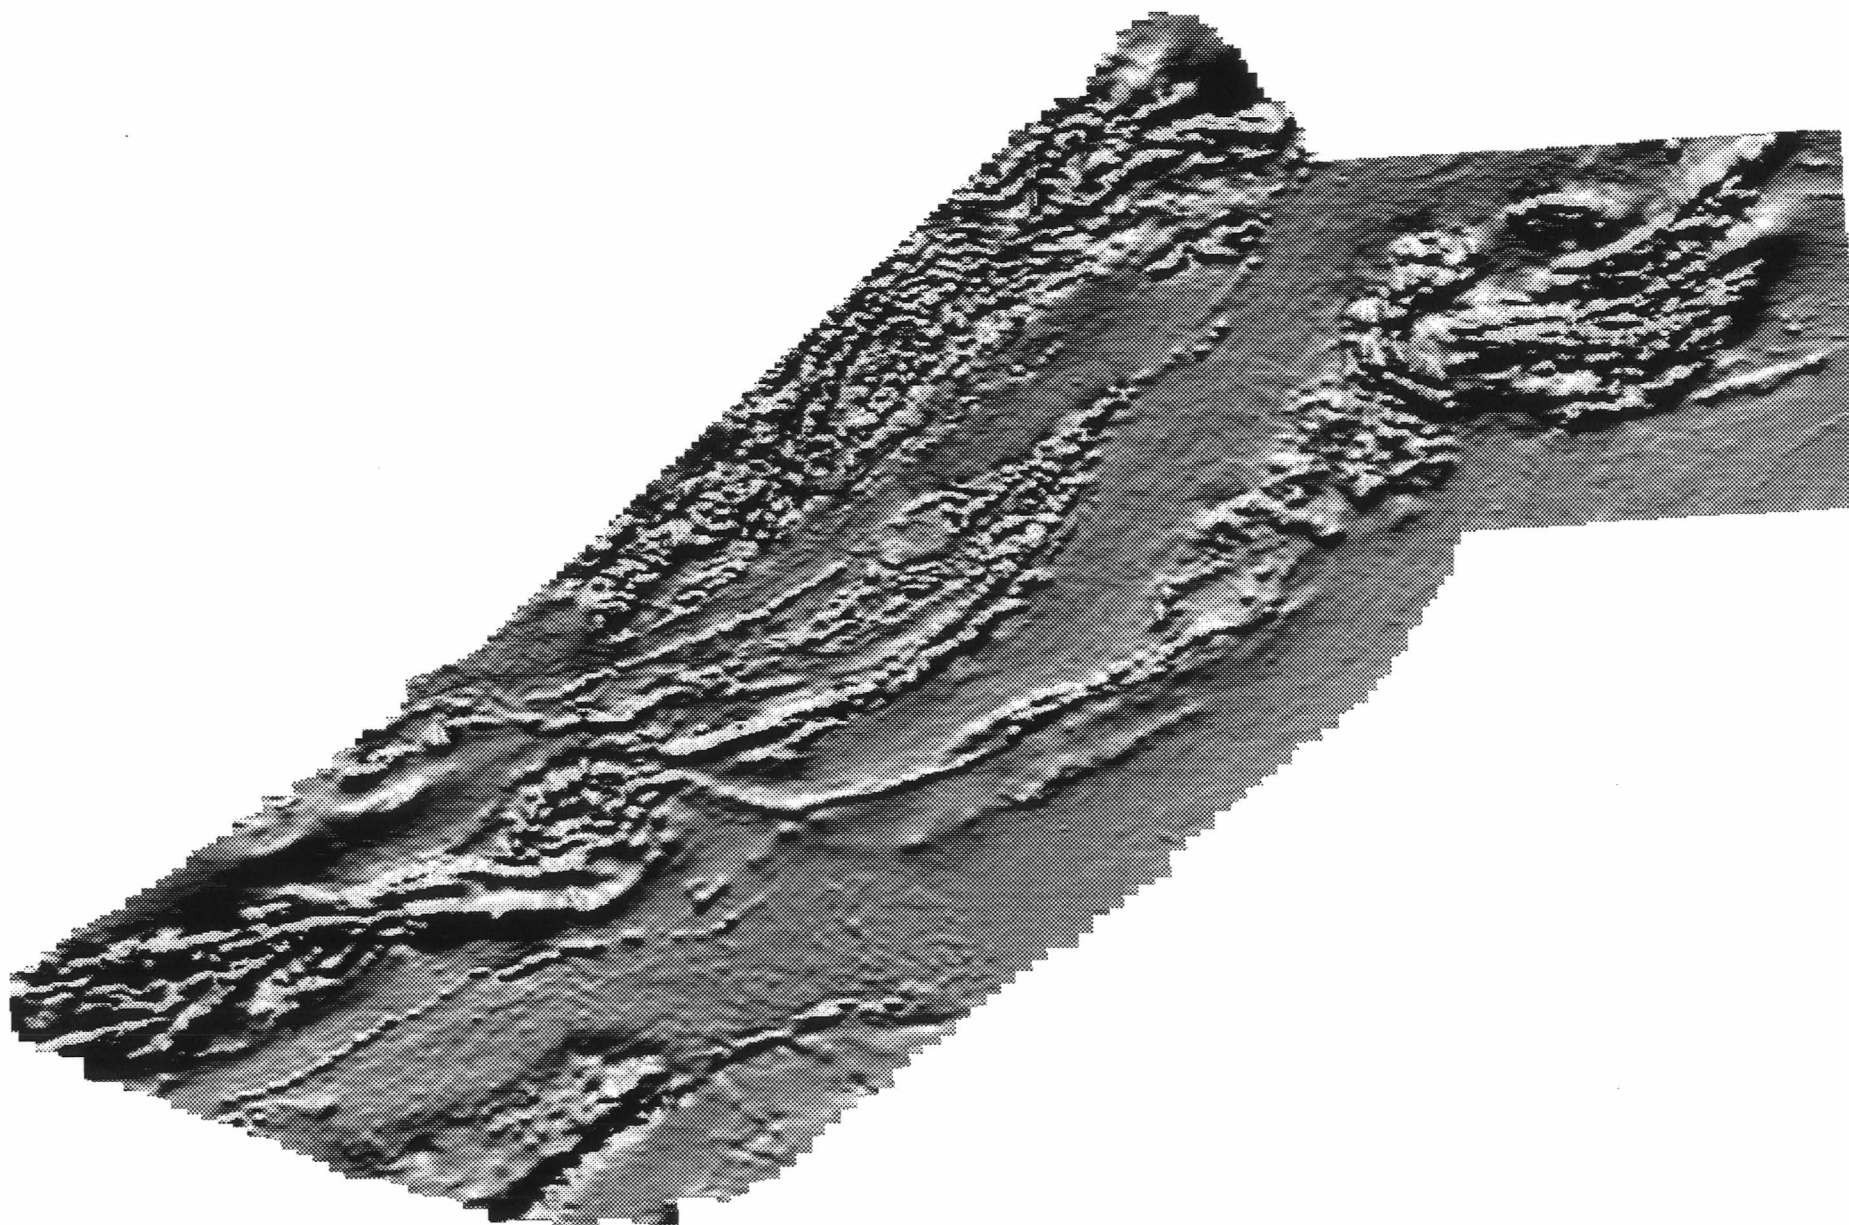


Figure 2: Shadow map of the aeromagnetic data from the Rampart-Manley area, Alaska. Illumination source is at 351 degrees. High magnetic values appear like the tops of mountains that are hit by sunlight.

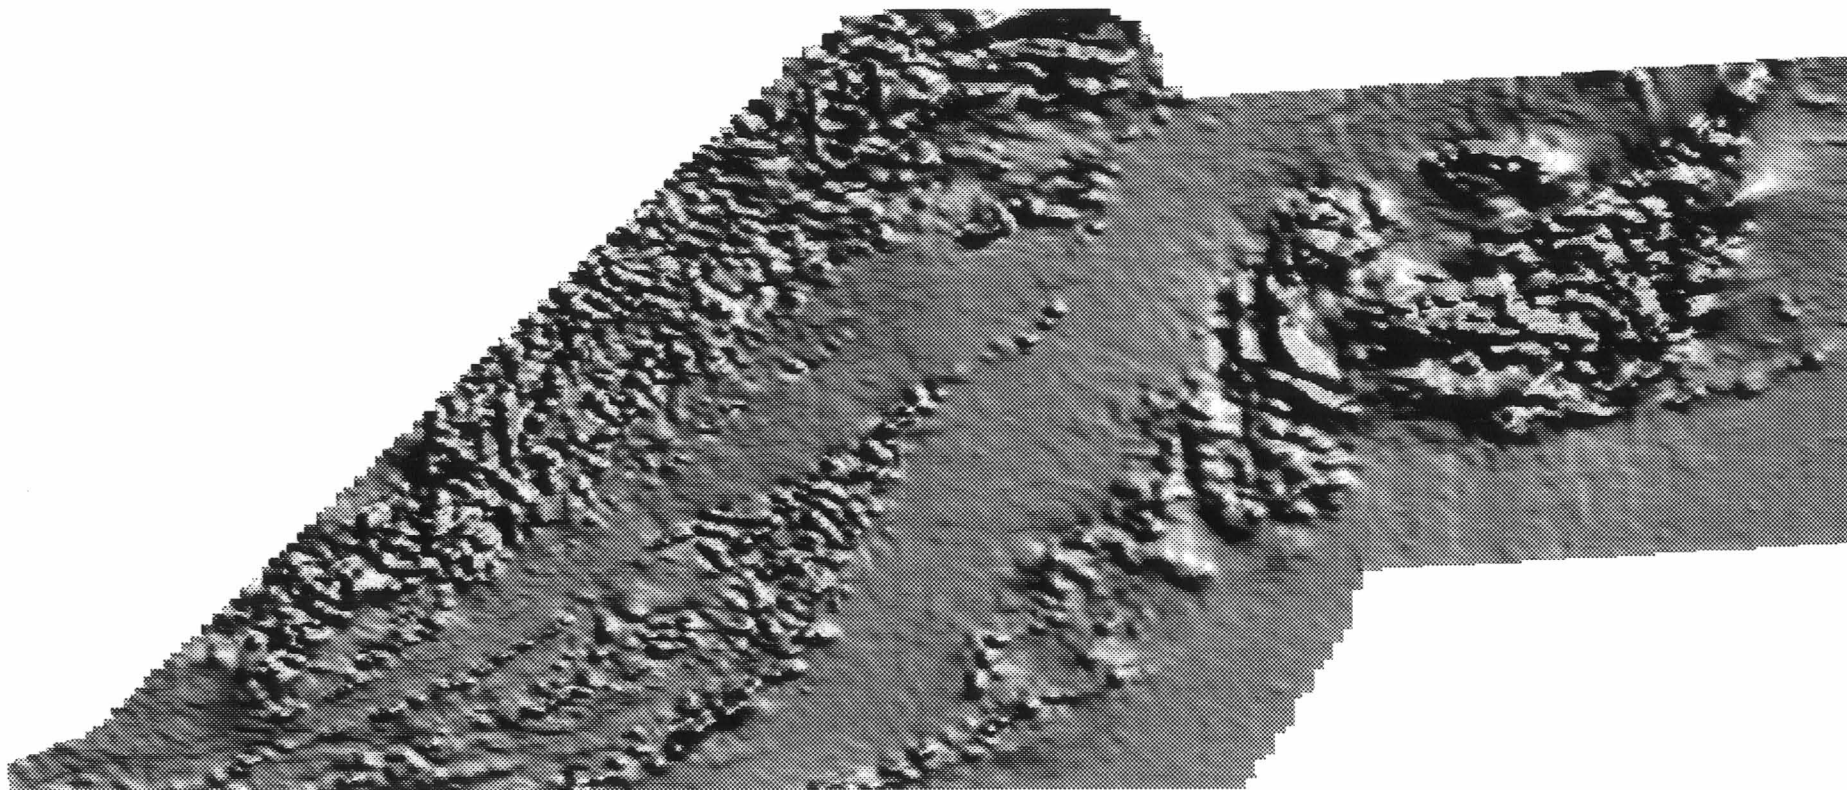


Figure 3: Shadow map containing the new aeromagnetic data from the Rampart-Manley area, Alaska. Illumination source is at 45 degrees.

High magnetic values appear like the tops of mountains that are hit by sunlight.



Figure 4: 7200 Hz resistivity map of the Rampart-Manley area, Alaska. Resistivity values in ohm-m. Conductive units have low values and are shown in purple and orange on this map.



Figure 5: 900 Hz resistivity map of the Rampart-Manley area, Alaska. Resistivity values in ohm-m. Conductive units have low values and are shown in purple and orange on this map.