

April 30, 1998 Price: \$43.50

Division of Geological & Geophysical Surveys

PUBLIC-DATA FILE 98-7

**PROJECT REPORT OF THE 1997 GEOPHYSICAL SURVEY DATA
FOR IRON CREEK AREA, TALKEETNA MOUNTAINS
QUADRANGLE, SOUTHCENTRAL ALASKA**

by

Ruth A. Pritchard
Geoterrex-Dighem

April 1998

THIS REPORT HAS NOT BEEN REVIEWED FOR
TECHNICAL CONTENT (EXCEPT AS NOTED IN TEXT) OR FOR
CONFORMITY TO THE EDITORIAL STANDARDS OF DGGs.

Released by

STATE OF ALASKA
DEPARTMENT OF NATURAL RESOURCES
Division of Geological & Geophysical Surveys
794 University Avenue, Suite 200
Fairbanks, Alaska 99709-3645

SUMMARY

This report describes the logistics and results of a DIGHEM^V airborne geophysical survey carried out under contract to WGM Inc., Mining and Geological Consultants, for the State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys. The survey was flown over a property located in the Iron Creek area, south-central Alaska. Total coverage of the survey block amounted to 3172 miles (5103 km). The survey was flown from August 6 to August 24, 1997.

The purpose of the survey was to detect zones of conductive mineralization and to provide information that could be used to map the geology and structure of the survey area. This was accomplished by using a DIGHEM^V multi-coil, multi-frequency electromagnetic system, supplemented by a high sensitivity Cesium magnetometer and a four-channel VLF receiver. The information from these sensors was processed to produce maps which display the magnetic and conductive properties of the survey area. A GPS electronic navigation system, utilizing a UHF link, ensured accurate positioning of the geophysical data with respect to the base maps. Visual flight path recovery techniques were used to confirm the location of the helicopter where visible topographic features could be identified on the ground.

The survey property contains many anomalous features, some of which may be considered as exploration targets. Most of the inferred bedrock conductors appear to warrant further investigation using appropriate surface exploration techniques. Areas of interest may be assigned priorities on the basis of supporting geophysical, geochemical and/or geological information. After initial investigations have been carried out, it may be necessary to re-evaluate the remaining anomalies based on information acquired from a follow-up program.

CONTENTS

1.	INTRODUCTION	1-1
2.	SURVEY EQUIPMENT	2-1
	Electromagnetic System.....	2-1
	Magnetometer.....	2-2
	Magnetic Base Station	2-2
	VLF System.....	2-3
	Radar Altimeter	2-3
	Analog Recorder	2-3
	Digital Data Acquisition System	2-3
	Tracking Camera.....	2-4
	Navigation System (RT-DGPS)	2-4
	Field Workstation	2-7
3.	PRODUCTS AND PROCESSING TECHNIQUES.....	3-1
	Base Maps	3-1
	Electromagnetic Anomalies	3-1
	Resistivity	3-1
	EM Magnetite.....	3-3
	Total Field Magnetics	3-3
	Multi-channel Stacked Profiles	3-3
	Contour, Color and Shadow Map Displays	3-3
	Conductivity-depth Sections.....	3-4
4.	SURVEY RESULTS	4-1
	GENERAL DISCUSSION	4-1
	GEOLOGY.....	4-4
	DESCRIPTION OF SURVEY RESULTS	4-5
5.	BACKGROUND INFORMATION	5-1
	ELECTROMAGNETICS	5-1
	MAGNETICS	5-12
6.	CONCLUSIONS AND RECOMMENDATIONS.....	6-1

APPENDIX A

LIST OF PERSONNEL

APPENDIX B

EM ANOMALY LIST - IRON CREEK AREA

LIST OF TABLES

Table 2-1. The Analog Profiles.....	2-5
Table 2-2. The Digital Profiles	2-6
Table 3-1. Survey Products	3-2
Table 4-1. EM Anomaly Statistics - Iron Creek.....	4-2
Table 5-1. EM Anomaly Grades	5-2

LIST OF FIGURES

Figure 1-1. Location Map of the Iron Creek Area, South-Central Alaska ..	1-2
Figure 4-1. Interpretation Map of the Iron Creek Area - Sheet 1	map pocket
Figure 4-2. Interpretation Map of the Iron Creek Area - Sheet 2	map pocket
Figure 5-1. Typical Dighem Anomaly Shapes.....	5-4

INTRODUCTION

A DIGHEM^V electromagnetic/resistivity/magnetic/VLF survey was flown under contract to WGM Inc., Mining and Geological Consultants, for the State of Alaska, Department of Natural Resources, Division of Geological and Geophysical Surveys. The survey was flown from August 6 to August 24, 1997, over a survey block located in the Iron Creek area within the following Quadrangles: Talkeetna Mountains: B-3/B-4/B-5/B-6; C-3/C-4/C-5/C-6.

Survey coverage consisted of approximately 3172 miles (5103 line-km), including 244 miles (392 line-km) of tie lines. Flight lines were flown in an azimuthal direction of 45°/315° with a line separation of ¼-mile (400 metres). Tie lines were flown perpendicular to the flight line direction with a separation of 3 miles (5 km).

The survey employed the DIGHEM^V electromagnetic system. Ancillary equipment consisted of a magnetometer, radar altimeter, video camera, analog and digital recorders, a VLF receiver and an electronic navigation system. Details of the survey equipment are given in Section 2.

LOCATION INDEX

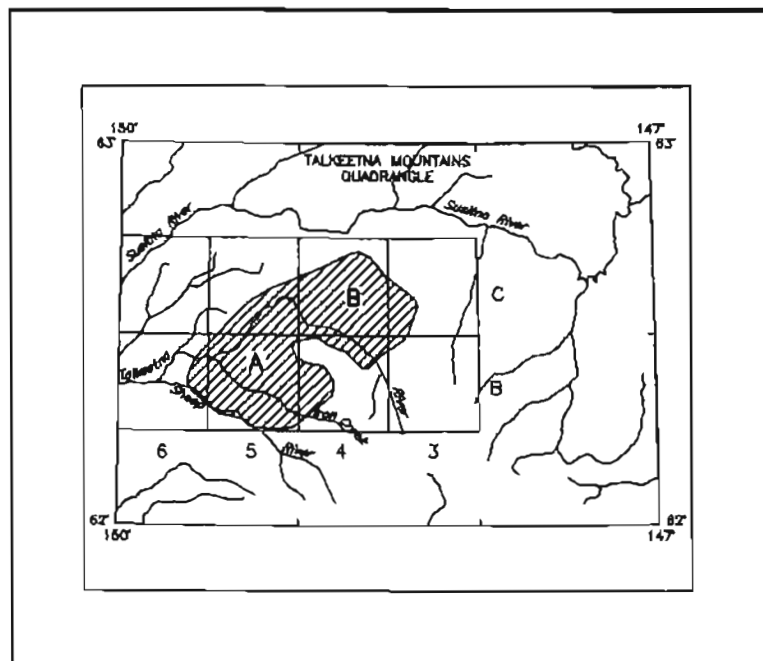


Figure 1-1
Location Map of the Iron Creek Area
South-Central, Alaska

SURVEY EQUIPMENT

The instrumentation was installed in an Aerospatiale AS350B2 turbine helicopter (Registration N188EH) which was provided by Era Aviation Inc. The helicopter flew at an average air speed of 67 mph (109 km/hr). The EM bird height was approximately 100 feet (30 metres).

Electromagnetic System

Model: DIGHEM^V

Type: Towed bird, symmetric dipole configuration operated at a nominal survey altitude of 30 metres. Coil separation is 8 metres for 900 Hz, 5500 Hz and 7200 Hz, and 6.3 metres for the 56,000 Hz coil-pair.

Coil orientations/frequencies:

Nominal Frequency (Hz)	Actual Frequencies (Hz)		
	August 6 Flight 1	August 6-August 8 Flights 2-8	August 9-August 24 Flights 9-48
coaxial 900	1070	1070	1070
coplanar 900	864	888	911
coaxial 5500	6368	6368	6368
coplanar 7200	7294	7294	7294
coplanar 56,000	55,951	55,951	55,951

Channels recorded: 5 inphase channels
5 quadrature channels
2 monitor channels

Sensitivity: 0.06 ppm at 900 Hz
0.10 ppm at 5,500 Hz
0.10 ppm at 7,200 Hz
0.30 ppm at 56,000 Hz

Sample rate: 10 per second

The electromagnetic system utilizes a multi-coil coaxial/coplanar technique to energize conductors in different directions. The coaxial coils are vertical with their axes in the flight direction. The coplanar coils are horizontal. The secondary fields are sensed simultaneously by means of receiver coils which are maximum coupled to their respective transmitter coils. The system yields an inphase and a quadrature channel from each transmitter-receiver coil-pair.

The EM system was calibrated for phase at the beginning of each day of operation. Gain calibrations were made at the start of flying. They were checked periodically throughout the survey and at the end of the flying of all the survey areas. Additional gain calibrations were made after any maintenance to the EM system.

The gain calibration was performed by inducing a 100 ppm signal into the system for each frequency using a calibrated coil, which was held externally to the EM bird. A corresponding reading in ppm was then obtained from the EM data acquisition system.

The phase calibration used a ferrite rod, which was held externally to the EM bird, that produced a negative deflection on the inphase electromagnetic parameter, but no deflection on the quadrature parameter. The phase was adjusted until no deflection was apparent on the quadrature EM parameter.

Magnetometer

Model:	Scintrex MEP-710
Type:	Optically pumped Cesium vapour
Sensitivity:	0.01 nT
Sample rate:	10 per second

The magnetometer sensor is towed in a bird 20 m below the helicopter.

Magnetic Base Station

Model:	GEM Systems GSM
Type:	Digital recording proton precession
Sensitivity:	0.10 nT
Sample rate:	3 seconds

A digital recorder is operated in conjunction with the base station magnetometer to record the diurnal variations of the earth's magnetic field. The clock of the base station is synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

VLF System

Manufacturer: Herz Industries Ltd.
Type: Totem-2A
Sensitivity: 0.1 %

The VLF receiver measures the total field and vertical quadrature components of the secondary VLF field. Signals from two separate transmitters can be measured simultaneously. The VLF sensor is housed in the same bird as the magnetic sensor, and is towed 20 m below the helicopter. No VLF data is available for much of the survey.

Radar Altimeter

Manufacturer: Honeywell/Sperry
Type: AA 220
Sensitivity: 0.3 m

The radar altimeter measures the vertical distance between the helicopter and the ground. This information is used in the processing algorithm which determines conductor depth.

Analog Recorder

Manufacturer: RMS Instruments
Type: DGR33 dot-matrix graphics recorder
Resolution: 4x4 dots/mm
Speed: 1.5 mm/sec

The analog profiles are recorded on chart paper in the aircraft during the survey. Table 2-1 lists the geophysical data channels and the vertical scale of each profile.

Digital Data Acquisition System

Manufacturer: RMS Instruments
Model: DGR 33
Recorder: RMS TCR-12, 6400 bpi, tape cartridge recorder

The digital data are used to generate several computed parameters. Both measured and computed parameters are plotted as "multi-channel stacked profiles" during data processing. These parameters are shown in Table 2-2. In Table 2-2, the log

resistivity scale of 0.06 decade/mm means that the resistivity changes by an order of magnitude in 16.6 mm. The resistivities at 0, 33 and 67 mm up from the bottom of the digital profile are respectively 1, 100 and 10,000 ohm-m.

Tracking Camera

Type: Panasonic Video
Model: AG 2400/WVCD132

Fiducial numbers are recorded continuously and are displayed on the margin of each image. This procedure ensures accurate correlation of analog and digital data with respect to visible features on the ground.

Navigation System (RT-DGPS)

Model: Sercel NR106, Real-time differential positioning
Type: SPS (L1 band), 10-channel, C/A code, 1575.42 MHz.
Sensitivity: -132 dBm, 0.5 second update
Accuracy: < 5 metres in differential mode,
± 50 metres in S/A (non differential) mode

The Global Positioning System (GPS) is a line of sight, satellite navigation system which utilizes time-coded signals from at least four of the twenty-four NAVSTAR satellites. In the differential mode, two GPS receivers are used. The base station unit is used as a reference which transmits real-time corrections to the mobile unit in the aircraft, via a UHF radio datalink. The on-board system calculates the flight path of the helicopter while providing real-time guidance. The raw XYZ data are recorded for both receivers, thereby permitting post-survey processing for accuracies of approximately 5 metres.

Although the base station receiver is able to calculate its own latitude and longitude, a higher degree of accuracy can be obtained if the reference unit is established on a known benchmark or triangulation point. The GPS records data relative to the WGS84 ellipsoid, which is the basis of the revised North American Datum (NAD83). Conversion software is used to transform the WGS84 coordinates to the system displayed on the base maps.

Table 2-1. The Analog Profiles

Channel Name	Parameter	Scale units/mm	Designation on Digital Profile
1X9I	coaxial inphase (900 Hz)	2.5 ppm	CXI (900 Hz)
1X9Q	coaxial quad (900 Hz)	2.5 ppm	CXQ (900 Hz)
3P9I	coplanar inphase (900 Hz)	2.5 ppm	CPI (900 Hz)
3P9Q	coplanar quad (900 Hz)	2.5 ppm	CPQ (900 Hz)
2P7I	coplanar inphase (7200 Hz)	5 ppm	CPI (7200 Hz)
2P7Q	coplanar quad (7200 Hz)	5 ppm	CPQ (7200 Hz)
4X7I	coaxial inphase (5500 Hz)	5 ppm	CXI (5500 Hz)
4X7Q	coaxial quad (5500 Hz)	5 ppm	CXQ (5500 Hz)
5P5I	coplanar inphase (56000 Hz)	10 ppm	CPI (56 kHz)
5P5Q	coplanar quad (56000 Hz)	10 ppm	CPQ (56 kHz)
ALTR	altimeter	3 m	ALT
MAGC	magnetics, coarse	20 nT	MAG
MAGF	magnetics, fine	2.0 nT	
CXSP	coaxial spherics monitor		CXS
CPSP	coplanar spherics monitor		CPS
CXPL	coaxial powerline monitor		CXP
CPPL	coplanar powerline monitor		CPP
4XSP	coaxial spherics monitor		4XS

Table 2-2. The Digital Profiles

Channel Name (Freq)	Observed Parameters	Scale Units/mm
MAG	magnetics - fine	10 nT
MAG	magnetics - coarse	100 nT
ALT	bird height	6 m
HMS	height above mean sea level	60 m
CXI (900 Hz)	vertical coaxial coil-pair inphase	2 ppm
CXQ (900 Hz)	vertical coaxial coil-pair quadrature	2 ppm
CPI (900 Hz)	horizontal coplanar coil-pair inphase	2 ppm
CPQ (900 Hz)	horizontal coplanar coil-pair quadrature	2 ppm
CXI (5500 Hz)	vertical coaxial coil-pair inphase	4 ppm
CXQ (5500 Hz)	vertical coaxial coil-pair quadrature	4 ppm
CPI (7200 Hz)	horizontal coplanar coil-pair inphase	4 ppm
CPQ (7200 Hz)	horizontal coplanar coil-pair quadrature	4 ppm
CPI (56,000 Hz)	horizontal coplanar coil-pair inphase	10 ppm
CPQ (56,000 Hz)	horizontal coplanar coil-pair quadrature	10 ppm
CXS	coaxial spherics monitor	
CXP	coaxial powerline monitor	
CPS	coplanar spherics monitor	
CPP	coplanar powerline monitor	
4XS	coaxial spherics monitor	
	Computed Parameters	
DFI (900 Hz)	difference function inphase from CXI and CPI	2 ppm
DFQ (900 Hz)	difference function quadrature from CXQ and CPQ	2 ppm
RES (900 Hz)	log resistivity	.06 decade
RES (7200 Hz)	log resistivity	.06 decade
RES (56,000 Hz)	log resistivity	.06 decade
DP (900 Hz)	apparent depth	6 m
DP (7200 Hz)	apparent depth	6 m
DP (56,000 Hz)	apparent depth	6 m
CDT	conductance	1 grade

Field Workstation

Manufacturer: Dighem
Model: FWS: V2.65
Type: 80586 or 80686 based P.C.

A portable PC-based field workstation is used at the survey base to verify data quality and completeness. Flight tapes are dumped to a hard drive to permit the creation of a database. This process allows the field operators to display both the positional (flight path) and geophysical data on a screen or printer.

PRODUCTS AND PROCESSING TECHNIQUES

The following products are available from the survey data. Those which are not part of the survey contract may be acquired later from WGM, Digheem or through the State of Alaska. Refer to Table 3-1 for a summary of the products which accompany this report.

Base Maps

Base maps of the survey area have been produced from published topographic maps. The maps used were quadrangles: Talkeetna Mountains: B-3/B-4/B-5/B-6; C-3/C-4/C-5/C-6.

Electromagnetic Anomalies

Anomalous electromagnetic responses are selected and analysed by computer to provide preliminary electromagnetic anomaly maps. These preliminary maps were used by the geophysicist, in conjunction with the computer-generated digital profiles, to produce the final interpreted EM anomalies which appear on the "Total Field Magnetism and EM Anomalies" maps. These maps include bedrock, surficial and cultural conductors.

Resistivity

The apparent resistivity in ohm-m was generated from the inphase and quadrature EM components for the 900 Hz, 7200 Hz and 56,000 Hz coplanar data, using a pseudo-layer halfspace model. A resistivity map portrays all the EM information for that frequency over the entire survey area. The maximum resistivity values, which are calculated for each frequency, are 1,000, 8,000 and 20,000 ohm-metres respectively. These cutoffs eliminate meaningless higher resistivities which would result from very small EM amplitudes. The 900 Hz and 7200 Hz coplanar resistivity data were presented as maps; the 56,000 Hz resistivity data were not presented as maps.

Table 3-1 Survey Products

Map Product	Map Index Number
Colour total field magnetics with digital topography	RI 98-1
Colour coplanar resistivity (900 Hz) with digital topo	RI98-2
Colour coplanar resistivity (7200 Hz) with digital topo	RI98-3
Flight lines	PDF98-1
Total field magnetics and EM anomalies (transparencies)	PDF98-2
Total field magnetics and EM anomalies (paper prints)	PDF98-3
900 Hz coplanar resistivity (transparencies)	PDF98-4
7200 Hz coplanar resistivity (transparencies)	PDF98-5
Total field magnetics and detailed EM anomalies (transparencies) @ 1:31,680	PDF98-6
Interpretation sketch maps on mylar (included with this report)	PDF98-7
CD-ROM archive	PDF98-9
Stacked Profiles (transparencies)	*

* - No number

RI - Report of Investigations

PDF - Public Data File

All map products and profiles are at a scale of 1:63,360, unless otherwise specified.

Also provided to the State of Alaska for both areas:

Colour shadow total field magnetics (4 sets)

Colour 7200 Hz coplanar resistivity (4 sets)

Colour 900 Hz coplanar resistivity (4 sets)

Colour total field magnetics (4 sets)

CD-ROM ASCII Archive (4 copies)

All original materials; flight logs, flight path videos, analog records and calibration records.

EM Magnetite

The apparent percent magnetite by weight is computed wherever magnetite produces a negative inphase EM response. This calculation is more meaningful in resistive areas.

Total Field Magnetics

The aeromagnetic data are corrected for diurnal variation using the magnetic base station data and by making manual corrections on the basis of tie line intercepts and visual analysis on the I-POWER VISION Imaging workstation. The total field magnetic data have been presented as contours on the base maps using a contour interval of 5 nT at a scale of 1:63,360, and at 2 nT for the magnetic maps @ 1:31,680. The regional IGRF gradient has been removed from the data.

Multi-channel Stacked Profiles

Distance-based profiles of the digitally recorded geophysical data were generated and plotted by computer. These profiles also contain the calculated parameters which are used in the interpretation process. These are produced as worksheets prior to interpretation, and have been presented in the final corrected form after interpretation. The profiles display electromagnetic anomalies with their respective interpretive symbols. The profiles are presented on transparent medium, from which prints can be made, at a scale of 1:63,360.

Contour, Colour and Shadow Map Displays

The geophysical data are interpolated onto a regular grid using a modified Akima spline technique. The resulting grid is suitable for generating contour maps of excellent quality. The grid cell size is usually 25% of the line interval.

Colour maps are produced by interpolating the grid down to the pixel size. The parameter is then incremented with respect to specific amplitude ranges to provide colour "contour" maps. Colour maps of the total magnetic field are particularly useful in defining the lithology of the survey area.

Shadow maps are generated by employing an artificial sun to cast shadows on a surface defined by the geophysical grid. Shadow maps of the total field magnetic data were combined with the colour magnetic grids to produce colour shadowed total field magnetic maps.

Conductivity-depth Sections

Sengpiel resistivity pseudo-depth sections can be produced from the survey data. The apparent resistivities for all frequencies can be displayed simultaneously as coloured conductivity-depth sections, which portray a smoothed approximation of resistivity distribution with depth. Usually, only the coplanar data are displayed as the quality tends to be higher than that of the coaxial data.

Conductivity-depth sections can be generated in two formats:

- (1) Sengpiel resistivity sections, where the apparent resistivity for each frequency is plotted at the depth of the centroid of the inphase current flow¹; and,
- (2) Differential resistivity sections, where the differential resistivity is plotted at the differential depth².

Both the Sengpiel and differential methods are derived from the pseudo-layer halfspace model. Both yield a coloured conductivity-depth section which attempts to portray a smoothed approximation of the true resistivity distribution with depth. Conductivity-depth sections are most useful in conductive layered situations, but may be unreliable in areas of moderate to high resistivity where signal amplitudes are weak. In areas where inphase responses have been suppressed by the effects of magnetite, the computed resistivities shown on the sections may be unreliable. The differential resistivity technique was developed by Dighem. It is more sensitive than the Sengpiel section to changes in the earth's resistivity and it reaches deeper.

¹ Approximate Inversion of Airborne EM Data from Multilayered Ground: Sengpiel, K.P., Geophysical Prospecting 36, 446-459, 1988.

² The Differential Resistivity Method for Multi-frequency Airborne EM Sounding: Huang, H. and Fraser, D.C., presented at Intern. Airb. EM Workshop, Tucson, Ariz., 1993.

SURVEY RESULTS

GENERAL DISCUSSION

The survey results are presented on two separate map sheets for each parameter at a scale of 1:63,360. The total field magnetics and detailed electromagnetic anomalies are presented on 7 map sheets at 1:31,680. Table 4-1 summarizes the EM responses in the survey area, with respect to conductance grade and interpretation.

The anomalies shown on the "Total Field Magnetics and Electromagnetic Anomalies" maps are based on a near-vertical, half plane model. This model best reflects "discrete" bedrock conductors. Wide bedrock conductors or flat-lying conductive units, whether from surficial or bedrock sources, may give rise to very broad anomalous responses on the EM profiles. These may not appear as anomalies on the maps if they have a regional character rather than a locally anomalous character. These broad conductors, which more closely approximate a half space model, will be maximum coupled to the horizontal (coplanar) coil-pair and should be more evident on the resistivity parameter. Resistivity maps, therefore, may be more valuable than the electromagnetic anomaly maps, in areas where broad or flat-lying conductors are considered to be of importance. Contoured resistivity maps, based on the 900 Hz and 7200 Hz coplanar data are included with this report.

Excellent resolution and discrimination of conductors was accomplished by using a fast sampling rate of 0.1 sec and by employing a common frequency (900 Hz) on two orthogonal coil-pairs (coaxial and coplanar). The resulting "difference channel" parameters often permit differentiation of bedrock and surficial conductors, even though they may exhibit similar conductance values.

Anomalies which occur near the ends of the survey lines (i.e., outside the survey area), should be viewed with caution. Some of the weaker anomalies could be due to aerodynamic noise, i.e., bird bending, which is created by abnormal stresses to which the bird is subjected during the climb and turn of the aircraft between lines. Such aerodynamic noise is usually manifested by an anomaly on the coaxial inphase channel only, although severe stresses can affect the coplanar inphase channels as well.

TABLE 4-1
EM ANOMALY STATISTICS
IRON CREEK AREA

CONDUCTOR GRADE	CONDUCTANCE RANGE SIEMENS (MHOS)	NUMBER OF RESPONSES
7	>100	12
6	50 - 100	6
5	20 - 50	33
4	10 - 20	57
3	5 - 10	137
2	1 - 5	1,640
1	<1	6,596
*	INDETERMINATE	2,222
TOTAL		10,703

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	933
B	DISCRETE BEDROCK CONDUCTOR	4,731
S	CONDUCTIVE COVER	2,234
H	ROCK UNIT OR THICK COVER	29
E	EDGE OF WIDE CONDUCTOR	14
M	MAGNETITE	2,762
TOTAL		10,703

(SEE EM MAP LEGEND FOR EXPLANATIONS)

In some portions of the survey area, the steep topography forced the pilot to exceed normal terrain clearance for reasons of safety. It is possible that some weak conductors may have escaped detection in areas where the bird height exceeded 120 m. In difficult areas where near-vertical climbs were necessary, the forward speed of the helicopter was reduced to a level which permitted excessive bird swinging. This problem, combined with the severe stresses to which the bird was subjected, gave rise to aerodynamic noise levels which are slightly higher than normal. Where warranted, reflights were carried out to minimize these adverse effects.

The EM anomalies resulting from this survey appear to fall within one of three general categories. The first type consists of discrete, well-defined anomalies which yield marked inflections on the difference channels. These anomalies are usually attributed to conductive sulphides or graphite and are generally given a "B", "T" or "D" interpretive symbol, denoting a bedrock source.

The second class of anomalies comprises moderately broad responses which exhibit the characteristics of a half space and do not yield well-defined inflections on the difference channels. Anomalies in this category are usually given an "S" or "H" interpretive symbol. The lack of a difference channel response usually implies a broad or flat-lying conductive source such as overburden. Some of these anomalies may reflect conductive rock units or zones of deep weathering.

The effects of conductive overburden are evident over portions of the survey area. Although the difference channels (DFI and DFQ) are extremely valuable in detecting bedrock conductors which are partially masked by conductive overburden, sharp undulations in the bedrock/overburden interface can yield anomalies in the difference channels which may be interpreted as possible bedrock conductors. Such anomalies usually fall into the "S?" or "B?" classification but may also be given an "E" interpretive symbol, denoting a resistivity contrast at the edge of a conductive unit.

The third class of anomalies consist of negative inphase responses which are indicative of magnetite. These are represented by triangles on the total field magnetics and EM anomaly maps.

In areas where EM responses are evident primarily on the quadrature components, zones of poor conductivity are indicated. Where these responses are coincident with magnetic anomalies, it is possible that the inphase component amplitudes have been suppressed by the effects of magnetite. Most of these poorly-conductive magnetic features give rise to resistivity anomalies which are only slightly below background. If it is expected that poorly-conductive economic mineralization may be associated with magnetite-rich units, most of these weakly anomalous features will be of interest. In

areas where magnetite causes the inphase components to become negative, the apparent conductance and depth of EM anomalies may be unreliable.

It is difficult to assess the relative merits of EM anomalies on the basis of conductance. It is recommended that an attempt be made to compile a suite of geophysical "signatures" over areas of interest. Anomaly characteristics are clearly defined on the computer-processed geophysical data profiles which are supplied as one of the survey products.

The "Total Field Magnetism and Detailed Electromagnetic Anomalies" maps show the anomaly locations with the interpreted conductor type, dip, conductance and depth being indicated by symbols. Direct magnetic correlation is also shown if it exists.

A complete assessment of the survey data should be undertaken, compiling all geophysical, geological and geochemical data available in areas which are selected for follow-up.

Geology³

The Iron Creek area is part of the Yentna-Cache Creek mining district and forms the southern edge of part of the Wrangellia terrane. Most of the area is underlain by a Pennsylvanian-Permian island arc chiefly composed of altered andesitic (greenstone) volcanics that extends from the Eastern Alaska Range to the study area. The belt of Triassic basalt and intrusive sills that is characteristic of the Wrangellia terrane may also be present in the survey area. It is unclear from the published mapping whether the Triassic sections dies out in the study area or continues through to the southwest. Both sequences of rocks contain carbonates and deep water siliceous sedimentary rocks in addition to volcanic stratigraphy.

A thick sequence of flat-lying rhyolites, basalts, and some dacites of Tertiary age overlies the older arc rocks near the boundary of areas A and B. Subvolcanic plugs of the Tertiary volcanic rocks are widespread in the region.

Jurassic plutons of dominantly intermediate composition intrude (or are locally faulted against) the greenstones along the entire southeastern border of the areas flown in this survey. Some of the plutonic complexes contain amphibolites and mafic intrusive

³ Most of this information is taken directly from the Appendix to the Survey Agreement, which was written by ADGGS personnel.

phases. Intermediate to silicic composition plutons of probable Tertiary to Cretaceous age intrude the greenstones in the western part of area A and near area F.

There is no recorded mineral production from the study area. Gold-quartz veins have been identified in the Iron Creek drainage. Copper mineralization in veins and fractures is widespread in the study area, and anomalous base metals and mercury have been detected in stream sediments and rock samples. The Toklat massive sulfide-barite occurrence is a barite-sulfide lense within a strong quartz-sericite-pyrite alteration halo in the Pennsylvanian-Permian metavolcanic section. The mineralization both parallels and crosscuts volcanic-sedimentary horizons, and can be found for a strike length of about one kilometer.

DESCRIPTION OF SURVEY RESULTS

The following is a brief overview of geophysical responses in the survey area, with some reference to geological mapping. Figures 4-1 and 4-2 in the map pockets of this report show sketches which identify features in the survey area that are discussed in this report.

The magnetic data display highly complex patterns on the contour map suggesting that the area is structurally complex. Many possible linear structural breaks can be inferred from the magnetic data and are marked on the interpretation maps with the designation "F". The magnetic data exhibit a large dynamic range of over 16,000 nT. Some of the highest magnetic values are evident near the northwest corner of sheet 2 within several highly magnetic, magnetite-rich units. Magnetite is evident throughout the block where the concentrations of magnetite cause the inphase parameter to become negative. These negative inphase anomalies are designated as "M" type anomalies denoting magnetite. Where negative inphase magnetite anomalies are associated with conductivity, they are given an S?, B? or D interpretation depending on the strength and definition of the quadrature anomaly.

One prominent magnetic zone, M₁, is situated near the northeast corner of the survey block. This complex zone is intersected by many probable structural features. It is magnetite-rich and generally displays little associated conductivity. It appears to exhibit a general correlation with Zone A, which is a highly resistive area possibly related to a resistive rock unit. Around the periphery of this zone, there are several conductive features which may reflect sulphide sources. Conductive zones R₁ through R₈ reflect zones of limited spatial extent which contain anomalies indicative of thin bedrock sources, possibly sulphides. These anomalies give rise to resistivities of less than 50 ohm-metres on the 900 Hz resistivity map. Magnetic correlation varies for these conductive features

R₁ through R₈. Most appear to be associated with possible structural features which can be inferred from the magnetic data intersecting Zone M₁, or are possible contact features. Only R₃ displays direct correlation with a thin, moderately magnetic feature situated immediately north of possible structural break F₁₄.

Several large, highly conductive zones dominate most of the survey area. Zones R₉, R₁₀, R₁₁ and R₁₂ contain multiple, closely-spaced bedrock sources which give rise to resistivities as low as fifteen to twenty ohm-metres. Zones R₉ and smaller Zone R₁₀ display a general association with a large geological unit mapped as undifferentiated volcanic rocks. This unit consists of over 1500 metre thick sequence of felsic to mafic subaerial volcanic rocks and related shallow intrusives. The lower part of the sequence consists of small stocks, irregular dikes, lenticular flows and thick layers of pyroclastic rocks. Rocks of the lower part of the sequence, occurring mostly in the upper Talkeetna River area, are interpreted to be vent facies deposits and near vent deposits of stratovolcanos. The upper part of the sequence consists of gently dipping andesite and basalt flows interlayered with minor amounts of tuffs⁴.

The magnetic data exhibit distinct characteristics associated with these zones. The magnetic data display complex patterns consisting of small highs and lows which are intersected by many structural features. R₉ and R₁₀ appear to be part of the same unit, separated by a break in the resistivity data associated with the Talkeetna River. Several magnetic lows within this complex magnetic zone are a fair bit stronger than other lows in the zone. L₁ and L₂ are thin, circular magnetic lows which may reflect remanent magnetism or alteration. Both are associated with structural breaks. L₂ is situated on the eastern edge of conductive zone R₉ in the vicinity of F₁₉, an extensive east/west trending structural break.

Conductive zones R₁₁ and R₁₂ are situated near the northern edge of the survey area. Both display similar resistivities to zones R₉ and R₁₀, and also consist of multiple, closely-spaced bedrock sources. R₁₂ displays a general association with relatively non-magnetic units, whereas R₁₁ is associated with more highly magnetic trends.

Conductive zone R₁₃ is situated near the southeastern edge of the area. It consists of multiple anomalies, similar to the other extensive conductive zones in the area.

⁴ Reconnaissance Geologic map and Geogronology, Talkeetna Mountains Quadrangle, northern part of Anchorage Quadrangle and southwest corner of Healy Quadrangle, Alaska, B. Csejtey, Jr., W.H Nelson, D.L. Jones, N.J. Silberling, R.M. Dean, M.S. Morris, M.A. Lanphere, J.G. Smith, M.L. Silberman.

United States Department of the Interior, Geological Survey. Open File Report 78-558, 1978.

Magnetic correlation is similar to Zone R_{12} , as it is generally associated with a relatively non-magnetic unit. This zone appears to be bounded at its northern edge by structural feature F_{26} .

Few other resistivity lows are as extensive as the previous zones, although there are several lows of limited spatial extent which may be of interest. Several elongate conductive trends correlate well with the rivers in the area. These features generally give rise to resistivities of between 400 and 600 ohm-metres, and appear to result from surficial sources. There are several resistivity anomalies along some of these rivers, however, which give rise to lower resistivities. These zones may result from a combination of both surficial and bedrock sources. Several of these resistivity lows, R_{19} , R_{20} , R_{21} and R_{22} , are situated along Iron Creek. All give rise to resistivities much lower than the rest of the river valley. R_{19} and R_{20} contain multiple anomalies indicative of bedrock sources. R_{21} displays some association with a circular, moderately magnetic feature. All display some association with structural breaks.

Zones R_{23} and R_{24} are situated in the southwestern corner of the survey block. R_{23} is associated with Diana Lakes, and may therefore reflect surficial conductance. There are, however, several anomalies within this zone which reflect possible bedrock sources. It is bounded to the north and south by structural breaks inferred from the magnetic data. R_{24} is situated in the vicinity of Sheep River, although somewhat to the north. It reflects a strong bedrock source which appears to extend approximately east/west sub-parallel to the flight lines. It is situated at the southern edge of a complex magnetic unit, at the contact of this unit and less magnetic material to the south. Zones R_{25} and R_{26} are also situated along Sheep River to the southeast of R_{24} . Both reflect possible bedrock sources. They display no direct magnetic correlation, but are situated immediately south of a possible structural feature.

Conductive Zone R_{17} is another conductive zone associated with a topographic low. It differs from the other zones as it is associated with a highly magnetic feature. This magnetic zone is situated between structural features F_{27} and F_{28} , immediately north of Zone B, a relative magnetic low within an area of complex magnetics which may represent an intrusive feature.

Several conductive zones which may reflect bedrock sources are also evident along the Talkeetna River. R_{15} and R_{16} reflect thin bedrock sources which are situated in the vicinity of structural break F_{11} . The sources of these anomalies appear to dip to the northwest. Both are associated with the southern edge of a moderately magnetic trend.

R₁₈ appears to reflect a bedrock source associated with a small topographic high. This circular feature consists of several anomalies indicative of bedrock sources. It is situated in the vicinity of several inferred structural breaks.

One other small resistivity low, R₁₄, is situated on sheet 2 in the vicinity of F₇. It consists of several anomalies indicative of thin bedrock sources. Dips determined from these anomalies suggest that the source is overturned along strike. This zone reflects possible sulphides or graphite. It is associated with a small magnetic low.

Many other anomalies have been interpreted to have possible bedrock sources, although few give rise to strong resistivity lows. Few give rise to resistivity lows of less than 400 ohm-metres on the 900 Hz resistivity map. Some anomalies may be of interest due to their magnetic correlation. Several strong magnetic lows are evident in the area which may reflect remanence or zones of alteration. Zones such as L₁ through L₉ and other similar anomalies may warrant further investigation.

BACKGROUND INFORMATION

Electromagnetics

DIGHEM electromagnetic responses fall into two general classes, discrete and broad. The discrete class consists of sharp, well-defined anomalies from discrete conductors such as sulphide lenses and steeply dipping sheets of graphite and sulfides. The broad class consists of wide anomalies from conductors having a large horizontal surface such as flatly dipping graphite or sulphide sheets, saline water-saturated sedimentary formations, conductive overburden and rock, and geothermal zones. A vertical conductive slab with a width of 200 m would straddle these two classes.

The vertical sheet (half plane) is the most common model used for the analysis of discrete conductors. All anomalies plotted on the geophysical maps are analyzed according to this model. The following section entitled **Discrete Conductor Analysis** describes this model in detail, including the effect of using it on anomalies caused by broad conductors such as conductive overburden.

The conductive earth (half space) model is suitable for broad conductors. Resistivity contour maps result from the use of this model. A later section entitled **Resistivity Mapping** describes the method further, including the effect of using it on anomalies caused by discrete conductors such as sulphide bodies.

Geometric Interpretation

The geophysical interpreter attempts to determine the geometric shape and dip of the conductor. Figure 5-1 shows typical DIGHEM anomaly shapes which are used to guide the geometric interpretation.

Discrete Conductor Analysis

The EM anomalies appearing on the electromagnetic map are analyzed by computer to give the conductance (i.e., conductivity-thickness product) in siemens (mhos) of a vertical sheet model. This is done regardless of the interpreted geometric shape of the conductor. This is not an unreasonable procedure, because the computed conductance increases as the electrical quality of the conductor increases, regardless of its true shape. DIGHEM anomalies are divided into seven grades of conductance, as shown in Table 5-1. The conductance in siemens (mhos) is the reciprocal of resistance in ohms.

The conductance value is a geological parameter because it is a characteristic of the conductor alone. It generally is independent of frequency, flying height or depth of

burial, apart from the averaging over a greater portion of the conductor as height increases. Small anomalies from deeply buried strong conductors are not confused with small anomalies from shallow weak conductors because the former will have larger conductance values.

Table 5-1. EM Anomaly Grades

<u>Anomaly Grade</u>	<u>Siemens</u>
7	> 100
6	50 - 100
5	20 - 50
4	10 - 20
3	5 - 10
2	1 - 5
	< 1

Conductive overburden generally produces broad EM responses which may not be shown as anomalies on the geophysical. However, patchy conductive overburden in otherwise resistive areas can yield discrete anomalies with a conductance grade (cf. Table 5-1) of 1, 2 or even 3 for conducting clays which have resistivities as low as 50 ohm-m. In areas where ground resistivities are below 10 ohm-m, anomalies caused by weathering variations and similar causes can have any conductance grade. The anomaly shapes from the multiple coils often allow such conductors to be recognized, and these are indicated by the letters S, H, and sometimes E on the geophysical maps (see EM legend on maps).

For bedrock conductors, the higher anomaly grades indicate increasingly higher conductances. Examples: DIGHEM's New Inco copper discovery (Noranda, Canada) yielded a grade 5 anomaly, as did the neighbouring copper-zinc Magusi River ore body; Mattabi (copper-zinc, Sturgeon Lake, Canada) and Whistle (nickel, Sudbury, Canada) gave grade 6; and DIGHEM's Montcalm nickel-copper discovery (Timmings, Canada) yielded a grade 7 anomaly. Graphite and sulfides can span all grades but, in any particular survey area, field work may show that the different grades indicate different types of conductors.


Strong conductors (i.e., grades 6 and 7) are characteristic of massive sulfides or graphite. Moderate conductors (grades 4 and 5) typically reflect graphite or sulfides of a less massive character, while weak bedrock conductors (grades 1 to 3) can signify poorly connected graphite or heavily disseminated sulfides. Grades 1 and 2 conductors may not respond to ground EM equipment using frequencies less than 2000 Hz.

The presence of sphalerite or gangue can result in ore deposits having weak to moderate conductances. As an example, the three million ton lead-zinc deposit of Restigouche Mining Corporation near Bathurst, Canada, yielded a well-defined grade 2 conductor. The 10 percent by volume of sphalerite occurs as a coating around the fine grained massive pyrite, thereby inhibiting electrical conduction. Faults, fractures and shear zones may produce anomalies which typically have low conductances (e.g., grades 1 to 3). Conductive rock formations can yield anomalies of any conductance grade. The conductive materials in such rock formations can be salt water, weathered products such as clays, original depositional clays, and carbonaceous material.

For each interpreted electromagnetic anomaly on the geophysical maps, a letter identifier and an interpretive symbol are plotted beside the EM grade symbol. The horizontal rows of dots, under the interpretive symbol, indicate the anomaly amplitude on the flight record. The vertical column of dots, under the anomaly letter, gives the estimated depth. In areas where anomalies are crowded, the letter identifiers, interpretive symbols and dots may be obliterated. The EM grade symbols, however, will always be discernible, and the obliterated information can be obtained from the anomaly listing appended to this report.

The purpose of indicating the anomaly amplitude by dots is to provide an estimate of the reliability of the conductance calculation. Thus, a conductance value obtained from a large ppm anomaly (3 or 4 dots) will tend to be accurate whereas one obtained from a small ppm anomaly (no dots) could be quite inaccurate. The absence of amplitude dots indicates that the anomaly from the coaxial coil-pair is 5 ppm or less on both the inphase and quadrature channels. Such small anomalies could reflect a weak conductor at the surface or a stronger conductor at depth. The conductance grade and depth estimate illustrates which of these possibilities fits the recorded data best.

The conductance measurement is considered more reliable than the depth estimate. There are a number of factors which can produce an error in the depth estimate, including the averaging of topographic variations by the altimeter, overlying conductive overburden, and the location and attitude of the conductor relative to the flight line. Conductor location and attitude can provide an erroneous depth estimate because the stronger part of the conductor may be deeper or to one side of the flight line, or because it has a shallow dip. A heavy tree cover can also produce errors in depth estimates. This is because the depth estimate is computed as the distance of bird from conductor, minus the altimeter reading. The altimeter can lock onto the top of a dense forest canopy. This situation yields an erroneously large depth estimate but does not affect the conductance estimate.

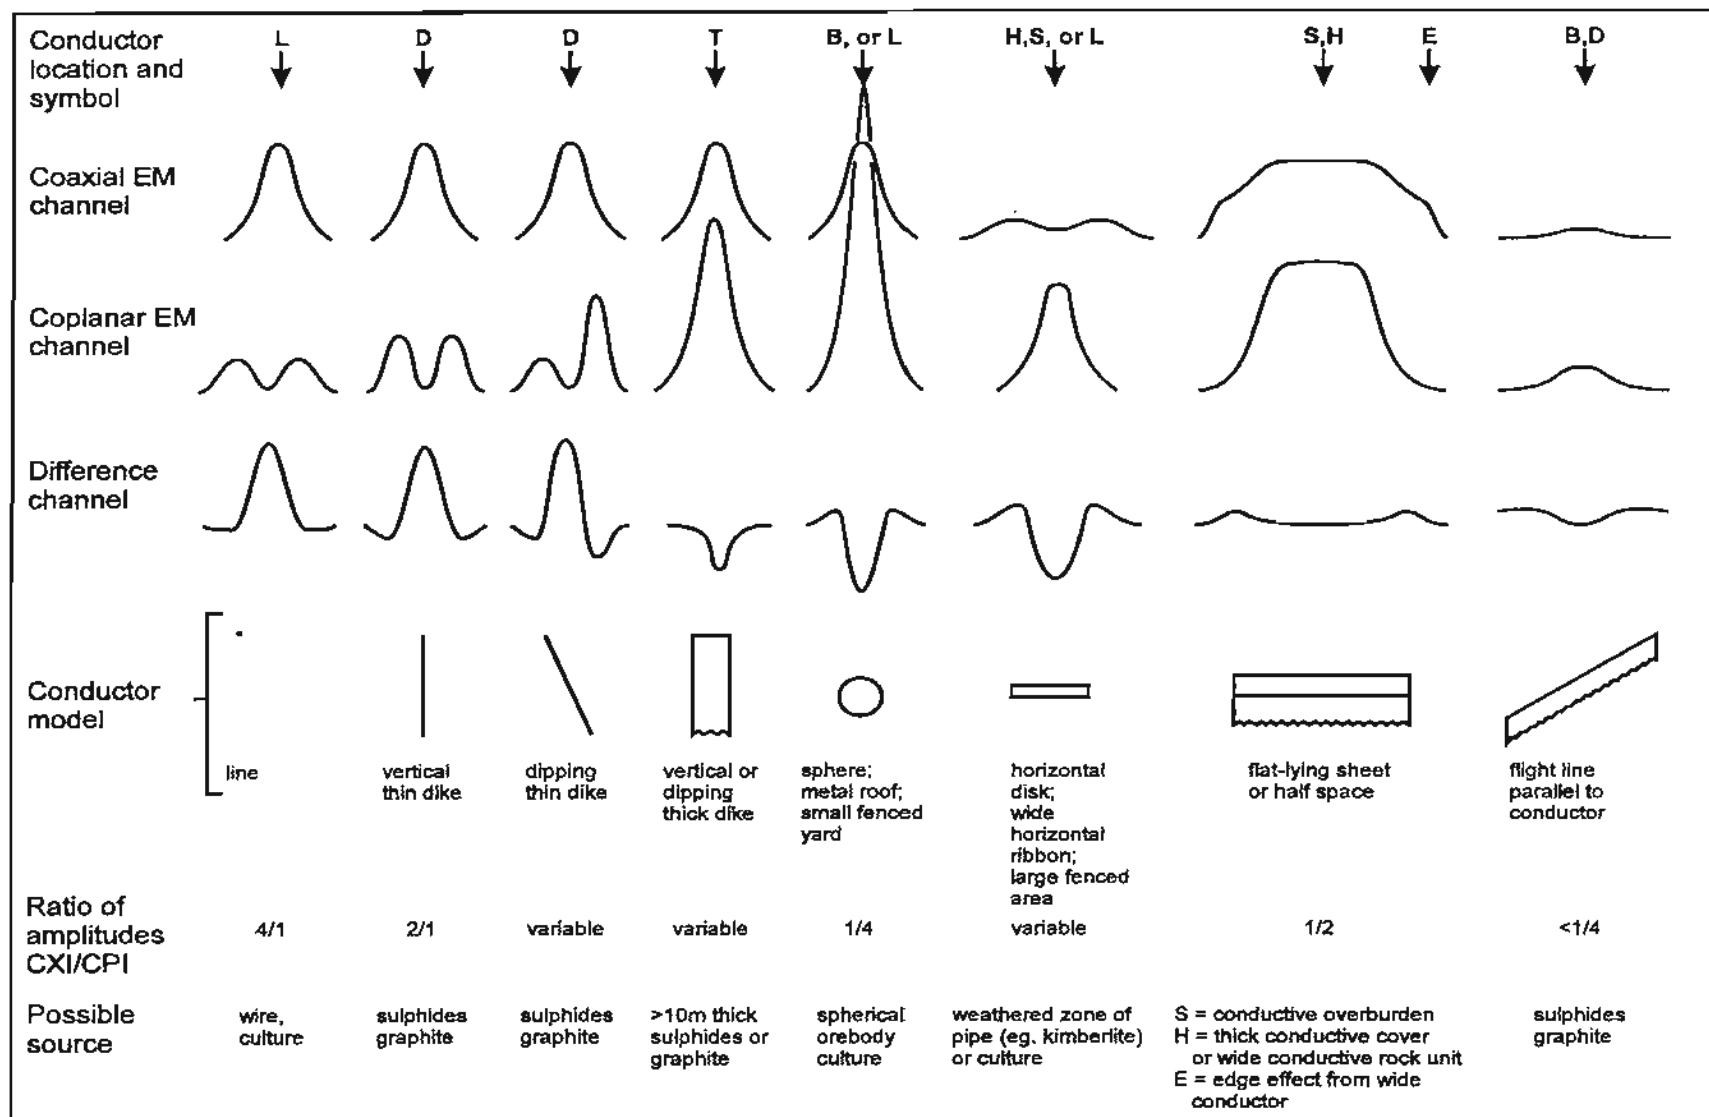

Typical DIGHEM anomaly shapes

Figure 5-1

Dip symbols are used to indicate the direction of dip of conductors. These symbols are used only when the anomaly shapes are unambiguous, which usually requires a fairly resistive environment.

A further interpretation is presented on the EM map by means of the line-to-line correlation of bedrock anomalies, which is based on a comparison of anomaly shapes on adjacent lines. This provides conductor axes which may define the geological structure over portions of the survey area. The absence of conductor axes in an area implies that anomalies could not be correlated from line to line with reasonable confidence.

DIGHEM electromagnetic anomalies are designed to provide a correct impression of conductor quality by means of the conductance grade symbols. The symbols can stand alone with geology when planning a follow-up program. The actual conductance values are printed in the attached anomaly list for those who wish quantitative data. The anomaly ppm and depth are indicated by inconspicuous dots which should not distract from the conductor patterns, while being helpful to those who wish this information. The map provides an interpretation of conductors in terms of length, strike and dip, geometric shape, conductance, depth, and thickness. The accuracy is comparable to an interpretation from a high quality ground EM survey having the same line spacing.

The attached EM anomaly list provides a tabulation of anomalies in ppm, conductance, and depth for the vertical sheet model. The EM anomaly list also shows the conductance and depth for a thin horizontal sheet (whole plane) model, but only the vertical sheet parameters appear on the EM map. The horizontal sheet model is suitable for a flatly dipping thin bedrock conductor such as a sulphide sheet having a thickness less than 10 m. The list also shows the resistivity and depth for a conductive earth (half space) model, which is suitable for thicker slabs such as thick conductive overburden. In the EM anomaly list, a depth value of zero for the conductive earth model, in an area of thick cover, warns that the anomaly may be caused by conductive overburden.

Since discrete bodies normally are the targets of EM surveys, local base (or zero) levels are used to compute local anomaly amplitudes. This contrasts with the use of true zero levels which are used to compute true EM amplitudes. Local anomaly amplitudes are shown in the EM anomaly list and these are used to compute the vertical sheet parameters of conductance and depth. Not shown in the EM anomaly list are the true amplitudes which are used to compute the horizontal sheet and conductive earth parameters.

Questionable Anomalies

DIGHem maps may contain EM responses which are displayed as asterisks (*). These responses denote weak anomalies of indeterminate conductance, which may reflect one of the following: a weak conductor near the surface, a strong conductor at depth (e.g., 100 to 120 m below surface) or to one side of the flight line, or aerodynamic noise. Those responses that have the appearance of valid bedrock anomalies on the flight profiles are indicated by appropriate interpretive symbols (see EM legend on maps). The others probably do not warrant further investigation unless their locations are of considerable geological interest.

The Thickness Parameter

DIGHem can provide an indication of the thickness of a steeply dipping conductor. The amplitude of the coplanar anomaly (e.g., CPI channel on the digital profile) increases relative to the coaxial anomaly (e.g., CXI) as the apparent thickness increases, i.e., the thickness in the horizontal plane. (The thickness is equal to the conductor width if the conductor dips at 90 degrees and strikes at right angles to the flight line.) This report refers to a conductor as thin when the thickness is likely to be less than 3 m, and thick when in excess of 10 m. Thick conductors are indicated on the EM map by parentheses "()". For base metal exploration in steeply dipping geology, thick conductors can be high priority targets because many massive sulphide ore bodies are thick, whereas non-economic bedrock conductors are often thin. The system cannot sense the thickness when the strike of the conductor is subparallel to the flight line, when the conductor has a shallow dip, when the anomaly amplitudes are small, or when the resistivity of the environment is below 100 ohm-m.

Resistivity Mapping

Resistivity mapping is useful in areas where broad or flat lying conductive units are of interest. One example of this is the clay alteration that is associated with Carlin-type deposits in the south west United States. The Dighem system was able to identify the clay alteration zone over the Cove deposit. The alteration zone appeared as a strong resistivity low on the 900 Hz resistivity parameter. The 7,200 Hz and 56,000 Hz resistivities show more of the detail in the covering sediments, and delineate a range front fault. This is typical in many areas of the south west United States, where conductive near surface sediments, which may sometimes be alkalic, attenuate the higher frequencies.

Resistivity mapping has proven successful for locating diatremes in diamond exploration. Weathering products from relatively soft kimberlite pipes produce a resistivity contrast with the unaltered host rock. In many cases weathered kimberlite

pipes were associated with thick conductive layers which contrasted with overlying or adjacent relatively thin layers of lake bottom sediments or overburden.

Areas of widespread conductivity are commonly encountered during surveys. These conductive zones may reflect alteration zones, shallow-dipping sulphide or graphite-rich units or conductive overburden. In such areas, anomalies can be generated by decreases of only 5 m in survey altitude as well as by increases in conductivity. The typical flight record in conductive areas is characterized by inphase and quadrature channels which are continuously active. Local EM peaks reflect either increases in conductivity of the earth or decreases in survey altitude. For such conductive areas, apparent resistivity profiles and contour maps are necessary for the correct interpretation of the airborne data. The advantage of the resistivity parameter is that anomalies caused by altitude changes are virtually eliminated, so the resistivity data reflect only those anomalies caused by conductivity changes. The resistivity analysis also helps the interpreter to differentiate between conductive bedrock and conductive overburden. For example, discrete conductors will generally appear as narrow lows on the contour map and broad conductors (e.g., overburden) will appear as wide lows.

The apparent resistivity is calculated using the pseudo-layer (or buried) half space model defined by Fraser (1978)⁵. This model consists of a resistive layer overlying a conductive half space. The depth channels give the apparent depth below surface of the conductive material. The apparent depth is simply the apparent thickness of the overlying resistive layer. The apparent depth (or thickness) parameter will be positive when the upper layer is more resistive than the underlying material, in which case the apparent depth may be quite close to the true depth.

The apparent depth will be negative when the upper layer is more conductive than the underlying material, and will be zero when a homogeneous half space exists. The apparent depth parameter must be interpreted cautiously because it will contain any errors which may exist in the measured altitude of the EM bird (e.g., as caused by a dense tree cover). The inputs to the resistivity algorithm are the inphase and quadrature components of the coplanar coil-pair. The outputs are the apparent resistivity of the conductive half space (the source) and the sensor-source distance. The flying height is not an input variable, and the output resistivity and sensor-source distance are independent of the flying height when the conductivity of the measured material is sufficient to yield significant inphase as well as quadrature responses. The apparent depth, discussed above, is simply the sensor-source distance minus the measured altitude or flying height.

⁵ Resistivity mapping with an airborne multicoil electromagnetic system: Geophysics, v. 43, p.144-172

Consequently, errors in the measured altitude will affect the apparent depth parameter but not the apparent resistivity parameter.

The apparent depth parameter is a useful indicator of simple layering in areas lacking a heavy tree cover. The DIGHEM system has been flown for purposes of permafrost mapping, where positive apparent depths were used as a measure of permafrost thickness. However, little quantitative use has been made of negative apparent depths because the absolute value of the negative depth is not a measure of the thickness of the conductive upper layer and, therefore, is not meaningful physically. Qualitatively, a negative apparent depth estimate usually shows that the EM anomaly is caused by conductive overburden. Consequently, the apparent depth channel can be of significant help in distinguishing between overburden and bedrock conductors.

Interpretation in Conductive Environments

Environments having low background resistivities (e.g., below 30 ohm-m for a 900 Hz system) yield very large responses from the conductive ground. This usually prohibits the recognition of discrete bedrock conductors. However, DIGHEM data processing techniques produce three parameters which contribute significantly to the recognition of bedrock conductors in conductive environments. These are the inphase and quadrature difference channels (DFI and DFQ, which are available only on systems with common frequencies on orthogonal coil pairs), and the resistivity and depth channels (RES and DP) for each coplanar frequency.

The EM difference channels (DFI and DFQ) eliminate most of the responses from conductive ground, leaving responses from bedrock conductors, cultural features (e.g., telephone lines, fences, etc.) and edge effects. Edge effects often occur near the perimeter of broad conductive zones. This can be a source of geologic noise. While edge effects yield anomalies on the EM difference channels, they do not produce resistivity anomalies. Consequently, the resistivity channel aids in eliminating anomalies due to edge effects. On the other hand, resistivity anomalies will coincide with the most highly conductive sections of conductive ground, and this is another source of geologic noise. The recognition of a bedrock conductor in a conductive environment therefore is based on the anomalous responses of the two difference channels (DFI and DFQ) and the resistivity channels (RES). The most favourable situation is where anomalies coincide on all channels.

The DP channels, which give the apparent depth to the conductive material, also help to determine whether a conductive response arises from surficial material or from a conductive zone in the bedrock. When these channels ride above the zero level on the digital profiles (i.e., depth is negative), it implies that the EM and resistivity profiles are responding primarily to a conductive upper layer, i.e., conductive overburden. If the DP

channels are below the zero level, it indicates that a resistive upper layer exists, and this usually implies the existence of a bedrock conductor. If the low frequency DP channel is below the zero level and the high frequency DP is above, this suggests that a bedrock conductor occurs beneath conductive cover.

The conductance channel CDT identifies discrete conductors which have been selected by computer for appraisal by the geophysicist. Some of these automatically selected anomalies on channel CDT are discarded by the geophysicist. The automatic selection algorithm is intentionally oversensitive to assure that no meaningful responses are missed. The interpreter then classifies the anomalies according to their source and eliminates those that are not substantiated by the data, such as those arising from geologic or aerodynamic noise.

Reduction of Geologic Noise

Geologic noise refers to unwanted geophysical responses. For purposes of airborne EM surveying, geologic noise refers to EM responses caused by conductive overburden and magnetic permeability. It was mentioned previously that the EM difference channels (i.e., channel DFI for inphase and DFQ for quadrature) tend to eliminate the response of conductive overburden.

Magnetite produces a form of geological noise on the inphase channels of all EM systems. Rocks containing less than 1% magnetite can yield negative inphase anomalies caused by magnetic permeability. When magnetite is widely distributed throughout a survey area, the inphase EM channels may continuously rise and fall, reflecting variations in the magnetite percentage, flying height, and overburden thickness. This can lead to difficulties in recognizing deeply buried bedrock conductors, particularly if conductive overburden also exists. However, the response of broadly distributed magnetite generally vanishes on the inphase difference channel DFI. This feature can be a significant aid in the recognition of conductors which occur in rocks containing accessory magnetite.

EM Magnetite Mapping

The information content of DIGHEM data consists of a combination of conductive eddy current responses and magnetic permeability responses. The secondary field resulting from conductive eddy current flow is frequency-dependent and consists of both inphase and quadrature components, which are positive in sign. On the other hand, the secondary field resulting from magnetic permeability is independent of frequency and consists of only an inphase component which is negative in sign. When magnetic permeability manifests itself by decreasing the measured amount of positive inphase, its presence may be difficult to recognize. However, when it manifests itself by yielding a negative inphase anomaly (e.g., in the absence of eddy current flow), its presence is

assured. In this latter case, the negative component can be used to estimate the percent magnetite content.

A magnetite mapping technique was developed for the coplanar coil-pair of DIGHEM. The method can be complementary to magnetometer mapping in certain cases. Compared to magnetometry, it is far less sensitive but is more able to resolve closely spaced magnetite zones, as well as providing an estimate of the amount of magnetite in the rock. The method is sensitive to 1/4% magnetite by weight when the EM sensor is at a height of 30 m above a magnetitic half space. It can individually resolve steep dipping narrow magnetite-rich bands which are separated by 60 m. Unlike magnetometry, the EM magnetite method is unaffected by remanent magnetism or magnetic latitude.

The EM magnetite mapping technique provides estimates of magnetite content which are usually correct within a factor of 2 when the magnetite is fairly uniformly distributed. EM magnetite maps can be generated when magnetic permeability is evident as negative inphase responses on the data profiles.

Like magnetometry, the EM magnetite method maps only bedrock features, provided that the overburden is characterized by a general lack of magnetite. This contrasts with resistivity mapping which portrays the combined effect of bedrock and overburden.

Recognition of Culture

Cultural responses include all EM anomalies caused by man-made metallic objects. Such anomalies may be caused by inductive coupling or current gathering. The concern of the interpreter is to recognize when an EM response is due to culture. Points of consideration used by the interpreter, when coaxial and coplanar coil-pairs are operated at a common frequency, are as follows:

1. Channels CXP and CPP monitor 60 Hz radiation. An anomaly on these channels shows that the conductor is radiating power. Such an indication is normally a guarantee that the conductor is cultural. However, care must be taken to ensure that the conductor is not a geologic body which strikes across a power line, carrying leakage currents.
2. A flight which crosses a "line" (e.g., fence, telephone line, etc.) yields a centre-peaked coaxial anomaly and an m-shaped coplanar anomaly.⁶ When the flight

⁶ See Figure 5-1 presented earlier.

crosses the cultural line at a high angle of intersection, the amplitude ratio of coaxial/coplanar response is 4. Such an EM anomaly can only be caused by a line. The geologic body which yields anomalies most closely resembling a line is the vertically dipping thin dike. Such a body, however, yields an amplitude ratio of 2 rather than 4. Consequently, an m-shaped coplanar anomaly with a CXI/CPI amplitude ratio of 4 is virtually a guarantee that the source is a cultural line.

3. A flight which crosses a sphere or horizontal disk yields centre-peaked coaxial and coplanar anomalies with a CXI/CPI amplitude ratio (i.e., coaxial/coplanar) of 1/4. In the absence of geologic bodies of this geometry, the most likely conductor is a metal roof or small fenced yard.⁷ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
4. A flight which crosses a horizontal rectangular body or wide ribbon yields an m-shaped coaxial anomaly and a centre-peaked coplanar anomaly. In the absence of geologic bodies of this geometry, the most likely conductor is a large fenced area.⁵ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
5. EM anomalies which coincide with culture, as seen on the camera film or video display, are usually caused by culture. However, care is taken with such coincidences because a geologic conductor could occur beneath a fence, for example. In this example, the fence would be expected to yield an m-shaped coplanar anomaly as in case #2 above. If, instead, a centre-peaked coplanar anomaly occurred, there would be concern that a thick geologic conductor coincided with the cultural line.
6. The above description of anomaly shapes is valid when the culture is not conductively coupled to the environment. In this case, the anomalies arise from inductive coupling to the EM transmitter. However, when the environment is quite conductive (e.g., less than 100 ohm-m at 900 Hz), the cultural conductor may be conductively coupled to the environment. In this latter case, the anomaly shapes tend to be governed by current gathering. Current gathering can completely distort the anomaly shapes, thereby complicating the identification of cultural anomalies. In such circumstances, the interpreter can only rely on the radiation channels and on the camera film or video records.

⁷ It is a characteristic of EM that geometrically similar anomalies are obtained from: (1) a planar conductor, and (2) a wire which forms a loop having dimensions identical to the perimeter of the equivalent planar conductor.

Magnetics

Total field magnetics provides information on the magnetic properties of the earth materials in the survey area. The information can be used to locate magnetic bodies of direct interest for exploration, and for structural and lithological mapping.

The total field magnetic response reflects the abundance of magnetic material, in the source. Magnetite is the most common magnetic mineral. Other minerals such as ilmenite, pyrrhotite, franklinite, chromite, hematite, arsenopyrite, limonite and pyrite are also magnetic, but to a lesser extent than magnetite on average.

In some geological environments, an EM anomaly with magnetic correlation has a greater likelihood of being produced by sulphides than one that is non-magnetic. However, sulphide ore bodies may be non-magnetic (e.g., the Kidd Creek deposit near Timmins, Canada) as well as magnetic (e.g., the Mattabi deposit near Sturgeon Lake, Canada).

Iron ore deposits will be anomalously magnetic in comparison to surrounding rock due to the concentration of iron minerals such as magnetite, ilmenite and hematite.

Changes in magnetic susceptibility often allow rock units to be differentiated based on the total field magnetic response. Geophysical classifications may differ from geological classifications if various magnetite levels exist within one general geological classification. Geometric considerations of the source such as shape, dip and depth, inclination of the earth's field and remanent magnetization will complicate such an analysis.

In general, mafic lithologies contain more magnetite and are therefore more magnetic than many sediments which tend to be weakly magnetic. Metamorphism and alteration can also increase or decrease the magnetization of a rock unit.

Textural differences on a total field magnetic contour, colour or shadow map due to the frequency of activity of the magnetic parameter resulting from inhomogeneities in the distribution of magnetite within the rock, may define certain lithologies. For example, near surface volcanics may display highly complex contour patterns with little line-to-line correlation.

Rock units may be differentiated based on the plan shapes of their total field magnetic responses. Mafic intrusive plugs can appear as isolated "bulls-eye" anomalies. Granitic intrusives appear as sub-circular zones, and may have contrasting rings due to contact metamorphism. Generally, granitic terrain will lack a pronounced strike direction, although granite gneiss may display strike.

Linear north-south units are theoretically not well-defined on total field magnetic maps in equatorial regions due to the low inclination of the earth's magnetic field. However, most stratigraphic units will have variations in composition along strike which will cause the units to appear as a series of alternating magnetic highs and lows.

Faults and shear zones may be characterized by alteration that causes destruction of magnetite (e.g., weathering) which produces a contrast with surrounding rock. Structural breaks may be filled by magnetite-rich, fracture filling material as is the case with diabase dikes, or by non-magnetic felsic material.

Faulting can also be identified by patterns in the magnetic total field contours or colours. Faults and dikes tend to appear as lineaments and often have strike lengths of several kilometres. Offsets in narrow, magnetic, stratigraphic trends also delineate structure. Sharp contrasts in magnetic lithologies may arise due to large displacements along strike-slip or dip-slip faults.

CONCLUSIONS AND RECOMMENDATIONS

This report provides a very brief description of the survey results and describes the equipment, procedures and logistics of the survey.

There are many anomalies in the survey block which are typical of massive sulphide responses. The survey was also successful in locating a few moderately weak or broad conductors which may warrant additional work. The various maps included with this report display the magnetic and conductive properties of the survey area.

The total field magnetic data have successfully mapped the structure and lithology of the survey area. Interpretation sketch maps included with this report identify numerous faults and contacts which have been inferred from the magnetic data.

The resistivity products provided information for general geological mapping purposes. Contact, faults and conductive stratigraphic units are all apparent on the resistivity maps.

It is recommended that the survey results be reviewed in detail, in conjunction with all available geophysical, geological and geochemical information. Particular reference should be made to the computer generated data profiles which clearly define the characteristics of the individual anomalies.

It is also recommended that image processing of existing geophysical data be considered, in order to extract the maximum amount of information from the survey results. Current software and imaging techniques often provide valuable information on structure and lithology, which may not be clearly evident on the contour and colour maps. These techniques can yield images which define subtle, but significant, structural details.

Respectfully submitted,

GEOTERREX-DIGHEM



Ruth A. Pritchard
Geophysicist

APPENDIX A

LIST OF PERSONNEL


The following personnel were involved in the acquisition, processing, interpretation and presentation of data, relating to a DIGHEM^V airborne geophysical survey carried out under contract to WGM Inc., for the State of Alaska in the Iron Creek area, south-central Alaska.

Chris Nind	Manager, Helicopter Geophysics
Greg Paleolog	Manager, Helicopter Operations
Michael Cain	Field Geophysicist
Victor Chen	Field Geophysicist
John McGuire	Geophysical Operator
Darcy Blouin	Geophysical Operator
Bob Wiggin, Tim Perry	Pilots (Era Aviation Inc.)
Doug McConnell	Manager, Computer Production
Gordon Smith	Data Processing Supervisor
Ruth A. Pritchard	Interpretation Geophysicist
Lyn Vanderstarren	Drafting Supervisor
Mike Armstrong	Draftsperson (CAD)
Susan Pothiah	Word Processing Operator
Albina Tonello	Secretary/Expeditor

The survey consisted of 3172 miles (5103 km) of coverage, flown from August 6 to August 24, 1997.

All personnel are employees of Dighem, except for the pilots who are employees of Era Aviation Inc.

GEOTERREX-DIGHEM



Ruth A. Pritchard
Geophysicist

RAP/sdp

R0645AUG.97

APPENDIX B

EM ANOMALY LIST

IRON CREEK AREA

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10011	(FLIGHT	2)											
A 677S	0	2	1	2	0	4	-	-	-	-	-	-	110
LINE 10020	(FLIGHT	1)											
A 1904B?	4	7	7	11	1	4	0.5	0	1	28	6023	0	0
B 1858M	0	1	1	2	0	1	-	-	-	-	-	-	40
C 1813M	0	1	0	1	0	1	-	-	-	-	-	-	0
D 1804M	0	1	0	2	0	3	-	-	-	-	-	-	120
E 1778M	0	0	0	1	0	1	-	-	-	-	-	-	90
LINE 10030	(FLIGHT	2)											
A 1632S?	1	2	1	2	1	2	-	-	-	-	-	-	0
B 1670B?	2	11	7	20	0	4	0.3	0	1	21	1205	0	14
C 1738M	5	18	5	40	0	7	0.1	0	1	0	2800	0	0
D 1740S?	1	2	1	2	0	4	-	-	-	-	-	-	0
E 1764M	0	2	1	2	0	3	-	-	-	-	-	-	90
F 1765S?	0	11	2	11	0	3	0.1	0	1	0	3920	0	0
G 1786S?	1	2	1	2	0	4	-	-	-	-	-	-	0
H 1817S	5	5	10	19	0	4	0.5	0	1	28	790	0	0
I 1840M	0	2	0	1	0	1	-	-	-	-	-	-	0
J 1846M	0	2	0	2	0	0	-	-	-	-	-	-	200
K 1882M	0	0	0	1	0	1	-	-	-	-	-	-	140
L 1899M	0	1	0	1	0	0	-	-	-	-	-	-	0
M 1905M	0	2	1	2	0	1	-	-	-	-	-	-	1800
N 1912S	1	20	6	44	0	7	0.1	0	1	0	3102	0	0
O 1925M	0	2	0	2	0	1	-	-	-	-	-	-	450
P 1950D	6	10	3	18	0	3	0.5	13	1	18	896	0	0
LINE 10040	(FLIGHT	2)											
A 2466B?	11	29	11	56	2	14	0.4	0	1	30	287	6	60
B 2460B?	9	29	12	56	5	14	0.4	0	1	46	247	22	0
C 2442B?	1	2	1	2	2	4	-	-	-	-	-	-	0
D 2387D	1	2	1	2	0	1	-	-	-	-	-	-	40
E 2360M	0	2	0	2	0	1	-	-	-	-	-	-	300
F 2335M	0	4	2	5	0	1	0.2	28	1	47	6173	0	0
G 2300S	1	2	1	2	0	3	-	-	-	-	-	-	0
H 2276S	0	2	1	2	0	2	-	-	-	-	-	-	-7
I 2139M	0	1	0	0	0	2	0.1	0	1	210	8388	0	-4
J 2074S	8	2	12	32	0	5	4.8	33	1	12	552	0	0
K 2053M	0	2	0	0	0	1	-	-	-	-	-	-	600
LINE 10050	(FLIGHT	2)											
A 3254B?	1	2	1	2	2	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10050	(FLIGHT	2)											
B 3350B?	1	2	1	2	0	2	-	-	-	-	-	-	30
C 3428M	1	2	0	1	0	0	-	-	-	-	-	-	0
D 3547B?	3	4	10	27	0	0	0.3	0	1	37	235	10	0
LINE 10060	(FLIGHT	2)											
A 4204B?	1	2	1	2	0	2	-	-	-	-	-	-	0
B 4177S	0	2	0	2	0	2	-	-	-	-	-	-	0
C 4086B?	6	11	10	4	2	5	0.4	0	1	18	265	0	0
D 4063B?	6	8	14	14	3	6	0.6	7	1	49	192	24	0
E 3992M	0	2	0	2	0	1	-	-	-	-	-	-	330
F 3907M	0	1	0	1	0	1	-	-	-	-	-	-	0
G 3881M	0	1	0	1	0	1	-	-	-	-	-	-	0
H 3870M	0	2	0	1	0	1	-	-	-	-	-	-	0
I 3790M	0	2	0	1	0	1	-	-	-	-	-	-	0
J 3728B?	9	20	21	44	0	8	0.5	0	1	19	390	0	0
LINE 10070	(FLIGHT	2)											
A 4371M	0	2	0	2	0	1	-	-	-	-	-	-	0
B 4415S?	2	10	9	18	0	3	0.4	0	1	16	1143	0	0
C 4422M	1	5	7	8	0	1	0.7	19	1	0	4076	0	0
D 4440M	0	2	1	1	0	2	-	-	-	-	-	-	0
E 4456M	0	2	1	2	0	3	-	-	-	-	-	-	60
F 4546D?	5	7	6	17	2	6	0.7	9	1	39	252	12	0
G 4561B?	5	7	16	6	4	8	0.6	0	1	40	163	16	0
H 4659S?	2	10	1	22	0	4	0.1	0	1	1	4257	0	-8
I 4672M	0	1	0	2	0	1	-	-	-	-	-	-	260
J 4683M	0	3	0	3	0	1	0.1	4	1	91	7400	5	0
K 4695M	0	1	0	1	0	1	0.1	4	1	129	8388	0	0
L 4736M	0	1	0	1	0	1	-	-	-	-	-	-	0
M 4744M	0	1	0	2	0	1	0.1	1	1	189	8388	0	0
N 4754M	0	2	0	3	0	1	0.1	0	1	113	8388	0	200
O 4801M	0	1	0	1	0	1	-	-	-	-	-	-	90
P 4815M	0	3	0	0	0	1	0.4	95	1	206	8388	0	0
Q 4883B?	15	8	34	36	6	15	2.8	6	1	32	132	11	0
R 4894B?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 4905B	0	2	1	2	0	4	-	-	-	-	-	-	0
LINE 10080	(FLIGHT	2)											
A 5230M	0	2	0	2	0	1	-	-	-	-	-	-	50
B 5184M	4	2	0	4	0	1	1.7	58	1	95	8218	0	50
C 5169M	0	1	0	1	0	1	0.1	0	1	83	7362	0	160

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	COND DEPTH
							RESIS DEPTH
							OHM-M
							M
							NT

LINE 10080	(FLIGHT	2)					
D 5162M	1	1	0	2	0	1	0
E 5152M	0	2	0	2	0	1	550
F 5132M	0	1	0	1	0	0	-5
G 5118M	0	1	0	1	0	1	0
H 4994B?	13	12	32	27	0	12	0
I 4980B?	1	2	1	2	0	4	20

LINE 10081	(FLIGHT	2)					
A 5657B	30	20	70	42	8	23	0
B 5613S?	0	6	0	25	0	2	9
C 5600M	0	1	2	6	0	1	410
D 5580S	1	2	1	2	0	4	0
E 5561S	1	2	1	2	0	2	0
F 5502M	0	1	1	2	0	2	16
G 5428S?	1	2	1	2	1	2	0
H 5412M	0	0	0	0	0	1	60
I 5400M	0	2	0	2	0	1	0
J 5388M	0	2	0	2	0	1	80

LINE 10095	(FLIGHT	33)					
A 698B	31	24	57	47	5	17	0
B 710M	0	2	1	2	0	3	170
C 721B?	1	2	1	2	0	3	0
D 728S?	10	27	22	58	0	9	0
E 733M	0	10	0	56	0	9	0
F 745M	0	5	0	10	0	1	1480
G 754M	0	4	0	7	0	1	110
H 761M	0	7	0	10	0	1	0
I 765M	0	6	0	10	0	2	0
J 769M	0	0	0	1	0	1	-8
K 776M	0	4	0	5	0	2	0
L 785M	3	12	2	32	0	5	180
M 794M	5	15	5	30	0	5	0
N 801B?	5	6	8	11	0	1	0
O 804M	5	6	8	1	0	0	0
P 811M	0	2	1	2	0	2	0
Q 826M	1	2	1	2	0	1	-8
R 862S?	1	9	2	15	1	2	0
S 902B?	1	2	1	2	0	4	0
T 912B?	1	2	1	2	0	2	4
U 922M	0	3	0	7	0	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10095	(FLIGHT	33)											
V 932M	0	1	0	4	0	1	0.1	7	1	68	6786	0	0
W 942M	0	1	0	10	0	2	0.1	1	1	41	5812	0	0
X 946M	0	5	0	11	0	2	0.1	3	1	27	4795	0	0
Y 952S?	0	18	0	39	0	6	0.1	3	1	5	2934	0	0
Z 974M	0	3	0	6	0	2	0.1	2	1	60	6403	0	0
AA 1015M	0	2	0	2	0	1	-	-	-	-	-	-	100
AB 1031M	0	1	0	1	0	1	-	-	-	-	-	-	40
AC 1045M	0	2	0	2	0	2	-	-	-	-	-	-	0
AD 1089B?	8	11	11	20	1	7	0.7	10	1	62	229	35	0
AE 1109B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AF 1116M	1	1	1	2	0	1	-	-	-	-	-	-	0

LINE 10105	(FLIGHT	34)											
A 631S	0	2	1	2	0	2	-	-	-	-	-	-	0
B 603S?	0	26	1	52	0	7	0.1	0	1	0	2487	0	-5
C 594M	0	3	0	18	0	1	0.1	0	1	38	5781	0	40
D 581B?	0	6	0	7	0	1	0.1	0	1	24	5437	0	-5
E 576M	0	2	0	6	0	2	0.1	0	1	32	5802	0	1580
F 564M	0	3	0	6	0	2	0.1	1	1	47	6021	0	100
G 557M	0	1	0	2	0	1	0.1	0	1	68	6836	0	0
H 542B?	0	15	0	37	0	7	0.1	0	1	24	5771	0	0
I 538M	0	6	0	37	0	6	0.1	0	1	3	3092	0	0
J 538B?	0	2	0	2	0	4	-	-	-	-	-	-	0
K 529B?	0	2	1	2	0	3	-	-	-	-	-	-	0
L 524S?	0	9	7	42	0	5	0.1	0	1	9	1594	0	-5
M 518M	0	12	2	41	0	3	0.1	0	1	8	3477	0	15
N 510M	0	2	0	2	0	2	-	-	-	-	-	-	90
O 506M	0	2	0	2	0	1	-	-	-	-	-	-	-9
P 498M	0	2	0	2	0	2	-	-	-	-	-	-	240
Q 486B?	0	25	4	48	0	7	0.1	0	1	0	2560	0	150
R 470B?	0	17	4	27	0	4	0.1	1	1	13	3273	0	0
S 452B?	1	2	1	2	1	1	-	-	-	-	-	-	0
T 414B?	0	4	0	9	0	1	0.1	5	1	49	5923	0	-8
U 400B?	1	5	7	6	1	2	1.0	31	1	55	2095	9	-8
V 390D	10	18	20	36	1	7	0.6	0	1	32	320	6	0
W 355S	0	2	1	2	0	3	-	-	-	-	-	-	0
X 335B?	0	6	3	25	0	3	0.1	0	1	8	4125	0	0
Y 332M	0	11	3	25	0	4	0.1	0	1	5	3803	0	1280
Z 304D	5	20	4	32	0	4	0.2	0	1	7	2941	0	0
AA 269B?	0	2	0	2	0	1	-	-	-	-	-	-	0
AB 245M	0	1	0	1	0	0	0.1	0	1	80	7154	0	60

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET	CONDUCTIVE EARTH		MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10105	(FLIGHT	34)											
AC 236M	0	4	0	6	0	1	0.1	1	1	51	6129	0	-8
AD 222M	0	2	0	2	0	1	-	-	-	-	-	-	0
AE 208B?	1	2	0	2	0	2	-	-	-	-	-	-	19
AF 184M	1	1	0	2	0	1	-	-	-	-	-	-	0
AG 136B	10	11	24	19	1	9	1.0	11	1	59	151	35	0

LINE 10115	(FLIGHT	34)											
A 753B?	0	5	7	11	0	3	0.5	0	1	47	1570	0	-8
B 757M	0	0	4	1	0	1	3.0	64	1	58	6737	0	0
C 772S	1	2	1	2	0	1	-	-	-	-	-	-	0
D 779M	0	0	1	2	0	0	-	-	-	-	-	-	0
E 796M	0	2	0	2	0	2	-	-	-	-	-	-	0
F 809M	0	1	0	4	0	1	0.1	1	1	47	6008	0	1150
G 815B?	0	8	0	8	0	1	0.1	0	1	29	5732	0	0
H 823M	0	13	0	25	0	4	0.1	3	1	8	3161	0	-7
I 838M	0	6	0	10	0	3	0.1	12	1	20	3458	0	1120
J 852M	0	2	0	2	0	1	-	-	-	-	-	-	-5
K 864M	0	6	0	15	0	2	0.1	1	1	18	4238	0	-5
L 880M	0	3	0	11	0	2	0.1	5	1	26	4489	0	0
M 891M	0	2	0	4	0	2	0.1	4	1	31	5041	0	0
N 903M	1	5	9	39	0	3	0.2	1	1	16	3747	0	50
O 908S?	7	18	18	55	0	9	0.3	4	1	13	743	0	-4
P 913M	0	22	18	30	0	5	0.6	13	1	1	2557	0	0
Q 921M	0	4	0	25	0	2	0.1	5	1	17	3732	0	0
R 927M	0	4	0	14	0	5	0.1	12	1	17	3213	0	0
S 935M	0	9	0	9	0	3	0.1	6	1	11	3213	0	0
T 939B?	0	9	0	3	0	2	0.1	0	1	4	3377	0	-5
U 943M	0	4	2	13	0	2	0.1	8	1	14	3543	0	0
V 950M	0	2	1	2	0	2	-	-	-	-	-	-	0
W 965B?	4	15	4	27	0	4	0.1	2	1	21	2693	0	0
X 982M	1	2	1	2	0	1	-	-	-	-	-	-	0
Y 1001B?	3	12	3	19	0	3	0.1	0	1	13	2464	0	0
Z 1018S?	8	44	28	84	1	14	0.2	0	1	17	358	0	0
AA 1042B?	5	11	9	25	0	4	0.3	5	1	30	1396	0	0
AB 1048M	0	1	1	12	0	0	0.1	3	1	13	3569	0	0
AC 1059M	0	11	3	42	0	1	0.1	0	1	7	2986	0	0
AD 1063B?	0	26	3	55	0	6	0.1	0	1	0	2037	0	0
AE 1065B?	0	32	6	55	0	8	0.1	0	1	4	2392	0	0
AF 1072M	0	0	6	25	0	1	0.2	4	1	16	3877	0	30
AG 1083M	0	14	7	23	0	4	0.2	8	1	15	3709	0	30
AH 1102D	3	15	3	22	1	3	0.1	0	1	18	2054	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10115	(FLIGHT	34)											
AI 1132D	0	2	1	2	0	1	-	-	-	-	-	-	15
AJ 1157M	0	4	0	6	0	1	0.1	0	1	40	5812	0	8
AK 1165M	0	5	2	8	0	1	0.1	16	1	49	6047	0	18
AL 1178B?	0	5	3	8	0	1	0.2	0	1	37	2779	0	0
AM 1184B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AN 1190S?	0	2	1	2	0	2	-	-	-	-	-	-	17
AO 1226B	24	8	49	34	8	18	6.7	14	1	45	65	28	19
AP 1243B?	9	3	43	27	4	16	3.9	48	1	33	158	14	-4

LINE 10121	(FLIGHT	36)											
A 5562S?	0	12	2	20	0	3	0.1	0	1	0	3630	0	-4
B 5556M	0	1	2	2	0	1	0.4	57	1	34	6060	0	360
C 5550B?	0	5	2	4	0	1	0.3	28	1	33	4748	0	0
D 5546M	0	3	1	25	0	2	0.1	0	1	25	5057	0	230
E 5532M	0	5	3	1	0	1	3.7	69	1	31	6188	0	-4

LINE 10125	(FLIGHT	36)											
A 5432M	0	1	0	2	0	1	-	-	-	-	-	-	0
B 5408M	0	1	0	2	0	1	-	-	-	-	-	-	0
C 5392M	0	1	0	5	0	1	0.1	4	1	41	5722	0	170
D 5388M	0	1	0	9	0	2	0.1	7	1	36	5229	0	250
E 5385B?	0	6	0	11	0	1	0.1	3	1	27	4780	0	-4
F 5381B?	0	6	0	12	0	2	0.1	0	1	24	5159	0	-4
G 5372M	0	1	0	3	0	0	0.1	0	1	61	6623	0	0
H 5366M	0	1	0	4	0	1	0.1	11	1	57	6282	0	0
I 5357M	0	2	0	2	0	2	-	-	-	-	-	-	0
J 5348M	0	3	0	16	0	1	0.1	2	1	37	5631	0	0
K 5342B?	0	14	0	30	0	4	0.1	0	1	0	3059	0	-4
L 5332B?	0	6	11	14	0	0	0.8	9	1	19	5631	0	0
M 5326M	0	19	11	36	0	5	0.3	0	1	0	2909	0	90
N 5324B?	0	19	11	36	0	5	0.3	0	1	0	2860	0	80
O 5315M	0	2	0	5	0	1	0.1	0	1	18	4655	0	50
P 5310M	0	9	0	19	0	3	0.1	1	1	9	3389	0	270
Q 5307M	0	10	0	1	0	3	0.1	0	1	5	3377	0	90
R 5304M	0	2	1	2	0	4	-	-	-	-	-	-	180
S 5301B?	3	13	21	16	0	4	1.7	11	1	24	839	0	0
T 5297B?	4	9	21	16	0	4	1.7	7	1	33	593	3	0
U 5290D	0	8	0	7	0	1	0.1	5	1	12	3371	0	120
V 5287M	0	8	0	11	0	2	0.1	7	1	11	3116	0	140
W 5282D	0	10	0	7	0	2	0.1	4	1	12	3408	0	0
X 5275D	0	5	0	10	0	2	0.1	0	1	11	3929	0	-4

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10125	(FLIGHT 36)														
Y	5269M	0	16	0	41	0	3	0.1	2	1	7	3111	0	310	
Z	5265D	0	21	0	41	0	6	0.1	4	1	0	2300	0	0	
AA	5263B?	0	33	0	49	0	7	0.1	6	1	0	2206	0	0	
AB	5258M	0	33	2	49	0	7	0.1	0	1	9	3647	0	60	
AC	5255S?	0	16	5	24	0	4	0.2	0	1	0	2828	0	0	
AD	5244S?	0	2	1	2	1	1	-	-	-	-	-	-	0	
AE	5238B?	1	2	1	2	2	2	-	-	-	-	-	-	0	
AF	5218S?	0	7	1	17	0	2	0.1	0	1	41	1936	4	0	
AG	5197B?	1	2	1	2	1	4	-	-	-	-	-	-	0	
AH	5191B?	6	7	21	17	1	5	0.8	19	1	38	332	11	0	
AI	5184B?	0	2	1	2	2	4	-	-	-	-	-	-	-7	
AJ	5180B?	0	19	3	26	0	6	0.1	0	1	23	1376	0	0	
AK	5136B?	2	21	3	32	0	4	0.1	0	1	21	1483	0	0	
AL	5101S	0	8	3	17	0	3	0.1	1	1	20	2226	0	0	
AM	5095B?	0	2	1	2	0	2	-	-	-	-	-	-	0	
AN	5083S?	0	2	1	2	0	2	-	-	-	-	-	-	0	
AO	5052S?	0	2	1	2	0	1	-	-	-	-	-	-	0	
AP	5035S?	0	2	1	2	0	1	-	-	-	-	-	-	0	
AQ	4960H	1	2	1	2	2	4	-	-	-	-	-	-	0	
AR	4938H	14	5	10	23	0	9	5.4	42	1	37	162	17	0	

LINE 10130	(FLIGHT 6)														
A	7641M	0	4	4	5	0	2	0.4	26	1	36	6173	0	210	
B	7632M	0	2	0	1	0	1	-	-	-	-	-	-	0	
C	7623M	0	11	8	19	1	2	0.4	6	1	32	5741	0	220	
D	7621B?	0	11	8	19	2	3	0.4	4	1	14	4105	0	0	
E	7596M	0	6	0	0	0	1	0.1	31	1	50	6008	0	-9760	
F	7579S?	0	12	2	29	0	4	0.1	1	1	11	3063	0	0	
G	7562M	0	1	0	7	0	1	0.1	4	1	34	5340	0	140	
H	7553M	0	1	0	2	0	0	0.1	0	1	60	6459	0	0	
I	7546M	0	5	0	11	0	2	0.1	2	1	61	6440	0	200	
J	7537M	0	6	0	10	0	1	0.1	6	1	81	6972	5	1190	
K	7528M	0	12	0	19	0	3	0.1	6	1	25	4382	0	0	
L	7522M	0	2	0	16	0	1	0.1	4	1	91	7400	5	-8	
M	7517M	0	2	0	2	0	2	0.1	5	1	130	8388	0	2190	
N	7512M	0	3	0	2	0	1	0.1	0	1	119	8388	0	480	
O	7504M	0	2	0	1	0	1	0.1	2	1	153	8388	0	0	
P	7494M	0	2	0	5	0	1	0.1	4	1	88	7290	5	60	
Q	7482S?	0	2	0	2	0	2	-	-	-	-	-	-	90	
R	7479M	0	2	1	2	0	2	-	-	-	-	-	-	0	
S	7476B?	0	6	1	6	0	3	0.1	0	1	15	4997	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 5368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10130	(FLIGHT	6)											
T 7463M	1	14	16	29	0	6	0.6	11	1	5	3092	0	0
U 7456M	1	4	16	9	0	2	2.3	26	1	4	3642	0	90
V 7449M	0	4	6	11	0	2	0.4	21	1	4	3396	0	-7
W 7446B?	0	4	6	11	0	2	0.4	19	1	18	1684	0	0
X 7431M	0	25	7	54	0	11	0.1	0	1	0	2463	0	-270
Y 7429B?	0	25	7	54	0	11	0.1	0	1	15	2994	0	590
Z 7414M	0	2	1	2	0	3	-	-	-	-	-	-	-8
AA 7412B?	0	11	2	17	0	4	0.1	0	1	10	3929	0	-8
AB 7392M	0	2	0	2	0	1	-	-	-	-	-	-	270
AC 7385M	0	13	0	23	0	4	0.1	3	1	10	3342	0	-6
AD 7383B?	0	13	0	23	0	3	0.1	0	1	10	3656	0	30
AE 7378B?	0	13	8	23	0	1	0.3	0	1	55	833	18	0
AF 7374B?	2	31	11	61	1	8	0.2	0	1	21	1034	0	-7
AG 7371B?	2	33	11	61	1	8	0.2	0	1	4	2672	0	0
AH 7368M	0	33	5	61	0	8	0.1	0	1	17	3795	0	30
AI 7360M	0	2	1	2	0	2	-	-	-	-	-	-	50
AJ 7344B?	2	16	7	28	1	3	0.2	0	1	24	1567	0	0
AK 7343B?	2	16	7	28	0	3	0.2	0	1	28	1408	0	0
AL 7338M	0	4	7	19	0	1	0.3	18	1	38	5176	0	40
AM 7332B?	0	2	1	2	0	3	-	-	-	-	-	-	0
AN 7314M	0	2	6	3	0	2	2.6	60	1	21	4501	0	150
AO 7298B?	11	21	24	31	1	5	0.6	9	1	24	358	1	0
AP 7292M	1	2	1	2	1	3	-	-	-	-	-	-	170
AQ 7291B?	1	2	1	2	2	3	-	-	-	-	-	-	170
AR 7288B?	3	19	15	14	2	3	1.2	19	1	28	540	1	0
AS 7251M	0	3	7	18	0	3	0.3	6	1	17	4538	0	250
AT 7249B?	0	2	1	2	0	2	-	-	-	-	-	-	0
AU 7227B?	6	38	5	58	0	8	0.1	0	1	13	1183	0	0
AV 7198B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AW 7187D	1	6	4	7	0	1	0.4	29	1	28	1862	0	-7
AX 7176D	0	8	7	8	0	1	0.7	33	1	20	2756	0	0
AY 7169D	0	15	0	4	0	3	0.1	4	1	23	4393	0	0
AZ 7152M	0	0	0	1	0	1	0.1	26	1	146	8388	0	14
BA 7024B?	1	2	1	2	0	1	-	-	-	-	-	-	0
BB 7011S?	1	13	0	16	0	2	0.1	0	1	0	3471	0	780
BC 7009M	0	13	0	17	0	2	0.1	0	1	10	3965	0	0
BD 6987M	4	12	1	23	0	3	0.2	10	1	9	3693	0	0
BE 6959H	12	2	3	6	1	10	14.3	39	1	45	198	22	0
BF 6933H	5	21	10	37	0	7	0.2	0	1	23	329	1	-9760
BG 6905S?	8	30	23	60	0	14	0.2	1	1	25	178	7	19
BH 6842S?	3	26	14	52	2	16	0.3	0	1	35	311	13	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10130	(FLIGHT	6)											
BI 6809S?	9	8	15	15	5	7	1.1	41	1	75	181	51	-7

LINE 10140	(FLIGHT	6)											
A 5856B	15	21	25	28	3	6	0.8	0	1	21	310	0	0
B 5880M	0	3	0	7	0	1	0.1	0	1	51	6218	0	-5
C 5882M	0	2	0	7	0	1	0.1	0	1	64	6690	0	0
D 5915B?	1	2	1	2	0	2	-	-	-	-	-	-	180
E 5935B?	1	2	1	2	0	4	-	-	-	-	-	-	0
F 5943B?	0	33	2	62	0	8	0.1	3	1	0	1916	0	0
G 5964M	0	5	0	15	0	3	0.1	7	1	11	3151	0	150
H 5976M	0	9	0	19	0	3	0.1	0	1	3	3445	0	0
I 5985M	0	2	0	2	0	0	0.1	7	1	39	5477	0	160
J 5988M	0	1	0	16	0	1	0.1	0	1	34	5694	0	0
K 6000M	0	3	0	9	0	2	0.1	6	1	29	4710	0	4
L 6012M	0	1	0	1	0	1	0.1	15	1	56	6234	0	320
M 6025M	0	2	0	5	0	1	0.1	0	1	43	5900	0	290
N 6029M	0	3	0	5	0	1	0.1	2	1	34	5477	0	70
O 6037M	0	8	0	36	0	5	0.1	0	1	0	2783	0	0
P 6039B?	0	2	1	2	0	4	-	-	-	-	-	-	0
Q 6048M	0	2	0	2	0	3	-	-	-	-	-	-	0
R 6055M	0	4	0	7	0	0	0.1	0	1	19	4417	0	0
S 6069M	0	5	0	9	0	1	0.1	0	1	24	4929	0	1530
T 6078M	2	23	14	50	0	11	0.3	0	1	0	2399	0	0
U 6082D	9	3	14	50	0	10	4.0	47	1	31	907	1	-7
V 6091M	1	2	1	2	0	4	-	-	-	-	-	-	0
W 6093B	30	23	61	91	0	21	2.2	14	1	17	269	0	-8
X 6098B?	16	23	49	91	0	21	0.9	7	1	30	214	9	0
Y 6106D	9	13	12	11	0	6	0.7	23	1	26	479	2	0
Z 6111D	12	13	29	15	0	4	1.1	26	1	12	1153	0	0
AA 6114M	0	6	22	15	0	4	2.1	24	1	0	2095	0	0
AB 6121D	0	22	0	30	0	2	0.1	4	1	0	1825	0	270
AC 6124M	0	12	0	18	0	4	0.1	6	1	0	1832	0	70
AD 6131D	17	36	16	14	0	8	0.6	2	1	12	866	0	0
AE 6135D	1	13	1	10	0	8	0.1	4	1	0	2266	0	0
AF 6144M	4	9	8	15	1	1	0.4	20	1	18	4067	0	0
AG 6147B?	4	12	8	17	1	3	0.4	8	1	20	1799	0	0
AH 6154B?	1	2	1	2	1	3	-	-	-	-	-	-	1210
AI 6161S?	8	25	15	48	0	8	0.3	6	1	13	976	0	0
AJ 6193S?	1	2	1	2	1	2	-	-	-	-	-	-	0
AK 6212B?	11	37	16	62	0	9	0.4	1	1	12	800	0	30
AL 6217M	1	2	1	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10140	(FLIGHT		6)										
AM 6227D	3	15	9	4	0	4	2.5	38	1	23	1090	0	0
AN 6231D	6	14	9	4	0	4	0.4	5	1	32	990	0	0
AO 6259S	4	6	4	6	0	2	0.4	33	1	18	2306	0	0
AP 6272D	1	2	1	2	0	4	-	-	-	-	-	-	0
AQ 6276D	1	20	4	5	0	6	0.5	45	1	6	2506	0	0
AR 6279B?	2	18	4	12	0	7	0.2	19	1	12	1579	0	0
AS 6286D	3	15	4	18	0	3	0.1	0	1	26	1367	0	0
AT 6301B?	3	23	5	29	0	6	0.1	0	1	13	1987	0	19
AU 6304B?	3	9	7	29	0	6	0.2	0	1	0	2283	0	1210
AV 6310B?	6	12	8	27	0	3	0.4	18	1	17	1304	0	0
AW 6319B?	5	14	10	29	0	5	0.3	13	1	25	1110	0	0
AX 6323D	0	14	10	29	0	3	0.3	7	1	4	2780	0	-4
AY 6342B?	3	8	4	6	0	3	0.4	33	1	36	1135	3	0
AZ 6351B?	2	9	7	17	0	3	0.3	10	1	18	1909	0	-4
EA 6362M	0	2	1	0	0	0	-	-	-	-	-	-	110
BB 6368D	2	13	3	12	0	2	0.1	7	1	17	3428	0	0
BC 6421M	0	2	1	2	0	3	-	-	-	-	-	-	610
BD 6430M	0	7	7	15	0	3	0.4	0	1	6	4468	0	930
BE 6459S?	2	22	8	41	0	6	0.2	0	1	25	1277	0	0
BF 6501S	8	16	17	32	0	6	0.5	2	1	20	364	0	0
BG 6537S	34	80	79	188	0	36	0.7	0	1	15	156	0	0
BH 6548S	11	30	2	61	1	3	0.4	0	1	26	283	4	0
BI 6572S?	1	2	1	2	0	4	-	-	-	-	-	-	0
BJ 6581S?	16	39	19	86	0	17	0.5	3	1	21	268	1	0
BK 6602S?	8	15	5	27	1	15	0.5	21	1	43	146	23	30
BL 6628S?	0	20	1	39	0	8	0.1	5	1	28	579	3	0

LINE 10150	(FLIGHT		6)										
A 7750D	16	15	12	23	2	4	1.4	0	1	24	740	0	0
B 7761B?	7	5	4	6	0	1	1.5	11	1	10	2516	0	0
C 7778M	0	3	0	4	0	3	0.1	0	1	70	7154	0	260
D 7816B	3	17	0	36	0	6	0.1	0	1	5	4780	0	0
E 7820B?	3	8	0	36	0	4	0.3	21	1	0	2772	0	0
F 7828B?	1	2	0	2	0	2	-	-	-	-	-	-	120
G 7846M	3	0	0	3	0	0	24.3	107	1	23	4359	0	0
H 7848M	0	9	0	18	0	2	0.1	5	1	22	4227	0	160
I 7850B?	0	9	0	18	0	3	0.1	4	1	17	3844	0	0
J 7856M	0	4	0	18	0	2	0.1	4	1	35	5397	0	-4
K 7863M	0	1	0	3	0	1	0.1	10	1	89	7400	3	310
L 7867M	0	2	0	4	0	1	0.1	1	1	82	7154	1	0
M 7879B?	1	2	0	2	0	1	-	-	-	-	-	-	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10150	(FLIGHT	6)											
N 7891M	0	3	0	5	0	1	0.1	6	1	42	5666	0	0
O 7903M	0	3	0	3	0	1	0.1	0	1	38	5761	0	380
P 7910B?	0	3	0	14	0	0	0.1	6	1	44	5741	0	0
Q 7921M	0	5	0	18	0	3	0.1	13	1	23	3578	0	0
R 7929M	0	1	0	7	0	1	0.1	17	1	37	4642	2	0
S 7941M	0	2	0	2	0	1	0.1	8	1	110	7935	13	0
T 7953M	0	6	0	10	0	1	0.1	7	1	51	5959	0	0
U 7963M	0	3	0	6	0	1	0.1	4	1	61	6367	0	0
V 7968M	0	1	0	1	0	2	0.1	15	1	70	6690	0	110
W 7979B?	0	12	0	25	0	7	0.1	3	1	15	3852	0	210
X 7982M	0	6	0	32	0	7	0.1	0	1	0	2708	0	-4
Y 7987B?	12	21	23	45	0	6	0.6	10	1	11	771	0	-4
Z 7995B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AA 8003B?	2	17	0	37	0	7	0.1	0	1	10	3747	0	0
AB 8012B?	5	10	6	20	0	3	0.4	9	1	20	1612	0	0
AC 8016D	2	13	0	20	0	3	0.1	0	1	9	4048	0	150
AD 8023D	32	37	5	70	0	11	1.4	0	1	14	521	0	0
AE 8036M	4	4	2	4	0	2	0.8	53	1	63	6645	0	0
AF 8045B?	0	14	0	29	0	3	0.1	0	1	9	4336	0	0
AG 8061M	0	4	0	14	0	3	0.1	10	1	66	6350	4	500
AH 8065B?	0	5	0	7	0	3	0.1	4	1	35	5359	0	310
AI 8066M	0	5	10	54	0	5	0.2	0	1	28	4738	0	510
AJ 8071D	33	65	63	129	6	26	0.8	0	1	14	616	0	0
AK 8074B?	33	65	63	129	6	26	0.8	0	1	28	278	6	0
AL 8090B?	7	9	8	40	2	12	0.8	42	1	16	743	0	0
AM 8093B?	6	29	8	40	2	12	0.2	1	1	12	790	0	0
AN 8100B?	6	11	15	18	1	8	0.4	28	1	10	2074	0	0
AO 8103B?	6	22	7	18	0	8	0.2	6	1	0	2394	0	90
AP 8119D	5	9	1	17	0	2	0.4	16	1	13	2621	0	0
AQ 8142B?	2	25	4	45	0	8	0.1	0	1	18	841	0	0
AR 8145B?	3	22	4	45	0	8	0.1	0	1	21	705	0	50
AS 8155B?	15	48	25	85	2	13	0.4	0	1	11	499	0	30
AT 8166M	4	8	17	17	0	7	1.2	20	1	0	2423	0	140
AU 8169B?	4	9	17	19	0	10	1.0	16	1	20	673	0	40
AV 8197D	3	15	1	4	0	3	0.1	1	1	6	3457	0	0
AW 8202M	0	1	1	2	0	1	-	-	-	-	-	-	0
AX 8213D	4	7	7	5	0	2	1.2	41	1	9	1854	0	0
AY 8216B?	4	6	7	6	0	2	0.9	44	1	0	2625	0	0
AZ 8220B?	0	22	5	51	0	8	0.1	0	1	8	2260	0	0
BA 8222D	0	22	5	55	0	8	0.1	0	1	0	2010	0	-5
BB 8224B?	3	26	9	55	0	9	0.1	0	1	0	1724	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ REAL QUAD REAL QUAD REAL QUAD . COND DEPTH* . COND DEPTH RESIS DEPTH	FID/INTERP PPM PPM PPM PPM PPM PPM . SIEMEN M . SIEMEN M OHM-M M	NT					
LINE 10150 (FLIGHT 6)							
BC 8227B?	3 22 9 55 0 9 . 0.1 0 . 1 14 1471 0 0						
BD 8235B?	1 9 7 15 0 2 . 0.4 18 . 1 25 1494 0 0						
BE 8239B?	0 2 1 2 0 2 . - - . - - - - 0						
BF 8249M	0 3 0 3 0 1 . 0.1 4 . 1 13 3471 0 0						
BG 8253B?	0 15 0 21 0 3 . 0.1 5 . 1 3 2587 0 0						
BH 8256M	0 9 12 21 0 4 . 0.6 22 . 1 6 2569 0 -4						
BI 8264B?	5 13 17 14 0 4 . 0.4 15 . 1 26 691 0 18						
BJ 8267M	5 13 17 14 0 6 . 0.4 15 . 1 17 1097 0 0						
BK 8310B?	1 2 1 2 1 2 . - - . - - - - 0						
BL 8345M	0 11 10 20 2 4 . 0.5 0 . 1 0 3648 0 670						
BM 8385S?	7 38 37 76 1 3 . 0.2 0 . 1 17 325 0 0						
BN 8411H	1 2 0 2 0 2 . - - . - - - - 20						
BO 8443H	1 2 1 2 0 4 . - - . - - - - 0						
BP 8462D	4 6 12 11 1 3 . 1.2 21 . 1 56 439 26 0						
BQ 8476H	5 3 10 3 0 2 . 2.1 35 . 1 61 233 33 0						
BR 8511M	0 2 0 2 0 1 . - - . - - - - 1230						
BS 8550S?	0 6 4 11 0 3 . 0.3 16 . 1 23 4795 0 0						
BT 8564S	4 12 7 29 0 5 . 0.2 0 . 1 28 471 1 0						
LINE 10160 (FLIGHT 6)							
A 8938S	6 16 22 26 0 10 . 0.3 0 . 1 21 422 0 0						
B 8935S?	12 21 22 39 0 10 . 0.7 4 . 1 23 444 0 0						
C 8913S?	0 11 4 19 0 3 . 0.1 6 . 1 4 2798 0 90						
D 8904M	3 13 1 40 0 6 . 0.1 9 . 1 0 2548 0 200						
E 8901B?	1 20 1 40 0 6 . 0.1 5 . 1 3 2597 0 0						
F 8892M	0 2 0 2 1 2 . - - . - - - - 140						
G 8878M	0 2 1 2 1 1 . - - . - - - - 130						
H 8871B?	4 15 13 26 2 5 . 0.5 8 . 1 27 1318 0 40						
I 8858M	0 2 0 2 0 2 . - - . - - - - 0						
J 8831M	0 2 0 7 0 1 . 0.1 0 . 1 62 6786 0 0						
K 8818M	0 2 0 3 0 0 . 0.1 0 . 1 115 8388 0 0						
L 8805M	0 2 0 2 0 1 . - - . - - - - 0						
M 8797M	0 1 0 3 0 1 . 0.1 2 . 1 119 8388 0 70						
N 8782M	0 2 0 2 0 1 . - - . - - - - 9						
O 8771M	0 2 0 6 0 1 . 0.1 3 . 1 90 7400 5 0						
P 8752M	0 3 0 5 0 1 . 0.1 2 . 1 79 7060 1 220						
Q 8738M	0 2 0 5 0 2 . 0.1 0 . 1 64 6667 0 240						
R 8724M	0 1 0 1 0 1 . 0.1 17 . 1 108 8218 6 -7						
LINE 10162 (FLIGHT 6)							
A 9645D	19 23 43 23 6 14 . 1.1 11 . 1 36 203 14 0						

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10162	(FLIGHT	6)											
B 9642B?	1	2	1	2	2	4	-	-	-	-	-	-	0
C 9597B?	0	2	1	2	0	1	-	-	-	-	-	-	0
D 9555M	0	25	2	54	0	7	0.1	0	1	6	3213	0	120
E 9535S	0	8	0	22	0	3	0.1	0	1	0	3510	0	-6
F 9523M	0	2	0	2	0	1	-	-	-	-	-	-	0
G 9505B?	0	15	1	47	0	4	0.1	0	1	5	3371	0	0
H 9500B?	0	21	0	47	0	6	0.1	6	1	2	2462	0	-7
I 9492M	0	4	0	8	0	1	0.1	4	1	34	5321	0	0
J 9484M	0	6	0	12	0	3	0.1	4	1	38	5538	0	-7
K 9478M	0	1	0	0	0	1	0.1	5	1	68	6580	1	380
L 9468M	0	3	0	4	0	2	0.5	1	1	210	993	0	0
M 9460M	0	2	0	3	0	2	0.1	2	1	39	5722	0	40
N 9450B?	0	9	0	12	0	2	0.1	0	1	1	4145	0	0
O 9436S?	0	20	1	41	0	5	0.1	0	1	0	2609	0	0
P 9427B?	0	2	0	2	0	2	-	-	-	-	-	-	450
Q 9424M	0	11	0	19	0	3	0.1	2	1	9	3377	0	1580
R 9413B?	15	46	22	67	0	20	0.4	0	1	16	478	0	-8
S 9403B?	0	12	16	17	0	1	1.1	25	1	0	2457	0	0
T 9395B?	17	44	39	88	0	18	0.5	0	1	19	360	0	-6
U 9390M	0	25	24	88	0	18	0.4	0	1	0	1920	0	-5
V 9388B?	0	25	9	52	0	13	0.2	0	1	5	1294	0	-5
W 9373M	0	2	0	4	0	1	0.1	0	1	39	6218	0	80
X 9358B?	0	13	0	4	0	4	0.1	2	1	11	3543	0	0
Y 9351B?	14	32	45	56	6	13	0.5	0	1	12	741	0	0
Z 9347B?	14	32	45	50	6	13	0.5	0	1	23	248	2	0
AA 9341B?	4	13	16	34	0	6	0.5	4	1	23	772	0	0
AB 9336B?	6	16	17	34	1	6	0.3	6	1	16	862	0	0
AC 9332B?	0	2	0	2	0	2	-	-	-	-	-	-	0
AD 9330B?	0	12	0	9	0	2	0.1	0	1	0	2507	0	0
AE 9324B?	0	12	0	11	0	4	0.1	0	1	2	3877	0	0
AF 9262B?	5	19	13	33	1	6	0.4	2	1	10	1397	0	-4
AG 9246D	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 9240D	14	28	14	38	2	5	0.6	0	1	24	655	0	40
AI 9194M	0	16	0	27	0	4	0.1	4	1	8	3068	0	0
AJ 9191B?	0	16	0	27	0	3	0.1	0	1	0	2389	0	100
AK 9184D	2	11	1	29	0	4	0.1	8	1	0	2736	0	0
AL 9179M	0	2	0	2	0	4	-	-	-	-	-	-	0
AM 9176D	2	19	4	4	0	3	0.6	53	1	0	2496	0	240
AN 9168B?	2	11	3	16	0	2	0.1	0	1	3	3360	0	0
AO 9161B?	0	2	0	2	0	1	-	-	-	-	-	-	0
AP 9151B?	0	9	0	26	0	2	0.1	0	1	3	3947	0	210

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10162	(FLIGHT	6)											
AQ 9142M	0	2	0	2	0	3	-	-	-	-	-	-	0
AR 9139B?	0	7	0	16	0	1	0.1	0	1	10	4125	0	0

LINE 10165	(FLIGHT	34)											
A 1623M	0	4	0	17	0	4	0.1	5	1	17	3763	0	230
B 1601B?	2	11	0	2	0	0	0.1	17	1	36	4642	1	0
C 1572B?	1	2	0	2	0	4	-	-	-	-	-	-	-7
D 1568B?	0	2	0	2	0	4	-	-	-	-	-	-	0
E 1507M	0	9	0	16	0	5	0.1	8	1	17	3517	0	320
F 1504B?	0	8	4	12	0	2	0.2	23	1	20	3606	0	0
G 1491M	0	2	1	2	0	2	-	-	-	-	-	-	350

LINE 10171	(FLIGHT	9)											
A 4220M	0	0	0	2	0	1	-	-	-	-	-	-	260
B 4227B?	2	21	8	40	0	5	0.2	0	1	5	1713	0	-7
C 4251B?	0	7	2	6	0	1	0.2	13	1	6	4030	0	0
D 4258D?	1	2	1	2	0	2	-	-	-	-	-	-	0
E 4266B?	1	2	1	2	0	4	-	-	-	-	-	-	0
F 4274M	0	2	1	2	0	1	-	-	-	-	-	-	0
G 4292M	0	1	0	1	0	0	-	-	-	-	-	-	0
H 4322M	0	1	0	11	0	2	0.1	4	1	34	5302	0	700
I 4331B?	0	4	0	1	0	1	0.1	0	1	41	6074	0	190
J 4370M	0	2	0	2	0	1	-	-	-	-	-	-	0
K 4420S	1	2	1	2	0	4	-	-	-	-	-	-	0
L 4429S?	1	2	1	2	0	3	-	-	-	-	-	-	50
M 4440S	8	11	18	25	0	8	0.7	19	1	45	315	18	0
N 4507M	1	2	1	2	0	3	-	-	-	-	-	-	360
O 4516D	6	13	12	12	0	3	0.4	18	1	37	1719	2	-7
P 4532M	0	2	0	2	0	2	-	-	-	-	-	-	140
Q 4545M	0	2	0	2	0	1	-	-	-	-	-	-	0
R 4556M	0	5	0	8	0	1	0.1	0	1	45	5971	0	50
S 4592B?	0	5	0	5	0	1	0.1	4	1	76	6889	2	500
T 4596M	0	3	0	4	0	0	0.1	0	1	100	7935	3	730
U 4620M	0	2	0	3	0	1	0.1	9	1	111	7935	13	360
V 4641M	0	1	0	0	0	0	0.1	16	1	146	8388	0	50
W 4661M	0	1	0	4	0	1	0.1	10	1	116	8100	16	0
X 4665M	0	4	0	12	0	1	0.1	10	1	75	6623	6	130
Y 4694B?	0	10	0	11	0	2	0.1	0	1	34	5622	0	0
Z 4698M	0	10	0	11	0	1	0.1	0	1	61	6518	0	430
AA 4706M	0	3	0	3	0	1	0.1	0	1	76	7001	0	0
AB 4728M	0	1	0	0	0	0	0.1	0	1	201	8388	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10171		(FLIGHT 9)													
AC	4751M	0	1	0	2	0	1	0.1	0	1	93	8100	0	140	
AD	4774M	0	1	0	2	0	0	-	-	-	-	-	-	0	

LINE 10180		(FLIGHT 7)													
A	1580S	15	20	24	46	3	11	0.9	5	1	27	158	7	0	
B	1552S	1	17	14	41	0	7	0.4	0	1	20	674	0	0	
C	1524M	0	1	1	2	0	1	0.3	77	1	78	7122	0	100	
D	1515M	0	1	1	1	1	0	-	-	-	-	-	-	170	
E	1482M	0	2	1	2	0	1	-	-	-	-	-	-	-9760	
F	1462M	0	3	0	1	0	1	0.1	16	1	104	7884	8	180	
G	1450M	0	3	0	9	0	1	0.1	0	1	69	6944	0	-7	
H	1437M	0	3	5	10	0	4	0.3	23	1	2	3161	0	40	
I	1426M	0	6	11	36	0	4	0.3	0	1	0	3167	0	250	
J	1421D	5	39	27	2	0	13	57.4	27	1	6	1279	0	80	
K	1413B?	11	23	35	142	0	24	0.5	10	1	12	367	0	0	
L	1409D	0	23	40	120	0	3	0.5	0	1	17	1777	0	80	
M	1406M	0	6	10	37	0	2	0.3	0	1	20	4464	0	300	
N	1394M	0	9	0	20	0	3	0.1	10	1	16	3240	0	130	
O	1384M	0	6	0	20	0	2	0.1	4	1	18	3947	0	120	
P	1369B?	5	23	34	8	0	13	9.8	20	1	16	586	0	20	
Q	1359D	97	121	199	237	13	68	1.9	0	1	14	51	1	0	
R	1351M	0	8	35	55	0	5	0.9	1	1	4	3262	0	-6	
S	1343M	0	4	0	5	0	1	0.1	1	1	18	4270	0	500	
T	1332M	0	6	0	10	0	2	0.1	10	1	18	3458	0	0	
U	1326M	0	7	0	17	0	4	0.1	0	1	0	2968	0	12	
V	1322B?	0	16	0	32	0	4	0.1	0	1	0	3307	0	-4	
W	1314M	0	1	0	2	0	1	0.1	0	1	46	6087	0	160	
X	1306M	0	2	0	5	0	1	0.1	4	1	60	6350	0	130	
Y	1295M	0	1	0	0	0	1	0.1	3	1	106	7989	8	0	
Z	1275D	0	23	8	53	0	9	0.1	0	1	0	2428	0	0	
AA	1270D	0	19	8	52	0	9	0.1	0	1	16	1314	0	0	
AB	1262B?	0	2	1	2	0	3	-	-	-	-	-	-	0	
AC	1260B?	0	2	1	2	2	3	-	-	-	-	-	-	110	
AD	1248M	2	13	15	29	3	5	0.6	15	1	7	2921	0	170	
AE	1244B?	4	24	15	14	3	3	1.2	15	1	17	756	0	15	
AF	1236D	2	6	17	9	4	1	2.8	25	1	17	1362	0	0	
AG	1229D	0	21	0	14	0	7	0.1	0	1	0	2044	0	10	
AH	1224D	0	16	0	14	0	8	0.1	7	1	0	1862	0	-6	
AI	1221D	0	17	0	14	0	6	0.1	2	1	0	2295	0	0	
AJ	1208B?	1	25	12	44	0	7	0.3	0	1	9	1148	0	0	
AK	1201D	0	12	2	20	1	4	0.1	0	1	26	1147	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR				
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT

LINE 10180	(FLIGHT	7)									
AL 1195D	1	2	1	2	1	4	-	-	-	-	0
AM 1191B	1	19	8	30	0	9	0.2	7	1	16	0
AN 1186B	5	19	8	30	1	9	0.2	0	1	36	1060
AO 1145B?	9	27	29	14	3	12	0.3	0	1	26	0

LINE 10181	(FLIGHT	9)									
A 3880B?	1	13	1	22	0	3	0.1	0	1	1	0
B 3872B?	1	2	1	2	0	3	-	-	-	-	120
C 3869D	2	6	2	8	0	3	0.2	20	1	3	0
D 3856B?	0	13	0	22	0	3	0.1	0	1	2	0
E 3767S?	0	3	0	1	0	2	0.1	8	1	46	0
F 3540S?	1	12	0	9	0	2	0.1	8	1	22	0
G 3490M	1	21	7	39	0	7	0.2	0	1	4	-4
H 3484M	4	21	12	39	0	6	0.3	0	1	32	140
I 3468M	1	2	1	2	0	3	-	-	-	-	170
J 3459M	0	17	2	32	0	6	0.1	0	1	3	180
K 3432M	0	5	0	7	0	1	0.1	0	1	31	50
L 3406S?	6	26	26	52	1	9	0.2	0	1	19	0
M 3397M	8	14	26	52	1	3	0.5	10	1	9	60
N 3370M	0	2	1	2	0	1	-	-	-	-	-7
O 3292M	0	1	0	1	0	0	-	-	-	-	0
P 3230M	0	1	0	6	0	1	0.1	0	1	56	60
Q 3188M	0	2	0	2	0	0	-	-	-	-	190
R 3162M	0	3	0	6	0	1	0.1	0	1	63	70
S 3136M	0	5	0	1	0	1	0.1	8	1	49	280
T 3101M	0	4	0	1	0	1	0.1	1	1	68	0
U 3064M	0	3	0	4	0	1	0.1	0	1	46	-4
V 3016M	0	1	0	0	0	4	0.1	14	1	85	12
W 2961M	0	14	0	6	0	3	0.1	5	1	26	0
X 2938B?	0	5	0	7	0	1	0.1	0	1	42	0
Y 2934M	0	4	0	7	0	1	0.1	6	1	40	710
Z 2921M	0	3	0	4	0	1	0.1	4	1	60	0

LINE 10190	(FLIGHT	9)									
A 973S?	4	14	6	26	0	5	0.2	0	1	25	0
B 1000B?	5	6	12	14	0	4	0.9	13	1	44	12
C 1028B?	1	2	1	2	0	4	-	-	-	-	0
D 1036B?	1	2	1	2	0	4	-	-	-	-	130
E 1072M	0	2	0	3	0	0	0.1	0	1	48	0
F 1078B?	2	5	0	6	0	2	0.2	0	1	9	0
G 1086M	0	1	0	2	0	0	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10190	(FLIGHT	9)											
H 1145M	0	10	0	17	0	2	0.1	13	1	23	3671	0	0
I 1193M	4	7	7	21	0	4	0.3	0	1	0	3054	0	230
J 1198S?	1	2	1	2	0	4	-	-	-	-	-	-	13
K 1208B?	12	11	15	12	0	6	1.4	10	1	9	407	0	0
L 1226B	31	23	13	50	4	8	2.3	0	1	15	159	0	0
M 1231B	25	31	118	122	5	42	1.1	0	1	13	92	0	-8
N 1250M	0	2	0	2	0	0	0.1	0	1	26	5640	0	810
O 1257B?	2	6	4	21	0	4	0.1	0	1	6	2269	0	0
P 1264M	0	2	0	19	0	4	0.1	0	1	0	3268	0	60
Q 1277B?	0	6	0	15	0	2	0.1	0	1	17	5194	0	0
R 1290M	0	1	0	1	0	0	0.1	13	1	61	6459	0	200
S 1296D?	0	5	0	8	0	1	0.1	0	1	25	5703	0	0
T 1304D?	0	5	0	8	0	1	0.1	0	1	8	4655	0	0
U 1307M	0	4	0	8	0	1	0.1	0	1	18	5024	0	0
V 1346M	0	1	1	2	0	1	-	-	-	-	-	-	0
W 1389M	1	15	23	8	0	8	5.0	23	1	0	2840	0	0
X 1398B?	18	40	37	4	1	14	0.6	0	1	14	345	0	0
Y 1413B?	0	2	1	2	0	4	-	-	-	-	-	-	70
Z 1417B?	2	11	6	24	0	6	0.2	0	1	16	1526	0	-4
AA 1424B?	1	2	1	2	0	2	-	-	-	-	-	-	60
AB 1428B?	5	11	13	14	0	3	0.4	8	1	25	939	0	0
AC 1436B?	0	3	2	2	0	0	0.7	69	1	3	3898	0	0
AD 1441B?	0	2	1	2	0	3	-	-	-	-	-	-	0
AE 1452M	0	2	1	13	0	1	0.1	0	1	11	4249	0	230
AF 1456B?	0	2	1	2	0	2	-	-	-	-	-	-	30
AG 1460S?	1	2	1	2	0	3	-	-	-	-	-	-	19
AH 1474D	8	13	9	13	0	3	0.7	6	1	21	921	0	-6
AI 1496M	0	2	0	2	0	1	-	-	-	-	-	-	16
AJ 1534S?	0	2	0	2	0	2	-	-	-	-	-	-	0
AK 1605B?	1	2	0	2	0	2	-	-	-	-	-	-	0
AL 1617B?	0	10	0	15	0	3	0.1	9	1	18	3523	0	0
AM 1735S	4	14	16	29	0	8	0.6	0	1	14	688	0	10
AN 1758S	1	2	1	2	0	4	-	-	-	-	-	-	0
AO 1781M	0	2	0	2	0	1	-	-	-	-	-	-	0
AP 1792M	0	6	0	9	0	1	0.1	0	1	16	4489	0	30
AQ 1802M	0	5	0	12	0	1	0.1	0	1	14	4270	0	0
AR 1825M	0	2	0	4	0	0	0.1	0	1	51	6478	0	510
AS 1838M	1	1	1	2	0	4	-	-	-	-	-	-	490
AT 1847D	1	2	1	2	0	4	-	-	-	-	-	-	-70
AU 1858B?	0	28	7	44	0	6	0.1	6	1	4	1848	0	-8
AV 1867B?	1	2	1	2	0	3	-	-	-	-	-	-	-8

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10190 (FLIGHT 9)													
AW 1888B?	6	20	7	25	0	5	0.2	2	1	17	1543	0	-7
LINE 10195 (FLIGHT 9)													
A 1909D	6	30	12	20	1	4	0.2	0	1	16	1846	0	0
B 1931B?	2	6	3	25	0	4	0.1	0	1	25	1281	0	16
C 1972M	0	2	0	1	0	3	0.5	4	1	170	993	0	-14
D 2021B?	0	4	0	12	0	1	0.1	11	1	19	3458	0	-7
E 2034B?	0	5	0	4	0	3	0.5	9	1	130	993	0	-6
F 2054M	0	1	0	2	0	2	0.5	13	1	223	993	0	90
G 2090M	0	1	0	2	0	1	0.1	1	1	29	5107	0	0
H 2123M	0	2	0	6	0	2	0.1	0	1	36	5761	0	90
I 2138M	0	1	0	5	0	1	0.1	0	1	32	5657	0	1160
J 2185M	0	2	0	0	0	2	-	-	-	-	-	-	100
K 2212M	0	1	0	1	0	0	0.1	0	1	68	7400	0	820
L 2245D	0	2	0	2	0	1	-	-	-	-	-	-	0
M 2256M	0	2	0	2	0	1	-	-	-	-	-	-	0
N 2263M	0	2	0	2	0	2	-	-	-	-	-	-	-4
O 2354M	0	3	0	16	0	1	0.1	9	1	21	3709	0	0
P 2378B?	0	1	0	1	0	2	0.1	7	1	30	4710	0	0
Q 2437B?	0	9	0	1	0	2	0.1	13	1	24	3642	0	10
R 2442M	0	10	0	12	0	2	0.1	13	1	25	3724	0	1290
S 2487M	0	3	0	5	0	0	0.1	4	1	28	4853	0	-9760
T 2580M	0	1	0	0	0	0	0.1	3	1	98	7691	6	1180
U 2649M	0	7	0	12	0	2	0.1	0	1	18	4696	0	90
V 2682M	0	2	0	1	0	0	-	-	-	-	-	-	230
W 2702B?	0	2	0	2	0	1	-	-	-	-	-	-	0
X 2724M	0	1	0	1	0	0	-	-	-	-	-	-	-380
Y 2764M	0	4	0	4	0	1	0.1	0	1	97	8280	0	0
Z 2780M	0	2	0	2	0	1	-	-	-	-	-	-	200
LINE 10200 (FLIGHT 9)													
A 6656B?	1	2	0	2	1	3	-	-	-	-	-	-	0
B 6646S?	7	13	15	56	0	12	0.5	18	1	27	296	5	0
C 6622B?	2	5	13	8	0	3	2.0	25	1	48	600	16	-6
D 6594M	0	5	2	8	0	1	0.1	0	1	49	6580	0	0
E 6559M	0	2	1	2	0	3	-	-	-	-	-	-	150
F 6518M	0	4	0	4	0	2	0.1	0	1	17	4227	0	970
G 6513B?	0	8	0	5	0	2	0.1	0	1	4	4001	0	-7
H 6504M	0	5	0	5	0	1	0.1	0	1	13	4175	0	0
I 6496M	0	2	0	2	0	1	-	-	-	-	-	-	190
J 6483B	117	152	273	335	4	83	1.9	0	1	11	45	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10200	(FLIGHT 9)												
K 6477M	0	4	146	218	0	54	1.6	0	1	0	3161	0	500
L 6468M	0	1	1	2	0	2	-	-	-	-	-	-	130
M 6460M	1	2	0	2	0	1	0.2	50	1	60	6690	0	110
N 6453M	0	1	0	2	0	1	-	-	-	-	-	-	260
O 6426B?	2	5	0	1	0	1	0.2	10	1	28	5971	0	-6
P 6416B?	2	11	0	12	0	3	0.1	0	1	4	4125	0	0
Q 6406B?	2	6	2	5	0	1	0.2	10	1	6	4106	0	0
R 6389D	7	20	7	15	0	2	0.3	3	1	20	1210	0	0
S 6382D	4	13	7	14	0	3	0.4	18	1	17	1281	0	0
T 6370B?	9	14	16	18	2	5	0.6	11	1	20	875	0	-6
U 6366M	1	2	1	2	0	3	-	-	-	-	-	-	0
V 6346M	0	5	1	18	0	3	0.1	5	1	7	2968	0	-6
W 6341D	5	19	6	3	0	5	1.7	55	1	8	2017	0	12
X 6334M	0	2	0	2	0	2	-	-	-	-	-	-	0
Y 6322M	0	2	0	2	0	4	-	-	-	-	-	-	130
Z 6309B?	5	8	10	9	0	0	0.5	26	1	35	960	3	0
AA 6302B?	5	11	9	22	0	4	0.4	9	1	17	1517	0	120
AB 6262D	1	2	1	2	1	4	-	-	-	-	-	-	0
AC 6258D	14	14	16	27	0	5	1.2	20	1	15	685	0	0
AD 6245M	0	8	4	23	0	3	0.1	7	1	18	3426	0	-7
AE 6230M	0	9	0	15	0	3	0.1	7	1	19	3732	0	0
AF 6215M	0	2	0	2	0	3	-	-	-	-	-	-	0
AG 6188M	0	11	0	10	0	1	0.1	15	1	32	4281	1	110
AH 6167D	1	2	1	0	0	1	-	-	-	-	-	-	0
AI 6152S?	0	2	0	2	0	2	-	-	-	-	-	-	0
AJ 6091M	0	2	0	26	0	0	0.1	4	1	200	8388	0	0
AK 6064M	0	1	0	2	0	0	0.1	11	1	64	6315	3	0
AL 6058M	0	3	0	11	0	2	0.1	1	1	35	5559	0	1040
AM 6043M	0	1	1	5	0	1	0.1	17	1	32	5722	0	0
AN 6028M	0	2	0	2	0	1	-	-	-	-	-	-	0
AO 6014M	0	2	0	2	0	1	-	-	-	-	-	-	40
AP 5982S	6	11	9	21	0	4	0.5	20	1	35	538	7	0
AQ 5961S	5	10	6	20	0	3	0.3	0	1	22	741	0	-7
AR 5958M	5	2	0	20	0	3	2.6	65	1	28	1375	0	140
AS 5906B?	0	5	0	11	0	2	0.1	11	1	19	3426	0	-7
AT 5901M	0	2	0	2	0	1	-	-	-	-	-	-	0
AU 5866M	0	12	0	22	0	3	0.1	9	1	19	3649	0	-7
AV 5859B?	0	1	0	12	0	0	0.1	2	1	45	5900	0	0

LINE 10205	(FLIGHT 34)												
A 2161M	0	5	0	16	0	3	0.1	0	1	21	4914	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10205	(FLIGHT	34)											
B 2177M	0	2	0	2	0	1	0.1	0	1	32	5791	0	230
C 2193B?	0	16	0	32	0	11	0.1	4	1	42	5761	0	160
D 2207D	0	16	0	8	0	4	0.1	0	1	4	3342	0	0
E 2210M	0	16	0	24	0	5	0.1	0	1	8	3503	0	0
F 2217M	0	2	0	2	0	2	-	-	-	-	-	-	230
G 2229B?	0	9	0	20	0	15	0.1	0	1	7	4145	0	-7
H 2260M	0	2	0	2	0	2	-	-	-	-	-	-	0
I 2287B?	0	15	0	45	0	6	0.1	6	1	34	5074	0	-6
J 2293B?	0	17	0	45	0	6	0.1	0	1	0	2758	0	150
K 2303M	0	2	0	2	0	2	-	-	-	-	-	-	-6
L 2339D	0	2	0	1	0	0	-	-	-	-	-	-	0
M 2354B?	0	2	0	2	0	0	-	-	-	-	-	-	0
N 2362D	0	4	0	6	0	0	0.1	0	1	64	7785	0	0
O 2372D	0	2	0	2	0	0	-	-	-	-	-	-	0
P 2392B?	0	10	0	14	0	2	0.1	0	1	18	5666	0	-5
Q 2490D	0	13	0	11	0	1	0.1	0	1	34	6282	0	-7

LINE 10210	(FLIGHT	9)											
A 6803D	19	10	29	33	6	21	3.1	16	1	36	102	18	0
B 6805D	36	8	29	33	6	21	13.2	9	1	35	116	15	0
C 6843S?	1	2	1	2	0	4	-	-	-	-	-	-	0
D 6882S?	2	1	0	8	0	0	1.0	96	1	35	5538	0	0
E 6910S	6	10	9	19	0	4	0.5	15	1	27	659	0	200
F 6943M	1	2	1	2	0	2	-	-	-	-	-	-	-4
G 6953M	1	2	0	2	0	3	-	-	-	-	-	-	20
H 6988M	0	2	0	5	0	1	0.1	2	1	46	5959	0	780
I 7036S	0	1	0	3	0	1	0.1	0	1	59	6498	0	0
J 7052M	0	9	0	23	0	1	0.1	1	1	19	4314	0	0
K 7060M	0	2	0	2	0	1	-	-	-	-	-	-	170
L 7072B?	0	10	0	12	0	1	0.1	0	1	0	4249	0	0
M 7076M	0	1	0	2	0	1	0.1	0	1	31	5359	0	510
N 7086M	0	5	0	8	0	2	0.1	0	1	17	4526	0	6
O 7092M	0	2	0	2	0	2	-	-	-	-	-	-	140
P 7104M	0	3	0	4	0	0	0.1	0	1	32	5802	0	0
Q 7127M	0	1	0	1	0	1	0.1	4	1	54	6144	0	390
R 7135M	0	4	0	7	0	1	0.1	0	1	29	5694	0	0
S 7138S?	0	3	0	6	0	2	0.1	0	1	20	5340	0	0
T 7150M	0	1	0	0	0	1	0.1	0	1	43	6188	0	110
U 7164M	0	4	0	8	0	1	0.1	0	1	18	4992	0	100
V 7180B?	0	12	0	23	0	3	0.1	0	1	0	3389	0	140
W 7193B?	2	17	8	15	0	4	0.4	3	1	3	1613	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10210	(FLIGHT	9)											
X 7203S?	0	2	1	2	0	4	-	-	-	-	-	-	0
Y 7244S?	1	2	1	2	1	4	-	-	-	-	-	-	0
Z 7250E	3	17	3	36	0	6	0.1	0	1	22	1031	0	0
AA 7263B?	0	2	0	2	0	1	-	-	-	-	-	-	-5
AB 7284S?	0	2	0	2	0	3	-	-	-	-	-	-	0
AC 7286M	0	10	0	19	0	2	0.1	0	1	3	4057	0	0
AD 7310M	0	2	0	6	0	1	0.1	6	1	35	5141	0	18
AE 7348S?	0	14	8	32	0	5	0.2	0	1	11	942	0	90
AF 7368S?	12	26	35	56	1	13	0.5	0	1	24	240	2	-9760
AG 7371S?	10	29	34	56	1	13	0.4	0	1	25	287	2	-7
AH 7403M	0	2	1	2	0	2	-	-	-	-	-	-	0
AI 7422M	0	2	0	2	1	1	-	-	-	-	-	-	80
AJ 7452M	0	1	0	2	0	1	-	-	-	-	-	-	0
AK 7459M	0	4	0	4	0	1	0.1	0	1	42	6422	0	1530
AL 7471M	0	1	0	1	0	1	0.1	0	1	78	7362	0	430
AM 7492M	0	1	0	2	0	1	0.1	0	1	49	6538	0	900
AN 7508S	0	2	1	2	0	4	-	-	-	-	-	-	0
AO 7538S	1	2	1	2	0	4	-	-	-	-	-	-	30

LINE 10211	(FLIGHT	9)											
A 7836M	0	9	0	19	0	6	0.1	14	1	29	3992	0	650
B 7849M	0	4	0	9	0	2	0.1	4	1	32	5141	0	110
C 7864M	0	2	0	2	0	2	-	-	-	-	-	-	160
D 7878M	0	2	0	2	0	2	-	-	-	-	-	-	700
E 7895B?	0	37	0	46	0	7	0.1	7	1	1	2227	0	0
F 7908M	0	3	0	8	0	2	0.1	0	1	17	4914	0	770
G 7924M	0	2	0	3	0	1	0.1	0	1	33	5959	0	0
H 7940M	0	1	0	1	0	2	-	-	-	-	-	-	0
I 7964M	0	1	0	5	0	3	0.1	0	1	57	6459	0	170
J 7983M	0	4	0	11	0	3	0.1	0	1	21	5284	0	0
K 8007D	0	11	0	6	0	3	0.1	3	1	59	6332	0	310
L 8183B?	0	2	0	2	0	2	-	-	-	-	-	-	0
M 8190M	0	2	0	2	0	2	-	-	-	-	-	-	0

LINE 10215	(FLIGHT	34)											
A 1886M	0	5	0	6	0	1	0.1	4	1	42	5741	0	20
B 1898B?	0	2	0	2	0	1	-	-	-	-	-	-	0
C 1911M	0	3	0	8	0	2	0.1	4	1	32	5057	0	50
D 1925B?	0	3	0	12	0	1	0.1	1	1	33	5417	0	0
E 1930M	0	6	0	12	0	3	0.1	1	1	16	4038	0	210
F 1945B?	1	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10215	(FLIGHT	34)											
G 1973B?	0	2	0	2	0	2	-	-	-	-	-	-	0
H 1985M	0	4	0	9	0	2	0.1	4	1	32	5141	0	30
I 1993M	0	4	0	14	0	3	0.1	4	1	24	4405	0	120

LINE 10220	(FLIGHT	9)											
A 9745B	40	40	47	49	6	14	1.8	1	1	39	175	18	0
B 9738D	1	2	1	2	2	4	-	-	-	-	-	-	140
C 9697S?	6	22	20	44	0	7	0.3	0	1	27	479	0	0
D 9667S	1	2	1	2	0	4	-	-	-	-	-	-	18
E 9580M	0	4	0	10	0	2	0.1	0	1	40	6021	0	170
F 9564M	0	3	0	14	0	2	0.1	0	1	77	7154	0	360
G 9549M	0	1	0	3	0	2	0.1	4	1	64	6459	0	190
H 9543M	0	1	0	3	0	1	0.1	0	1	63	6601	0	0
I 9534B?	0	10	0	22	0	3	0.1	5	1	23	4292	0	0
J 9528B?	0	6	0	22	0	2	0.1	0	1	30	5559	0	0
K 9521B?	0	6	0	32	0	0	0.1	0	1	48	6129	0	140
L 9512B?	0	26	0	51	0	7	0.1	0	1	0	2938	0	0
M 9507B?	0	26	0	51	0	7	0.1	0	1	8	3671	0	0
N 9503B?	0	3	0	93	0	14	0.1	0	1	17	4325	0	0
O 9497D	1	57	4	93	0	14	0.1	0	1	0	1795	0	0
P 9487B?	0	17	8	44	0	9	0.1	0	1	35	1355	0	-4
Q 9472B?	0	2	1	2	0	4	-	-	-	-	-	-	0
R 9466D	0	22	0	7	0	1	0.1	0	1	0	2606	0	0
S 9462D	0	25	0	7	0	7	0.1	5	1	2	2519	0	0
T 9453B?	3	24	8	60	0	9	0.1	0	1	72	794	33	0
U 9419B?	1	2	7	4	0	1	2.0	52	1	46	4157	0	30
V 9405M	1	9	4	34	0	6	0.1	0	1	7	2995	0	0
W 9399B?	0	9	0	20	0	4	0.1	3	1	12	3503	0	230
X 9398B?	0	9	0	20	0	4	0.1	3	1	13	3634	0	240
Y 9394D	0	6	0	12	0	2	0.1	0	1	6	3613	0	0
Z 9388D	0	21	1	103	0	15	0.1	2	1	7	3187	0	50
AA 9383B?	0	49	0	103	0	15	0.1	8	1	0	1662	0	40
AB 9367M	2	17	5	35	0	9	0.1	10	1	18	2810	1	60
AC 9359D	0	17	0	45	0	8	0.1	0	1	17	4206	0	0
AD 9352D	0	27	0	45	0	8	0.1	10	1	7	2473	0	40
AE 9344D	0	20	7	205	0	30	0.1	0	1	8	1697	0	-5
AF 9335M	0	84	0	205	0	30	0.1	8	1	4	2414	0	0
AG 9313B?	6	4	11	5	0	2	1.5	12	1	47	464	13	0
AH 9298M	0	8	0	12	0	1	0.1	6	1	50	5935	0	100
AI 9292M	0	3	0	12	0	2	0.1	14	1	36	5124	0	20
AJ 9269S	1	2	1	2	0	3	-	-	-	-	-	-	30

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	COND DEPTH .SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10220	(FLIGHT	9)											
AK 9255B?	0	2	0	2	0	2	-	-	-	-	-	-	-4
AL 9244M	1	12	1	31	0	5	0.1	1	1	8	3342	0	30
AM 9243B?	1	2	1	2	0	4	-	-	-	-	-	-	-4
AN 9228M	1	5	0	1	0	0	0.1	9	1	94	7691	2	210
AO 9218M	0	9	0	41	0	3	0.1	0	1	22	5559	0	80
AP 9211M	0	1	1	2	0	4	-	-	-	-	-	-	0
AQ 9209B?	10	1	16	42	0	8	17.4	47	1	7	2148	0	0
AR 9205B?	10	23	16	42	0	8	0.4	0	1	29	693	0	-7
AS 9199M	10	7	16	15	0	3	1.5	41	1	37	5580	0	50
AT 9172S?	5	14	11	23	0	5	0.3	0	1	33	781	0	-7
AU 9157M	0	4	0	7	0	2	0.1	0	1	32	5983	0	2240
AV 9148M	0	5	4	9	0	2	0.3	24	1	37	5812	0	0
AW 9123B?	4	5	8	7	0	2	0.9	20	1	39	637	6	-4
AX 9105B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AY 9052M	1	2	1	2	0	1	-	-	-	-	-	-	40
AZ 9017B?	0	33	0	5	0	4	0.1	16	1	22	3262	1	270
BA 9005B?	0	19	0	21	0	4	0.1	1	1	5	3136	0	0
BB 8980M	0	4	0	11	0	2	0.1	0	1	15	4105	0	0
BC 8961B?	1	2	1	2	0	1	-	-	-	-	-	-	100
BD 8949D	1	2	1	2	1	4	-	-	-	-	-	-	0
BE 8942D	3	21	12	28	2	6	0.4	0	1	35	424	6	0
BF 8935B?	1	2	1	2	1	4	-	-	-	-	-	-	0
BG 8920M	0	5	4	5	0	1	0.4	47	1	53	6060	0	130
BH 8913M	0	3	0	5	0	1	0.1	0	1	68	6836	0	130
BI 8868M	0	1	2	5	0	1	0.2	35	1	58	6518	0	170
BJ 8850M	0	8	0	13	0	2	0.1	0	1	71	7001	0	0
BK 8842M	0	9	0	11	0	3	0.1	0	1	25	4945	0	220
BL 8828M	0	17	0	23	0	6	0.1	3	1	5	2951	0	1030
BM 8820B?	0	3	0	19	0	1	0.1	8	1	27	4325	0	360
BN 8817B?	0	11	0	8	0	2	0.1	10	1	21	3649	0	0
BO 8774M	0	6	0	7	0	2	0.1	0	1	16	4945	0	510
BP 8760M	0	2	0	2	0	2	-	-	-	-	-	-	80
BQ 8692M	0	11	0	4	0	2	0.1	0	1	36	6074	0	0

LINE 10240	(FLIGHT	7)											
A 3485B?	18	4	16	11	0	6	11.4	26	1	41	524	11	0
B 3477M	10	24	14	16	0	6	0.4	1	1	4	3649	0	640
C 3308S	0	9	3	17	0	4	0.1	5	1	26	1900	0	0
D 3277S?	0	11	0	22	0	4	0.1	0	1	0	3477	0	0
E 3257M	0	1	0	1	0	1	-	-	-	-	-	-	40
F 3244M	0	1	0	2	0	2	0.1	0	1	97	8043	0	-6

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10240	(FLIGHT	7)											
G 3218M	0	10	6	23	0	5	0.2	1	1	37	5781	0	170
H 3209M	0	11	7	18	0	7	0.3	11	1	0	2438	0	18
I 3198M	0	4	0	8	0	1	0.1	0	1	40	5866	0	360
J 3175M	0	10	0	18	0	2	0.1	5	1	11	3336	0	0
K 3172B?	0	10	0	18	0	3	0.1	4	1	6	2968	0	140
L 3160B?	0	1	0	10	0	4	0.1	0	1	4	3530	0	0
M 3150M	0	1	0	1	0	1	-	-	-	-	-	-	190
N 3135M	0	2	0	2	0	1	0.1	0	1	43	5996	0	0
O 3129M	0	5	0	5	0	1	0.1	0	1	32	5601	0	160
P 3122M	0	10	0	16	0	3	0.1	0	1	12	4038	0	90
Q 3094B?	1	2	1	2	0	3	-	-	-	-	-	-	20
R 3048S?	6	7	7	9	2	3	0.8	21	1	43	366	15	0
S 3016S?	1	2	1	2	2	4	-	-	-	-	-	-	0
T 3005M	0	0	1	2	0	4	-	-	-	-	-	-	40
U 2972M	0	5	5	6	0	1	0.7	37	1	21	4853	0	0
V 2947S?	0	2	0	2	0	2	-	-	-	-	-	-	140
W 2918M	0	2	0	2	0	1	-	-	-	-	-	-	0
X 2898M	0	1	0	2	0	1	-	-	-	-	-	-	16
Y 2841B?	1	2	1	2	0	1	-	-	-	-	-	-	0
Z 2814B?	9	14	10	23	0	3	0.7	15	1	22	831	0	-6
AA 2778S	10	19	10	38	0	10	0.5	17	1	17	366	0	0
AB 2753S?	17	86	36	195	0	40	0.3	2	1	0	888	0	0
AC 2750S?	17	143	36	280	0	42	0.2	0	1	7	428	0	280

LINE 10245	(FLIGHT	34)											
A 3805B?	0	18	2	27	0	4	0.1	0	1	11	3284	0	-7
B 3834M	0	2	0	3	0	1	0.1	0	1	31	5888	0	70
C 3848B?	2	17	0	4	0	4	0.1	0	1	5	3678	0	-7
D 3861B?	12	27	21	46	0	8	0.5	1	1	17	605	0	0
E 3874B?	1	2	1	2	0	1	-	-	-	-	-	-	0
F 3901M	0	3	0	6	0	1	0.1	1	1	39	5732	0	0
G 3911M	0	2	0	2	0	3	-	-	-	-	-	-	120
H 3940M	0	2	0	2	0	1	-	-	-	-	-	-	-7
I 4004M	0	5	0	11	0	2	0.1	6	1	49	5900	0	-8
J 4041B?	0	2	0	2	0	1	-	-	-	-	-	-	0
K 4048M	0	6	0	12	0	2	0.1	0	1	19	5497	0	0
L 4048B?	0	2	0	2	0	4	-	-	-	-	-	-	0
M 4061M	0	2	0	0	0	0	-	-	-	-	-	-	250
N 4085B?	0	27	0	121	0	26	0.1	13	1	0	1361	0	0
O 4089B?	0	22	0	41	0	17	0.1	0	1	8	3947	0	0
P 4107S?	0	15	0	21	0	4	0.1	0	1	8	3634	0	-4

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10245	(FLIGHT	34)											
Q 4108M	0	2	0	18	0	1	0.1	0	1	40	6250	0	-4
R 4130M	0	3	0	6	0	1	0.1	0	1	38	6021	0	40
S 4141B?	0	2	0	10	0	0	0.1	0	1	107	8388	0	0
T 4162M	0	1	0	3	0	0	0.1	0	1	69	8388	0	0
U 4198B?	0	2	0	2	0	1	-	-	-	-	-	-	50
V 4222M	0	2	0	2	0	0	-	-	-	-	-	-	60
W 4230B?	0	2	0	8	0	0	0.1	0	1	18	5911	0	0
X 4264M	0	2	0	2	0	2	-	-	-	-	-	-	0
Y 4338M	0	11	0	21	0	4	0.1	4	1	18	3929	0	0
Z 4350S?	0	6	0	17	0	0	0.1	0	1	33	6811	0	-4

LINE 10260	(FLIGHT	7)											
A 5127D	28	23	22	13	4	8	2.0	7	1	35	270	11	0
B 5125D	28	23	22	13	4	8	2.0	6	1	19	586	0	0
C 5117B?	0	6	9	8	1	5	1.2	36	1	0	2740	0	-6
D 5115B?	0	22	0	31	1	5	0.1	3	1	4	2844	0	0
E 5112M	0	22	0	31	0	5	0.1	4	1	22	4314	0	310
F 5023S	0	2	0	2	0	1	-	-	-	-	-	-	0
G 4996S?	1	9	8	55	0	10	0.1	0	1	0	2140	0	4
H 4970S	6	6	10	10	0	3	0.9	45	1	60	481	30	0
I 4955M	0	2	1	2	0	4	-	-	-	-	-	-	230
J 4949M	0	2	0	6	0	2	0.1	0	1	93	7737	1	40
K 4934M	0	2	0	2	0	1	0.1	0	1	114	8388	0	1200
L 4915M	0	2	0	2	0	1	-	-	-	-	-	-	0
M 4903M	0	2	1	2	0	2	-	-	-	-	-	-	0
N 4892S?	0	8	1	10	0	2	0.1	0	1	6	3894	0	0
O 4863M	0	16	0	33	0	2	0.1	0	1	0	3564	0	350
P 4828B?	5	22	15	39	0	6	0.2	0	1	29	871	0	0
Q 4825S?	6	22	15	38	0	7	0.2	0	1	28	455	1	0
R 4790S?	12	3	19	4	2	2	7.1	35	1	64	80	44	0
S 4760S?	1	1	1	2	0	4	-	-	-	-	-	-	20
T 4758S?	1	1	1	2	0	4	-	-	-	-	-	-	40
U 4731M	0	3	5	22	0	4	0.2	0	1	0	3182	0	30
V 4712S?	0	14	0	30	0	5	0.1	2	1	6	2347	0	0
W 4697M	1	2	1	2	0	4	-	-	-	-	-	-	11
X 4682M	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 4675M	0	9	11	21	0	4	0.5	12	1	0	1821	0	0
Z 4664M	0	13	4	56	0	9	0.1	0	1	0	1430	0	0
AA 4663M	0	13	8	24	0	9	0.3	10	1	0	1428	0	0
AB 4640S?	7	54	16	111	0	18	0.1	0	1	4	664	0	40
AC 4624S?	0	38	8	82	0	11	0.1	0	1	0	1097	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10260	(FLIGHT	7)											
AD 4599S?	4	18	13	59	0	10	0.2	0	1	14	470	0	30
AE 4586S?	5	11	14	40	0	6	0.4	0	1	16	963	0	150
AF 4584S?	5	11	14	40	0	6	0.4	0	1	11	850	0	0

LINE 10265	(FLIGHT	34)											
A 5087M	2	1	0	4	0	1	2.5	103	1	29	5229	0	-4
B 5109B?	0	8	0	5	0	1	0.1	3	1	11	3484	0	0
C 5114B?	1	4	0	28	0	4	0.1	31	1	12	3224	0	0
D 5139B?	0	18	0	32	0	5	0.1	8	1	12	3035	0	0
E 5158M	0	2	0	2	0	3	-	-	-	-	-	-	-4
F 5168B?	0	17	0	22	0	5	0.1	8	1	7	2664	0	1190
G 5199M	2	2	0	8	0	2	0.7	77	1	33	5622	0	18
H 5227M	0	2	0	2	0	1	-	-	-	-	-	-	5
I 5240M	0	13	0	28	0	4	0.1	6	1	19	3835	0	40
J 5260M	0	2	0	2	0	2	-	-	-	-	-	-	60
K 5263B?	0	2	1	2	0	4	-	-	-	-	-	-	-6
L 5265B?	0	9	2	24	0	4	0.1	0	1	0	3649	0	-5
M 5273M	0	3	2	6	0	1	0.1	22	1	16	3965	0	30
N 5284S?	0	15	0	31	0	6	0.1	4	1	2	2593	0	0
O 5294M	0	14	0	28	0	1	0.1	0	1	21	5211	0	-4
P 5323B?	0	56	0	140	0	50	0.1	13	1	0	1607	0	1180
Q 5323M	0	56	0	140	0	50	0.1	12	1	0	1657	0	1180
R 5328B?	0	28	0	72	0	25	0.1	4	1	0	1807	0	310
S 5340B?	0	6	0	10	0	5	0.1	0	1	4	3203	0	-7
T 5358D	0	21	0	50	0	13	0.1	2	1	15	3852	0	-7
U 5365D	0	50	0	50	0	20	0.1	14	1	0	1578	0	0
V 5367D	0	24	0	50	0	15	0.1	9	1	0	1564	0	-7
W 5370B?	0	24	0	50	0	15	0.1	3	1	0	1914	0	-7
X 5374M	0	2	0	2	0	4	-	-	-	-	-	-	130
Y 5388M	0	3	0	14	0	3	0.1	3	1	25	4589	0	200
Z 5397M	0	5	0	7	0	1	0.1	0	1	39	5911	0	-6
AA 5406M	0	3	0	6	0	2	0.1	0	1	49	6282	0	0
AB 5418M	0	3	0	8	0	2	0.1	0	1	33	5911	0	0
AC 5446B?	3	4	0	50	0	8	0.5	37	1	10	4526	0	-7
AD 5453B?	0	22	0	55	0	8	0.1	3	1	0	2222	0	-7
AE 5468B?	0	2	0	2	0	3	-	-	-	-	-	-	50
AF 5475B?	0	6	0	13	0	0	0.1	0	1	63	7362	0	0
AG 5489B?	0	6	0	17	0	1	0.1	0	1	34	6021	0	0
AH 5495S?	0	13	0	20	0	4	0.1	0	1	15	4217	0	-5
AI 5514B?	0	18	0	14	0	4	0.1	10	1	35	4883	0	570
AJ 5526B?	0	12	0	22	0	6	0.1	8	1	13	3177	0	30

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10265	(FLIGHT	34)											
AK 5534M	0	6	0	28	0	3	0.1	0	1	33	5771	0	80
AL 5550S?	0	2	0	2	0	2	-	-	-	-	-	-	-6
AM 5618S?	0	19	0	43	0	8	0.1	2	1	0	2417	0	0
AN 5629S?	0	22	0	47	0	11	0.1	9	1	6	2420	0	80
AO 5640S?	0	10	0	20	0	4	0.1	0	1	16	4175	0	220
AP 5661S?	2	12	0	22	0	3	0.1	2	1	11	3795	0	150
LINE 10270	(FLIGHT	7)											
A 5406D	22	24	28	45	0	8	1.3	4	1	44	1009	8	0
B 5459D	0	2	0	2	0	2	-	-	-	-	-	-	0
C 5560S	0	2	1	2	0	3	-	-	-	-	-	-	0
D 5605H	1	2	1	2	0	4	-	-	-	-	-	-	0
E 5628M	0	2	0	2	0	1	-	-	-	-	-	-	5
F 5637M	0	2	0	2	0	1	-	-	-	-	-	-	0
G 5658M	0	2	0	2	0	1	-	-	-	-	-	-	0
H 5679B?	0	11	6	25	0	4	0.2	1	1	6	3273	0	0
I 5691D	0	14	3	20	0	3	0.1	0	1	1	3107	0	0
J 5698M	0	2	0	2	0	1	-	-	-	-	-	-	0
K 5718S?	0	10	6	20	0	4	0.2	0	1	22	1536	0	0
L 5728M	0	2	1	2	0	3	-	-	-	-	-	-	0
M 5744S?	20	21	35	21	0	9	1.4	3	1	38	165	16	0
N 5770S?	1	2	1	2	0	4	-	-	-	-	-	-	0
O 5795S	4	4	9	9	0	5	0.9	17	1	50	197	25	0
P 5825S?	4	9	12	12	6	8	1.0	15	1	58	260	31	0
Q 5843S?	8	7	5	4	4	9	1.2	27	1	58	292	30	0
R 5854M	1	2	0	2	2	3	-	-	-	-	-	-	50
S 5866M	1	2	1	2	0	2	-	-	-	-	-	-	0
T 5876M	1	2	1	2	0	2	-	-	-	-	-	-	20
U 5889S?	0	21	0	18	0	5	0.1	4	1	0	1816	0	15
V 5904M	0	6	4	21	0	2	0.1	0	1	0	2521	0	110
W 5914M	0	4	2	12	0	2	0.1	5	1	3	2661	0	0
X 5921M	0	3	0	6	0	1	0.1	1	1	3	2864	0	60
Y 5942S	1	1	1	2	0	0	-	-	-	-	-	-	0
Z 5981S?	1	2	1	2	0	4	-	-	-	-	-	-	30
LINE 10275	(FLIGHT	34)											
A 6101M	0	4	0	12	0	3	0.1	4	1	10	3219	0	610
B 6088D	0	11	0	14	0	2	0.1	0	1	9	3739	0	1420
C 6084M	0	9	0	14	0	1	0.1	0	1	0	3116	0	-7
D 6075D	0	2	0	2	0	4	-	-	-	-	-	-	-7
E 6074B?	0	73	0	176	0	32	0.1	15	1	0	1078	0	-7

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10275	(FLIGHT	34)											
F 6065B?	0	2	1	2	0	4	-	-	-	-	-	-	0
G 6058B?	0	16	0	32	0	7	0.1	7	1	26	4336	0	330
H 6038M	0	3	0	5	0	1	0.1	0	1	69	7091	0	70
I 5972M	0	2	0	2	0	1	-	-	-	-	-	-	0
J 5958S?	0	2	0	2	0	3	-	-	-	-	-	-	110
K 5948M	0	1	0	6	0	3	0.1	7	1	37	5247	0	140
L 5942M	0	5	0	8	0	2	0.1	2	1	45	5900	0	17
M 5932M	0	0	0	3	0	1	0.1	0	1	61	6518	0	7
N 5917M	0	2	0	4	0	2	0.1	7	1	81	6916	6	0
O 5903M	0	4	0	10	0	3	0.1	6	1	47	5844	0	80
P 5878M	0	4	0	7	0	2	0.1	1	1	85	7290	1	-7
Q 5861M	0	8	0	16	0	3	0.1	1	1	86	7326	1	20
R 5854S?	0	9	0	19	0	3	0.1	0	1	13	4405	0	0
S 5850M	0	2	0	19	0	0	0.1	0	1	35	5771	0	5
T 5838M	0	4	0	12	0	5	0.1	0	1	44	6218	0	0
U 5784B?	0	5	3	26	0	4	0.1	0	1	56	2622	12	0
V 5778S?	0	13	0	26	0	4	0.1	0	1	7	3439	0	270
W 5770S?	0	2	0	2	0	2	-	-	-	-	-	-	0
X 5760M	0	2	0	2	0	1	-	-	-	-	-	-	0

LINE 10276	(FLIGHT	34)											
A 6365M	0	1	0	2	0	1	-	-	-	-	-	-	30
B 6349S?	0	20	0	41	0	7	0.1	4	1	9	3116	0	320
C 6343B?	0	12	0	27	0	5	0.1	0	1	25	5141	0	380
D 6338M	0	2	0	2	0	1	0.1	0	1	48	6158	0	400
E 6305D	4	19	18	31	0	5	0.6	7	1	24	656	0	-7
F 6302B?	4	6	18	29	0	1	0.7	9	1	22	1463	0	-7
G 6300B?	0	2	1	2	0	3	-	-	-	-	-	-	0
H 6299M	0	6	9	8	0	3	1.0	42	1	7	2821	0	0
I 6291B?	0	13	6	36	0	7	0.1	0	1	5	2743	0	140
J 6284M	0	11	6	15	0	3	0.3	12	1	37	5751	0	-7
K 6284M	0	11	6	15	0	3	0.3	11	1	25	5074	0	-7
L 6283M	0	2	0	2	0	3	-	-	-	-	-	-	0
M 6276B?	0	1	0	6	0	1	0.1	0	1	56	6478	0	0
N 6266M	0	5	0	6	0	0	0.1	0	1	69	6836	0	0
O 6259M	0	2	1	2	0	1	-	-	-	-	-	-	280
P 6250M	0	1	1	2	0	0	-	-	-	-	-	-	80
Q 6207B?	0	1	0	32	0	26	0.1	3	1	4	2880	0	1770
R 6185D	0	4	0	33	0	16	0.1	0	1	5	3693	0	530
S 6157B	0	11	0	31	0	17	0.1	9	1	6	2501	0	480

LINE 10280	(FLIGHT	7)											
A 7203D	9	25	21	37	0	8	0.4	0	1	13	1102	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10280	(FLIGHT		7)										
B 7201D	9	26	21	37	0	9	0.4	0	1	14	778	0	0
C 7195D	12	24	21	35	0	7	0.5	1	1	26	1595	0	0
D 7182D	0	2	0	2	0	2	-	-	-	-	-	-	0
E 7176M	0	2	0	2	0	1	-	-	-	-	-	-	0
F 7170S	2	15	0	28	0	4	0.1	0	1	0	3585	0	0
G 7143M	2	1	0	5	0	1	3.5	107	1	115	8100	15	0
H 7055S?	5	11	3	25	0	4	0.4	9	1	3	3253	0	13
I 7050S?	1	2	0	2	0	4	-	-	-	-	-	-	0
J 6956S	1	1	1	1	2	4	-	-	-	-	-	-	0
K 6937S	14	6	22	11	4	12	3.8	35	1	61	124	40	0
L 6909S?	12	6	6	10	1	8	2.7	23	1	50	164	27	0
M 6888S?	11	8	26	17	3	9	1.6	21	1	52	125	31	0
N 6874B?	16	28	36	53	3	15	0.7	4	1	36	189	15	40
O 6851B?	9	16	23	28	6	12	0.6	20	1	64	97	45	20
P 6836B?	1	2	1	1	0	2	-	-	-	-	-	-	0
Q 6830S?	2	29	16	55	1	9	0.3	0	1	17	306	0	0
R 6806S?	2	18	8	34	0	6	0.2	0	1	19	393	0	0
S 6795S	5	14	14	30	3	9	0.5	0	1	30	229	7	0
T 6774S	15	17	29	30	5	11	1.1	3	1	30	78	13	0
U 6761B?	15	10	37	13	2	24	2.2	14	1	39	33	25	300
V 6753H	1	1	1	2	2	2	-	-	-	-	-	-	0
W 6738H	17	14	38	24	6	6	1.7	19	1	43	28	30	0
X 6719E	7	45	92	76	13	37	0.2	0	1	35	68	21	0
Y 6708B?	9	11	6	39	0	9	0.9	15	1	19	454	0	0
Z 6664M	0	5	0	10	0	2	0.1	5	1	19	3938	0	0
AA 6656M	0	6	0	12	0	3	0.1	8	1	18	3664	0	140
AB 6649M	0	14	0	68	0	11	0.1	9	1	5	2384	0	0
AC 6636S?	0	18	0	34	0	5	0.1	1	1	0	2136	0	-4
AD 6625S?	0	25	0	48	0	7	0.1	0	1	0	1914	0	0
AE 6600S?	0	2	0	2	0	3	-	-	-	-	-	-	90
AF 6586S	7	9	18	23	0	6	0.7	17	1	12	682	0	0

LINE 10285	(FLIGHT		34)										
A 6485B?	0	13	0	19	0	5	0.1	4	1	3	2691	0	130
B 6489B?	0	16	0	19	0	5	0.1	4	1	9	3107	0	-7
C 6494B?	0	3	0	23	0	5	0.1	0	1	29	5694	0	0
D 6499S?	0	2	0	2	0	4	-	-	-	-	-	-	1070
E 6537S	3	3	17	15	0	4	1.3	0	1	28	466	0	-7
F 6547S?	5	11	7	18	0	3	0.3	5	1	35	672	5	0
G 6564M	0	0	0	2	0	1	-	-	-	-	-	-	0
H 6576M	0	3	1	3	0	0	0.2	33	1	16	4577	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	COND DEPTH .SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10285	(FLIGHT	34)											
I 6589M	2	4	2	5	0	1	0.3	50	1	40	5675	0	90
J 6597M	0	2	0	2	0	3	-	-	-	-	-	-	1120
K 6600M	0	3	0	8	0	1	0.1	6	1	32	4992	0	-7
L 6625S?	0	2	0	2	0	3	-	-	-	-	-	-	0
M 6640M	0	30	0	75	0	18	0.1	7	1	11	3116	0	0
N 6644B?	0	30	0	75	0	18	0.1	11	1	0	1788	0	0
O 6650M	0	19	0	75	0	18	0.1	0	1	10	3852	0	-7
P 6676B?	2	9	3	16	0	4	0.1	0	1	2	2802	0	0
Q 6684B?	0	17	0	40	0	7	0.1	5	1	5	2787	0	0
R 6687B?	0	24	0	43	0	6	0.1	1	1	0	2590	0	-7
S 6704M	0	7	0	12	0	3	0.1	0	1	23	4738	0	-7
T 6716M	0	1	0	2	0	2	0.1	0	1	97	7785	3	-7
U 6732M	0	0	0	1	0	1	0.1	26	1	148	8388	0	-7
V 6741M	0	3	0	5	0	2	0.1	2	1	89	7400	4	0
W 6758M	0	2	0	2	0	1	-	-	-	-	-	-	0
X 6794S?	0	4	0	24	0	6	0.1	2	1	21	4336	0	0
Y 6803B?	0	2	0	2	0	4	-	-	-	-	-	-	0
Z 6806B?	0	4	0	22	0	5	0.1	4	1	13	3530	0	0
AA 6821S?	0	2	0	2	0	4	-	-	-	-	-	-	0
AB 6823M	0	2	0	2	0	4	-	-	-	-	-	-	0
AC 6834M	0	2	0	2	0	2	-	-	-	-	-	-	1180
AD 6844M	0	1	0	4	0	1	0.1	0	1	45	6403	0	40
AE 6855S	0	2	0	2	0	2	-	-	-	-	-	-	30
AF 6862S?	0	2	0	2	0	4	-	-	-	-	-	-	90
AG 6968S?	0	2	0	2	0	2	-	-	-	-	-	-	-7

LINE 10290	(FLIGHT	7)											
A 7327B?	0	2	0	2	0	2	-	-	-	-	-	-	0
B 7349B?	0	6	0	6	0	1	0.1	0	1	51	6203	0	0
C 7359B?	0	2	2	6	1	0	0.1	11	1	46	3924	0	0
D 7388S	1	2	1	2	0	3	-	-	-	-	-	-	0
E 7406S	3	8	8	14	0	2	0.4	12	1	50	678	16	50
F 7430S?	1	2	1	2	0	2	-	-	-	-	-	-	0
G 7445S?	0	16	10	34	0	7	0.3	0	1	1	3169	0	0
H 7500S?	2	10	1	18	0	4	0.1	3	1	32	892	2	0
I 7516S?	8	14	14	31	0	7	0.5	19	1	21	1052	0	-5
J 7527S	1	2	1	2	2	3	-	-	-	-	-	-	0
K 7562D	11	16	21	29	4	5	0.7	15	1	49	376	21	0
L 7572S?	4	9	11	25	2	5	0.4	0	1	38	244	13	0
M 7582S?	2	7	15	16	2	6	1.0	8	1	48	248	22	20
N 7621S	3	12	11	12	1	4	0.9	18	1	31	807	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 10290	(FLIGHT	7)												
O 7631S?	5	14	12	31	2	7	0.4	3	1	36	439	10	0	
P 7654S?	7	5	7	15	3	2	1.5	32	1	71	299	41	-4	
Q 7672S	1	2	1	2	0	2	-	-	-	-	-	-	0	
R 7695S?	0	4	0	7	0	1	0.1	0	1	37	5802	0	0	
S 7723S?	0	19	2	42	0	6	0.1	0	1	0	2244	0	0	
T 7760D	12	14	16	13	0	4	1.1	9	1	31	663	0	0	
U 7766B?	6	10	16	15	0	3	0.5	25	1	23	1790	0	0	
V 7778S?	1	2	1	2	0	2	-	-	-	-	-	-	0	
W 7789S?	8	13	10	26	0	4	0.6	17	1	7	2305	0	0	
X 7796S?	8	24	10	61	0	9	0.3	8	1	0	1695	0	50	

LINE 10294	(FLIGHT	44)												
A 745B?	0	16	2	27	0	4	0.1	0	1	6	3045	0	0	
B 743M	0	11	10	22	2	3	0.4	0	1	46	574	10	0	
C 720S	0	11	12	24	1	4	0.5	1	1	40	871	7	40	
D 713M	0	2	3	3	0	1	0.6	53	1	53	6538	0	0	
E 708M	0	5	0	11	0	1	0.1	0	1	23	5211	0	180	
F 692M	0	8	3	11	0	2	0.1	0	1	17	5107	0	350	
G 683B?	0	2	1	2	1	1	-	-	-	-	-	-	0	
H 668M	0	2	0	2	0	1	-	-	-	-	-	-	100	
I 655M	0	2	1	2	0	1	-	-	-	-	-	-	0	
J 620B?	0	18	0	26	0	4	0.1	0	1	0	2942	0	0	
K 612B?	0	18	0	19	0	1	0.1	0	1	5	3992	0	620	
L 605M	0	18	0	41	0	7	0.1	11	1	6	2349	0	-4	
M 598B?	0	16	0	27	0	5	0.1	12	1	8	2425	0	620	
N 583B?	0	14	0	79	0	16	0.1	11	1	0	1786	0	0	
O 562B?	0	12	0	98	0	15	0.1	10	1	10	2726	0	0	
P 553M	0	18	0	36	0	10	0.1	10	1	9	2681	0	0	
Q 545B?	0	24	9	59	0	6	0.1	0	1	0	2641	0	0	
R 539B?	0	24	9	41	0	6	0.2	0	1	50	874	15	9	
S 534D	0	13	3	26	0	5	0.1	2	1	10	2860	0	19	
T 531D	0	0	0	7	0	2	0.1	0	1	27	6060	0	-6	
U 514M	0	1	0	2	0	0	-	-	-	-	-	-	-6	
V 506M	0	2	0	3	0	1	0.1	1	1	64	6601	0	90	
W 487M	0	3	0	5	0	0	0.1	0	1	57	7091	0	14	
X 444M	0	7	0	5	0	2	0.1	0	1	4	3102	0	0	
Y 417B?	0	6	0	2	0	0	0.1	1	1	4	3097	0	0	
Z 411B?	0	6	0	5	0	1	0.1	3	1	6	3045	0	0	
AA 409B?	0	2	0	2	0	1	-	-	-	-	-	-	60	
AB 406B?	0	3	0	2	0	2	0.5	4	1	110	959	10	20	
AC 399S?	0	4	0	11	0	1	0.1	0	1	17	4292	0	0	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10294	(FLIGHT	44)											
AD 386M	0	2	0	3	0	1	0.1	8	1	37	5176	0	0
AE 369S?	0	2	0	19	0	0	0.1	2	1	35	5477	0	0
AF 360M	0	10	0	18	0	3	0.1	0	1	15	4370	0	220
AG 349S?	0	0	0	17	0	0	0.1	0	1	63	7255	0	60
AH 338B?	0	12	0	26	0	3	0.1	0	1	14	4019	0	0
AI 331S?	0	2	1	2	0	2	-	-	-	-	-	-	-5

LINE 10300	(FLIGHT	7)											
A 8716M	0	1	0	2	0	0	-	-	-	-	-	-	0
B 8701M	4	3	0	5	0	1	1.2	62	1	35	5781	0	120
C 8688S?	2	7	0	28	0	4	0.1	14	1	4	3262	0	0
D 8682M	2	7	0	28	0	4	0.2	25	1	23	4175	0	0
E 8672M	0	1	0	2	0	2	-	-	-	-	-	-	0
F 8598B?	1	2	1	2	0	2	-	-	-	-	-	-	0
G 8560M	0	1	0	2	0	1	0.1	0	1	36	5791	0	0
H 8546M	6	14	4	25	0	4	0.4	15	1	4	3284	0	0
I 8544S?	6	14	5	25	0	4	0.4	14	1	10	3903	0	0
J 8525H	7	5	15	8	2	7	1.3	28	1	51	157	28	0
K 8507H	1	2	1	2	2	3	-	-	-	-	-	-	100
L 8489S?	3	15	6	29	0	5	0.1	0	1	20	1533	0	0
M 8480M	0	3	2	11	0	2	0.1	10	1	24	4551	0	0
N 8472B?	1	17	6	35	0	5	0.1	0	1	17	1985	0	0
O 8447S	10	28	33	57	0	13	0.4	0	1	21	279	0	0
P 8404S	1	2	1	2	0	4	-	-	-	-	-	-	0
Q 8395S	5	10	5	23	1	3	0.2	0	1	16	661	0	0
R 8370B?	232	179	694	269	102	297	4.4	0	2	9	5	3	0
S 8362B?	1	2	1	2	0	4	-	-	-	-	-	-	0
T 8342B?	1	2	1	2	0	4	-	-	-	-	-	-	0
U 8329S?	5	10	1	23	0	5	0.4	23	1	30	1234	0	20
V 8317B?	0	9	6	10	0	2	0.5	27	1	17	3755	0	0
W 8307B?	0	2	1	2	0	2	-	-	-	-	-	-	60
X 8296S	3	21	13	46	0	6	0.3	0	1	9	874	0	0
Y 8288B?	1	2	1	2	0	3	-	-	-	-	-	-	50
Z 8252B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AA 8242B?	1	1	1	2	1	1	-	-	-	-	-	-	0
AB 8236B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AC 8218M	1	2	1	2	0	2	-	-	-	-	-	-	0
AD 8197M	0	2	1	2	0	3	-	-	-	-	-	-	0
AE 8185M	0	10	0	19	0	2	0.1	0	1	0	2765	0	0

LINE 10304	(FLIGHT	44)											
A 948B?	0	2	1	2	0	1	-	-	-	-	-	-	390

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR				
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT

LINE 10304	(FLIGHT	44)									
B 955M	0	2	1	2	0	3	-	-	-	-	0
C 960B?	0	16	4	24	0	3	0.1	0	1	3 2912	0 0
D 963B?	0	2	1	2	0	4	-	-	-	-	290
E 973M	0	2	0	2	0	3	-	-	-	-	1480
F 974B?	0	7	0	14	0	2	0.1	0	1	7 3543	0 0
G 978M	0	2	0	22	0	2	0.1	0	1	11 3835	0 460
H 982B?	0	2	0	2	0	4	-	-	-	-	0
I 994B?	0	2	0	2	0	2	-	-	-	-	0
J 1016M	0	2	0	2	0	1	-	-	-	-	0
K 1038S?	0	2	0	2	0	2	-	-	-	-	100
L 1060B?	0	2	0	2	0	2	-	-	-	-	20
M 1093B?	0	1	0	23	0	3	0.1	6	1	19 3869	0 0
N 1112B?	0	22	0	38	0	6	0.1	0	1	0 2422	0 0
O 1120M	0	25	2	8	0	2	0.1	12	1	3 2986	0 1380
P 1122D	3	25	5	8	0	5	0.4	30	1	5 3365	0 0
Q 1133S?	2	6	3	9	0	2	0.2	5	1	20 5517	0 120
R 1152M	0	3	0	2	0	1	0.1	3	1	30 5559	0 50
S 1155M	0	4	0	1	0	1	0.1	0	1	32 5771	0 -5
T 1174M	0	3	0	13	0	2	0.1	7	1	36 5194	0 0
U 1188M	0	2	0	6	0	1	0.1	0	1	24 4945	0 450
V 1192M	0	5	0	7	0	1	0.1	0	1	25 5124	0 1650
W 1194B?	1	2	0	2	0	1	-	-	-	-	0
X 1216M	2	4	0	2	0	1	0.4	33	1	41 6385	0 0
Y 1250M	1	2	0	2	0	1	-	-	-	-	0
Z 1264M	1	2	0	2	0	1	-	-	-	-	0
AA 1281S?	0	25	0	64	0	10	0.1	7	1	0 2140	0 140
AB 1293M	0	3	0	7	0	1	0.1	0	1	31 5640	0 0
AC 1300S?	0	20	0	40	0	6	0.1	4	1	1 2539	0 310
AD 1308M	0	5	0	16	0	1	0.1	0	1	22 5284	0 0
AE 1318M	0	2	0	2	0	1	-	-	-	-	0
AF 1326B?	0	18	0	15	0	4	0.1	0	1	7 3371	0 0
AG 1331B?	5	40	8	71	0	10	0.1	0	1	33 1318	1 0
AH 1334B?	7	40	11	71	0	10	0.2	0	1	12 1288	0 0
AI 1340M	0	4	0	1	0	1	0.1	2	1	50 6060	0 0
AJ 1348M	0	1	0	1	0	0	0.1	0	1	79 7154	0 110
AK 1352M	0	1	0	1	0	0	0.1	13	1	86 7187	5 140
AL 1370M	2	5	3	12	0	2	0.1	7	1	21 4616	0 270
AM 1396B?	0	15	0	32	0	6	0.1	10	1	16 3235	0 0
AN 1421M	0	2	0	7	0	2	0.1	6	1	61 6315	0 260

LINE 10310	(FLIGHT	8)									
A 314B?	3	20	7	40	1	6	0.2	0	1	16 1272	0 0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10310	(FLIGHT	8)											
B 328S	6	19	4	21	0	5	0.3	0	1	4	1594	0	0
C 348M	0	2	0	1	0	0	0.1	0	1	46	6034	0	0
D 354M	0	1	0	0	0	0	0.1	10	1	51	6101	0	20
E 358M	0	2	0	4	0	1	0.1	1	1	39	5771	0	190
F 363M	0	11	0	12	0	1	0.1	0	1	25	4960	0	0
G 366B?	0	11	0	3	0	2	0.1	0	1	16	4155	0	0
H 372B?	0	5	0	12	0	2	0.1	0	1	21	4577	0	0
I 381B?	1	7	1	6	0	1	0.1	1	1	17	4551	0	0
J 390B?	0	18	2	21	0	2	0.1	0	1	8	3737	0	0
K 393D	0	18	0	21	0	3	0.1	3	1	7	3049	0	0
L 401D	1	10	0	9	0	1	0.1	4	1	18	4314	0	12
M 411D	1	2	1	2	0	1	-	-	-	-	-	-	0
N 436M	0	2	0	2	0	1	-	-	-	-	-	-	0
O 540M	0	2	0	2	0	1	-	-	-	-	-	-	0
P 572M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 588D	1	11	7	11	0	2	0.6	21	1	23	3115	0	0
R 598M	0	8	9	10	0	3	0.8	26	1	10	3815	0	0
S 611B?	8	1	10	1	0	2	12.2	31	1	43	283	15	0
T 628S?	1	2	1	2	0	4	-	-	-	-	-	-	0
U 641M	1	2	0	2	0	1	-	-	-	-	-	-	0
V 647S?	0	2	0	2	0	3	-	-	-	-	-	-	0
W 656M	0	1	0	2	0	0	-	-	-	-	-	-	0
X 670S?	0	2	0	2	0	1	-	-	-	-	-	-	0
Y 686S?	7	14	20	91	0	14	0.5	14	1	7	706	0	0
Z 708B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AA 776B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AB 779D	10	20	17	16	0	8	0.5	1	1	17	572	0	0
AC 784B?	12	21	18	34	0	5	0.6	0	1	6	622	0	-5
AD 792B?	89	123	219	302	0	74	1.6	0	1	9	59	0	200
AE 815S?	16	62	36	249	0	36	0.4	0	1	0	854	0	0
AF 827B?	11	22	24	47	0	10	0.5	8	1	20	251	0	0
AG 835S?	10	57	3	114	0	20	0.2	0	1	17	455	0	40
AH 837S?	10	57	3	114	0	20	0.2	0	1	9	627	0	0
AI 859S	1	2	1	2	0	2	-	-	-	-	-	-	30
AJ 908M	0	3	0	7	0	1	0.1	0	1	53	6332	0	0
AK 939S?	8	20	6	12	0	5	0.4	0	1	10	1561	0	0
AL 945B?	9	7	11	13	0	3	1.5	26	1	27	907	0	0
AM 994S	1	2	1	2	0	2	-	-	-	-	-	-	0
LINE 10320	(FLIGHT	8)											
A 1926M	0	17	0	26	0	0	0.1	3	1	22	4347	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10320	(FLIGHT 8)												
B 1923B?	0	17	0	27	0	3	0.1	3	1	5	2905	0	0
C 1908S?	0	16	0	32	0	4	0.1	0	1	0	2888	0	0
D 1897B?	0	2	0	2	0	1	-	-	-	-	-	-	0
E 1888M	0	5	0	13	0	1	0.1	0	1	22	4616	0	70
F 1881M	0	2	0	3	0	1	0.1	17	1	23	4577	0	0
G 1864B?	0	14	0	24	0	0	0.1	3	1	58	6282	0	180
H 1823S?	1	2	1	2	0	3	-	-	-	-	-	-	50
I 1795B?	0	9	0	16	0	1	0.1	0	1	12	5378	0	0
J 1786M	0	3	0	4	0	1	0.1	0	1	91	7785	0	50
K 1755M	0	1	0	2	0	0	-	-	-	-	-	-	0
L 1745M	0	2	0	2	0	2	-	-	-	-	-	-	30
M 1741S	1	2	0	2	0	2	-	-	-	-	-	-	0
N 1711B?	79	35	189	209	3	58	6.1	1	1	11	59	0	20
O 1692B?	1	2	1	2	0	4	-	-	-	-	-	-	0
P 1689B?	17	14	40	27	1	8	1.8	17	1	44	257	19	-5
Q 1676M	0	3	0	4	0	1	0.1	2	1	19	4259	0	1440
R 1668M	0	11	0	19	0	2	0.1	1	1	5	3107	0	100
S 1662M	0	2	1	1	0	0	0.4	87	1	10	3929	0	150
T 1653S	0	21	2	23	0	6	0.1	0	1	0	2715	0	0
U 1644M	0	1	0	35	0	1	0.1	0	1	72	6972	0	170
V 1638S?	0	18	0	37	0	5	0.1	0	1	0	3013	0	0
W 1633M	0	5	0	31	0	0	0.1	3	1	62	6440	0	200
X 1618M	0	1	0	2	0	0	-	-	-	-	-	-	510
Y 1607B?	0	9	0	11	0	2	0.1	0	1	18	4270	0	30
Z 1600M	0	2	0	1	0	1	0.1	0	1	26	5321	0	0
AA 1590M	0	44	7	94	0	14	0.1	0	1	0	2391	0	0
AB 1587B?	0	44	7	94	0	14	0.1	0	1	0	1666	0	0
AC 1571M	0	2	0	2	0	1	-	-	-	-	-	-	0
AD 1564M	0	1	0	2	0	0	0.1	19	1	96	7691	4	0
AE 1558B?	0	2	0	2	0	2	-	-	-	-	-	-	0
AF 1548M	0	2	0	2	0	1	-	-	-	-	-	-	0
AG 1536M	0	1	0	1	0	1	0.1	0	1	105	8218	2	0
AH 1483B?	1	2	1	2	0	3	-	-	-	-	-	-	80
AI 1474S	13	21	27	45	0	11	0.7	2	1	22	379	0	0
AJ 1451S	7	24	28	48	0	10	0.3	0	1	19	451	0	-5
AK 1423M	0	6	0	11	0	1	0.1	0	1	69	6972	0	490
AL 1397S?	10	12	26	25	0	7	0.9	14	1	29	376	4	0
AM 1370M	1	2	1	2	0	3	-	-	-	-	-	-	-5
AN 1341S?	0	21	0	39	0	6	0.1	0	1	0	2216	0	0

LINE 10324	(FLIGHT 44)												
A 2047M	0	2	0	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10324	(FLIGHT	44)											
B 2058B?	0	2	0	2	0	2	-	-	-	-	-	-	0
C 2085M	0	2	0	2	0	2	-	-	-	-	-	-	0
D 2131M	0	2	0	2	0	2	-	-	-	-	-	-	0
E 2141M	0	3	0	6	0	0	0.1	0	1	32	5741	0	500
F 2150B?	0	4	0	1	0	0	0.1	0	1	35	6188	0	-5
G 2161B?	0	3	0	6	0	1	0.1	0	1	15	5866	0	420
H 2185M	0	3	0	8	0	2	0.1	0	1	30	5823	0	0
I 2230M	0	2	0	2	0	2	-	-	-	-	-	-	-4
J 2251B?	0	21	0	49	0	7	0.1	9	1	9	2719	0	0
K 2256B?	0	9	0	24	0	5	0.1	14	1	13	2657	0	50
L 2271S?	2	11	0	6	0	2	0.1	13	1	15	3709	0	0
M 2274S	1	2	0	2	0	4	-	-	-	-	-	-	-5
N 2290B?	3	10	3	11	0	1	0.2	2	1	10	4883	0	0
O 2329M	0	2	0	6	0	1	0.1	3	1	63	6478	0	0
P 2332M	0	2	0	0	0	0	0.1	0	1	58	6645	0	-5
Q 2389S?	0	3	0	11	0	0	0.1	0	1	70	6972	0	0
R 2404M	0	6	0	6	0	3	0.1	11	1	40	5266	0	510
S 2439M	0	2	0	2	0	1	-	-	-	-	-	-	90
T 2479S?	0	2	0	2	0	4	-	-	-	-	-	-	30
U 2494M	0	6	0	25	0	6	0.1	0	1	40	5877	0	0
V 2524M	0	1	0	5	0	1	0.1	4	1	66	6538	0	80
W 2527M	0	1	0	6	0	1	0.1	7	1	61	6350	0	-5
X 2540M	0	2	0	10	0	3	0.1	0	1	38	5771	0	0

LINE 10325	(FLIGHT	44)											
A 2692M	0	2	0	7	0	1	0.1	3	1	57	6282	0	0
B 2706S?	0	17	0	39	0	7	0.1	12	1	13	2825	0	-5

LINE 10330	(FLIGHT	8)											
A 2090S?	0	2	0	2	0	1	-	-	-	-	-	-	0
B 2117M	0	0	0	1	0	0	-	-	-	-	-	-	220
C 2146M	0	2	0	2	0	1	-	-	-	-	-	-	0
D 2168B?	0	3	0	1	0	0	0.1	0	1	41	6008	0	30
E 2180B?	0	5	0	4	0	0	0.1	0	1	30	5761	0	0
F 2188B?	1	4	2	6	0	1	0.2	3	1	34	3943	0	40
G 2202B?	2	15	1	12	0	2	0.1	0	1	20	2247	0	80
H 2261D	0	11	0	9	0	1	0.1	12	1	32	4464	0	0
I 2270M	0	7	0	8	0	2	0.1	12	1	36	4780	0	0
J 2290M	0	1	0	7	0	0	0.1	3	1	93	7478	5	300
K 2297S?	0	2	0	2	0	4	-	-	-	-	-	-	0
L 2310M	0	21	1	46	0	7	0.1	0	1	38	5732	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10330	(FLIGHT	8)											
M 2323S?	2	27	14	62	0	10	0.2	0	1	15	881	0	0
N 2336S?	4	23	7	48	0	6	0.1	0	1	0	2097	0	100
O 2345D	12	20	9	28	0	5	0.6	7	1	10	683	0	-5
P 2349D	6	16	9	28	0	3	0.3	15	1	27	688	2	0
Q 2361B?	22	64	105	125	4	32	0.5	0	1	23	110	7	0
R 2363B?	22	64	105	125	4	32	0.5	0	1	31	73	16	-5
S 2367B?	13	25	3	4	0	9	0.6	11	1	36	101	19	0
T 2375B?	29	24	4	41	4	7	2.1	0	1	27	118	8	-4
U 2384D	1	2	1	2	0	2	-	-	-	-	-	-	0
V 2398M	0	4	0	7	0	0	0.1	0	1	29	5417	0	0
W 2407S	0	7	0	10	0	2	0.1	0	1	12	4452	0	0
X 2416M	0	2	0	2	0	0	0.1	0	1	45	5971	0	0
Y 2422S?	0	11	0	21	0	3	0.1	0	1	3	3869	0	0
Z 2430M	0	2	0	2	0	1	-	-	-	-	-	-	0
AA 2444B?	0	3	0	2	0	1	0.1	0	1	31	5732	0	0
AB 2450M	0	6	0	10	0	3	0.1	6	1	27	4589	0	2000
AC 2459B?	0	14	0	28	0	4	0.1	0	1	16	4135	0	0
AD 2467M	0	2	0	4	0	1	0.1	1	1	59	6403	0	900
AE 2477S?	0	11	0	24	0	4	0.1	4	1	25	4464	0	0
AF 2493M	0	8	0	17	0	2	0.1	4	1	67	6559	0	2080
AG 2499B?	0	8	0	23	0	3	0.1	4	1	18	3920	0	0
AH 2506D	0	10	0	9	0	2	0.1	4	1	25	4616	0	0
AI 2512B?	0	7	0	7	0	1	0.1	7	1	41	5580	0	180
AJ 2519M	0	1	0	1	0	0	0.1	0	1	60	6459	0	0
AK 2525M	0	1	0	3	0	1	0.1	4	1	67	6559	0	760
AL 2541M	0	0	0	5	0	1	0.1	30	1	42	6158	0	530
AM 2594S?	1	2	0	2	0	2	-	-	-	-	-	-	-410
AN 2621B?	3	20	4	32	0	5	0.1	0	1	0	3049	0	20
AO 2672M	0	1	0	1	0	1	0.1	0	1	173	8388	0	770
AP 2712S?	0	5	0	12	0	3	0.1	0	1	16	4642	0	0
AQ 2742M	2	7	0	12	0	2	0.1	8	1	2	3477	0	0
AR 2758M	1	4	0	8	0	1	0.1	15	1	6	3517	0	0
AS 2763M	0	2	0	2	0	2	-	-	-	-	-	-	70

LINE 10334	(FLIGHT	44)											
A 3242M	0	3	0	5	0	1	0.1	0	1	59	6713	0	0
B 3182M	0	4	0	5	0	1	0.1	0	1	80	7255	0	540
C 3157B?	10	71	26	118	0	16	0.2	0	1	12	717	0	-5
D 3112D	1	2	1	2	0	0	-	-	-	-	-	-	0
E 3095B?	1	2	1	2	0	1	-	-	-	-	-	-	70
F 3078B?	0	8	1	10	2	3	0.1	0	1	26	1522	0	20

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10334	(FLIGHT	44)											
G 3058M	0	2	0	2	0	1	-	-	-	-	-	-	0
H 2994M	0	2	0	2	0	1	-	-	-	-	-	-	0
I 2983M	0	3	0	6	0	1	0.1	0	1	42	5935	0	-5
J 2914M	0	3	0	4	0	1	0.1	0	1	79	7478	0	-5
K 2898M	0	2	0	2	0	1	-	-	-	-	-	-	0
L 2858M	0	2	0	3	0	1	0.1	0	1	92	7989	0	0
M 2828M	0	4	0	7	0	1	0.1	0	1	71	6862	0	70
N 2808M	0	4	0	7	0	1	0.1	0	1	58	6478	0	200
O 2797M	0	5	0	7	0	1	0.1	0	1	57	6836	0	1410
LINE 10340	(FLIGHT	8)											
A 3852B?	0	5	0	5	0	1	0.1	0	1	41	5971	0	0
B 3838M	0	2	0	8	0	2	0.1	8	1	31	4696	0	180
C 3835B?	0	9	0	9	0	2	0.1	0	1	16	4217	0	30
D 3829B?	2	6	0	9	0	0	0.1	13	1	20	4868	0	0
E 3818M	0	5	1	20	0	2	0.1	8	1	21	3835	0	0
F 3797M	1	1	0	2	0	2	-	-	-	-	-	-	0
G 3766M	0	5	0	12	0	2	0.1	10	1	13	2995	0	0
H 3761M	0	2	0	2	0	4	-	-	-	-	-	-	0
I 3758M	0	15	0	10	0	1	0.1	6	1	14	3402	0	70
J 3738M	0	2	0	2	0	2	-	-	-	-	-	-	110
K 3692B?	1	2	0	2	0	0	-	-	-	-	-	-	0
L 3677B?	5	3	0	0	0	0	1.4	37	1	50	6444	0	0
M 3664M	0	2	0	2	0	1	-	-	-	-	-	-	0
N 3637M	0	2	0	2	0	0	0.1	0	1	86	7478	0	0
O 3629M	0	1	0	3	0	1	0.1	0	1	69	6786	0	30
P 3603B?	1	1	0	0	0	0	0.7	91	1	72	6916	0	20
Q 3554M	0	2	0	2	0	0	-	-	-	-	-	-	0
R 3549B?	0	13	0	19	0	4	0.1	0	1	0	3156	0	0
S 3545M	0	6	0	25	0	1	0.1	0	1	26	5008	0	80
T 3541D	0	9	0	7	0	1	0.1	4	1	40	5675	0	0
U 3524S	0	10	5	17	0	3	0.2	0	1	25	1975	0	0
V 3501S	0	25	11	48	0	8	0.2	0	1	20	702	0	0
W 3494D	7	12	10	14	0	2	0.5	13	1	43	370	16	0
X 3482B?	16	27	39	70	0	14	0.7	7	1	25	233	4	0
Y 3470B?	4	4	15	5	2	2	4.3	14	1	36	218	11	0
Z 3462S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 3457M	0	2	1	2	0	4	-	-	-	-	-	-	0
AB 3451M	0	1	0	3	0	3	0.1	0	1	4	4682	0	1170
AC 3440M	0	1	0	1	0	0	0.1	9	1	62	6836	0	20
AD 3420B?	0	12	0	20	0	3	0.1	0	1	15	4019	0	610

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10340	(FLIGHT	8)											
AE 3416B?	0	5	0	12	0	2	0.1	0	1	19	4738	0	0
AF 3410M	0	2	0	2	0	1	-	-	-	-	-	-	0
AG 3400M	0	2	0	2	0	1	0.1	0	1	70	6889	0	1030
AH 3386B?	0	8	0	12	0	2	0.1	1	1	30	5159	0	0
AI 3379M	0	15	0	24	0	3	0.1	0	1	6	3974	0	0
AJ 3345B?	0	39	0	61	0	8	0.1	5	1	0	2270	0	0
AK 3343B?	0	2	0	2	0	4	-	-	-	-	-	-	0
AL 3335B?	0	15	0	37	0	5	0.1	0	1	0	2837	0	0
AM 3331B?	0	13	0	37	0	5	0.1	0	1	13	3827	0	540
AN 3326M	0	4	0	12	0	3	0.1	1	1	22	4589	0	0
AO 3321B?	0	2	1	2	0	2	-	-	-	-	-	-	0
AP 3313M	0	2	1	2	0	2	-	-	-	-	-	-	110
AQ 3214B?	0	2	0	2	0	0	-	-	-	-	-	-	0
AR 3178B?	0	4	0	6	0	2	0.1	2	1	10	3371	0	60
AS 3172B?	0	13	0	13	0	2	0.1	0	1	5	3490	0	0
AT 3157B?	0	5	0	12	0	1	0.1	0	1	25	5074	0	0
AU 3152M	0	3	0	3	0	1	0.1	2	1	37	5657	0	0
AV 3140M	0	2	0	5	0	1	0.1	5	1	64	6403	0	70
AW 3128M	0	11	0	22	0	3	0.1	14	1	33	4382	0	0
AX 3126M	0	11	0	22	0	1	0.1	8	1	41	5559	0	0
AY 3114S?	0	12	0	27	0	4	0.1	0	1	9	3557	0	0
AZ 3105M	0	3	0	5	0	1	0.1	2	1	61	6459	0	460
BA 3098M	0	2	0	6	0	1	0.1	0	1	86	7400	0	-4
BB 3086M	0	3	0	5	0	1	0.1	0	1	95	7737	2	0
BC 3078M	0	1	0	1	0	0	0.1	0	1	192	8388	0	-4
BD 3049M	0	1	0	2	0	0	-	-	-	-	-	-	0
BE 3032S	0	9	0	18	0	2	0.1	0	1	16	4682	0	0
BF 3026M	0	10	0	12	0	1	0.1	0	1	62	6811	0	1680
BG 3005S	0	7	6	15	0	3	0.3	0	1	13	1917	0	0
BH 2992B?	0	15	2	9	0	3	0.1	0	1	0	2880	0	170
BI 2979M	0	2	0	2	0	3	-	-	-	-	-	-	-5
BJ 2965S?	0	2	0	2	0	4	-	-	-	-	-	-	260
BK 2957B?	0	26	0	51	0	6	0.1	0	1	0	2510	0	0

LINE 10344	(FLIGHT	44)											
A 3354M	0	2	0	7	0	2	0.1	0	1	48	6385	0	410
B 3371M	0	12	0	18	0	4	0.1	2	1	20	4336	0	30
C 3386B?	0	6	0	5	0	1	0.1	0	1	40	6266	0	0
D 3447D	1	2	1	2	0	2	-	-	-	-	-	-	0
E 3466D	13	24	29	39	3	10	0.6	0	1	31	291	6	-5
F 3485B?	2	4	10	15	1	0	0.6	0	1	39	709	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10344	(FLIGHT	44)											
G 3492B	8	24	10	27	1	4	0.3	1	1	35	784	5	20
H 3527M	0	2	0	2	0	1	-	-	-	-	-	-	20
I 3554M	0	2	0	4	0	1	0.1	4	1	59	6299	0	340
J 3574M	0	5	0	10	0	2	0.1	0	1	33	5685	0	0
K 3584S?	0	6	0	9	0	2	0.1	1	1	32	5302	0	-4
L 3605M	0	2	0	2	0	1	-	-	-	-	-	-	0
M 3617B?	1	2	0	2	0	2	-	-	-	-	-	-	18
N 3622B?	5	6	2	8	0	2	0.6	20	1	15	4536	0	0
O 3628M	3	3	1	9	0	2	0.7	55	1	49	6158	0	0
P 3639M	2	3	0	5	0	1	0.4	56	1	82	7091	3	80
Q 3673M	0	1	0	3	0	1	0.1	6	1	146	8388	0	0
R 3698M	0	4	0	6	0	1	0.1	3	1	74	6836	0	0
S 3702M	0	4	0	7	0	0	0.1	0	1	109	8344	3	250
T 3718S?	0	5	0	6	0	2	0.1	8	1	43	5657	0	0
U 3757B?	0	13	0	13	0	1	0.1	7	1	38	5359	0	-5
V 3772M	0	6	0	13	0	5	0.1	8	1	34	4914	0	0
W 3786M	0	8	0	15	0	2	0.1	7	1	32	4929	0	0
X 3808S?	0	28	0	49	0	7	0.1	2	1	1	2661	0	150
Y 3828S?	0	5	0	10	0	1	0.1	0	1	54	6350	0	270
Z 3838M	0	2	0	4	0	1	0.1	0	1	62	7060	0	-5
AA 3848M	0	2	0	2	0	1	-	-	-	-	-	-	0

LINE 10350	(FLIGHT	10)											
A 413M	0	2	0	8	0	2	0.1	2	1	47	5983	0	-5
B 421B?	0	14	0	21	0	3	0.1	4	1	15	3678	0	-6
C 429B?	0	2	0	2	0	4	-	-	-	-	-	-	220
D 438M	0	9	0	14	0	4	0.1	1	1	14	3860	0	140
E 459B?	0	13	0	23	0	4	0.1	0	1	2	2930	0	-7
F 468B?	0	2	1	2	0	2	-	-	-	-	-	-	-7
G 474B?	0	25	1	53	0	8	0.1	3	1	7	3035	0	0
H 478B?	0	34	1	53	0	8	0.1	6	1	3	2499	0	0
I 538B?	1	2	1	2	0	3	-	-	-	-	-	-	0
J 558S?	1	16	2	26	0	4	0.1	0	1	2	3463	0	40
K 579S	4	13	9	22	0	5	0.3	0	1	17	968	0	0
L 602M	0	18	0	17	0	3	0.1	0	1	25	4809	0	0
M 610B?	0	18	3	2	0	4	1.0	66	1	9	3981	0	0
N 620B?	6	16	7	19	0	4	0.3	0	1	23	1420	0	-7
O 650B?	1	2	1	2	0	3	-	-	-	-	-	-	0
P 664M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 676B?	0	7	0	9	0	2	0.1	0	1	20	4393	0	0
R 680M	1	2	0	2	0	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10350	(FLIGHT	10)											
S 689M	12	18	21	64	0	7	0.7	24	1	10	3078	0	20
T 695B?	12	35	21	64	0	11	0.4	2	1	26	839	0	0
U 698B?	12	35	21	64	0	11	0.4	0	1	16	743	0	-6
V 720S?	0	36	0	71	0	10	0.1	7	1	0	1929	0	-5
W 729S?	2	24	13	69	0	11	0.2	0	1	0	3055	0	0
X 735S?	11	19	13	59	0	10	0.6	18	1	20	976	0	0
Y 756D	4	8	0	6	0	2	0.4	19	1	23	5640	0	-5
Z 774M	1	2	1	2	0	3	-	-	-	-	-	-	370
AA 784S	10	10	10	19	0	5	1.1	16	1	13	1348	0	-5
AB 795M	10	12	8	15	0	3	0.9	23	1	12	4206	0	140
AC 818M	0	2	0	2	0	2	-	-	-	-	-	-	0
AD 826M	0	2	0	2	0	1	-	-	-	-	-	-	80
AE 837M	0	10	0	8	0	1	0.1	0	1	31	5497	0	0
AF 849S?	0	16	0	35	0	6	0.1	0	1	6	3664	0	140
AG 864M	0	3	0	5	0	1	0.1	1	1	45	5959	0	0
AH 874B?	0	5	0	13	0	1	0.1	0	1	28	5694	0	1190
AI 881B?	0	12	0	13	0	2	0.1	2	1	29	5008	0	-4
AJ 891M	0	6	0	15	0	2	0.1	0	1	38	5996	0	50
AK 900B?	0	13	0	17	0	2	0.1	4	1	20	4125	0	-160
AL 916D	0	31	0	22	0	3	0.1	2	1	6	3111	0	15
AM 950M	0	2	0	4	0	1	0.1	0	1	39	6087	0	300
AN 962M	0	2	0	12	0	1	0.1	6	1	71	6645	2	-6
AO 980M	0	2	0	9	0	3	0.1	1	1	10	3592	0	0
AP 987B?	0	8	0	20	0	3	0.1	0	1	16	4206	0	0
AQ 1020S?	0	6	0	8	0	1	0.1	0	1	36	5732	0	13
AR 1079B?	1	0	0	2	0	3	-	-	-	-	-	-	0
AS 1100S?	0	2	0	2	0	4	-	-	-	-	-	-	-5
AT 1130S?	0	3	0	8	0	4	0.1	10	1	22	3763	0	-5
AU 1184M	0	2	0	2	0	1	-	-	-	-	-	-	0
AV 1216S?	1	8	2	18	0	6	0.1	5	1	35	4992	0	1300
AW 1257M	0	2	0	4	0	1	0.1	7	1	80	6916	5	0
AX 1276M	0	3	0	6	0	1	0.1	6	1	71	6645	2	420
AY 1290M	0	2	0	7	0	1	0.1	0	1	68	6916	0	0
AZ 1305M	0	3	0	4	0	1	0.1	0	1	71	6916	0	0
BA 1316M	0	2	0	2	0	2	-	-	-	-	-	-	0
BB 1333M	0	3	1	10	0	2	0.1	0	1	72	7220	0	1370
BC 1343S?	0	8	0	15	0	2	0.1	0	1	17	5159	0	0
BD 1350M	0	3	0	4	0	1	0.1	0	1	67	6889	0	0
BE 1360B?	5	58	8	115	0	17	0.1	0	1	0	2145	0	0
BF 1386S?	4	9	7	19	0	2	0.3	7	1	0	2880	0	0

LINE 10354	(FLIGHT	44)											
A 4323S?	0	19	0	37	0	5	0.1	0	1	4	3146	0	-4

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10354	(FLIGHT	44)											
B 4298B?	0	7	0	30	0	4	0.1	0	1	26	5211	0	150
C 4293B?	0	12	1	31	0	4	0.1	0	1	14	4314	0	0
D 4241B?	24	26	37	23	6	14	1.3	0	1	34	156	13	-4
E 4236B?	8	9	37	2	5	14	0.9	8	1	41	152	18	-4
F 4232D	34	14	26	19	5	13	5.3	0	1	21	91	2	-160
G 4225D	8	14	29	15	5	10	0.5	8	1	45	299	19	70
H 4214D	8	8	9	19	2	4	1.1	9	1	38	187	14	0
I 4192B?	33	13	80	126	4	35	5.7	24	1	37	122	19	0
J 4182B?	1	2	1	2	2	4	-	-	-	-	-	-	-5
K 4175B?	7	12	18	18	5	4	0.6	17	1	24	1704	0	50
L 4165B?	0	2	1	2	0	1	-	-	-	-	-	-	0
M 4148B?	1	2	1	2	0	1	-	-	-	-	-	-	0
N 4136B?	3	5	6	8	1	2	0.6	16	1	45	1212	6	-4
O 4121S?	0	2	0	2	0	2	-	-	-	-	-	-	310
P 4092M	0	5	0	6	0	1	0.1	0	1	45	6021	0	0
Q 4000M	0	2	0	2	0	0	-	-	-	-	-	-	0
R 3980B?	0	2	0	2	0	2	-	-	-	-	-	-	0
S 3962S?	0	5	0	6	0	1	0.1	4	1	33	5229	0	-5
T 3950S?	1	1	1	2	0	1	-	-	-	-	-	-	0
U 3930M	0	1	0	1	0	1	0.1	0	1	43	5959	0	270
V 3922S?	0	10	0	18	0	4	0.1	1	1	21	4464	0	270
W 3909S?	0	2	0	2	0	3	-	-	-	-	-	-	0
X 3900B?	0	11	0	7	0	3	0.1	0	1	7	4738	0	0

LINE 10367	(FLIGHT	48)											
A 826S?	5	7	5	15	0	2	0.3	2	1	28	599	0	0
B 833B?	5	8	11	9	0	5	1.3	22	1	19	687	0	50
C 853S?	1	2	1	2	0	1	-	-	-	-	-	-	0
D 872S?	3	14	8	34	0	5	0.2	0	1	12	1464	0	30
E 916B?	7	13	9	48	0	7	0.5	12	1	14	784	0	0
F 926M	0	6	9	15	0	1	0.5	24	1	24	4393	0	110
G 935D	4	9	7	8	0	1	0.7	22	1	32	1384	0	0
H 959B?	3	13	1	27	0	4	0.1	7	1	19	2227	0	12
I 973B?	7	4	8	20	0	3	1.8	29	1	35	620	3	0
J 979B?	1	9	5	20	0	3	0.2	4	1	30	1312	0	90
K 997S	9	24	22	51	0	9	0.4	5	1	25	418	2	17
L 1014S	6	12	7	19	0	4	0.4	6	1	19	1423	0	0
M 1025B?	0	10	0	13	0	1	0.1	4	1	25	4551	0	0
N 1032S?	1	2	0	4	0	1	0.3	62	1	10	4281	0	0
O 1042B?	7	14	15	22	0	7	0.4	11	1	17	1346	0	0
P 1045S?	2	20	15	22	0	6	0.7	7	1	17	786	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10367	(FLIGHT	48)											
Q 1068D	3	8	0	6	0	2	0.3	15	1	2	3693	0	400
R 1085S?	0	2	0	2	0	4	-	-	-	-	-	-	0
S 1099M	0	4	0	4	0	1	0.1	4	1	20	4105	0	0
T 1102M	0	8	0	13	0	0	0.1	2	1	23	4526	0	450
U 1104B?	0	8	0	17	0	2	0.1	1	1	17	4105	0	1380
V 1110B?	0	14	0	36	0	3	0.1	1	1	3	2930	0	0
W 1114B?	0	22	0	36	0	4	0.1	4	1	0	2318	0	0
X 1127D	0	34	0	52	0	7	0.1	0	1	0	2058	0	0
Y 1135D	0	6	3	30	0	1	0.1	0	1	14	3894	0	0
Z 1143B?	3	6	4	7	0	0	0.4	32	1	12	3827	0	0
AA 1154M	1	4	1	3	0	2	0.2	49	1	4	3198	0	0
AB 1157B?	0	4	0	12	0	1	0.1	0	1	0	3246	0	320
AC 1161B?	1	12	0	12	0	1	0.1	0	1	0	2783	0	0
AD 1165B?	1	2	1	2	0	2	-	-	-	-	-	-	60
AE 1173B?	1	11	4	5	0	3	0.6	34	1	0	3484	0	0
AF 1180B?	1	2	0	2	0	1	-	-	-	-	-	-	0
AG 1250B?	1	2	0	2	0	2	-	-	-	-	-	-	17
AH 1286B?	3	4	0	2	0	0	0.4	36	1	53	6498	0	0
AI 1317S?	0	1	0	7	0	1	0.1	6	1	25	4359	0	0
AJ 1354M	0	4	0	5	0	2	0.1	0	1	28	5378	0	0

LINE 10368	(FLIGHT	48)											
A 1540M	0	1	0	2	0	0	-	-	-	-	-	-	0
B 1559S	6	5	15	13	0	7	1.2	34	1	21	646	0	200
C 1589S	0	2	0	2	0	2	-	-	-	-	-	-	17
D 1603B?	0	2	1	2	0	4	-	-	-	-	-	-	120
E 1607S	0	2	0	2	0	1	-	-	-	-	-	-	0
F 1631B?	6	12	8	16	0	2	0.5	22	1	29	1375	0	0
G 1650B?	1	15	0	21	0	3	0.1	0	1	9	3523	0	0
H 1659S?	0	2	0	2	0	2	-	-	-	-	-	-	0
I 1668S?	5	7	11	9	0	1	0.6	23	1	34	1006	0	0
J 1682B?	27	28	41	47	6	16	1.5	3	1	29	129	10	9
K 1694D	94	99	161	161	40	64	2.3	0	1	21	35	9	0
L 1697D	83	99	161	159	40	64	1.9	0	1	25	13	16	17
M 1705B	123	99	239	187	45	86	3.4	0	1	18	24	8	0
N 1712B?	23	35	36	76	14	10	0.9	4	1	36	272	13	0
O 1717M	8	32	24	76	0	10	0.2	6	1	1	2757	0	80
P 1723B?	4	18	12	28	0	4	0.4	10	1	28	956	0	0
Q 1727M	2	22	8	38	0	5	0.2	0	1	0	2286	0	130
R 1733S?	3	22	8	40	0	5	0.2	0	1	0	2250	0	0
S 1737M	0	11	1	40	0	4	0.1	4	1	5	2848	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	RESIS M	DEPTH OHM-M	DEPTH M	NT
LINE 10368	(FLIGHT	48)											
T 1744B?	3	8	3	30	0	2	0.1	0	1	7	2742	0	0
U 1752M	0	4	2	2	0	0	0.5	63	1	24	5302	0	0
V 1774D	2	9	0	6	0	1	0.1	12	1	22	4752	0	0
W 1793M	0	1	0	2	0	1	-	-	-	-	-	-	0
X 1810B?	1	7	1	12	0	1	0.1	0	1	20	4847	0	0
Y 1815M	0	4	1	12	0	1	0.1	0	1	22	5791	0	0
Z 1848M	0	3	0	2	0	1	0.1	10	1	69	6422	5	0
AA 1864S?	0	6	0	12	0	1	0.1	6	1	30	4809	0	0
AB 1913M	0	3	0	16	0	0	0.1	13	1	30	4206	0	0
AC 1977S?	0	11	0	20	0	2	0.1	0	1	11	3724	0	0
LINE 10370	(FLIGHT	11)											
A 3872M	0	1	0	2	0	2	0.1	0	1	70	7091	0	450
B 3865B?	0	2	0	2	0	1	-	-	-	-	-	-	0
C 3861B?	0	2	0	2	0	1	-	-	-	-	-	-	0
D 3834M	0	2	0	2	0	1	-	-	-	-	-	-	140
E 3702M	0	2	0	2	0	1	0.1	5	1	80	6972	3	0
F 3678M	0	1	0	2	0	1	-	-	-	-	-	-	0
G 3600S	1	2	1	2	0	3	-	-	-	-	-	-	420
H 3575S?	0	24	1	51	0	6	0.1	0	1	0	2340	0	0
I 3560B?	0	2	1	2	0	1	-	-	-	-	-	-	0
J 3556S?	0	2	0	2	0	3	-	-	-	-	-	-	0
K 3542B?	0	2	1	2	0	4	-	-	-	-	-	-	150
L 3539B?	1	16	9	31	0	5	0.3	0	1	15	1410	0	-6
M 3529S?	0	14	0	59	0	10	0.1	7	1	0	2104	0	0
N 3514S?	0	2	0	2	0	1	-	-	-	-	-	-	30
O 3491S?	0	7	0	19	0	2	0.1	0	1	0	2765	0	470
P 3486M	0	2	0	2	0	3	-	-	-	-	-	-	0
Q 3462D	10	20	30	13	5	9	0.5	4	1	23	243	2	0
R 3457B?	18	6	28	36	4	9	6.4	25	1	28	167	7	0
S 3453B	9	18	43	54	5	14	0.5	4	1	21	133	3	0
T 3435B?	15	8	35	16	11	14	3.1	16	1	25	72	9	0
U 3431D	1	2	1	2	2	4	-	-	-	-	-	-	0
V 3423D	123	134	173	213	43	81	2.4	3	1	22	82	8	13
W 3416D	38	107	84	135	20	15	0.6	0	1	17	88	2	0
X 3413D	57	79	84	135	20	15	1.4	0	1	25	80	10	0
Y 3378S?	0	2	1	2	0	3	-	-	-	-	-	-	130
Z 3376S?	0	2	1	2	0	3	-	-	-	-	-	-	0
LINE 10371	(FLIGHT	11)											
A 4665B?	4	9	0	20	0	3	0.3	18	1	0	2712	0	30

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	COND DEPTH
							RESIS DEPTH
							OHM-M
							M
							NT

LINE 10371	(FLIGHT	11)					
B 4663B?	4	11	0	20	0	3	0.3 10 . 1 0 3161 0 0
C 4635B?	3	12	0	0	0	2	0.2 8 . 1 10 3787 0 0
D 4618M	1	1	0	2	0	1	- - . - - - - 0
E 4590S	1	2	1	2	0	4	- - . - - - - 4
F 4566B?	1	4	0	4	0	6	0.1 28 . 1 21 4629 0 0
G 4555B?	0	3	0	11	0	2	0.1 8 . 1 28 4464 0 -5
H 4530S?	5	7	3	19	0	3	0.6 38 . 1 16 4048 0 110
I 4503M	0	2	0	2	0	1	- - . - - - - 0
J 4481B?	1	2	0	2	0	1	- - . - - - - 80
K 4467B?	9	19	12	39	0	6	0.4 9 . 1 10 2603 0 0
L 4464B?	2	17	1	39	0	6	0.1 0 . 1 2 3202 0 -5
M 4424D	11	21	14	19	0	4	0.6 0 . 1 21 733 0 -4
N 4407D	3	17	7	41	0	7	0.1 0 . 1 2 3417 0 180
O 4401B?	5	21	7	41	0	7	0.1 0 . 1 14 1531 0 0
P 4377B?	4	7	0	16	0	3	0.4 26 . 1 51 6367 0 -4
Q 4369D	1	2	1	2	0	2	- - . - - - - 0
R 4364B?	16	60	38	127	0	21	0.4 0 . 1 14 778 0 0
S 4360B?	19	60	38	127	0	21	0.4 0 . 1 18 353 0 0
T 4355B?	2	22	18	36	0	8	0.6 12 . 1 30 359 8 0
U 4324B?	2	6	3	9	0	1	0.1 0 . 1 21 3119 0 -9760
V 4317M	0	4	0	5	0	2	0.1 0 . 1 26 5732 0 0
W 4302M	0	3	0	10	0	2	0.1 0 . 1 39 5959 0 160
X 4299B?	0	8	0	11	0	3	0.1 0 . 1 28 5657 0 0
Y 4291S?	4	8	8	4	0	3	2.5 24 . 1 25 1020 0 0
Z 4272S	0	8	0	13	0	2	0.1 0 . 1 5 4010 0 0
AA 4262M	0	1	0	6	0	1	0.1 0 . 1 16 4795 0 1180
AB 4252M	8	16	21	90	0	16	0.5 18 . 1 3 2821 0 0
AC 4249B?	8	59	21	121	0	9	0.1 0 . 1 1 1027 0 0
AD 4242B?	0	13	5	121	0	9	0.1 0 . 1 0 1636 0 0
AE 4238B?	0	7	23	32	0	1	0.9 10 . 1 13 628 0 0
AF 4221M	0	1	0	30	0	1	0.1 0 . 1 17 4526 0 0
AG 4215B?	0	37	0	81	0	11	0.1 0 . 1 0 2371 0 -4
AH 4214B?	0	37	0	81	0	11	0.1 0 . 1 0 1886 0 0
AI 4203B?	0	8	0	14	0	1	0.1 0 . 1 8 3860 0 -4
AJ 4194B?	0	18	0	29	0	5	0.1 5 . 1 4 2681 0 0
AK 4190B?	0	8	0	8	0	1	0.1 3 . 1 0 2482 0 430
AL 4180S?	0	23	0	28	0	6	0.1 0 . 1 0 2349 0 0
AM 4167M	0	2	0	1	0	1	- - . - - - - 130
AN 4156B?	2	7	5	10	0	2	0.4 8 . 1 4 2276 0 0

LINE 10375	(FLIGHT	35)					
A 941S?	0	33	0	76	0	12	0.1 6 . 1 0 1604 0 0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10375	(FLIGHT	35)											
B 937M	0	30	0	98	0	12	0.1	9	1	0	1759	0	16
C 932S?	0	53	3	152	0	21	0.1	0	1	0	1197	0	90
D 917M	0	2	3	4	0	1	0.3	38	1	4	3634	0	0
E 909B?	4	7	5	39	0	7	0.1	0	1	4	2073	0	0
F 904B?	1	20	5	39	0	7	0.1	0	1	0	2013	0	0
G 897B?	0	35	0	27	0	4	0.1	12	1	2	1857	0	0
H 856B?	0	7	0	11	0	2	0.1	3	1	24	4501	0	0
I 826M	0	2	0	1	0	1	-	-	-	-	-	-	30
J 812M	0	2	0	3	0	1	0.1	0	1	25	5781	0	40
K 790B?	0	3	0	11	0	2	0.1	5	1	0	2335	0	0
L 775B?	0	9	0	32	0	5	0.1	0	1	3	3040	0	0
M 755S?	0	27	0	40	0	6	0.1	4	1	0	2379	0	30
N 718S?	0	2	0	2	0	1	-	-	-	-	-	-	0

LINE 10376	(FLIGHT	35)											
A 1482B?	0	10	0	39	0	6	0.1	0	1	7	3627	0	-4
B 1468S?	0	2	4	6	0	1	0.5	33	1	15	4463	0	-5
C 1405B?	2	5	1	11	0	1	0.2	33	1	33	985	3	0
D 1397B?	5	17	8	6	0	5	1.4	39	1	26	958	0	10

LINE 10380	(FLIGHT	11)											
A 1522B?	0	2	0	2	0	2	-	-	-	-	-	-	0
B 1539B?	0	3	0	16	0	3	0.1	12	1	20	3439	0	0
C 1548B?	0	13	0	8	0	2	0.1	8	1	32	4853	0	0
D 1589S?	0	10	0	17	0	2	0.1	0	1	5	4175	0	0
E 1598M	0	4	0	4	0	1	0.1	0	1	33	5751	0	0
F 1624S?	1	2	1	2	0	4	-	-	-	-	-	-	0
G 1639S?	0	10	2	18	0	3	0.1	0	1	0	2325	0	0
H 1651B?	8	27	9	51	0	8	0.3	3	1	0	1800	0	0
I 1661S?	2	16	11	30	0	4	0.4	8	1	0	1925	0	60
J 1666S?	6	41	11	64	0	9	0.1	0	1	0	1676	0	90
K 1674B?	3	14	9	27	0	4	0.3	2	1	0	2844	0	50
L 1685B?	5	17	8	31	1	6	0.3	2	1	23	857	0	0
M 1692B?	1	2	1	2	0	1	-	-	-	-	-	-	40
N 1697S?	7	21	8	38	0	8	0.3	0	1	17	900	0	0
O 1710M	0	2	0	2	0	3	-	-	-	-	-	-	190
P 1711B?	0	11	0	20	0	2	0.1	0	1	3	3235	0	0
Q 1713B?	0	2	0	2	0	2	-	-	-	-	-	-	0
R 1717B?	0	9	0	9	0	2	0.1	0	1	7	3439	0	0
S 1724B?	0	6	0	9	0	2	0.1	0	1	1	3709	0	0
T 1729B?	0	11	0	18	0	4	0.1	0	1	2	3213	0	660

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10380	(FLIGHT	11)											
U 1735B?	44	27	10	171	0	34	3.3	14	1	17	1211	0	0
V 1739B	91	180	174	341	16	70	1.1	0	1	14	153	0	0
W 1750S?	1	9	5	11	0	2	0.3	27	1	14	2054	0	0
X 1757D	0	13	4	28	0	4	0.1	0	1	4	3097	0	40
Y 1765B	57	92	113	177	7	41	1.2	1	1	17	285	0	0
Z 1774B?	1	2	1	2	2	2	-	-	-	-	-	-	0
AA 1775B?	25	5	39	86	8	21	12.6	29	1	27	182	8	0
AB 1789B?	0	2	1	2	0	3	-	-	-	-	-	-	30
AC 1798M	0	2	0	3	0	1	0.1	2	1	18	4067	0	0
AD 1806M	0	3	0	7	0	2	0.1	1	1	22	4513	0	160
AE 1811B?	0	4	0	1	0	1	0.1	1	1	23	4655	0	0
AF 1820B?	0	14	0	25	0	2	0.1	7	1	11	3121	0	0
AG 1824B?	0	6	0	13	0	2	0.1	2	1	1	2684	0	0

LINE 10381	(FLIGHT	12)											
A 4918M	0	6	0	9	0	2	0.1	0	1	22	5359	0	4
B 4915M	0	6	0	13	0	2	0.1	0	1	14	4417	0	0
C 4908B?	0	2	1	2	0	1	-	-	-	-	-	-	0
D 4900M	0	1	3	4	0	1	0.4	50	1	17	4336	0	5
E 4893S?	2	12	5	8	0	3	0.5	20	1	7	2831	0	2780
F 4862S?	0	9	6	24	0	3	0.2	0	1	5	2622	0	0
G 4859B?	1	2	1	2	0	2	-	-	-	-	-	-	100
H 4848M	0	3	0	8	0	1	0.1	0	1	23	4824	0	260
I 4822M	0	3	0	3	0	0	0.1	0	1	38	5935	0	0
J 4805S?	1	2	0	2	0	1	-	-	-	-	-	-	0
K 4797S?	4	2	1	8	0	1	2.4	40	1	4	4990	0	0
L 4766S?	1	2	1	2	0	2	-	-	-	-	-	-	5
M 4716S?	11	50	14	96	0	18	0.3	0	1	26	149	7	0
N 4703S	3	9	4	18	0	3	0.1	0	1	27	1109	0	0
O 4665M	0	10	0	17	0	1	0.1	0	1	15	4883	0	0
P 4662B?	0	2	1	2	0	2	-	-	-	-	-	-	0
Q 4658B?	3	26	18	49	0	7	0.4	0	1	0	1594	0	8
R 4627M	0	2	0	2	0	1	-	-	-	-	-	-	0
S 4561S?	1	2	1	2	0	3	-	-	-	-	-	-	0
T 4531S?	0	2	0	2	0	2	-	-	-	-	-	-	0
U 4518B?	0	2	0	2	0	1	-	-	-	-	-	-	6
V 4481B	8	20	5	6	1	3	0.4	10	1	29	730	2	0
W 4477B	9	15	6	22	1	3	0.6	18	1	31	606	4	0
X 4464S?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 4384M	0	2	0	9	0	1	0.1	0	1	40	5844	0	140
Z 4376M	0	4	0	5	0	1	0.1	0	1	42	6074	0	13

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 10381	(FLIGHT	12)											
AA 4359D	5	13	8	18	0	3	0.3	0	1	18	1473	0	0
LINE 10385	(FLIGHT	35)											
A 288B?	4	6	4	7	0	1	0.4	0	1	16	1999	0	-5
B 306S?	0	8	3	14	0	3	0.1	4	1	18	4186	0	0
C 356S?	1	2	1	2	0	3	-	-	-	-	-	-	7
D 366S?	0	2	1	2	0	2	-	-	-	-	-	-	150
E 404B?	0	2	0	2	0	2	-	-	-	-	-	-	0
LINE 10390	(FLIGHT	11)											
A 1036M	0	2	0	6	0	1	0.1	2	1	35	5517	0	0
B 1011M	0	2	0	2	0	1	-	-	-	-	-	-	1220
C 968B?	7	28	48	56	11	19	0.2	0	1	47	69	30	0
D 954B?	44	59	91	111	12	35	1.3	3	1	29	60	15	7
E 949B?	1	2	0	2	1	4	-	-	-	-	-	-	-6
F 942S?	13	8	3	13	0	5	2.2	28	1	29	277	7	0
G 920B?	7	15	18	33	0	6	0.4	6	1	18	601	0	0
H 897D	25	30	32	25	9	22	1.2	0	1	30	387	4	0
I 892D	73	76	101	128	13	34	2.1	0	1	23	140	6	0
J 867D	5	16	19	30	1	7	0.3	1	1	24	602	0	0
K 864B?	1	2	1	2	1	4	-	-	-	-	-	-	0
L 858D	19	13	24	29	6	11	2.1	18	1	31	196	10	0
M 856D	15	10	24	29	6	11	2.3	22	1	39	193	17	0
N 847D	31	9	8	68	3	33	8.1	21	1	27	106	10	0
O 843D	46	9	8	14	4	7	16.7	18	1	28	83	13	0
P 837D	44	29	20	36	4	6	3.0	13	1	29	111	12	0
Q 834D	47	42	18	56	2	24	2.2	13	1	20	338	0	80
R 826S?	0	11	0	87	0	4	0.1	9	1	0	1524	0	-6
S 803S?	0	10	6	22	0	3	0.2	0	1	7	2139	0	190
T 790B?	0	5	0	20	0	1	0.1	0	1	16	4602	0	30
U 786B?	0	8	0	20	0	3	0.1	6	1	16	3564	0	-4
V 782M	0	6	0	20	0	2	0.1	4	1	28	4738	0	0
W 772M	0	5	0	4	0	1	0.1	1	1	36	5657	0	4
X 750B?	0	17	3	30	0	5	0.1	0	1	6	2955	0	0
Y 741M	0	1	0	13	0	2	0.1	1	1	44	5900	0	0
Z 730B?	8	24	37	63	0	17	0.4	4	1	28	620	1	20
AA 728D	8	26	37	63	0	17	0.3	0	1	28	295	4	0
AB 696M	0	2	0	2	0	1	-	-	-	-	-	-	0
AC 664M	0	3	0	2	0	1	0.1	0	1	94	7935	0	0
AD 618M	0	4	0	5	0	1	0.5	0	1	165	993	0	0
LINE 10392	(FLIGHT	12)											
A 3369M	0	5	0	7	0	2	0.1	5	1	29	4795	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10392	(FLIGHT	12)											
B 3382M	0	30	0	64	0	9	0.1	7	1	0	1988	0	540
C 3383B?	0	25	0	64	0	9	0.1	5	1	0	2051	0	0
D 3397S?	0	6	0	23	0	3	0.1	9	1	14	3172	0	520
E 3406B?	0	9	0	14	0	2	0.1	0	1	7	3739	0	0
F 3409M	0	4	0	31	0	2	0.1	0	1	13	3819	0	20
G 3414S?	0	22	0	39	0	5	0.1	3	1	0	2313	0	50
H 3423B?	0	10	1	28	0	2	0.1	0	1	11	4084	0	0
I 3436M	0	2	0	2	0	1	-	-	-	-	-	-	350
J 3439S?	0	9	0	15	0	3	0.1	0	1	14	4489	0	70
K 3447B?	0	24	2	20	0	6	0.1	0	1	0	2368	0	0
L 3449B?	1	11	4	38	0	6	0.1	0	1	0	2357	0	13
M 3453B?	1	18	4	38	0	7	0.1	0	1	13	2686	0	14
N 3465B?	0	3	0	4	0	0	0.1	0	1	14	5791	0	0
O 3470M	0	3	0	10	0	0	0.1	0	1	39	6021	0	560
P 3482D	0	12	0	1	0	5	0.1	5	1	2	2468	0	410
Q 3487D	0	18	0	28	0	4	0.1	0	1	3	3497	0	0
R 3494B?	0	2	0	8	0	1	0.1	7	1	27	4393	0	0
S 3503B?	0	9	0	21	0	4	0.1	0	1	32	5657	0	11
T 3534S	1	1	1	2	0	4	-	-	-	-	-	-	0
U 3554S?	1	2	1	2	0	3	-	-	-	-	-	-	0
V 3583S?	11	52	6	103	0	15	0.2	0	1	16	633	0	70
W 3612S	0	2	0	2	0	2	-	-	-	-	-	-	10
X 3643M	0	4	0	7	0	3	0.1	2	1	17	4076	0	1340
Y 3654B?	0	15	0	22	0	3	0.1	0	1	0	3172	0	340
Z 3657B?	0	2	0	2	0	2	-	-	-	-	-	-	0
AA 3664M	0	4	0	10	0	1	0.1	7	1	10	3063	0	320
AB 3674B?	0	41	0	27	0	10	0.1	8	1	0	1629	0	1170
AC 3681B?	0	10	0	24	0	6	0.1	6	1	0	1913	0	0
AD 3684B?	0	10	0	10	0	5	0.1	1	1	0	2268	0	70
AE 3689B?	0	9	0	8	0	5	0.1	0	1	0	2802	0	120
AF 3693B?	0	11	0	5	0	5	0.1	2	1	19	4175	0	9
AG 3710S	0	12	0	22	0	3	0.1	0	1	0	3613	0	0
AH 3720M	0	2	0	2	0	0	-	-	-	-	-	-	0
AI 3737S	4	13	12	4	0	3	4.3	33	1	26	860	0	0
AJ 3766S?	1	2	1	2	0	4	-	-	-	-	-	-	16
AK 3786B?	10	8	10	28	0	7	1.4	19	1	25	406	0	0
AL 3793B?	1	9	18	29	0	6	0.7	6	1	15	1738	0	0
AM 3807B?	0	2	1	2	0	2	-	-	-	-	-	-	0
AN 3810M	0	3	0	18	0	2	0.1	0	1	1	3877	0	0
AO 3846D	6	4	3	7	0	1	2.0	22	1	64	507	28	9
AP 3853B?	1	2	1	2	0	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10392		(FLIGHT 12)													
AQ	3892B?	1	2	1	2	0	1	-	-	-	-	-	-	-	0
AR	3954M	0	2	0	2	0	0	-	-	-	-	-	-	-	0
AS	3983B?	6	10	3	7	0	2	0.5	0	1	2	4062	0	0	0
AT	3991B?	1	2	1	2	0	0	-	-	-	-	-	-	-	0
AU	4007B?	1	5	3	27	0	4	0.1	0	1	16	3051	0	0	0
LINE 10400		(FLIGHT 12)													
A	3260S?	3	17	16	45	0	6	0.4	3	1	26	794	0	970	
B	3249B?	0	20	4	33	0	5	0.1	0	1	0	3122	0	220	
C	3245M	0	20	4	33	0	5	0.1	0	1	3	3059	0	0	
D	3233M	1	2	1	2	0	1	-	-	-	-	-	-	0	
E	3211S?	3	17	6	33	0	5	0.1	0	1	10	1813	0	0	
F	3175M	0	5	0	9	0	1	0.1	0	1	23	5359	0	0	
G	3167M	2	10	0	18	0	2	0.1	3	1	14	4135	0	0	
H	3164B?	2	10	0	18	0	2	0.1	0	1	26	5601	0	0	
I	3156M	0	4	0	10	0	2	0.1	0	1	24	4868	0	9	
J	3145B?	3	10	4	24	0	3	0.1	2	1	13	3517	0	9	
K	3141B?	3	11	4	20	0	3	0.1	0	1	25	2318	0	0	
L	3105S	1	2	1	2	0	2	-	-	-	-	-	-	0	
M	3075B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
N	3069B?	8	33	21	57	0	10	0.3	0	1	16	972	0	110	
O	3034M	1	2	1	2	0	1	-	-	-	-	-	-	190	
P	3017M	1	2	1	2	0	1	-	-	-	-	-	-	350	
Q	3011S?	4	10	7	27	0	4	0.2	0	1	23	1308	0	80	
R	3007B?	4	14	7	27	0	4	0.2	0	1	1	3383	0	0	
S	2995S?	0	2	1	2	0	3	-	-	-	-	-	-	0	
T	2984B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
U	2979B?	0	10	0	15	0	2	0.1	0	1	8	4165	0	0	
V	2957S?	0	2	0	2	0	4	-	-	-	-	-	-	0	
W	2937M	0	2	0	2	0	0	-	-	-	-	-	-	410	
X	2920B?	0	3	0	8	0	2	0.1	0	1	39	6299	0	0	
Y	2915D	8	12	19	19	0	4	0.7	11	1	9	4752	0	710	
Z	2909S?	1	2	1	2	0	4	-	-	-	-	-	-	0	
AA	2874S?	1	2	1	2	0	2	-	-	-	-	-	-	0	
AB	2861M	2	4	5	6	0	1	0.7	35	1	7	4086	0	110	
AC	2850M	0	9	4	16	0	2	0.2	0	1	3	4155	0	540	
AD	2832M	0	1	1	2	0	2	-	-	-	-	-	-	510	
AE	2826B?	10	3	6	10	0	2	4.1	1	1	66	610	25	0	
AF	2812S?	1	2	1	2	1	3	-	-	-	-	-	-	7	
AG	2780B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
AH	2761B?	5	15	2	13	0	2	0.3	5	1	44	1045	9	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN M	COND DEPTH .SIEMEN M	RESIS OHM-M	DEPTH M	NT		

LINE 10400	(FLIGHT	12)											
AI 2730S?	2	9	5	14	1	3	0.3	5	1	13	4501	0	0
AJ 2434S?	0	6	0	14	0	2	0.1	0	1	20	4577	0	0
AK 2422M	0	1	0	1	0	1	0.1	0	1	25	5041	0	0
AL 2387S?	2	8	0	14	0	2	0.1	1	1	24	5741	0	0
AM 2384S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AN 2370S?	8	6	10	11	0	2	1.5	29	1	41	833	7	0
AO 2358B?	1	2	1	2	0	4	-	-	-	-	-	-	490
AP 2355B?	17	18	31	28	3	9	1.2	10	1	42	227	18	0
AQ 2349B?	23	19	46	36	4	15	1.8	13	1	43	138	23	0
AR 2341D	14	15	63	26	4	13	1.2	20	1	43	96	25	0
AS 2338B?	14	15	63	26	4	13	1.2	23	1	46	116	27	0
AT 2295S?	6	8	6	16	0	4	0.6	24	1	34	586	5	0
AU 2289S?	1	2	1	2	1	3	-	-	-	-	-	-	290
AV 2273S	7	28	24	56	3	9	0.2	0	1	37	251	14	0
AW 2265D	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 2258D	44	50	70	68	10	23	1.6	0	1	31	103	14	6
AY 2253D	46	50	102	84	10	34	1.7	0	1	32	57	17	8
AZ 2244D	46	28	102	47	10	34	3.4	2	1	41	118	21	0
BA 2211H	11	15	22	25	2	9	0.7	3	1	46	249	20	170
BB 2176M	0	2	0	2	0	2	-	-	-	-	-	-	0
BC 2156B?	4	18	13	29	0	5	0.4	0	1	43	1334	3	0
BD 2150S?	1	2	1	2	0	4	-	-	-	-	-	-	0

LINE 10410	(FLIGHT	12)											
A 4983B?	1	22	5	21	0	1	0.2	7	1	3	2641	0	0
B 4986B?	0	23	2	53	0	7	0.1	4	1	6	2572	0	0
C 5009M	0	2	0	2	0	0	0.1	4	1	67	6580	0	0
D 5019B?	0	12	1	7	0	3	0.1	4	1	11	4301	0	0
E 5032B?	2	18	10	29	0	6	0.3	0	1	14	1460	0	0
F 5037S?	1	19	3	32	0	6	0.1	0	1	17	1152	0	0
G 5045B?	1	2	1	2	0	3	-	-	-	-	-	-	0
H 5048B?	2	13	7	16	0	4	0.4	16	1	41	751	11	0
I 5056B?	15	12	54	20	5	15	1.7	19	1	53	138	31	0
J 5059B?	1	2	1	2	2	4	-	-	-	-	-	-	0
K 5073B?	4	21	9	70	0	10	0.1	0	1	5	1947	0	0
L 5078D	2	37	13	70	0	10	0.2	0	1	6	1196	0	0
M 5082D	0	8	0	70	0	1	0.1	0	1	0	2644	0	0
N 5087B?	0	28	0	58	0	8	0.1	0	1	0	2104	0	0
O 5089B?	0	2	0	2	0	4	-	-	-	-	-	-	0
P 5099M	0	5	0	7	0	1	0.1	0	1	11	4564	0	0
Q 5107B?	0	9	0	24	0	4	0.1	0	1	15	4057	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10410	(FLIGHT	12)											
R 5110M	0	9	0	24	0	4	0.1	1	1	7	3296	0	0
S 5116B?	0	21	9	39	0	5	0.2	0	1	0	3501	0	0
T 5130S?	1	9	5	12	0	2	0.3	11	1	9	4125	0	0
U 5150S?	1	2	1	2	0	2	-	-	-	-	-	-	0
V 5175B?	1	2	1	1	0	0	-	-	-	-	-	-	0
W 5189B?	13	25	27	10	0	9	0.6	0	1	27	504	0	0
X 5204S?	0	2	1	2	0	3	-	-	-	-	-	-	0
Y 5229M	0	2	0	2	0	0	-	-	-	-	-	-	0
Z 5248M	0	5	0	19	0	3	0.1	0	1	8	3912	0	0
AA 5254B?	0	10	0	12	0	3	0.1	0	1	0	3503	0	0
AB 5257B?	0	2	0	2	0	3	-	-	-	-	-	-	0
AC 5265B?	3	20	3	31	0	5	0.1	0	1	0	2634	0	0
AD 5276B?	8	34	11	52	0	8	0.2	0	1	8	1486	0	0
AE 5281B?	8	16	11	52	0	8	0.5	24	1	9	2934	0	0
AF 5285B?	0	2	0	2	0	4	-	-	-	-	-	-	0
AG 5296B?	0	8	0	14	0	3	0.1	3	1	28	4929	0	0
AH 5316M	0	5	0	12	0	2	0.1	4	1	23	4370	0	0
AI 5331M	0	2	0	2	0	4	-	-	-	-	-	-	0
AJ 5339S?	0	17	0	29	0	4	0.1	0	1	0	3230	0	0
AK 5353B?	3	7	1	17	0	2	0.3	17	1	19	5247	0	0
AL 5364B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AM 5420M	1	2	0	2	0	1	-	-	-	-	-	-	0
AN 5464M	5	14	11	25	0	5	0.4	0	1	0	4808	0	0
AO 5481B?	8	17	15	41	0	5	0.5	7	1	44	617	13	0
AP 5486S?	3	24	12	41	0	5	0.3	0	1	21	1066	0	0
AQ 5522S	1	2	1	2	0	2	-	-	-	-	-	-	0
AR 5545S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AS 5600M	0	2	0	2	0	0	-	-	-	-	-	-	0
AT 5620M	0	2	0	2	0	2	-	-	-	-	-	-	0
AU 5742M	0	9	0	19	0	3	0.1	0	1	10	4370	0	0
AV 5745D	0	8	1	19	0	2	0.1	0	1	21	5229	0	0
AW 5764B?	0	7	0	2	0	2	0.5	0	1	167	993	0	0
AX 5778M	0	2	0	2	0	2	-	-	-	-	-	-	0
AY 5842S?	1	20	16	40	1	6	0.4	0	1	33	605	4	0
AZ 5847B?	0	2	1	2	0	4	-	-	-	-	-	-	0
BA 5850M	0	2	1	2	0	4	-	-	-	-	-	-	0
BB 5857M	0	2	8	1	1	0	12.2	45	1	53	2172	7	0
BC 5877S	0	2	1	2	1	2	-	-	-	-	-	-	0
BD 5892M	0	2	1	2	0	2	-	-	-	-	-	-	0
BE 5940B	8	13	21	17	0	6	0.6	8	1	53	332	25	0
BF 5959B	1	24	13	39	0	6	0.3	0	1	18	1501	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10410	(FLIGHT	12)											
BG 5966D	1	2	1	2	0	4	-	-	-	-	-	-	0
BH 5973D	1	2	1	2	2	4	-	-	-	-	-	-	0
BI 5979D	11	19	8	15	3	5	0.6	4	1	59	316	30	0
BJ 5988D	16	13	7	7	5	11	1.6	10	1	50	115	29	0
BK 5994B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BL 6000B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BM 6057S?	2	24	7	47	0	8	0.1	0	1	28	931	1	0
BN 6084M	0	16	0	23	0	3	0.1	2	1	21	4382	0	0
BO 6086B?	0	16	0	23	0	3	0.1	5	1	23	4336	0	0
BP 6094M	0	4	0	11	0	2	0.1	2	1	47	5959	0	0
BQ 6103M	0	10	0	21	0	1	0.1	0	1	67	6786	0	0
BR 6107S	0	2	0	2	0	3	-	-	-	-	-	-	0
BS 6118M	0	2	0	2	0	2	-	-	-	-	-	-	0
BT 6158M	0	6	0	11	0	2	0.1	0	1	35	5761	0	0
BU 6172S?	2	21	4	37	0	6	0.1	0	1	4	3396	0	0

LINE 10420	(FLIGHT	13)											
A 1345B?	1	2	1	2	0	4	-	-	-	-	-	-	0
B 1317M	0	34	8	29	0	8	0.2	5	1	0	2507	0	0
C 1311S?	0	34	1	57	0	9	0.1	0	1	0	1931	0	0
D 1294S?	4	19	11	30	0	5	0.4	0	1	18	1076	0	0
E 1285D	21	32	35	86	1	13	0.9	9	1	21	390	0	0
F 1272M	1	28	14	42	0	6	0.3	0	1	14	3894	0	0
G 1269D	0	28	0	44	0	6	0.1	0	1	0	2545	0	-7
H 1262S?	0	22	6	40	0	5	0.1	0	1	10	1977	0	230
I 1260S?	0	39	3	74	0	10	0.1	0	1	3	2744	0	1520
J 1256S?	0	39	3	74	0	10	0.1	0	1	0	1732	0	1600
K 1243S?	2	28	2	42	0	8	0.1	0	1	0	2449	0	0
L 1235B?	0	16	0	21	0	3	0.1	0	1	6	3716	0	270
M 1217M	0	9	0	28	0	4	0.1	1	1	26	4899	0	0
N 1213S?	0	2	0	2	0	4	-	-	-	-	-	-	170
O 1190S?	3	9	6	1	0	2	8.2	57	1	29	1414	0	0
P 1155B?	11	7	19	10	2	5	1.9	4	1	44	232	17	0
Q 1149B?	4	20	19	31	2	6	0.7	6	1	19	1722	0	60
R 1127S?	2	9	2	14	0	2	0.1	8	1	17	4616	0	0
S 1101M	1	1	0	4	0	1	0.4	80	1	52	6478	0	-7
T 1076S?	1	21	10	43	0	7	0.2	0	1	0	2638	0	1000
U 1073S?	1	21	10	43	0	7	0.2	0	1	15	1503	0	0
V 1067S?	5	16	14	27	0	5	0.5	0	1	15	944	0	-6
W 1059D	0	15	13	26	0	4	0.5	13	1	6	2986	0	0
X 1056M	0	15	0	26	0	2	0.1	1	1	14	3787	0	2580

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL QUAD		REAL QUAD		REAL QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE	10420	(FLIGHT 13)												
Y	1044S?	0	15	0	24	0	3	0.1	2	1	6	3078	0	0
Z	1029B?	0	12	0	23	0	3	0.1	0	1	3	3177	0	0
AA	1025M	0	11	0	21	0	3	0.1	0	1	0	3213	0	270
AB	1008S?	2	34	11	67	0	9	0.2	0	1	0	1961	0	0
AC	992S	2	6	4	22	0	4	0.1	0	1	17	1497	0	0
AD	946M	0	6	0	9	0	2	0.1	0	1	29	5959	0	0
AE	943B?	0	2	0	2	0	2	-	-	-	-	-	-	0
AF	934B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AG	919B?	3	14	4	28	0	6	0.1	0	1	34	848	4	0
AH	912B?	7	9	4	15	0	5	0.8	9	1	33	566	2	0
AI	900S?	1	11	4	27	0	5	0.1	0	1	6	2911	0	-4
AJ	896M	1	11	3	20	0	4	0.1	0	1	11	4048	0	0
AK	856B?	0	17	0	39	0	6	0.1	2	1	6	3097	0	15
AL	838S?	0	2	0	2	0	3	-	-	-	-	-	-	0
AM	812M	0	2	0	2	0	1	-	-	-	-	-	-	0
AN	776S?	0	16	0	34	0	4	0.1	10	1	16	3330	0	0
AO	753M	0	2	0	3	0	1	0.1	0	1	66	7060	0	-6
AP	669B?	0	13	2	28	0	4	0.1	0	1	20	4809	0	-6
AQ	666B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AR	663B?	0	2	0	2	0	4	-	-	-	-	-	-	110
AS	652M	0	3	0	5	0	1	0.1	0	1	9	4238	0	410
AT	643S?	0	10	2	32	0	4	0.1	0	1	14	3555	0	0
AU	623B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AV	561D	3	21	6	31	0	4	0.1	0	1	0	3757	0	30
AW	555D	0	13	1	31	0	0	0.1	0	1	7	3724	0	230
AX	548D	1	2	1	2	0	4	-	-	-	-	-	-	570
AY	545D	9	15	16	24	0	4	0.6	1	1	23	854	0	0
AZ	529S?	1	13	3	7	0	4	0.2	10	1	5	3383	0	0
BA	497S?	0	2	0	2	0	2	-	-	-	-	-	-	0
BB	485S?	0	2	0	2	0	2	-	-	-	-	-	-	50
BC	430S?	2	3	1	6	0	1	0.3	23	1	21	6158	0	0
BD	385S?	1	2	1	2	0	3	-	-	-	-	-	-	0
BE	227B?	1	2	0	2	0	1	-	-	-	-	-	-	0
BF	217B?	1	2	1	2	0	1	-	-	-	-	-	-	-4
BG	181S?	4	12	5	22	0	3	0.2	0	1	27	2024	0	0
BH	174S?	4	12	8	31	0	5	0.2	6	1	9	2921	0	0
BI	158S?	2	15	9	31	0	4	0.3	0	1	0	2905	0	0
BJ	129M	0	2	0	5	0	3	0.1	0	1	29	6034	0	610
BK	105S?	1	2	1	0	0	2	-	-	-	-	-	-	0

LINE	10430	(FLIGHT 14)												
A	740S?	1	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT

LINE 10430	(FLIGHT 14)										
B 758B?	1	2	1	2	2	3	-	-	-	-	0
C 767B?	0	4	0	6	0	1	0.1	0	1	38 5923	0 0
D 775B?	3	11	5	27	0	4	0.1	0	1	12 2086	0 0
E 778S?	3	12	0	21	0	4	0.2	7	1	0 3013	0 0
F 821S?	1	2	1	2	0	4	-	-	-	-	0

LINE 10431	(FLIGHT 14)										
A 174M	0	1	0	2	0	0	-	-	-	-	0
B 202M	1	2	1	2	0	1	-	-	-	-	140
C 306M	0	2	0	2	0	1	0.1	0	1	51 6299	0 1300
D 330M	0	2	0	2	0	2	-	-	-	-	0
E 351S?	0	2	0	2	0	1	-	-	-	-	-6
F 366M	1	2	1	2	0	1	-	-	-	-	0
G 368D	0	6	0	2	0	1	0.1	0	1	3 5141	0 380
H 392M	0	2	0	2	0	1	-	-	-	-	0
I 398B?	0	10	0	15	0	2	0.1	0	1	0 4292	0 30
J 410M	0	2	0	4	0	1	0.1	0	1	28 5732	0 0
K 426M	0	2	5	28	0	0	0.1	0	1	39 5923	0 0
L 436B?	7	26	17	49	0	7	0.3	0	1	11 1054	0 160
M 441B?	7	26	17	49	0	7	0.3	0	1	33 583	2 0
N 449M	4	10	15	20	0	4	0.8	17	1	16 4135	0 0
O 513B?	18	19	25	31	0	17	1.2	11	1	27 183	7 0
P 515B?	18	41	25	31	0	17	0.6	0	1	21 218	1 0
Q 539B?	1	2	1	2	0	1	-	-	-	-	0
R 553B?	0	12	0	25	0	4	0.1	2	1	10 3477	0 0
S 612B?	0	8	0	18	0	3	0.1	0	1	10 4589	0 0
T 618M	0	10	0	20	0	3	0.1	0	1	5 3426	0 0
U 626M	0	2	2	20	0	1	0.1	0	1	28 5041	0 120
V 631S	0	7	2	10	0	2	0.1	3	1	12 3755	0 -5
W 696B?	0	2	1	2	1	4	-	-	-	-	0
X 699B?	17	39	38	71	0	6	0.5	0	1	26 270	4 0
Y 711B?	19	22	65	83	2	20	1.2	11	1	28 170	8 0
Z 714B?	19	31	65	83	1	20	0.8	4	1	24 125	6 0
AA 748M	0	3	0	4	0	1	0.1	0	1	21 6060	0 270
AB 790B?	8	20	21	40	1	7	0.4	0	1	18 474	0 0
AC 811S?	0	2	1	2	0	3	-	-	-	-	0
AD 916M	0	1	0	2	0	1	-	-	-	-	0
AE 946M	0	2	0	2	0	1	-	-	-	-	0
AF 999D	1	2	1	2	0	2	-	-	-	-	-100
AG 1024D	1	2	1	2	1	3	-	-	-	-	0
AH 1028D	7	13	1	9	1	2	0.5	0	1	41 529	8 0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR		
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT		
LINE 10431		(FLIGHT 14)														
AI	1042D	10	10	8	11	1	2	1.1	0	1	28	308	0	0		
AJ	1052D	1	2	1	2	1	4	-	-	-	-	-	-	0		
AK	1055D	11	14	11	20	1	4	0.9	16	1	51	486	21	0		
AL	1214S?	1	2	1	2	0	2	-	-	-	-	-	-	40		
AM	1225S?	3	11	3	29	0	4	0.1	0	1	9	3268	0	0		
AN	1246B?	4	34	12	66	0	13	0.2	0	1	0	1967	0	0		
AO	1261S?	1	2	1	2	0	4	-	-	-	-	-	-	0		
AP	1272S?	0	12	0	31	0	5	0.1	6	1	7	2833	0	30		
AQ	1294S?	0	18	0	29	0	4	0.1	1	1	0	2371	0	0		
LINE 10440		(FLIGHT 14)														
A	2781B?	1	2	1	2	0	2	-	-	-	-	-	-	0		
B	2766B?	4	17	13	28	0	4	0.4	2	1	27	1047	0	0		
C	2761B?	4	12	13	28	0	3	0.4	0	1	14	1721	0	0		
D	2751M	0	12	9	30	0	5	0.3	0	1	4	3273	0	0		
E	2747S?	0	13	0	30	0	5	0.1	0	1	5	3471	0	0		
F	2724M	1	2	1	2	0	1	-	-	-	-	-	-	0		
G	2720B?	2	8	3	10	0	2	0.1	3	1	21	3179	0	0		
H	2717M	2	8	3	10	0	2	0.1	0	1	5	4347	0	0		
I	2703M	2	2	1	5	0	1	0.6	62	1	22	5247	0	0		
J	2698B?	0	5	0	6	0	1	0.1	0	1	31	5741	0	0		
K	2691M	3	2	0	4	0	1	0.8	64	1	25	5497	0	0		
L	2676S?	1	57	0	109	0	14	0.1	4	1	0	1545	0	0		
M	2671B?	1	28	2	109	0	14	0.1	0	1	2	2820	0	0		
N	2667M	1	28	2	109	0	14	0.1	0	1	3	3886	0	0		
O	2662M	0	4	0	14	0	2	0.1	3	1	34	5340	0	0		
P	2657M	4	2	5	7	0	1	0.6	37	1	27	5041	0	0		
Q	2642S?	0	35	0	69	0	9	0.1	9	1	3	2142	0	0		
R	2620M	2	3	0	5	0	1	0.5	65	1	50	5946	0	0		
S	2538M	1	2	0	2	0	1	0.1	19	1	50	6459	0	0		
T	2528M	0	2	0	5	0	1	0.1	0	1	42	6008	0	0		
U	2519M	0	9	1	16	0	1	0.1	0	1	27	5791	0	0		
V	2513S?	0	9	1	16	0	2	0.1	0	1	3	4133	0	0		
W	2491S?	0	2	0	2	0	4	-	-	-	-	-	-	0		
X	2481M	0	3	0	22	0	1	0.1	0	1	30	5302	0	0		
Y	2477B?	0	5	0	69	0	10	0.1	0	1	16	4752	0	0		
Z	2469B?	0	37	0	69	0	10	0.1	0	1	0	1953	0	0		
AA	2458M	0	9	0	16	0	1	0.1	4	1	21	4155	0	0		
AB	2457B?	0	9	0	16	0	2	0.1	5	1	17	3787	0	0		
AC	2455M	0	9	0	16	0	2	0.1	1	1	11	3613	0	0		
AD	2445B?	0	25	0	37	0	5	0.1	1	1	0	2557	0	0		

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10440	(FLIGHT	14)											
AE 2442B?	0	19	0	37	0	5	0.1	0	1	0	2471	0	0
AF 2435S?	0	21	0	54	0	9	0.1	8	1	3	2374	0	0
AG 2429S?	1	15	2	26	0	4	0.1	0	1	2	3497	0	0
AH 2376M	1	2	1	2	0	1	-	-	-	-	-	-	0
AI 2366M	2	4	4	5	0	1	0.6	32	1	30	5877	0	0
AJ 2359B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AK 2327B?	0	16	0	50	0	7	0.1	2	1	0	2142	0	0
AL 2311B?	0	4	0	38	0	6	0.1	7	1	20	3811	0	0
AM 2298B?	5	10	8	53	0	8	0.1	0	1	0	2530	0	0
AN 2244B?	0	10	0	14	0	2	0.1	5	1	32	5041	0	0
AO 2182S	0	21	1	37	0	5	0.1	0	1	2	3068	0	0
AP 2172S?	0	10	0	16	0	2	0.1	3	1	10	3371	0	0
AQ 2158S	0	2	0	2	0	3	-	-	-	-	-	-	0
AR 2147M	1	4	1	8	0	1	0.1	0	1	20	5057	0	0
AS 2141S?	0	11	0	29	0	5	0.1	0	1	7	3477	0	0
AT 2137M	0	11	0	29	0	2	0.1	0	1	28	5580	0	0
AU 2116M	0	6	0	21	0	2	0.1	0	1	48	6266	0	0
AV 2114B?	0	12	0	21	0	3	0.1	0	1	29	5417	0	0
AW 2112M	0	2	0	2	0	3	-	-	-	-	-	-	0
AX 2091B?	3	18	29	46	0	6	0.8	0	1	26	1005	0	0
AY 2085B?	11	14	3	46	1	2	0.9	7	1	25	313	0	0
AZ 2080D	23	17	32	74	1	19	2.1	13	1	21	221	1	0
BA 2077B?	10	17	32	74	0	19	0.6	16	1	22	181	3	0
BB 2074B?	27	63	32	74	2	19	0.7	0	1	25	148	8	0
BC 2051B?	13	7	27	14	1	7	2.9	8	1	36	220	11	0
BD 2028M	0	8	0	13	0	2	0.1	0	1	14	4048	0	0
BE 2022M	0	5	0	13	0	1	0.1	1	1	25	4824	0	0
BF 1987M	0	6	0	12	0	2	0.1	9	1	35	4899	0	0
BG 1966M	0	2	0	5	0	0	0.1	5	1	38	5497	0	0
BH 1932M	0	5	0	21	0	4	0.1	8	1	28	4476	0	0
BI 1916M	2	12	8	15	0	2	0.5	20	1	11	3701	0	0
BJ 1889S	1	2	1	2	0	2	-	-	-	-	-	-	0
BK 1817S	1	2	1	2	0	1	-	-	-	-	-	-	0
BL 1794B?	0	7	2	8	0	2	0.1	0	1	48	1288	4	0
BM 1738S?	0	9	0	30	0	4	0.1	0	1	3	3585	0	0
BN 1728M	0	3	0	4	0	1	0.1	0	1	29	5631	0	0
BO 1708M	9	11	25	43	1	7	0.9	25	1	19	1025	0	0
BP 1699B?	14	25	25	40	1	6	0.7	12	1	37	646	9	0
BQ 1680B?	13	19	33	43	1	5	0.8	0	1	46	296	16	0
BR 1432B?	7	14	15	26	0	7	0.5	4	1	24	863	0	0
BS 1418S?	4	24	10	50	0	8	0.2	0	1	0	2389	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10440	(FLIGHT	14)											
BT 1403S?	5	7	14	14	0	3	1.1	1	1	35	557	4	0
BU 1392M	0	2	1	2	0	3	-	-	-	-	-	-	0

LINE 10450	(FLIGHT	14)											
A 2910B?	1	2	1	2	0	4	-	-	-	-	-	-	0
B 2933B?	3	9	8	43	1	4	0.2	0	1	53	704	17	0
C 2938D	8	26	11	43	0	7	0.3	0	1	30	974	0	0
D 2943B?	8	15	15	43	0	4	0.5	17	1	35	825	5	-6
E 2947B?	0	12	1	24	0	4	0.1	0	1	6	3627	0	140
F 2958M	3	7	14	6	0	1	2.8	32	1	10	4096	0	0
G 2968M	3	11	14	19	0	3	0.7	14	1	2	3240	0	0
H 2971B?	0	11	0	19	0	2	0.1	0	1	1	3354	0	0
I 2981B?	0	2	0	2	0	3	-	-	-	-	-	-	0
J 2986B?	0	4	0	12	0	3	0.1	0	1	7	4292	0	590
K 2990M	0	2	0	6	0	3	0.1	0	1	5	4067	0	0
L 2998B?	0	6	0	11	0	2	0.1	0	1	37	5844	0	0
M 3009M	0	2	0	4	0	1	0.1	0	1	41	5959	0	110
N 3020M	0	3	0	3	0	1	0.1	0	1	30	6129	0	0
O 3031B?	0	25	0	50	0	7	0.1	0	1	0	2667	0	0
P 3034M	0	25	5	50	0	7	0.1	0	1	1	3678	0	1610
Q 3043S?	0	2	1	2	0	2	-	-	-	-	-	-	180
R 3054S	3	11	17	17	0	4	1.2	0	1	33	374	4	0
S 3128M	0	1	0	4	0	1	0.1	8	1	38	5900	0	0
T 3144S?	0	9	0	19	0	2	0.1	0	1	16	4067	0	-5
U 3160M	0	2	0	9	0	1	0.1	0	1	44	6315	0	1360
V 3171M	0	2	0	9	0	1	0.1	0	1	21	5417	0	0
W 3178M	0	1	0	2	0	2	-	-	-	-	-	-	0
X 3196B?	0	4	1	10	0	1	0.1	0	1	21	4889	0	0
Y 3203B?	0	2	1	2	0	3	-	-	-	-	-	-	0
Z 3210B?	0	2	0	2	0	3	-	-	-	-	-	-	0
AA 3229S?	0	9	0	22	0	4	0.1	0	1	12	4067	0	0
AB 3241B?	0	19	0	21	0	3	0.1	7	1	3	2435	0	0
AC 3246B?	0	9	0	21	0	6	0.1	10	1	8	2622	0	0
AD 3252B?	0	14	0	22	0	6	0.1	5	1	3	2625	0	0
AE 3259B	0	35	5	66	0	9	0.1	0	1	0	1791	0	0
AF 3261B?	0	35	5	66	0	9	0.1	0	1	0	2210	0	190
AG 3266B?	1	16	4	66	0	9	0.1	0	1	0	3883	0	110
AH 3274S?	0	15	5	28	0	5	0.1	0	1	7	3324	0	0
AI 3344B?	3	21	4	46	0	7	0.1	0	1	29	2503	0	0
AJ 3350B?	5	21	14	46	0	7	0.3	0	1	16	759	0	0
AK 3384D	0	2	1	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10450	(FLIGHT	14)											
AL 3392B?	0	7	1	9	0	3	0.1	0	1	1	4910	0	0
AM 3404M	0	4	0	7	0	1	0.1	0	1	19	5284	0	0
AN 3426M	0	5	0	21	0	3	0.1	8	1	23	3983	0	240
AO 3436M	0	2	0	2	0	3	-	-	-	-	-	-	0
AP 3446M	0	6	0	14	0	2	0.1	0	1	25	5477	0	0
AQ 3537S?	2	19	3	37	0	5	0.1	0	1	0	3082	0	560
AR 3547B?	1	2	1	2	0	0	-	-	-	-	-	-	-4
AS 3564B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AT 3570B?	3	15	5	40	0	5	0.1	0	1	16	2004	0	0
AU 3588B?	1	2	1	2	0	0	-	-	-	-	-	-	0
AV 3597S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AW 3606S?	4	18	10	14	0	5	0.6	21	1	19	1463	0	0
AX 3616S?	14	15	26	50	1	9	1.1	8	1	17	359	0	0
AY 3622B?	10	23	18	16	1	4	0.5	0	1	28	412	2	0
AZ 3628S?	5	24	17	41	1	8	0.2	0	1	30	421	3	0
BA 3651S?	2	18	5	30	0	4	0.1	0	1	2	3268	0	180
BB 3663S?	1	1	5	4	0	2	0.9	43	1	21	5176	0	0
BC 3775B?	3	20	6	41	0	5	0.1	0	1	5	2674	0	-5
BD 3788M	1	2	1	2	0	4	-	-	-	-	-	-	180
BE 3794B?	7	29	10	44	0	6	0.2	0	1	13	1179	0	30
BF 3819S?	4	8	4	14	0	3	0.2	1	1	15	4752	0	0
BG 3840M	1	2	0	2	0	1	-	-	-	-	-	-	0
BH 3908M	0	4	0	3	0	1	0.1	0	1	48	7060	0	0
BI 3934S	1	2	1	2	0	4	-	-	-	-	-	-	0
BJ 3964B?	1	2	1	2	1	1	-	-	-	-	-	-	0
BK 3997M	2	2	1	5	0	1	0.6	66	1	99	8218	0	-70
BL 4052M	0	2	0	7	0	1	0.1	5	1	80	6972	3	40
BM 4098S?	0	2	1	2	1	2	-	-	-	-	-	-	210
BN 4118B?	1	2	1	2	0	2	-	-	-	-	-	-	0
BO 4204M	1	1	1	2	0	1	-	-	-	-	-	-	730
BP 4224M	1	2	1	2	0	3	-	-	-	-	-	-	0
BQ 4226S?	1	2	1	2	0	3	-	-	-	-	-	-	0
BR 4237S?	18	13	32	14	0	9	2.0	7	1	41	169	18	0

LINE 10460	(FLIGHT	14)											
A 5923B?	9	22	2	20	0	3	0.4	11	1	27	537	2	0
B 5922B?	1	2	1	2	0	3	-	-	-	-	-	-	0
C 5914D	19	31	26	80	0	5	0.8	6	1	33	432	8	0
D 5906B?	5	6	17	16	0	4	1.2	5	1	39	727	5	0
E 5896S?	5	12	10	18	0	3	0.4	4	1	30	881	0	0
F 5884M	1	2	1	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10460	(FLIGHT	14)											
G 5879S?	4	20	10	32	0	5	0.3	0	1	14	1156	0	0
H 5864M	0	2	1	2	0	1	-	-	-	-	-	-	0
I 5847B?	0	12	0	20	0	3	0.1	0	1	2	4048	0	0
J 5839M	0	1	0	9	0	1	0.1	4	1	26	5640	0	0
K 5830M	0	4	0	7	0	1	0.1	0	1	25	5631	0	0
L 5816B?	0	4	0	13	0	2	0.1	0	1	40	5900	0	0
M 5806B?	0	14	0	42	0	5	0.1	1	1	14	3912	0	0
N 5804B?	0	17	0	64	0	5	0.1	0	1	8	3484	0	0
O 5797S?	0	36	0	64	0	9	0.1	0	1	0	2084	0	0
P 5786D	5	8	1	6	0	1	0.5	18	1	26	5802	0	0
Q 5780B?	0	5	0	8	0	1	0.1	0	1	29	5397	0	0
R 5772M	0	4	0	5	0	0	0.1	4	1	42	5741	0	0
S 5766B?	0	3	0	5	0	0	0.1	0	1	42	5959	0	0
T 5750S?	9	12	14	16	0	4	0.8	1	1	31	560	0	0
U 5742M	1	2	1	2	0	3	-	-	-	-	-	-	0
V 5672S	2	9	11	17	0	3	0.6	0	1	25	652	0	0
W 5664M	0	9	11	17	0	2	0.6	0	1	31	6129	0	0
X 5648M	0	2	0	2	0	1	-	-	-	-	-	-	0
Y 5630S?	0	2	0	2	0	3	-	-	-	-	-	-	0
Z 5609M	0	2	0	2	0	0	-	-	-	-	-	-	0
AA 5598S?	0	18	0	50	0	7	0.1	1	1	7	3230	0	0
AB 5591S?	0	23	0	22	0	6	0.1	10	1	3	2140	0	0
AC 5581M	0	9	0	17	0	2	0.1	0	1	10	3739	0	0
AD 5577B?	0	5	0	8	0	1	0.1	0	1	9	3709	0	0
AE 5576M	0	5	0	6	0	1	0.1	0	1	9	3732	0	0
AF 5568B?	0	21	0	34	0	5	0.1	6	1	3	2516	0	0
AG 5562M	0	21	0	27	0	5	0.1	4	1	3	2701	0	0
AH 5560D	0	11	0	27	0	5	0.1	1	1	14	3779	0	0
AI 5550D	0	24	4	78	0	11	0.1	0	1	0	2712	0	0
AJ 5544S?	1	39	0	78	0	11	0.1	7	1	0	1715	0	0
AK 5534B?	2	11	5	11	0	4	0.3	7	1	7	1995	0	0
AL 5528B?	0	15	1	7	0	4	0.1	0	1	7	3414	0	0
AM 5501S?	0	15	6	25	0	4	0.2	4	1	18	4019	0	0
AN 5466S	1	10	1	24	0	3	0.1	1	1	26	2043	0	0
AO 5446S	2	13	9	26	0	3	0.3	0	1	30	1121	0	0
AP 5422B?	0	7	0	12	0	1	0.1	0	1	25	5631	0	0
AQ 5413M	9	31	17	12	0	2	0.3	0	1	17	4655	0	0
AR 5406B?	9	31	23	54	0	8	0.3	0	1	6	1142	0	0
AS 5393S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AT 5348M	0	2	0	2	0	0	-	-	-	-	-	-	0
AU 5285S?	0	2	0	2	0	2	-	-	-	-	-	-	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10460	(FLIGHT	14)											
AV 5282M	0	4	2	12	0	2	0.1	0	1	18	5141	0	0
AW 5127S	1	2	1	2	0	3	-	-	-	-	-	-	0
AX 5105S?	1	2	1	2	0	1	-	-	-	-	-	-	0
AY 5095S?	4	17	11	35	0	5	0.3	0	1	25	1013	0	0
AZ 5084M	1	2	1	2	0	1	-	-	-	-	-	-	0
BA 5061M	0	2	1	2	0	1	-	-	-	-	-	-	0
BB 5052M	0	2	0	2	0	2	-	-	-	-	-	-	0
BC 5032D	0	8	0	11	0	2	0.1	1	1	12	3709	0	0
BD 5020D	1	2	1	2	0	1	-	-	-	-	-	-	0
BE 4993M	0	2	0	2	0	1	-	-	-	-	-	-	0
BF 4965B?	0	8	0	8	0	2	0.1	0	1	9	4105	0	0
BG 4957B?	0	4	0	8	0	3	0.1	0	1	0	3599	0	0
BH 4947B?	0	7	0	10	0	2	0.1	0	1	1	3543	0	0
BI 4937B?	0	19	0	27	0	4	0.1	0	1	0	3497	0	0
BJ 4923S	0	2	1	2	0	2	-	-	-	-	-	-	0
BK 4874M	0	2	0	2	0	2	-	-	-	-	-	-	0
BL 4832M	0	2	0	2	0	1	-	-	-	-	-	-	0
BM 4826M	0	8	0	13	0	2	0.1	0	1	30	5771	0	0
BN 4810M	0	2	1	2	0	2	-	-	-	-	-	-	0
BO 4780S?	0	8	2	15	0	2	0.1	0	1	4	3842	0	0
BP 4769M	0	2	4	7	0	1	0.4	33	1	23	4883	0	0
BQ 4720B?	21	48	8	75	0	15	0.6	1	1	25	289	4	0
BR 4715B?	9	50	30	75	2	15	0.2	0	1	22	327	0	0
BS 4703B?	1	2	1	2	1	4	-	-	-	-	-	-	0
BT 4575B?	2	17	4	20	0	3	0.1	0	1	17	2405	0	0
BU 4550M	0	3	0	8	0	1	0.1	0	1	56	6459	0	0
BV 4456B?	3	6	2	10	0	2	0.3	12	1	22	2423	0	0
BW 4384M	1	8	0	16	0	3	0.1	0	1	14	4809	0	0
BX 4374B?	0	14	0	18	0	2	0.1	0	1	0	2964	0	0
BY 4358S?	0	20	0	43	0	7	0.1	8	1	1	2165	0	0
BZ 4350S?	0	2	0	2	0	2	-	-	-	-	-	-	0
CA 4340M	0	25	1	24	0	5	0.1	0	1	10	3606	0	0
CB 4336B?	0	25	1	29	0	9	0.1	0	1	5	3278	0	0

LINE 10470	(FLIGHT	14)											
A 6019M	6	19	28	13	1	5	0.3	8	1	23	1338	0	0
B 6020B?	1	2	1	2	1	4	-	-	-	-	-	-	0
C 6029B?	13	17	28	36	1	6	0.9	9	1	30	365	5	0
D 6041S	6	11	18	22	0	3	0.5	15	1	27	589	0	0
E 6052M	5	10	13	3	0	1	9.2	45	1	8	3458	0	0
F 6058B?	2	10	8	12	0	2	0.5	13	1	20	1311	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT

LINE 10470	(FLIGHT	14)											
G 6066M	0	10	8	13	0	2	0.5	19	1	1	3136	0	0
H 6078M	0	6	0	7	0	1	0.1	0	1	12	3852	0	0
I 6087B?	0	7	0	8	0	1	0.1	0	1	1	3627	0	0
J 6096S?	0	20	0	31	0	5	0.1	0	1	0	2612	0	0
K 6108M	0	5	4	5	0	1	0.5	26	1	7	4824	0	0
L 6117S?	0	8	4	15	0	2	0.2	6	1	13	3992	0	0
M 6125D	0	10	5	13	0	3	0.3	1	1	26	2640	0	0
N 6138M	0	23	0	33	0	5	0.1	4	1	7	3022	0	0
O 6146D	11	26	14	49	0	12	0.5	8	1	29	1035	0	0
P 6148D	11	23	14	40	0	12	0.5	10	1	0	2657	0	0
Q 6167S?	0	2	0	2	0	3	-	-	-	-	-	-	0
R 6184S?	6	17	16	33	0	6	0.3	0	1	19	571	0	0
S 6264M	2	2	0	4	0	1	1.0	80	1	49	6218	0	0
T 6282M	0	2	0	6	0	1	0.1	0	1	35	5866	0	0
U 6288M	0	2	0	5	0	1	0.1	0	1	39	5855	0	0
V 6295M	0	3	0	9	0	2	0.1	4	1	36	5397	0	0
W 6311S?	0	13	0	28	0	4	0.1	5	1	12	3359	0	0
X 6318S?	0	7	0	14	0	3	0.1	1	1	22	4616	0	0
Y 6354M	0	2	0	13	0	2	0.1	0	1	26	5057	0	0
Z 6372M	1	4	0	9	0	2	0.1	14	1	18	4551	0	0
AA 6381M	0	2	0	8	0	1	0.1	0	1	20	4476	0	0
AB 6388B?	0	7	0	64	0	5	0.1	0	1	0	4513	0	0
AC 6393B?	0	26	0	64	0	8	0.1	4	1	1	2414	0	0
AD 6396B?	0	35	0	64	0	8	0.1	3	1	0	2032	0	0
AE 6508M	0	4	1	9	0	1	0.1	4	1	35	5559	0	0
AF 6525M	0	12	0	5	0	1	0.1	0	1	32	5900	0	0
AG 6531M	0	2	1	2	0	3	-	-	-	-	-	-	0
AH 6552M	0	1	8	10	0	1	0.7	16	1	36	6144	0	0
AI 6570B?	0	2	0	2	0	4	-	-	-	-	-	-	0
AJ 6578B?	4	24	12	40	0	6	0.3	3	1	23	1032	0	0
AK 6594S?	1	21	7	38	0	5	0.1	0	1	1	2569	0	0
AL 6614B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AM 6633B?	2	11	2	14	0	2	0.1	4	1	31	3311	0	0
AN 6656B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AO 6784D	1	4	2	4	0	0	0.2	19	1	37	3950	0	0
AP 6790M	0	2	0	2	0	1	-	-	-	-	-	-	0
AQ 6817S?	0	4	0	12	0	2	0.1	2	1	21	4325	0	0
AR 6834M	0	1	2	4	0	1	0.2	30	1	37	5833	0	0
AS 6924S	1	2	1	2	0	3	-	-	-	-	-	-	0
AT 6968M	3	2	0	7	0	1	1.0	74	1	40	5771	0	0
AU 6978S?	0	12	0	23	0	3	0.1	7	1	23	4086	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10470	(FLIGHT 14)												
AV 7068S?	0	2	0	2	0	4	-	-	-	-	-	-	0
AW 7074S?	0	2	0	2	0	4	-	-	-	-	-	-	0
AX 7078B?	0	13	0	32	0	5	0.1	1	1	4	3013	0	0
AY 7098M	0	4	0	8	0	0	0.1	0	1	22	5437	0	0
AZ 7106M	0	1	0	16	0	1	0.1	0	1	28	5359	0	0
BA 7127D	36	65	54	117	1	23	0.9	0	1	21	226	1	0
BB 7130B?	3	57	54	117	1	23	0.8	0	1	28	203	9	0
BC 7135B?	11	50	7	109	2	6	0.2	0	1	22	259	2	0
BD 7145S?	8	25	17	46	1	8	0.3	0	1	29	643	1	0
BE 7173M	2	5	1	8	0	1	0.3	41	1	42	5877	0	0
BF 7187S?	1	2	0	2	0	2	-	-	-	-	-	-	0
BG 7300S	1	2	1	2	0	3	-	-	-	-	-	-	0
BH 7362B?	0	2	1	2	0	0	-	-	-	-	-	-	0
BI 7435S?	0	15	0	19	0	3	0.1	0	1	14	4115	0	0

LINE 10480	(FLIGHT 15)												
A 1783D	5	23	9	53	0	8	0.1	0	1	34	1113	3	0
B 1781D	4	8	13	53	0	8	0.3	0	1	37	767	8	0
C 1773D	8	21	14	32	0	4	0.4	6	1	27	573	1	0
D 1747B?	5	10	17	16	0	3	1.3	16	1	34	626	5	0
E 1742M	1	2	1	2	0	1	-	-	-	-	-	-	0
F 1736M	0	17	0	29	0	3	0.1	2	1	1	2631	0	0
G 1734B?	0	17	0	29	0	4	0.1	2	1	0	2379	0	0
H 1731B?	0	2	0	2	0	4	-	-	-	-	-	-	0
I 1725B?	0	6	0	41	0	6	0.1	0	1	0	2584	0	0
J 1703D	0	11	0	17	0	3	0.1	0	1	17	4382	0	0
K 1693M	0	11	0	11	0	2	0.1	0	1	14	4135	0	0
L 1680B?	0	40	13	57	0	13	0.2	0	1	0	1765	0	0
M 1676B?	0	41	17	57	0	14	0.3	0	1	14	816	0	0
N 1669B?	9	39	16	89	0	14	0.2	0	1	17	1065	0	0
O 1649M	0	2	0	6	0	1	0.1	0	1	35	5771	0	0
P 1636S?	0	11	0	45	0	7	0.1	14	1	13	2638	0	0
Q 1629S?	0	24	0	58	0	8	0.1	6	1	0	2264	0	0
R 1620M	1	3	1	10	0	2	0.1	43	1	32	4809	0	0
S 1606B?	3	5	3	12	0	1	0.1	0	1	19	3045	0	0
T 1602D?	1	2	1	2	0	2	-	-	-	-	-	-	0
U 1597D?	3	10	2	19	0	2	0.2	8	1	6	3754	0	0
V 1523M	0	2	0	11	0	2	0.1	6	1	28	4589	0	0
W 1517M	0	2	0	2	0	2	-	-	-	-	-	-	0
X 1510B?	1	19	3	35	0	5	0.1	0	1	3	2888	0	0
Y 1507B?	0	12	0	35	0	5	0.1	0	1	12	3965	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10480	(FLIGHT	15)											
Z 1486M	0	2	0	2	0	1	-	-	-	-	-	-	0
AA 1471M	0	2	0	2	0	1	-	-	-	-	-	-	0
AB 1460S	1	8	3	15	0	2	0.1	0	1	7	3713	0	0
AC 1443S?	0	103	0	217	0	29	0.1	17	1	0	1006	0	0
AD 1419S?	0	12	0	27	0	4	0.1	8	1	16	3452	0	0
AE 1400M	0	20	0	53	0	5	0.1	5	1	3	2554	0	0
AF 1394D	0	32	0	53	0	5	0.1	2	1	5	3022	0	0
AG 1376M	0	5	1	17	0	2	0.1	0	1	14	4249	0	0
AH 1362M	0	25	1	31	0	4	0.1	0	1	9	3648	0	0
AI 1356D	4	25	11	31	0	4	0.3	10	1	6	2751	0	0
AJ 1335S?	8	28	11	52	2	8	0.3	6	1	31	790	4	0
AK 1275B?	0	17	0	62	0	9	0.1	13	1	6	2093	0	0
AL 1221S?	0	38	0	74	0	10	0.1	0	1	0	2049	0	0
AM 1216M	0	2	0	2	0	4	-	-	-	-	-	-	0
AN 1202S?	0	13	0	28	0	4	0.1	0	1	5	3763	0	0
AO 1192M	0	14	6	6	0	1	0.9	28	1	13	5057	0	0
AP 1179B?	4	21	10	18	0	4	0.5	17	1	25	1487	0	0
AQ 1152S?	1	2	1	2	1	1	-	-	-	-	-	-	0
AR 1126S	13	46	34	77	0	14	0.3	0	1	25	377	3	0
AS 1101M	0	4	4	6	0	1	0.4	38	1	33	5417	0	0
AT 1091S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AU 1088M	0	7	5	12	0	2	0.3	15	1	17	4227	0	0
AV 1057M	0	5	3	6	0	1	0.3	5	1	30	2657	0	0
AW 995S?	0	18	0	37	0	4	0.1	4	1	6	2909	0	0
AX 982M	0	8	0	22	0	3	0.1	4	1	14	3656	0	0
AY 959M	0	2	0	8	0	1	0.1	0	1	51	6158	0	0
AZ 898M	0	1	0	19	0	1	0.1	0	1	23	5159	0	0
BA 881S?	1	7	0	52	0	7	0.1	9	1	3	2272	0	0
BB 849S?	4	15	8	23	0	4	0.3	0	1	13	1290	0	0
BC 804B?	0	2	0	2	0	3	-	-	-	-	-	-	0
BD 792B?	0	2	0	2	0	4	-	-	-	-	-	-	0
BE 772M	0	4	0	10	0	1	0.1	0	1	37	5722	0	0
BF 748M	0	1	0	4	0	0	0.1	0	1	81	7290	0	0
BG 705S?	4	8	8	33	0	2	0.2	0	1	21	1493	0	0
BH 690S	4	17	10	44	0	7	0.2	0	1	0	2125	0	0
BI 679B?	0	20	0	23	0	5	0.1	10	1	2	2082	0	0
BJ 675B?	0	20	0	34	0	4	0.1	11	1	3	2040	0	0
BK 667D	32	33	36	36	0	8	1.6	16	1	0	1522	0	0
BL 661D	32	50	36	38	0	6	1.0	7	1	24	388	2	0
BM 652B	46	86	96	133	4	32	0.9	3	1	30	145	12	0
BN 649B	46	86	96	133	4	32	0.9	0	1	28	132	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10480	(FLIGHT	15)											
BO 467S?	0	3	0	1	0	1	0.1	1	1	21	4513	0	0
BP 460M	0	3	0	17	0	2	0.1	8	1	25	4175	0	0
BQ 410S?	0	2	0	2	0	2	-	-	-	-	-	-	0
BR 371S?	1	2	1	2	0	2	-	-	-	-	-	-	0
BS 332M	0	7	0	12	0	2	0.1	0	1	29	5631	0	0
BT 317M	0	4	0	8	0	1	0.1	0	1	41	6203	0	0

LINE 10491	(FLIGHT	15)											
A 2018B?	1	2	1	2	0	4	-	-	-	-	-	-	0
B 2034M	0	7	5	10	0	2	0.3	25	1	21	4489	0	0
C 2058S?	2	13	16	15	0	4	1.2	13	1	24	711	0	0
D 2066B?	0	3	0	13	0	0	0.1	0	1	22	4839	0	350
E 2071M	0	5	0	12	0	2	0.1	1	1	14	3852	0	130
F 2080M	0	3	0	6	0	1	0.1	0	1	19	4589	0	0
G 2092M	0	3	0	4	0	1	0.1	0	1	14	4440	0	240
H 2098M	0	3	3	10	0	2	0.2	15	1	16	3956	0	0
I 2108B?	23	86	67	161	0	31	0.4	0	1	10	303	0	1680
J 2110B?	23	70	67	161	0	31	0.5	0	1	14	329	0	0
K 2121B?	0	7	0	12	0	4	0.1	0	1	4	3097	0	0
L 2137M	0	2	1	7	0	1	0.1	0	1	35	6332	0	600
M 2149M	0	2	0	2	0	1	-	-	-	-	-	-	0
N 2160M	0	4	261	8	0	1	462.4	0	1	26	5781	0	810
O 2171M	0	2	1	2	0	1	-	-	-	-	-	-	0
P 2180S	0	2	1	2	0	2	-	-	-	-	-	-	0
Q 2188M	0	3	1	3	0	1	0.1	39	1	51	6250	0	280
R 2209B?	2	10	8	12	0	2	0.6	2	1	28	1185	0	0
S 2216M	0	8	0	13	0	2	0.1	3	1	20	4186	0	110
T 2219B?	0	8	2	11	0	2	0.1	0	1	19	5041	0	0
U 2293S?	4	12	9	22	0	3	0.3	0	1	15	878	0	0
V 2305B?	8	11	12	23	0	4	0.7	5	1	12	534	0	0
W 2314D	5	15	12	31	0	5	0.3	0	1	7	1978	0	0
X 2320M	0	2	0	2	0	1	-	-	-	-	-	-	240
Y 2328M	0	2	0	4	0	1	0.1	0	1	42	6115	0	0
Z 2345S?	0	5	0	8	0	2	0.1	0	1	10	4370	0	0
AA 2360M	2	5	0	15	0	2	0.2	32	1	17	4048	0	0
AB 2370M	0	6	0	12	0	2	0.1	4	1	27	4710	0	0
AC 2382M	0	3	0	3	0	1	0.1	0	1	45	6021	0	0
AD 2388B?	4	8	0	8	0	1	0.3	22	1	27	5176	0	0
AE 2392D	1	11	0	9	0	1	0.1	0	1	28	5321	0	0
AF 2397B?	0	8	0	29	0	1	0.1	1	1	34	5497	0	0
AG 2399B?	0	8	0	50	0	7	0.1	0	1	17	4175	0	-4

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10491	(FLIGHT	15)											
AH 2404S?	0	25	0	50	0	7	0.1	5	1	0	2384	0	100
AI 2410B?	0	67	1	134	0	18	0.1	9	1	0	1235	0	180
AJ 2415B?	0	65	0	120	0	16	0.1	4	1	0	1407	0	20
AK 2417B?	0	65	0	120	0	16	0.1	4	1	0	1358	0	-5
AL 2424M	0	6	0	15	0	2	0.1	0	1	17	4238	0	400
AM 2441S?	0	2	0	2	0	2	-	-	-	-	-	-	-5
AN 2451B?	0	2	0	2	0	2	-	-	-	-	-	-	250
AO 2481M	0	2	0	2	0	1	-	-	-	-	-	-	50
AP 2495M	1	2	0	2	0	4	-	-	-	-	-	-	0
AQ 2500D	14	27	27	100	0	15	0.6	10	1	32	443	7	0
AR 2504B?	7	45	27	100	0	15	0.1	1	1	0	1592	0	320
AS 2511B?	8	17	11	13	0	4	0.5	12	1	27	1008	0	0

LINE 10492	(FLIGHT	15)											
A 2654B?	0	9	0	52	0	5	0.1	0	1	10	4655	0	0
B 2661B?	0	30	1	52	0	7	0.1	1	1	0	2499	0	350
C 2667B?	0	30	0	52	0	7	0.1	0	1	21	4914	0	0
D 2670M	0	0	0	6	0	1	400.7	160	1	27	5024	0	1060
E 2682M	0	7	0	11	0	2	0.1	0	1	25	5194	0	0
F 2698M	0	1	0	3	0	1	0.1	0	1	44	6266	0	360
G 2708M	0	13	0	25	0	1	0.1	0	1	28	5751	0	-5
H 2715M	0	13	0	25	0	3	0.1	3	1	15	3755	0	-5
I 2722B?	0	12	0	26	0	4	0.1	1	1	27	4960	0	-5
J 2756M	0	4	0	8	0	1	0.1	0	1	34	5580	0	320
K 2783S?	13	30	28	50	0	10	0.5	4	1	28	437	4	0
L 2790S?	0	18	0	25	0	5	0.1	6	1	5	2719	0	1710
M 2844M	0	4	0	9	0	1	0.1	0	1	48	6234	0	0
N 2860M	0	1	0	2	0	1	0.1	0	1	60	6713	0	0
O 2877M	0	2	0	2	0	1	-	-	-	-	-	-	0
P 2924M	0	2	1	2	0	1	-	-	-	-	-	-	160
Q 2948B?	0	2	1	2	0	1	-	-	-	-	-	-	0
R 3028S?	3	28	5	52	0	7	0.1	0	1	5	1472	0	40
S 3065M	0	4	0	5	0	1	0.1	0	1	16	4752	0	0
T 3074M	0	2	0	2	0	2	-	-	-	-	-	-	0
U 3090M	0	4	0	9	0	0	0.1	0	1	35	5781	0	0
V 3112B?	0	2	0	2	0	3	-	-	-	-	-	-	0
W 3122B?	0	7	0	2	0	1	0.1	0	1	6	3537	0	0
X 3146B?	0	6	0	15	0	3	0.1	0	1	25	4883	0	0
Y 3217M	3	4	3	7	0	1	0.3	16	1	24	5675	0	110
Z 3254B?	12	21	18	45	0	8	0.6	1	1	17	537	0	290
AA 3258B?	12	21	18	45	0	8	0.6	1	1	20	473	0	140

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10492	(FLIGHT	15)											
AB 3264D	41	47	49	77	0	16	1.5	0	1	20	279	0	0
AC 3266D	37	55	49	77	0	16	1.1	1	1	22	338	0	0
AD 3269D	37	21	49	124	0	11	3.4	20	1	7	1728	0	0
AE 3273B	3	58	0	124	0	16	0.1	1	1	0	1316	0	0
AF 3289M	48	165	112	313	3	51	0.6	0	1	10	190	0	0
AG 3289D	48	165	112	313	3	51	0.6	0	1	11	159	0	0
AH 3294D	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 3465S?	1	11	0	12	0	2	0.1	6	1	42	5694	0	0
AJ 3537S?	0	2	0	2	0	2	-	-	-	-	-	-	30
AK 3544B?	0	3	0	9	0	1	0.1	0	1	36	5771	0	50
AL 3610M	0	4	2	7	0	1	0.1	0	1	41	6332	0	0
AM 3621B?	0	17	3	37	0	6	0.1	0	1	0	3517	0	0
AN 3626B?	0	17	0	37	0	6	0.1	0	1	8	3503	0	380
AO 3646M	0	6	1	7	0	1	0.1	0	1	20	5538	0	100
AP 3659M	0	2	0	2	0	0	-	-	-	-	-	-	140

LINE 10500	(FLIGHT	15)											
A 5207B?	11	42	24	75	0	12	0.3	0	1	17	503	0	0
B 5194M	0	15	0	16	0	2	0.1	6	1	8	2930	0	0
C 5187S?	0	2	0	2	0	3	-	-	-	-	-	-	370
D 5180S?	0	58	2	124	0	19	0.1	2	1	0	1296	0	0
E 5174M	0	9	0	22	0	4	0.1	3	1	6	3045	0	0
F 5167M	0	2	0	4	0	1	0.1	0	1	14	4370	0	130
G 5159M	0	2	0	8	0	0	0.1	0	1	22	5649	0	0
H 5151S?	0	7	0	20	0	3	0.1	0	1	13	3992	0	750
I 5137M	0	3	0	24	0	5	0.1	7	1	16	3543	0	480
J 5126M	0	7	0	9	0	2	0.1	0	1	10	4206	0	0
K 5121M	0	12	17	14	0	3	1.4	15	1	0	3301	0	790
L 5116S?	8	15	20	30	0	5	0.5	0	1	18	468	0	0
M 5102M	0	4	0	5	0	1	0.1	0	1	32	5833	0	0
N 5092M	0	1	0	5	0	1	0.1	0	1	32	5812	0	420
O 5080M	0	1	0	4	0	1	0.1	0	1	38	5866	0	0
P 5073M	0	4	0	3	0	1	0.1	0	1	39	5959	0	0
Q 5065M	0	1	3	4	0	1	0.5	51	1	34	5649	0	0
R 5057S?	2	8	4	12	0	2	0.2	0	1	4	2787	0	0
S 5046M	0	2	0	7	0	1	0.1	0	1	33	5694	0	0
T 5020S	1	2	1	2	0	3	-	-	-	-	-	-	0
U 4956S?	4	16	15	27	0	5	0.6	0	1	18	567	0	0
V 4953S?	6	21	15	32	0	5	0.3	0	1	17	561	0	50
W 4931M	0	3	2	8	0	1	0.1	12	1	30	5457	0	0
X 4919M	0	4	6	7	0	1	0.6	28	1	28	5640	0	140

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10500	(FLIGHT	15)											
Y 4910S?	1	10	6	13	0	2	0.3	11	1	34	1326	0	0
Z 4891D	0	15	1	23	0	3	0.1	0	1	3	3439	0	0
AA 4886D	0	31	0	23	0	5	0.1	2	1	3	2787	0	0
AB 4882B?	0	3	0	6	0	2	0.1	6	1	8	2888	0	0
AC 4878B?	0	15	0	7	0	3	0.1	12	1	12	2740	0	30
AD 4875B?	0	12	0	7	0	4	0.1	12	1	13	2856	0	11
AE 4871D	0	7	2	1	0	3	1.8	97	1	18	3869	0	0
AF 4857B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AG 4850B?	0	2	0	2	0	4	-	-	-	-	-	-	0
AH 4846B?	0	62	0	104	0	14	0.1	10	1	0	1473	0	0
AI 4833S?	0	9	0	27	0	1	0.1	0	1	3	3869	0	0
AJ 4812M	0	2	0	2	0	3	-	-	-	-	-	-	0
AK 4792M	0	2	0	2	0	2	-	-	-	-	-	-	160
AL 4784M	1	2	1	2	0	2	-	-	-	-	-	-	0
AM 4780S	1	11	9	18	0	3	0.4	0	1	25	1032	0	0
AN 4764S?	1	13	8	36	0	5	0.2	0	1	25	1245	0	0
AO 4759S	2	18	7	36	0	5	0.1	0	1	26	873	0	0
AP 4700S	0	2	1	2	0	2	-	-	-	-	-	-	0
AQ 4674S	1	14	3	30	0	4	0.1	0	1	25	1048	0	0
AR 4631B?	0	2	0	2	0	2	-	-	-	-	-	-	18
AS 4620M	0	3	0	16	0	2	0.1	1	1	14	3877	0	0

LINE 10501	(FLIGHT	15)											
A 4536B?	0	9	0	8	0	3	0.1	0	1	10	3620	0	0
B 4533B?	0	8	0	8	0	3	0.1	5	1	10	3136	0	30
C 4523B?	0	34	0	54	0	7	0.1	15	1	8	2185	0	-4
D 4498M	0	2	0	5	0	0	0.1	0	1	52	6403	0	0
E 4477S	0	9	1	18	0	3	0.1	0	1	15	4381	0	0
F 4455S?	2	15	4	36	0	5	0.1	0	1	13	2644	0	0
G 4453S?	1	20	4	36	0	5	0.1	0	1	14	2499	0	0
H 4419S?	12	17	29	44	1	9	0.8	7	1	36	256	12	0
I 4395B?	0	14	4	19	1	3	0.2	0	1	15	4322	0	20
J 4389B?	0	2	0	3	0	1	0.1	0	1	47	6277	0	0
K 4382B?	0	2	0	2	0	0	-	-	-	-	-	-	0
L 4376B?	0	3	0	3	0	0	0.1	0	1	75	7603	0	-4
M 4368M	0	1	0	4	0	1	0.1	0	1	87	7518	0	-4
N 4357M	0	2	0	2	0	1	-	-	-	-	-	-	290
O 4328M	0	2	1	2	0	1	-	-	-	-	-	-	0
P 4321S?	0	2	1	2	0	1	-	-	-	-	-	-	360
Q 4292M	1	4	0	2	0	1	0.1	13	1	78	7154	0	50
R 4272M	0	3	0	6	0	1	0.1	0	1	39	6047	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10501	(FLIGHT	15)											
S 4248B?	1	2	1	2	0	1	-	-	-	-	-	-	0
T 4235S?	2	9	14	42	0	6	0.3	0	1	22	787	0	-5
U 4210M	0	2	1	2	0	1	-	-	-	-	-	-	600
V 4168M	0	2	0	2	0	2	-	-	-	-	-	-	90
W 4154M	0	12	0	29	0	3	0.1	8	1	14	3257	0	0
X 4150B?	0	28	0	12	0	8	0.1	8	1	5	2539	0	0
Y 4148B?	0	28	0	12	0	8	0.1	9	1	1	1991	0	0
Z 4143B?	0	47	0	59	0	12	0.1	8	1	0	1585	0	160
AA 4135S?	0	26	8	42	0	6	0.2	0	1	0	2360	0	0
AB 4126S?	6	51	17	113	1	17	0.1	0	1	0	1869	0	40
AC 4116M	0	9	10	19	0	2	0.4	16	1	10	3510	0	90
AD 4100M	0	2	1	2	0	1	-	-	-	-	-	-	310
AE 4094B?	4	10	7	19	0	2	0.3	0	1	26	1249	0	0
AF 4090B?	1	2	1	2	0	3	-	-	-	-	-	-	70
AG 4084B?	7	12	9	21	1	4	0.6	15	1	46	1342	8	0
AH 4075D	15	15	17	25	2	6	1.2	0	1	35	584	3	0
AI 4069M	0	15	17	25	2	5	0.7	12	1	12	3877	0	130
AJ 4060M	0	11	0	14	0	2	0.1	0	1	13	4067	0	640
AK 4057D	0	11	0	8	0	2	0.1	0	1	3	3739	0	0
AL 4052D	0	34	3	73	0	18	0.1	0	1	9	4115	0	0
AM 4044B?	0	35	0	73	0	18	0.1	16	1	1	1465	0	1700
AN 4039B?	4	17	14	73	0	18	0.2	0	1	17	1327	0	0
AO 4031S?	8	10	12	29	0	5	0.8	30	1	27	784	0	9
AP 4027S?	13	31	27	40	3	6	0.5	9	1	28	744	2	50
AQ 4019B?	9	13	27	19	3	3	0.7	27	1	20	4186	0	30
AR 4009M	0	0	7	4	0	1	1.9	59	1	50	5946	0	30
AS 4004M	0	4	0	9	0	2	0.1	8	1	37	5176	0	-4
AT 3985S?	0	2	1	2	0	3	-	-	-	-	-	-	0
AU 3976S?	0	11	0	25	0	3	0.1	11	1	13	2905	0	130
AV 3964M	0	2	0	2	0	1	-	-	-	-	-	-	100
AW 3948M	0	6	0	6	0	2	0.1	6	1	16	3564	0	230
AX 3931M	0	1	0	9	0	1	0.1	0	1	18	4440	0	0
AY 3901S?	0	3	0	15	0	2	0.1	11	1	30	4382	0	320
AZ 3891M	0	4	2	27	0	1	0.1	0	1	31	5247	0	0
BA 3888B?	0	2	1	2	0	4	-	-	-	-	-	-	30
BB 3884B?	1	9	6	27	0	4	0.2	0	1	15	1697	0	-4
BC 3878B?	0	11	0	12	0	2	0.1	2	1	1	2677	0	30
BD 3870M	0	3	0	15	0	4	0.1	8	1	10	2942	0	800
BE 3857B?	0	8	8	30	0	4	0.2	0	1	7	1454	0	0
BF 3850M	0	3	0	29	0	4	0.1	0	1	0	2539	0	0
BG 3837B?	0	2	0	2	0	3	-	-	-	-	-	-	-4

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET	CONDUCTIVE EARTH		MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10501	(FLIGHT	15)											
BH 3824M	0	3	0	4	0	0	0.1	0	1	57	6713	0	0
BI 3810M	0	2	0	2	0	2	-	-	-	-	-	-	0
BJ 3796M	0	10	0	22	0	3	0.1	0	1	0	3510	0	0
BK 3786M	0	2	1	2	0	2	-	-	-	-	-	-	120

LINE 10510	(FLIGHT	16)											
A 113S?	2	22	7	49	0	7	0.1	0	1	34	689	8	-5
B 132B?	6	46	22	85	1	13	0.1	0	1	0	1988	0	-4
C 137B?	3	18	19	71	0	15	0.3	0	1	21	565	0	0
D 143B?	5	50	27	71	0	4	0.1	0	1	18	441	0	0
E 166S?	0	2	1	2	0	3	-	-	-	-	-	-	0
F 170M	0	6	5	17	0	2	0.2	0	1	24	5666	0	690
G 190M	0	8	0	16	0	2	0.1	3	1	28	4824	0	0
H 208S?	0	2	0	2	0	2	-	-	-	-	-	-	-5
I 213M	0	2	1	2	0	1	-	-	-	-	-	-	0
J 234M	0	2	1	2	0	1	-	-	-	-	-	-	0
K 244M	3	1	25	3	0	1	21.0	12	1	0	4303	0	80
L 251S	3	7	25	10	0	5	4.1	0	1	42	165	17	0
M 266D	0	12	17	13	0	3	1.5	15	1	6	4145	0	-4
N 270M	0	12	10	9	0	1	1.0	33	1	17	4186	0	0
O 278D	0	12	0	16	0	2	0.1	0	1	2	3903	0	80
P 282M	0	8	5	16	0	2	0.2	2	1	3	3484	0	140
Q 295S?	2	10	12	25	0	2	0.5	0	1	27	687	0	-5
R 309S	0	2	1	2	0	2	-	-	-	-	-	-	0
S 346S	1	2	1	2	0	3	-	-	-	-	-	-	0
T 362M	0	1	0	2	0	1	-	-	-	-	-	-	0
U 382S?	8	28	18	57	0	9	0.3	0	1	18	757	0	0
V 389M	8	36	18	42	0	7	0.2	1	1	0	2335	0	-4
W 391B?	2	36	4	42	0	7	0.1	0	1	1	2501	0	0
X 403M	0	9	2	7	0	1	0.1	26	1	15	3510	0	280
Y 407B?	0	9	0	6	0	1	0.1	2	1	12	3620	0	0
Z 411B?	0	2	1	2	0	2	-	-	-	-	-	-	-4
AA 420B?	0	15	2	32	0	4	0.1	0	1	5	2740	0	0
AB 423B?	2	17	2	32	0	4	0.1	0	1	9	3082	0	190
AC 440S?	0	20	1	32	0	5	0.1	9	1	7	2597	0	0
AD 453B?	0	7	0	8	0	1	0.1	0	1	11	4038	0	19
AE 465B?	2	13	2	20	0	3	0.1	0	1	0	3860	0	0
AF 492M	0	2	1	2	0	4	-	-	-	-	-	-	0
AG 531B?	6	28	5	62	0	11	0.2	0	1	23	734	0	120
AH 541B?	11	39	39	85	0	22	0.3	6	1	18	451	0	0
AI 546B?	17	16	39	42	0	22	1.4	33	1	24	373	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG		
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR		
		ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH	
		FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE	10510		(FLIGHT	16)												
AJ	551B?	4	32	6	87	0	12	0.1	1	1	14	1079	0	0		
AK	579S?	5	24	11	42	0	6	0.2	0	1	21	990	0	0		
AL	627S?	0	1	1	13	0	1	0.1	0	1	25	4378	0	0		
AM	669S?	1	2	1	2	0	3	-	-	-	-	-	-	-		
AN	683S?	1	2	1	2	0	4	-	-	-	-	-	-	-		19
AO	763B?	3	19	7	30	1	4	0.2	0	1	28	1280	0	0		
AP	772B?	2	18	9	27	0	5	0.3	3	1	21	1506	0	17		
AQ	782B?	1	16	7	40	0	5	0.1	0	1	16	2233	0	0		
AR	811S	0	15	2	22	0	3	0.1	0	1	29	1928	0	0		
AS	853B?	6	28	13	9	0	9	0.2	0	1	34	554	7	0		
AT	860B?	14	9	30	69	0	19	2.1	38	1	28	292	8	-4		
AU	865B?	13	26	16	53	0	9	0.6	13	1	36	399	11	90		
AV	903B?	1	2	1	2	0	2	-	-	-	-	-	-	5		
AW	970S?	0	7	1	15	0	3	0.1	2	1	8	3301	0	100		
AX	978M	0	6	7	12	0	1	0.5	12	1	4	4115	0	0		
AY	992M	0	2	1	2	0	1	-	-	-	-	-	-	140		
AZ	1010M	0	2	1	2	0	2	-	-	-	-	-	-	0		
BA	1039B?	0	13	3	18	0	3	0.1	0	1	0	3066	0	-5		
BB	1091B?	0	2	1	2	0	2	-	-	-	-	-	-	0		
BC	1137M	0	1	0	8	0	1	0.1	0	1	33	5622	0	0		
BD	1162M	0	5	0	15	0	2	0.1	5	1	24	4359	0	0		
BE	1192M	0	4	0	2	0	1	0.1	0	1	26	5497	0	0		
BF	1232M	0	3	0	9	0	1	0.1	4	1	43	5781	0	0		
BG	1243B?	0	2	0	2	0	1	-	-	-	-	-	-	0		
BH	1262M	0	2	1	2	0	1	-	-	-	-	-	-	90		
BI	1295M	0	18	0	20	0	6	0.1	1	1	3	2934	0	120		
BJ	1303B?	0	21	0	19	0	6	0.1	4	1	2	2587	0	50		
BK	1331B?	8	36	22	66	0	10	0.2	0	1	23	496	0	0		
BL	1339S?	14	15	23	28	1	6	1.1	10	1	36	294	11	0		
BM	1354B?	2	23	12	72	0	10	0.2	0	1	19	585	0	0		
BN	1359B?	9	34	23	72	0	11	0.3	0	1	27	388	4	0		
BO	1374B?	1	2	1	2	0	2	-	-	-	-	-	-	0		
BP	1378B?	5	12	14	27	0	3	0.3	17	1	23	847	0	0		
BQ	1380B?	13	15	21	27	0	3	1.1	29	1	10	1934	0	0		
BR	1385B?	13	6	21	27	1	3	3.5	25	1	26	449	0	0		
BS	1388B?	15	16	28	29	2	7	1.2	7	1	23	357	0	0		
BT	1430M	0	2	0	2	0	1	-	-	-	-	-	-	130		
BU	1509M	0	2	0	2	0	4	-	-	-	-	-	-	0		
BV	1519B?	0	12	1	6	0	2	0.1	13	1	3	2917	0	0		
BW	1529B?	0	22	7	22	0	3	0.2	2	1	21	1594	0	0		
BX	1535B?	4	22	14	22	0	3	0.6	20	1	2	2441	0			

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10510	(FLIGHT 16)												
BY 1555S?	3	19	3	43	0	5	0.1	0	1	16	665	0	0
BZ 1575B?	14	59	16	118	0	15	0.3	0	1	16	298	0	60
CA 1580B?	19	88	59	161	0	23	0.3	0	1	14	221	0	0
CB 1583B?	29	88	82	161	0	23	0.5	0	1	14	205	0	5
CC 1588D	32	36	75	161	0	23	1.4	0	1	17	157	0	0
CD 1594B?	18	98	75	152	0	22	0.3	0	1	11	632	0	0
CE 1599B?	0	98	0	152	0	22	0.1	7	1	0	1166	0	50
CF 1606B?	0	32	3	53	0	7	0.1	0	1	0	2457	0	180

LINE 10520	(FLIGHT 16)												
A 3288M	0	16	2	51	0	7	0.1	4	1	0	2047	0	0
B 3270B?	8	36	34	54	0	9	0.2	0	1	24	342	1	0
C 3255M	0	4	9	7	0	2	1.2	29	1	30	5812	0	0
D 3218B?	0	14	0	49	0	7	0.1	9	1	5	2449	0	0
E 3213B?	0	24	0	49	0	7	0.1	8	1	0	2110	0	0
F 3205M	0	18	1	39	0	5	0.1	1	1	0	2612	0	0
G 3203B?	0	17	1	39	0	5	0.1	1	1	0	2542	0	0
H 3196M	0	2	1	2	0	2	-	-	-	-	-	-	0
I 3178M	0	3	0	22	0	4	0.1	2	1	8	3230	0	0
J 3165B?	1	2	1	2	0	4	-	-	-	-	-	-	0
K 3162B?	4	8	8	50	0	9	0.1	0	1	13	3439	0	0
L 3155B?	4	16	8	37	0	7	0.2	0	1	0	2868	0	0
M 3152B?	9	24	23	37	0	7	0.4	0	1	31	497	4	0
N 3148B?	1	2	1	2	0	4	-	-	-	-	-	-	0
O 3119S?	21	27	43	28	0	13	1.1	0	1	33	153	12	0
P 3110S?	18	19	43	27	3	6	1.3	17	1	44	228	21	0
Q 3104B?	6	4	8	2	3	6	1.4	33	1	42	191	18	0
R 3097S?	1	2	1	2	0	4	-	-	-	-	-	-	0
S 3066S	5	12	11	20	0	4	0.4	12	1	47	383	19	0
T 3049S	4	9	10	13	1	2	0.7	18	1	49	560	18	0
U 3021S?	13	65	47	211	0	30	0.3	0	1	11	344	0	0
V 3000M	0	19	7	25	0	4	0.2	6	1	11	3383	0	0
W 2998B?	0	19	7	25	0	3	0.2	0	1	22	1795	0	0
X 2986M	0	5	0	15	0	1	0.1	0	1	35	5694	0	0
Y 2979M	0	7	0	15	0	2	0.1	5	1	31	4868	0	0
Z 2976M	0	2	0	50	0	14	0.1	2	1	20	4238	0	0
AA 2968B	0	71	3	52	0	13	0.1	2	1	0	1687	0	0
AB 2966B	0	71	3	52	0	13	0.1	0	1	0	1661	0	0
AC 2961D	2	34	16	2	0	0	27.6	46	1	21	1038	0	0
AD 2956B?	5	40	5	87	0	12	0.1	0	1	19	798	0	0
AE 2926M	0	10	0	16	0	2	0.1	0	1	14	3974	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10520	(FLIGHT		16)										
AF 2915M	0	2	1	2	0	3	-	-	-	-	-	-	0
AG 2902M	7	12	9	31	0	6	0.5	19	1	16	1118	0	0
AH 2896B?	6	22	3	40	0	4	0.3	0	1	23	607	0	0
AI 2886B?	1	2	1	2	1	4	-	-	-	-	-	-	0
AJ 2879S?	20	27	35	55	0	14	1.0	0	1	27	149	7	0
AK 2863S?	8	17	24	43	1	8	0.5	6	1	37	198	15	0
AL 2858B?	1	2	1	2	1	2	-	-	-	-	-	-	0
AM 2846B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AN 2842B?	7	14	5	37	1	5	0.4	16	1	42	463	14	0
AO 2808M	2	9	7	27	0	4	0.2	5	1	15	3779	0	0
AP 2798M	6	29	14	46	0	7	0.2	5	1	10	3078	0	0
AQ 2793B?	6	29	14	46	0	7	0.2	0	1	26	801	0	0
AR 2709B?	3	14	7	17	0	7	0.3	13	1	29	1194	0	0
AS 2700B?	3	10	3	37	0	2	0.2	22	1	32	1250	3	0
AT 2683B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AU 2660B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AV 2634S?	3	9	2	14	0	4	0.2	15	1	34	1126	2	0
AW 2591S?	1	14	4	24	0	3	0.1	3	1	18	3735	0	0
AX 2575S?	2	18	2	37	0	5	0.1	6	1	17	2983	0	0
AY 2527S?	6	20	10	27	0	6	0.2	3	1	28	1215	0	0
AZ 2515S?	5	17	10	29	0	5	0.3	0	1	32	727	2	0
BA 2482B?	5	16	12	22	0	3	0.5	10	1	35	1503	0	0
BB 2471B?	4	17	10	22	0	3	0.4	18	1	7	2806	0	0
BC 2459B?	0	39	4	121	0	18	0.1	2	1	0	1366	0	0
BD 2454B?	0	52	0	473	0	101	0.1	8	1	0	1387	0	0
BE 2448B	128	268	369	473	0	101	1.2	0	1	11	57	0	0
BF 2438B	97	95	232	255	0	23	2.5	0	1	14	52	2	0
BG 2352M	6	3	15	13	0	2	1.8	50	1	15	4476	0	0
BH 2346B?	6	23	19	40	0	7	0.2	0	1	29	895	0	0
BI 2338B?	4	23	19	40	0	3	0.5	0	1	32	598	4	0
BJ 2312B?	0	2	1	2	0	1	-	-	-	-	-	-	0
BK 2288S?	1	8	7	21	1	3	0.2	0	1	12	4325	0	0
BL 2273M	0	3	3	6	0	1	0.3	19	1	59	7001	0	0
BM 2233M	0	1	0	3	0	1	0.1	0	1	53	6601	0	0
BN 2223M	0	30	8	40	0	6	0.2	0	1	8	3068	0	0
BO 2219B?	0	30	8	28	0	7	0.3	0	1	7	1541	0	0
BP 2215M	0	30	8	28	0	5	0.3	0	1	2	3359	0	0
BQ 2205M	0	7	14	8	0	1	2.1	34	1	9	3592	0	0
BR 2184M	0	4	4	13	0	5	0.2	5	1	18	2486	0	0
BS 2176M	0	10	5	18	0	3	0.2	0	1	21	2372	0	0
BT 2164M	0	1	5	9	0	2	0.4	21	1	25	5497	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT

LINE 10520	(FLIGHT		16)											
BU 2156M	1	23	16	32	0	4	0.5	8	1	4	2981	0		0
BV 2137S?	0	13	5	28	0	4	0.1	0	1	4	3068	0		0
BW 2094M	14	78	50	17	1	3	0.2	0	1	18	3620	0		0
BX 2088B?	14	78	50	121	1	31	0.2	0	1	15	486	0		0
BY 2084B?	18	111	110	220	1	48	0.2	0	1	14	358	0		0
BZ 2078B?	38	127	109	220	2	48	0.5	0	1	18	172	3		0
CA 2068B?	14	39	16	72	6	11	0.4	0	1	21	155	3		0
CB 2065B?	1	2	1	2	2	4	-	-	-	-	-	-		0
CC 2058B?	47	71	82	122	7	28	1.2	0	1	21	100	6		0
CD 2051B?	47	29	82	56	7	10	3.4	16	1	22	448	0		0
CE 2038B?	12	38	20	68	1	10	0.3	2	1	26	294	5		0
CF 2032B?	34	102	78	192	0	29	0.6	0	1	20	195	3		0
CG 2003B?	18	94	99	225	8	42	0.3	0	1	19	171	3		0
CH 2000B?	18	94	99	225	8	42	0.3	0	1	20	116	5		0
CI 1986B?	9	8	47	54	0	10	1.2	36	1	33	403	9		0
CJ 1983B?	6	29	30	49	0	9	0.2	0	1	29	335	5		0
CK 1980B?	3	23	19	41	0	9	0.5	0	1	32	507	4		0
CL 1973M	3	5	19	5	0	1	6.6	43	1	27	4370	0		0
CM 1955B?	0	21	10	43	0	6	0.2	0	1	18	1276	0		0
CN 1950B?	0	17	5	43	0	6	0.1	0	1	19	1684	0		0
CO 1942M	0	2	1	2	0	4	-	-	-	-	-	-		0
CP 1934B?	0	26	10	42	0	6	0.2	1	1	10	3240	0		0
CQ 1919M	0	13	0	27	0	5	0.1	9	1	13	3049	0		0
CR 1859B?	0	52	1	99	0	13	0.1	8	1	0	1640	0		0
CS 1847M	1	40	29	63	0	9	0.6	0	1	0	3167	0		0
CT 1846B?	1	40	29	63	0	9	0.6	0	1	14	1242	0		0
CU 1836B?	11	44	40	230	0	31	0.3	0	1	0	1215	0		0
CV 1834B?	11	155	59	230	0	31	0.1	0	1	0	659	0		0
CW 1823B?	13	17	42	46	1	5	0.9	1	1	35	141	14		0
CX 1804M	0	3	14	11	0	2	1.5	33	1	54	5086	0		0
CY 1790B?	14	10	49	28	0	13	2.0	25	1	43	96	25		0
CZ 1770B?	1	2	1	2	2	4	-	-	-	-	-	-		0
DA 1762B?	14	19	30	137	2	15	0.9	21	1	18	110	3		0
DB 1751B?	31	56	50	111	7	16	0.9	0	1	19	76	5		0
DC 1738B?	1	2	1	2	1	4	-	-	-	-	-	-		0
DD 1731M	15	8	24	19	3	5	2.9	30	1	26	915	0		0
DE 1720M	8	7	14	22	3	6	1.1	36	1	32	585	4		0

LINE 10530	(FLIGHT		16)											
A 3384B?	0	14	0	50	0	9	0.1	0	1	0	2619	0	1670	
B 3404M	0	2	0	5	0	1	0.1	0	1	22	5666	0		

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10530	(FLIGHT	16)											
C 3417B?	0	15	0	22	0	4	0.1	0	1	8	3795	0	0
D 3428M	1	2	1	2	0	4	-	-	-	-	-	-	0
E 3432S?	11	37	38	48	0	9	0.3	0	1	17	344	0	0
F 3455S?	0	29	0	64	0	8	0.1	7	1	0	2088	0	0
G 3470M	2	1	11	6	0	1	2.2	33	1	12	4501	0	670
H 3482B?	0	37	0	63	0	11	0.1	0	1	0	2077	0	-4
I 3486M	1	37	10	63	0	11	0.1	0	1	0	2193	0	0
J 3492B?	1	2	1	2	0	4	-	-	-	-	-	-	0
K 3496B?	0	12	0	16	0	5	0.1	0	1	4	3920	0	1330
L 3503M	0	2	0	2	0	3	-	-	-	-	-	-	0
M 3508M	0	7	0	17	0	1	0.1	0	1	18	4464	0	0
N 3520B?	0	36	13	68	0	11	0.2	0	1	0	2134	0	0
O 3522M	0	36	13	68	0	11	0.2	0	1	4	1493	0	240
P 3534B?	0	7	3	16	0	3	0.1	0	1	13	4115	0	0
Q 3540M	0	4	0	16	0	0	0.1	0	1	31	5741	0	70
R 3571B?	12	25	20	49	2	12	0.5	0	1	35	113	15	0
S 3605H	5	27	34	21	0	2	0.2	0	1	28	236	6	0
T 3630S?	1	2	1	2	0	3	-	-	-	-	-	-	-5
U 3644S?	8	29	24	95	0	15	0.3	4	1	17	669	0	60
V 3650S?	9	41	23	72	0	13	0.2	0	1	21	533	0	0
W 3656S?	6	41	8	72	0	13	0.1	0	1	32	611	3	0
X 3702S	5	11	8	12	0	3	0.4	7	1	27	1469	0	0
Y 3759B?	26	18	50	40	0	17	2.4	6	1	26	146	6	-5
Z 3764B?	1	2	1	2	0	4	-	-	-	-	-	-	70
AA 3781B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AB 3799B?	1	2	0	2	0	2	-	-	-	-	-	-	0
AC 3809S?	0	24	0	41	0	6	0.1	6	1	7	2772	0	0
AD 3846S	4	20	2	42	0	5	0.1	4	1	2	2504	0	0
AE 3863S	1	2	1	2	0	2	-	-	-	-	-	-	0
AF 3948B?	5	9	4	12	0	1	0.5	16	1	24	3409	0	0
AG 3962S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AH 3977B?	3	16	5	23	0	3	0.2	0	1	9	3649	0	9
AI 3985B?	3	11	5	21	0	3	0.2	3	1	19	3411	0	0
AJ 3993B?	0	18	2	33	0	4	0.1	2	1	9	3008	0	0
AK 3999B?	0	15	0	33	0	5	0.1	5	1	17	3779	0	0
AL 4044B?	7	14	13	3	0	6	0.5	0	1	26	803	0	0
AM 4047B?	5	7	13	3	0	6	7.1	42	1	24	1184	0	0
AN 4061S?	18	32	40	61	0	9	0.7	0	1	10	334	0	20
AO 4064S?	18	28	40	61	0	9	0.8	0	1	17	301	0	0
AP 4085B	199	156	406	244	66	140	4.1	0	1	14	13	6	60
AQ 4097B	95	42	166	70	44	57	6.6	0	1	17	12	8	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10530	(FLIGHT		16)											
AR 4107B	87	53	27	195	27	38	4.3	0	1	19	52	5	90	
AS 4112B	67	99	153	195	39	14	1.4	0	1	11	97	0	0	
AT 4115B	43	98	153	195	12	14	0.8	0	1	9	143	0	0	
AU 4118B	43	76	153	195	6	14	1.0	0	1	9	400	0	0	
AV 4141B?	0	2	0	3	0	1	0.1	0	1	65	7187	0	0	
AW 4189M	0	2	1	2	0	3	-	-	-	-	-	-	9	
AX 4207M	0	2	0	2	0	2	-	-	-	-	-	-	0	
AY 4245B?	0	8	0	24	0	3	0.1	0	1	12	4945	0	0	
AZ 4254M	0	2	0	2	0	3	-	-	-	-	-	-	0	
BA 4258B?	0	4	0	1	0	4	0.1	0	1	7	3477	0	0	
BB 4270M	0	16	0	35	0	4	0.1	0	1	0	2733	0	0	
BC 4276M	0	2	1	2	0	4	-	-	-	-	-	-	0	
BD 4289B?	6	15	9	24	0	4	0.4	0	1	14	1302	0	0	
BE 4294B?	1	2	1	2	0	3	-	-	-	-	-	-	0	
BF 4329M	0	16	0	103	0	13	0.1	5	1	18	3903	0	50	
BG 4336S?	0	16	0	103	0	13	0.1	9	1	0	1557	0	0	
BH 4350M	0	22	0	11	0	9	0.1	11	1	6	2376	0	30	
BI 4376B?	15	53	18	86	0	12	0.4	1	1	0	1810	0	360	
BJ 4381B?	15	44	32	86	0	12	0.4	0	1	20	634	0	0	
BK 4383B?	15	44	32	86	0	12	0.4	0	1	15	458	0	0	
BL 4392D	1	2	1	2	0	4	-	-	-	-	-	-	340	
BM 4405B	24	232	73	417	0	62	0.2	0	1	23	283	2	0	
BN 4410B	26	232	73	417	0	62	0.2	0	1	7	288	0	80	
BO 4415B	7	47	97	191	0	24	0.1	6	1	5	453	0	0	
BP 4423B	26	145	61	51	0	7	0.3	0	1	12	243	0	0	
BQ 4430B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
BR 4439B?	8	11	12	29	0	4	0.7	6	1	31	396	3	0	
BS 4453B?	16	45	77	78	0	26	0.4	6	1	32	577	7	0	
BT 4457B?	1	2	1	2	0	4	-	-	-	-	-	-	80	
BU 4463B?	30	58	77	120	0	26	0.8	0	1	27	146	9	0	
BV 4478B?	10	25	20	81	0	8	0.4	1	1	33	435	7	40	
BW 4484B?	7	46	16	81	0	11	0.2	0	1	16	702	0	0	
BX 4501S?	8	29	9	44	0	8	0.3	0	1	10	1418	0	-4	
BY 4504M	8	26	9	44	0	8	0.3	0	1	21	5008	0	-4	
BZ 4549B?	3	13	5	25	0	4	0.1	0	1	14	1971	0	70	
CA 4561M	1	2	1	2	0	2	-	-	-	-	-	-	0	
CB 4566S?	3	21	4	25	0	3	0.1	0	1	0	3354	0	70	
CC 4576B?	0	39	0	73	0	10	0.1	1	1	0	2075	0	0	
CD 4579B?	0	27	0	73	0	10	0.1	0	1	0	2293	0	0	
CE 4593M	0	1	0	2	0	1	0.1	2	1	39	5722	0	0	
CF 4603B?	9	14	21	24	0	6	0.7	6	1	48	311	21	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10530	(FLIGHT 16)													
CG 4614M	0	8	1	18	0	1	0.1	0	1	87	7603	0	0	
CH 4632B?	27	34	62	84	2	16	1.2	2	1	24	170	4	-4	
CI 4641B?	15	73	35	133	0	19	0.3	0	1	11	169	0	260	
CJ 4647B?	54	50	83	122	4	24	2.2	9	1	22	87	8	0	
CK 4667B?	70	139	179	291	0	51	1.0	5	1	15	122	2	0	

LINE 10540	(FLIGHT 16)													
A 6101B?	7	55	32	115	0	17	0.1	0	1	5	691	0	0	
B 6093S?	7	37	0	90	0	16	0.2	0	1	0	1860	0	1990	
C 6075M	0	2	1	2	0	2	-	-	-	-	-	-	0	
D 6064M	0	4	0	11	0	2	0.1	0	1	17	4839	0	0	
E 6056M	0	1	0	5	0	1	0.1	10	1	40	5771	0	0	
F 6045B?	6	28	20	61	0	9	0.2	7	1	3	2259	0	0	
G 6037B?	6	35	20	66	0	4	0.1	0	1	19	641	0	0	
H 6029B?	0	21	3	39	0	6	0.1	0	1	24	864	0	-4	
I 6026B?	1	2	1	2	0	4	-	-	-	-	-	-	170	
J 6022B?	6	16	8	31	0	5	0.3	0	1	25	561	0	0	
K 6006M	10	34	32	84	0	12	0.3	13	1	2	1818	0	0	
L 6004B?	10	34	32	84	0	12	0.3	11	1	22	1042	0	0	
M 5999D	10	50	32	90	0	14	0.2	0	1	24	474	1	0	
N 5992S?	4	28	15	49	0	8	0.3	0	1	23	808	0	60	
O 5983M	1	2	1	2	0	2	-	-	-	-	-	-	310	
P 5971M	0	1	0	3	0	1	0.1	0	1	34	6173	0	0	
Q 5956M	0	4	0	8	0	1	0.1	0	1	44	6021	0	0	
R 5946M	3	9	10	21	0	2	0.4	12	1	36	5722	0	0	
S 5940S	3	10	10	21	0	4	0.4	0	1	31	800	0	0	
T 5892S?	4	13	11	23	0	4	0.5	9	1	38	1252	4	0	
U 5884M	4	11	11	23	0	0	0.5	5	1	67	6889	0	50	
V 5856B?	6	39	23	74	0	11	0.1	0	1	16	435	0	0	
W 5834S?	1	38	16	78	0	11	0.2	0	1	9	664	0	0	
X 5826S?	0	11	2	16	0	2	0.1	0	1	11	2377	0	0	
Y 5823S?	0	14	5	22	0	3	0.2	0	1	17	1443	0	0	
Z 5817M	0	2	1	2	0	2	-	-	-	-	-	-	0	
AA 5806S?	14	32	42	61	0	13	0.5	2	1	27	241	6	0	
AB 5797S?	5	34	7	62	3	14	0.1	0	1	25	342	4	0	
AC 5786B?	14	9	38	41	3	5	2.1	10	1	35	147	13	0	
AD 5774M	0	2	1	2	0	4	-	-	-	-	-	-	180	
AE 5733S	0	6	11	59	0	16	0.2	0	1	14	1285	0	0	
AF 5728M	0	6	11	59	0	16	0.2	3	1	0	1462	0	0	
AG 5718S?	3	38	9	78	1	11	0.1	0	1	0	1925	0	370	
AH 5687S	0	14	2	22	0	3	0.1	0	1	28	2498	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10540	(FLIGHT	16)											
AI 5671S?	0	8	0	31	0	5	0.1	14	1	21	3284	0	70
AJ 5628S?	4	16	7	14	0	4	0.4	17	1	37	1749	1	0
AK 5553M	2	6	1	14	0	2	0.1	22	1	42	5802	0	120
AL 5496B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AM 5468B?	3	26	2	35	0	5	0.1	4	1	25	975	1	0
AN 5457B?	8	40	12	45	0	8	0.2	0	1	27	678	1	0
AO 5447B?	13	17	19	28	1	8	0.9	0	1	38	164	15	0
AP 5404B	159	76	283	130	84	103	7.2	0	1	19	22	9	0
AQ 5398B	129	41	220	40	84	71	11.6	3	1	19	16	10	330
AR 5391B?	22	16	220	78	24	71	2.1	26	1	17	107	3	0
AS 5385M	74	347	165	714	2	94	0.5	0	1	15	152	1	0
AT 5378B	74	287	165	714	25	94	0.6	0	1	13	69	1	0
AU 5369B	45	44	231	175	36	75	1.9	11	1	22	57	9	0
AV 5366B	115	44	231	175	33	75	8.7	14	1	34	36	22	0
AW 5347B?	3	15	8	32	0	6	0.2	0	1	19	1667	0	0
AX 5342M	3	8	0	32	0	5	0.2	32	1	12	2844	0	0
AY 5322M	0	2	0	2	0	2	-	-	-	-	-	-	50
AZ 5300B?	0	25	0	46	0	5	0.1	7	1	5	2603	0	0
BA 5284B?	6	28	8	41	0	6	0.2	2	1	2	2715	0	0
BB 5263M	0	14	6	23	0	4	0.2	0	1	0	3313	0	0
BC 5250M	0	9	0	18	0	2	0.1	0	1	21	5321	0	0
BD 5223B?	0	19	0	22	0	4	0.1	0	1	7	3811	0	0
BE 5219B?	0	14	0	22	0	4	0.1	0	1	5	3974	0	0
BF 5213B?	2	8	2	13	0	4	0.2	3	1	31	3699	0	0
BG 5195S?	1	2	1	2	0	3	-	-	-	-	-	-	160
BH 5181M	3	9	7	20	0	2	0.3	0	1	15	5437	0	160
BI 5154B?	4	17	8	18	0	2	0.4	0	1	34	1299	0	0
BJ 5148M	4	9	8	17	0	4	0.4	9	1	10	4206	0	0
BK 5136M	0	3	3	6	0	1	0.3	26	1	24	5229	0	40
BL 5126M	0	15	2	34	0	5	0.1	0	1	9	3054	0	220
BM 5125B?	0	15	2	34	0	5	0.1	3	1	8	2791	0	190
BN 5113M	0	13	9	37	0	4	0.2	7	1	7	2496	0	30
BO 5110B?	2	21	9	37	0	5	0.2	2	1	19	1382	0	0
BP 5106M	7	22	14	37	1	6	0.3	7	1	0	2309	0	190
BQ 5092B?	14	84	27	163	2	22	0.2	0	1	11	681	0	0
BR 5083M	9	53	8	139	2	22	0.2	0	1	24	720	0	140
BS 5079D	22	88	86	139	4	22	0.4	0	1	19	231	0	50
BT 5073D	16	21	86	169	5	31	1.0	15	1	17	139	1	0
BU 5066D	30	25	20	12	5	5	2.0	9	1	14	76	0	0
BV 5058B?	42	103	117	242	5	45	0.7	0	1	19	94	4	0
BW 5052B?	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10540 (FLIGHT 16)															
BX	5039B?	42	19	25	42	8	8	5.0	7	1	28	90	11	0	
BY	5035B?	53	102	124	171	8	40	1.0	0	1	15	79	1	0	
BZ	4995M	6	15	13	32	1	5	0.3	17	1	17	3803	0	110	
CA	4992S	10	15	13	32	2	5	0.7	25	1	36	1125	5	10	
CB	4978B?	7	47	43	67	1	12	0.1	0	1	36	277	14	0	
CC	4972B?	5	47	23	91	2	12	0.1	0	1	28	228	8	70	
CD	4963B?	21	46	46	75	3	15	0.6	3	1	28	260	8	0	
CE	4955M	1	2	1	2	2	4	-	-	-	-	-	-	1030	
CF	4944B?	0	2	1	2	0	3	-	-	-	-	-	-	0	
CG	4934M	0	2	1	2	0	1	-	-	-	-	-	-	110	
CH	4932B?	0	8	3	5	0	1	0.3	28	1	23	3399	0	0	
CI	4924B?	0	15	1	23	0	11	0.1	4	1	18	3973	0	0	
CJ	4918M	42	57	68	62	0	15	1.3	14	1	5	2255	0	0	
CK	4914B	42	57	68	108	0	15	1.3	1	1	23	170	5	0	
CL	4903B?	0	34	6	56	0	7	0.1	0	1	0	2206	0	0	
CM	4899M	0	34	6	52	0	7	0.1	0	1	4	2237	0	140	
CN	4895B?	0	33	0	49	0	6	0.1	6	1	3	2504	0	0	
CO	4884M	5	2	15	4	0	1	7.6	50	1	30	4629	0	330	
CP	4842M	0	2	0	2	0	4	-	-	-	-	-	-	440	
CQ	4830M	0	9	0	33	0	6	0.1	15	1	29	3974	1	0	
CR	4811B?	54	82	125	198	4	18	1.3	0	1	25	87	10	0	
CS	4807B?	16	115	32	198	6	18	0.2	0	1	20	99	6	0	
CT	4800B?	68	53	131	89	12	38	2.9	0	1	18	22	7	60	
LINE 10550 (FLIGHT 17)															
A	299S?	1	45	16	93	1	16	0.2	0	1	0	1424	0	0	
B	309B?	0	17	0	35	0	12	0.1	0	1	0	1941	0	0	
C	313B?	0	20	0	35	0	12	0.1	0	1	0	1755	0	1270	
D	359B?	0	27	1	50	0	7	0.1	0	1	0	2542	0	50	
E	361M	0	2	1	2	0	4	-	-	-	-	-	-	50	
F	366B?	0	6	5	50	0	1	0.1	0	1	32	1763	0	0	
G	374B?	4	12	14	14	0	3	1.1	8	1	26	722	0	0	
H	385B?	6	12	4	19	0	4	0.4	6	1	36	469	8	0	
I	395B?	1	2	1	2	2	2	-	-	-	-	-	-	15	
J	425B?	0	9	0	9	0	4	0.1	0	1	2	3819	0	-4	
K	428M	0	2	0	2	0	4	-	-	-	-	-	-	0	
L	430B?	0	8	0	9	0	4	0.1	0	1	9	4010	0	0	
M	432M	0	8	0	9	0	2	0.1	0	1	13	4048	0	450	
N	481M	0	1	4	1	0	1	6.3	75	1	30	5675	0	440	
O	526M	0	2	1	2	0	1	-	-	-	-	-	-	0	
P	547S?	0	15	1	24	0	3	0.1	0	1	0	3161	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE	10550	(FLIGHT		17)										
Q	556S?	2	11	3	17	0	2	0.1	0	1	0	2488	0	0
R	564B?	1	2	1	2	0	4	-	-	-	-	-	-	50
S	573S?	15	98	49	215	0	29	0.2	0	1	9	471	0	0
T	584B?	8	38	17	29	0	5	0.2	0	1	12	923	0	0
U	588B?	1	2	1	2	0	4	-	-	-	-	-	-	160
V	596S?	0	22	0	49	0	6	0.1	8	1	2	2259	0	0
W	614S?	6	18	13	46	0	8	0.3	5	1	0	2293	0	0
X	632M	2	6	0	18	0	2	0.2	36	1	13	3224	0	0
Y	637M	0	5	4	12	0	2	0.2	22	1	12	3097	0	0
Z	648B?	0	26	4	63	0	8	0.1	0	1	2	2235	0	0
AA	651B?	0	30	4	63	0	8	0.1	0	1	0	1815	0	330
AB	654B?	0	26	0	63	0	8	0.1	5	1	4	2625	0	470
AC	662B?	0	6	0	25	0	3	0.1	0	1	0	3371	0	0
AD	670M	0	5	0	25	0	3	0.1	4	1	2	2572	0	560
AE	673M	0	4	0	32	0	4	0.1	8	1	7	2681	0	0
AF	685B?	16	57	28	93	0	14	0.4	0	1	13	550	0	0
AG	720S	1	2	1	2	0	3	-	-	-	-	-	-	0
AH	787B?	2	19	3	33	0	5	0.1	0	1	17	2367	0	0
AI	912S	0	2	1	2	1	3	-	-	-	-	-	-	0
AJ	932S?	0	24	13	52	1	7	0.3	0	1	7	2051	0	100
AK	993S?	0	2	1	2	0	3	-	-	-	-	-	-	0
AL	1019S	0	17	4	29	1	3	0.1	0	1	25	1079	0	0
AM	1031B?	6	18	16	30	1	6	0.3	0	1	44	396	16	0
AN	1035B?	1	2	1	2	0	4	-	-	-	-	-	-	150
AO	1086S?	0	2	1	2	0	3	-	-	-	-	-	-	0
AP	1129B?	44	124	253	219	16	72	0.7	0	1	10	33	0	10
AQ	1144B?	14	26	42	53	5	11	0.6	0	1	22	225	0	0
AR	1149B?	9	26	42	53	0	11	0.3	0	1	32	391	5	0
AS	1155S?	4	21	22	20	0	5	1.4	10	1	0	3610	0	0
AT	1167M	0	3	11	6	0	1	1.9	20	1	8	4836	0	1320
AU	1195B?	2	7	10	38	1	7	0.3	0	1	21	169	0	0
AV	1204D	8	32	10	38	1	6	0.3	0	1	30	871	1	0
AW	1224B?	3	23	7	44	0	5	0.1	0	1	21	1217	0	-50
AX	1229B?	0	27	15	48	0	7	0.3	0	1	27	763	0	19
AY	1243B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AZ	1279M	0	2	0	7	0	1	0.1	3	1	27	4809	0	0
BA	1288M	0	29	0	48	0	7	0.1	0	1	6	3296	0	190
BB	1289B?	0	29	0	48	0	7	0.1	0	1	0	2705	0	50
BC	1291M	0	29	6	48	0	7	0.1	0	1	0	2504	0	50
BD	1308S?	0	14	1	26	0	3	0.1	0	1	0	3203	0	110
BE	1321M	0	2	0	2	0	3	-	-	-	-	-	-	11

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10550	(FLIGHT	17)											
BF 1431B?	0	2	0	38	0	5	0.1	0	1	7	3313	0	0
BG 1444B?	0	16	0	26	0	3	0.1	3	1	0	2493	0	0
BH 1459B?	0	2	0	2	0	1	-	-	-	-	-	-	0
BI 1468B?	0	18	0	9	0	6	0.1	6	1	3	2533	0	0
BJ 1470B?	0	25	0	9	0	6	0.1	8	1	4	2384	0	0
BK 1477B?	4	15	0	29	0	3	0.2	10	1	8	3268	0	0
BL 1493B?	11	16	11	22	0	3	0.8	0	1	21	1087	0	0
BM 1495B?	1	2	1	2	0	3	-	-	-	-	-	-	0
BN 1504S?	1	2	1	2	0	2	-	-	-	-	-	-	150
BO 1516D	25	40	55	87	1	18	0.9	1	1	29	231	8	0
BP 1519D	25	66	55	87	1	18	0.6	3	1	38	261	17	0
BQ 1528B?	14	121	21	218	0	28	0.1	0	1	14	322	0	0
BR 1538D	31	22	70	54	0	11	2.5	18	1	23	266	3	0
BS 1566B?	13	8	26	23	1	8	2.3	0	1	30	185	5	0
BT 1615B?	4	21	8	34	0	6	0.2	0	1	33	1041	1	0
BU 1633S?	7	28	14	60	0	9	0.2	0	1	46	513	15	0
BV 1653B?	15	24	30	48	0	9	0.7	0	1	19	313	0	130
BW 1663S?	7	9	12	46	0	6	0.7	28	1	13	1068	0	30
BX 1673B?	51	210	109	312	0	58	0.5	0	1	10	203	0	1360
BY 1677B?	51	210	109	312	0	58	0.5	0	1	21	336	0	0
BZ 1681B?	22	61	48	110	0	18	0.5	0	1	13	339	0	60
CA 1700S?	30	40	61	71	0	17	1.1	4	1	38	117	19	150
CB 1720M	3	3	3	12	0	2	0.1	18	1	49	5823	0	0
CC 1730M	0	3	6	7	2	1	0.7	41	1	60	6299	0	0
CD 1745B?	25	21	63	26	12	20	1.9	0	1	38	71	19	0
CE 1751B?	32	53	63	68	12	20	0.9	0	1	30	113	12	0
CF 1758S?	35	38	83	73	5	15	1.6	15	1	20	318	1	0

LINE 10560	(FLIGHT	17)											
A 3265B?	12	57	42	61	0	15	0.2	493	1	520	395	200	0
B 3259B?	21	43	59	72	0	15	0.7	504	1	521	226	200	0
C 3250M	0	35	58	79	0	10	1.3	501	1	493	2072	200	0
D 3246B?	0	35	0	79	0	10	0.1	2	1	0	1384	0	0
E 3238M	6	5	18	7	0	3	1.4	43	1	0	3002	0	0
F 3223M	0	13	9	29	0	4	0.3	0	1	4	1664	0	0
G 3221S?	0	13	9	29	0	4	0.3	0	1	10	1003	0	0
H 3207D	3	41	20	121	0	18	0.2	0	1	13	840	0	0
I 3204D	0	54	42	121	0	18	0.6	4	1	0	1200	0	0
J 3202B?	1	2	1	2	1	4	-	-	-	-	-	-	0
K 3199D	17	41	42	121	1	17	0.5	9	1	21	439	1	0
L 3196D	17	29	42	121	1	10	0.7	11	1	28	302	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10560	(FLIGHT	17)											
M 3193B?	14	29	40	115	1	10	0.6	0	1	31	253	8	0
N 3181B?	8	18	16	26	0	6	0.4	9	1	39	393	13	0
O 3167S?	5	13	8	31	1	5	0.2	0	1	25	1472	0	0
P 3167B?	8	16	24	26	0	7	0.5	0	1	26	206	2	0
Q 3147S?	0	8	0	20	0	3	0.1	0	1	14	4165	0	0
R 3095M	0	8	4	8	0	3	0.3	32	1	31	2474	0	0
S 3024S?	0	12	6	20	0	3	0.2	0	1	32	1508	0	0
T 3015B?	0	2	7	27	0	4	0.2	0	1	28	1492	0	0
U 3009S?	3	46	26	91	0	13	0.4	0	1	33	857	4	0
V 3001S?	0	14	5	22	1	3	0.2	0	1	25	1735	0	0
W 2993B?	0	9	6	35	1	5	0.1	0	1	28	4914	0	0
X 2975B?	0	29	3	35	0	5	0.1	0	1	14	4105	0	0
Y 2959S?	0	20	5	41	0	6	0.1	0	1	30	1848	0	0
Z 2950S?	0	4	0	16	0	3	0.1	4	1	15	3724	0	0
AA 2940M	0	4	4	33	0	3	0.1	0	1	20	4217	0	0
AB 2937B?	0	15	4	33	0	5	0.1	0	1	4	3199	0	0
AC 2932B?	0	7	0	31	0	4	0.1	0	1	0	2578	0	0
AD 2924M	0	11	0	18	0	5	0.1	0	1	3	3279	0	0
AE 2918M	0	23	0	39	0	5	0.1	0	1	0	2884	0	0
AF 2913M	0	23	0	39	0	5	0.1	3	1	0	2490	0	0
AG 2911B?	0	23	10	39	1	5	0.2	0	1	55	802	21	0
AH 2898B?	2	24	12	41	0	6	0.3	0	1	31	762	0	0
AI 2835S	1	2	1	2	0	2	-	-	-	-	-	-	0
AJ 2827S	1	2	1	2	0	4	-	-	-	-	-	-	0
AK 2803S?	3	13	11	26	0	4	0.4	0	1	32	726	1	0
AL 2771S?	3	6	6	16	0	2	0.3	11	1	44	1382	8	0
AM 2760B?	3	10	5	16	0	2	0.2	3	1	26	1971	0	0
AN 2750S?	7	9	7	40	0	6	0.8	26	1	33	1173	0	0
AO 2714S?	2	11	1	16	0	1	0.1	9	1	30	2477	0	0
AP 2615B?	5	24	4	46	0	7	0.2	0	1	23	770	0	0
AQ 2612B?	2	15	11	19	0	3	0.5	12	1	28	966	0	0
AR 2591B?	1	15	9	19	0	3	0.4	18	1	2	2513	0	0
AS 2588M	1	14	9	24	0	3	0.3	15	1	7	2638	0	0
AT 2581M	2	12	5	17	0	2	0.2	2	1	23	2056	0	0
AU 2568B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AV 2529B?	1	14	10	14	0	2	0.7	26	1	31	974	2	0
AW 2519B?	6	6	4	19	0	3	0.8	42	1	62	2143	18	0
AX 2490B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AY 2477B?	0	24	0	28	0	4	0.1	0	1	0	2942	0	0
AZ 2469B?	0	2	0	27	0	4	0.1	0	1	0	3348	0	0
BA 2463M	0	14	0	23	0	3	0.1	0	1	0	3035	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT

LINE 10560	(FLIGHT	17)									
BB 2456M	0	2	0	2	0	3	-	-	-	-	0
BC 2416B?	1	2	1	2	0	4	-	-	-	-	0
BD 2387B?	1	2	1	2	0	4	-	-	-	-	0
BE 2379B?	0	2	1	2	0	3	-	-	-	-	0
BF 2259S?	0	1	0	19	0	2	0.1	6	1	12	0
BG 2210B?	5	14	10	17	1	2	0.3	0	1	36	0
BH 2191B?	1	24	2	34	0	4	0.1	0	1	4	0
BI 2173B?	28	100	86	192	1	33	0.5	0	1	13	0
BJ 2158D	40	21	54	45	0	37	3.9	19	1	17	0
BK 2152D	68	187	151	349	0	59	0.8	0	1	21	0
BL 2141B?	26	56	42	178	0	27	0.7	11	1	12	0
BM 2133B?	44	87	42	178	3	27	0.9	6	1	13	0
BN 2129B?	44	87	172	507	3	80	0.9	0	1	22	0
BO 2120D	16	16	28	39	2	9	1.4	13	1	39	0
BP 2108B?	1	3	1	2	0	1	0.2	45	1	41	0
BQ 2043S	1	2	1	2	0	2	-	-	-	-	0
BR 2016B?	5	8	9	15	0	3	0.5	16	1	35	0
BS 2003S	34	298	370	385	0	82	0.2	0	1	29	0
BT 1987B?	171	298	370	385	35	82	1.6	0	1	16	0
BU 1980B	178	177	302	359	35	105	3.0	0	1	13	0
BV 1973B	178	74	302	346	18	105	9.0	2	1	28	0
BW 1953M	0	1	0	6	0	0	0.1	0	1	114	0
BX 1931M	2	5	1	29	0	5	0.2	47	1	25	0
BY 1922M	16	11	3	22	4	6	1.9	27	1	14	0
BZ 1910B?	1	2	1	2	2	4	-	-	-	-	0
CA 1896D	50	56	34	102	8	24	1.7	0	1	25	0
CB 1893B?	59	37	96	48	15	22	3.7	0	1	20	0
CC 1885D	15	19	96	38	15	5	0.9	18	1	16	0

LINE 10575	(FLIGHT	48)									
A 4765S?	0	53	0	114	0	16	0.1	7	1	0	0
B 4762M	0	53	0	114	0	16	0.1	5	1	0	0
C 4757B?	0	25	0	96	0	8	0.1	5	1	2	850
D 4749S?	3	46	17	96	0	12	0.2	0	1	3	180
E 4743M	3	46	17	96	0	12	0.2	0	1	0	0
F 4738D	3	13	10	19	0	4	0.4	8	1	21	0
G 4724S?	4	27	9	54	0	6	0.1	0	1	11	0
H 4704S?	12	48	25	91	0	14	0.3	0	1	12	30
I 4690M	1	4	12	2	0	0	10.1	50	1	19	120
J 4677B?	7	7	14	8	0	2	1.0	14	1	28	0
K 4672B?	1	2	1	2	0	3	-	-	-	-	80

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 10575 (FLIGHT 48)															
L	4664S?	6	7	14	31	0	5	0.8	25	1	25	762	0	20	
M	4646M	0	2	0	2	0	2	-	-	-	-	-	-	0	
N	4630M	0	2	0	2	0	1	-	-	-	-	-	-	200	
O	4608M	0	2	0	2	0	2	-	-	-	-	-	-	0	
P	4606S?	0	2	0	2	0	2	-	-	-	-	-	-	0	
Q	4547S?	2	33	3	62	0	9	0.1	0	1	0	2144	0	0	
R	4526S?	5	64	9	109	0	17	0.1	0	1	0	1423	0	0	
S	4500M	0	2	1	2	1	0	-	-	-	-	-	-	20	
T	4473M	0	14	14	44	0	6	0.3	1	1	10	3389	0	0	
U	4468B?	0	26	14	44	0	7	0.3	0	1	0	2593	0	0	
V	4464D	11	34	14	53	0	8	0.4	0	1	10	872	0	0	
W	4450S?	1	11	0	15	0	3	0.1	0	1	13	4105	0	1140	
X	4440M	1	12	0	2	0	1	0.1	0	1	41	5959	0	0	
Y	4433S?	1	2	1	2	1	3	-	-	-	-	-	-	7	
Z	4404S?	5	11	3	33	2	5	0.4	29	1	25	2032	0	0	
AA	4370S	1	2	1	2	1	4	-	-	-	-	-	-	0	
AB	4362S	7	12	11	22	2	4	0.5	11	1	40	585	10	0	
AC	4348B?	1	17	4	38	0	5	0.1	0	1	14	2728	0	0	
AD	4332S?	5	17	6	27	2	3	0.2	0	1	31	1313	0	0	
AE	4319S	1	2	1	2	2	3	-	-	-	-	-	-	80	
AF	4281S	1	2	1	2	1	4	-	-	-	-	-	-	0	
AG	4272S?	1	2	1	2	0	3	-	-	-	-	-	-	20	
AH	4238B?	6	13	5	17	1	3	0.4	9	1	36	1199	1	0	
AI	4188S?	1	8	2	16	0	2	0.1	0	1	21	3726	0	0	
AJ	4154S	1	2	1	2	1	3	-	-	-	-	-	-	4	
AK	4140S	8	16	11	33	0	4	0.4	8	1	28	979	0	0	
AL	4131M	4	5	3	26	0	3	0.6	46	1	7	3342	0	170	
AM	4117M	0	18	0	39	0	5	0.1	12	1	28	4145	0	180	
AN	4101M	1	2	1	2	0	4	-	-	-	-	-	-	0	
AO	4092B?	6	0	13	23	0	1	719.9	81	1	25	953	0	0	
AP	4078B?	6	10	12	53	0	9	0.5	40	1	2	1788	0	110	
AQ	4068B?	23	8	0	28	0	5	5.8	41	1	0	1784	0	0	
AR	4060B?	28	11	69	46	2	9	5.4	24	1	26	198	6	0	
AS	4051B?	28	45	69	67	2	14	0.9	0	1	34	207	12	0	
AT	4030S?	6	43	6	57	0	7	0.1	0	1	7	1735	0	0	
AU	4017D	0	21	0	15	0	3	0.1	2	1	14	3755	0	240	
AV	4010M	0	1	1	15	0	1	0.1	0	1	26	5124	0	380	
AW	3995B?	6	52	3	109	0	17	0.1	0	1	0	1558	0	20	
AX	3992B?	6	43	0	109	0	17	0.1	0	1	0	1828	0	0	
AY	3980S?	3	3	5	21	0	4	0.2	1	1	5	3420	0	0	
AZ	3963M	0	2	0	2	0	2	-	-	-	-	-	-	50	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10575	(FLIGHT	48)											
BA 3941B?	2	9	9	17	0	3	0.4	0	1	43	879	5	0
BB 3936B?	1	2	1	2	0	3	-	-	-	-	-	-	0
BC 3920B?	0	7	0	15	0	2	0.1	0	1	43	6478	0	0
BD 3912M	0	7	0	15	0	3	0.1	0	1	17	4393	0	0
BE 3898M	0	16	2	28	0	4	0.1	3	1	12	3246	0	0
BF 3891B?	0	16	0	14	0	4	0.1	10	1	20	3578	0	0
BG 3882M	0	1	0	2	0	1	-	-	-	-	-	-	5
BH 3864B?	7	16	10	39	0	5	0.4	2	1	16	1089	0	0
BI 3847M	0	0	7	16	0	3	0.3	12	1	13	4096	0	0
BJ 3839B?	2	17	7	24	1	4	0.2	8	1	33	1521	2	0
BK 3824M	0	15	18	30	0	5	0.7	16	1	11	3187	0	140
BL 3816B?	12	48	20	67	0	7	0.3	0	1	16	897	0	0
BM 3809B?	14	24	6	41	1	7	0.7	5	1	26	421	1	0
BN 3798B	91	223	194	407	0	67	1.0	0	1	14	99	1	0
BO 3792D	31	75	194	407	0	67	0.7	0	1	17	541	0	40
BP 3774B	14	21	23	28	1	6	0.7	8	1	39	432	12	0
BQ 3769B?	3	23	23	40	0	6	0.7	4	1	36	784	6	0
BR 3767M	3	23	23	40	0	6	0.7	15	1	7	2638	0	0
BS 3757S?	0	9	5	13	0	2	0.2	17	1	18	4029	0	0
BT 3738S?	0	2	1	2	0	3	-	-	-	-	-	-	0
BU 3679B?	3	15	11	18	0	5	0.5	0	1	25	1017	0	17
BV 3659B?	4	16	10	26	0	4	0.3	0	1	11	1784	0	0
BW 3645M	1	2	0	2	0	4	-	-	-	-	-	-	130
BX 3635B?	13	10	50	44	0	4	1.6	30	1	21	550	0	80
BY 3628S?	24	21	50	44	4	19	1.8	18	1	19	285	0	240
BZ 3623B?	34	30	57	83	4	18	2.0	0	1	21	128	3	0
CA 3596B	83	119	150	206	12	53	1.5	0	1	13	69	0	0
CB 3587B	73	100	133	173	18	39	1.6	0	1	17	70	4	160
CC 3579M	9	5	133	17	18	39	2.1	44	1	40	355	15	110

LINE 10580	(FLIGHT	18)											
A 4128S	4	51	37	104	0	16	0.5	0	1	10	379	0	0
B 4111M	0	12	0	15	0	2	0.1	0	1	24	4992	0	0
C 4101S?	0	2	0	2	0	3	-	-	-	-	-	-	0
D 4098B?	6	33	24	21	0	5	0.1	0	1	0	2394	0	0
E 4088B?	15	52	36	87	0	14	0.4	3	1	23	392	2	0
F 4084M	1	2	1	2	0	3	-	-	-	-	-	-	0
G 4078S?	14	33	21	23	0	3	0.5	0	1	21	460	0	0
H 4069S?	6	22	11	39	0	6	0.2	1	1	16	1122	0	0
I 4049B?	2	27	4	58	0	8	0.1	0	1	0	2128	0	0
J 4044B?	2	24	7	37	0	5	0.2	0	1	0	3658	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10580	(FLIGHT	18)											
K 4040M	6	24	7	37	0	5	0.2	0	1	10	3340	0	0
L 4020S?	3	15	17	29	0	6	0.6	4	1	21	946	0	0
M 4011S?	8	11	15	19	0	3	0.7	3	1	32	576	1	0
N 4000M	0	1	0	2	0	1	-	-	-	-	-	-	0
O 3957M	0	2	4	3	0	1	0.8	39	1	28	6034	0	0
P 3939S	0	2	1	2	0	2	-	-	-	-	-	-	0
Q 3928M	0	7	2	12	0	1	0.1	10	1	44	5844	0	0
R 3917S?	0	20	5	36	0	5	0.1	0	1	15	2162	0	0
S 3908S?	2	52	10	104	0	14	0.1	0	1	0	1797	0	0
T 3905S?	2	36	10	59	0	8	0.1	0	1	6	1422	0	0
U 3897S	6	67	30	138	0	15	0.1	0	1	10	491	0	0
V 3892M	5	67	30	138	0	15	0.1	0	1	0	1325	0	0
W 3852M	0	4	3	7	0	1	0.2	24	1	52	6282	0	0
X 3836B?	0	15	0	51	0	8	0.1	4	1	4	2751	0	0
Y 3832B?	0	25	0	43	0	9	0.1	5	1	0	2293	0	0
Z 3812B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AA 3810B?	0	17	3	55	0	8	0.1	0	1	0	2895	0	0
AB 3806M	0	17	3	55	0	3	0.1	0	1	14	4809	0	0
AC 3758M	1	2	1	2	1	4	-	-	-	-	-	-	0
AD 3757B?	4	9	13	10	1	5	1.4	29	1	28	1275	0	0
AE 3742B?	5	26	19	86	0	14	0.2	6	1	29	566	5	0
AF 3738B?	9	37	19	86	0	14	0.3	1	1	25	628	0	0
AG 3736M	1	2	1	2	2	4	-	-	-	-	-	-	0
AH 3720S?	0	13	2	29	1	4	0.1	0	1	25	2344	0	0
AI 3693S?	1	2	1	2	1	1	-	-	-	-	-	-	0
AJ 3629S?	1	12	2	24	0	3	0.1	0	1	23	4461	0	0
AK 3620S?	1	2	1	2	0	1	-	-	-	-	-	-	0
AL 3616M	1	2	1	2	0	1	-	-	-	-	-	-	0
AM 3584B?	3	16	1	18	0	2	0.2	7	1	28	3075	0	0
AN 3432B?	5	12	8	18	0	4	0.4	9	1	22	1328	0	0
AO 3420S?	0	12	0	30	0	4	0.1	4	1	4	2761	0	0
AP 3406B?	0	8	0	14	0	2	0.1	5	1	16	3678	0	0
AQ 3398M	0	2	0	2	0	1	-	-	-	-	-	-	0
AR 3344M	0	2	1	2	0	2	-	-	-	-	-	-	0
AS 3322S?	17	30	6	57	2	10	0.7	0	1	28	301	5	0
AT 3304B?	6	26	9	42	1	6	0.2	0	1	0	2942	0	0
AU 3299B?	6	36	9	63	0	9	0.2	0	1	0	2425	0	0
AV 3294B?	2	40	4	44	0	8	0.1	0	1	0	2637	0	0
AW 3288M	2	21	4	44	0	8	0.1	0	1	0	2088	0	0
AX 3287M	2	21	4	44	0	8	0.1	0	1	0	2079	0	0
AY 3269D	35	114	55	212	0	34	0.5	0	1	6	379	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 10580	(FLIGHT		18)											
AZ 3263D	33	108	53	212	0	34	0.5	0	1	12	366	0	0	
BA 3233B?	0	10	0	18	0	3	0.1	3	1	20	4145	0	0	
BB 3224M	0	3	0	15	0	2	0.1	2	1	33	5359	0	0	
BC 3204M	0	2	1	2	1	1	-	-	-	-	-	-	0	
BD 3190B?	6	15	14	27	0	6	0.3	0	1	24	494	0	0	
BE 3158M	0	8	0	19	0	5	0.1	15	1	16	2860	0	0	
BF 3142B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
BG 3130M	1	2	1	2	1	2	-	-	-	-	-	-	0	
BH 3120S?	4	5	10	13	1	2	0.7	7	1	39	807	5	0	
BI 3104D	15	42	25	76	1	11	0.4	0	1	18	852	0	0	
BJ 3048D	12	15	9	24	2	5	0.9	12	1	41	556	11	0	
BK 3043B?	8	17	9	24	2	5	0.5	0	1	43	576	11	0	
BL 2939E	3	20	10	85	0	13	0.1	0	1	10	2010	0	0	
BM 2928B?	2	19	16	45	0	14	0.4	4	1	0	2573	0	0	
BN 2926M	0	13	0	45	0	14	0.1	3	1	0	2022	0	0	
BO 2914S?	12	21	31	56	0	10	0.6	0	1	19	352	0	0	
BP 2904S?	1	2	1	2	0	3	-	-	-	-	-	-	0	
BQ 2894S?	6	13	18	25	0	5	0.4	0	1	29	456	0	0	
BR 2873B?	8	24	18	16	0	7	0.3	0	1	0	2787	0	0	
BS 2849D	76	27	74	58	15	44	8.5	7	1	24	54	10	0	
BT 2842B?	43	50	83	79	18	26	1.6	0	1	19	42	6	0	
BU 2839B?	36	42	83	73	8	26	1.5	1	1	22	43	10	0	
BV 2828B?	25	33	50	58	5	36	1.1	0	1	20	55	6	0	
BW 2824B?	60	73	184	131	20	36	1.6	0	1	18	57	5	0	
BX 2818B?	71	115	184	201	15	59	1.3	1	1	23	44	11	0	
BY 2808M	0	10	178	49	14	16	14.1	4	1	42	169	22	0	

LINE 10590	(FLIGHT		18)											
A 4215B?	6	38	20	60	0	17	0.1	0	1	22	725	0	0	
B 4230M	0	12	0	10	0	5	0.1	0	1	5	3203	0	3030	
C 4236M	0	2	0	2	0	3	-	-	-	-	-	-	330	
D 4259B?	1	2	1	2	0	4	-	-	-	-	-	-	70	
E 4264B?	10	24	17	44	0	13	0.5	4	1	13	761	0	0	
F 4271B?	0	8	0	11	0	1	0.1	2	1	1	2648	0	0	
G 4274M	0	8	0	11	0	5	0.1	2	1	4	2977	0	0	
H 4282B?	0	17	0	26	0	3	0.1	6	1	7	2872	0	30	
I 4285M	0	17	0	26	0	3	0.1	10	1	16	3307	0	0	
J 4294B?	0	12	0	18	0	2	0.1	0	1	10	3716	0	0	
K 4297B?	0	7	0	18	0	2	0.1	0	1	19	4551	0	0	
L 4318S	6	14	13	23	0	5	0.4	0	1	23	778	0	0	
M 4341S?	5	9	7	15	0	3	0.5	5	1	28	1325	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10590	(FLIGHT	18)											
N 4352M	4	3	4	7	0	1	1.0	27	1	29	6440	0	830
O 4376M	6	20	10	33	0	5	0.3	8	1	34	5477	0	0
P 4379B?	6	20	10	33	0	5	0.3	6	1	9	3543	0	0
Q 4389M	6	23	10	33	0	5	0.2	2	1	33	5601	0	0
R 4398S?	0	15	0	30	0	4	0.1	1	1	5	3078	0	0
S 4418M	4	12	1	16	0	3	0.2	10	1	14	4217	0	590
T 4421B?	4	12	1	16	0	3	0.2	7	1	7	3877	0	0
U 4434S?	9	26	16	48	0	7	0.4	0	1	12	756	0	40
V 4448S?	5	28	5	51	0	7	0.1	0	1	0	2278	0	0
W 4450S?	5	23	5	51	0	6	0.1	0	1	0	2268	0	0
X 4457B?	1	2	0	2	0	4	-	-	-	-	-	-	0
Y 4459D	6	38	1	47	0	6	0.1	0	1	0	2852	0	180
Z 4464B?	2	15	1	28	0	4	0.1	2	1	14	3716	0	0
AA 4492M	4	14	7	22	0	4	0.3	0	1	0	3222	0	-4
AB 4504M	0	1	0	4	0	1	0.1	0	1	12	4602	0	0
AC 4524B?	0	2	1	2	0	3	-	-	-	-	-	-	-4
AD 4531B?	0	17	6	31	0	5	0.2	0	1	0	3354	0	0
AE 4533M	0	17	6	31	0	5	0.2	0	1	2	3530	0	70
AF 4540M	0	2	0	31	0	1	0.1	0	1	45	6690	0	0
AG 4556B?	4	21	25	37	0	9	0.8	0	1	0	3745	0	0
AH 4577B?	14	34	28	61	2	10	0.5	0	1	24	476	0	0
AI 4595B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 4599B?	6	12	12	20	1	6	0.4	11	1	29	925	0	60
AK 4605B?	5	21	6	16	1	6	0.2	0	1	26	1841	0	40
AL 4658S	1	2	1	2	2	2	-	-	-	-	-	-	0
AM 4762S?	0	21	0	29	0	4	0.1	6	1	13	3319	0	0
AN 4773B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AO 4781B?	0	15	2	17	0	3	0.1	0	1	13	3598	0	0
AP 4787S?	1	10	3	13	1	2	0.1	14	1	20	3844	0	0
AQ 4795S?	1	2	1	2	1	3	-	-	-	-	-	-	5
AR 4804B?	4	18	4	15	1	4	0.1	3	1	13	3437	0	0
AS 4871B?	3	14	5	29	0	4	0.1	0	1	30	2202	0	0
AT 4888M	0	24	2	36	0	5	0.1	9	1	8	2417	0	0
AU 4896S?	2	24	2	36	0	1	0.1	0	1	20	2925	0	0
AV 4902S?	0	18	5	34	0	6	0.1	1	1	15	2063	0	0
AW 4911M	1	2	1	2	0	3	-	-	-	-	-	-	40
AX 4979B?	14	25	30	40	3	13	0.6	0	1	25	141	5	0
AY 4992B?	17	66	48	129	2	21	0.3	0	1	18	378	0	50
AZ 4999D	28	65	44	129	0	21	0.7	0	1	21	322	0	0
BA 5003M	28	65	44	18	0	15	0.7	0	1	0	1777	0	0
BB 5011B?	36	29	79	45	0	30	2.2	20	1	0	1483	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10590	(FLIGHT	18)											
BC 5023M	36	95	79	170	0	30	0.6	0	1	7	3433	0	30
BD 5027M	0	4	0	98	0	2	0.1	1	1	17	4076	0	0
BE 5039B?	0	7	0	8	0	1	0.1	0	1	23	5194	0	0
BF 5047B?	0	12	0	11	0	1	0.1	0	1	20	5124	0	0
BG 5052B?	0	2	0	2	0	2	-	-	-	-	-	-	160
BH 5066B?	4	3	4	13	0	1	0.2	0	1	39	1731	0	0
BI 5082B?	0	10	0	20	0	3	0.1	5	1	11	3284	0	230
BJ 5092M	0	7	0	18	0	3	0.1	0	1	10	3627	0	0
BK 5103M	0	10	0	25	0	5	0.1	3	1	10	3354	0	0
BL 5116D	21	92	0	152	0	22	0.3	0	1	0	1430	0	0
BM 5126B?	23	78	54	153	0	24	0.4	0	1	16	311	0	0
BN 5144B?	32	64	63	111	1	21	0.8	0	1	18	213	0	0
BO 5147B?	32	53	63	111	1	21	1.0	1	1	29	522	3	0
BP 5158D	2	12	4	21	0	3	0.1	0	1	55	2415	11	0
BQ 5167B?	14	40	33	63	0	10	0.4	0	1	30	879	1	0
BR 5170B?	20	28	33	63	1	10	1.0	0	1	32	280	8	0
BS 5182M	0	7	0	6	0	1	0.1	1	1	23	4616	0	12
BT 5192S?	0	10	7	18	1	2	0.3	15	1	16	3678	0	0
BU 5202B?	9	57	51	84	3	17	0.2	0	1	28	240	7	0
BV 5210B?	2	29	23	57	1	10	0.5	1	1	38	510	11	0
BW 5237M	0	2	0	2	0	2	-	-	-	-	-	-	14
BX 5291B?	1	22	4	32	0	4	0.1	0	1	7	3324	0	0
BY 5300M	0	1	2	32	0	0	0.1	0	1	39	6266	0	0
BZ 5308S	1	2	1	2	0	4	-	-	-	-	-	-	0
CA 5334S	1	2	1	2	0	4	-	-	-	-	-	-	0
CB 5354B	38	35	70	52	12	23	1.9	0	1	29	56	14	0
CC 5364B	105	184	171	359	38	91	1.4	0	1	21	28	10	0
CD 5371B	73	184	171	359	31	91	0.9	0	1	20	35	9	70
CE 5379B	48	68	92	123	0	68	1.3	11	1	19	55	7	0

LINE 10600	(FLIGHT	18)											
A 6559S?	2	7	0	5	0	3	0.1	7	1	3	3787	0	0
B 6547B?	0	33	9	66	0	13	0.1	0	1	0	1861	0	0
C 6545B?	0	33	9	66	0	13	0.1	0	1	0	2090	0	0
D 6538B?	0	20	9	34	0	6	0.2	0	1	11	1488	0	0
E 6522B?	1	18	9	32	0	5	0.3	0	1	11	1550	0	0
F 6513B?	7	15	16	24	0	4	0.5	5	1	23	801	0	0
G 6503S?	0	7	0	15	0	2	0.1	10	1	17	3330	0	0
H 6489D	0	29	9	84	0	9	0.1	0	1	0	2202	0	0
I 6484S?	9	49	22	84	0	13	0.2	0	1	0	1609	0	0
J 6478B?	9	32	22	57	0	9	0.3	0	1	28	493	2	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10600	(FLIGHT	18)											
K 6474B?	9	32	22	57	0	9	0.3	0	1	12	821	0	0
L 6453S?	0	19	4	40	0	5	0.1	0	1	0	3230	0	0
M 6439M	1	7	9	4	0	3	3.0	48	1	20	3280	0	0
N 6428B?	1	2	1	2	0	3	-	-	-	-	-	-	0
O 6422M	0	3	0	23	0	1	0.1	0	1	62	7326	0	0
P 6409M	0	3	0	11	0	1	0.1	0	1	66	7187	0	0
Q 6395M	3	1	17	8	0	2	2.9	29	1	26	5302	0	0
R 6386S?	3	23	17	46	0	7	0.4	0	1	16	812	0	0
S 6381M	0	51	19	130	0	18	0.2	0	1	4	3082	0	0
T 6377S?	0	51	19	130	0	18	0.2	0	1	7	1208	0	0
U 6367S?	7	59	32	120	0	18	0.1	0	1	14	484	0	0
V 6356S?	1	17	11	40	0	5	0.3	0	1	0	2225	0	0
W 6344S	0	2	1	2	0	4	-	-	-	-	-	-	0
X 6335S?	0	13	7	19	0	3	0.3	0	1	27	1277	0	0
Y 6323M	0	2	1	2	0	2	-	-	-	-	-	-	0
Z 6318M	0	2	1	2	0	1	-	-	-	-	-	-	0
AA 6313M	0	6	2	7	0	1	0.2	22	1	46	5971	0	0
AB 6303B?	0	21	0	35	0	5	0.1	1	1	5	3161	0	0
AC 6301M	0	14	18	35	0	5	0.6	6	1	4	3136	0	0
AD 6295B?	0	15	18	13	0	2	1.9	21	1	17	721	0	0
AE 6292M	0	15	18	13	0	2	1.9	27	1	2	1656	0	0
AF 6287S?	4	48	35	65	0	9	0.8	1	1	19	404	0	0
AG 6281S?	2	31	35	66	0	9	0.7	2	1	14	580	0	0
AH 6274B?	14	7	16	16	0	3	3.1	27	1	31	287	7	0
AI 6268B?	6	28	15	61	0	9	0.2	0	1	38	290	14	0
AJ 6262S?	4	32	32	61	0	11	0.7	0	1	23	325	1	0
AK 6253M	1	2	1	2	0	3	-	-	-	-	-	-	0
AL 6251B?	1	10	7	14	0	3	0.4	0	1	30	1016	0	0
AM 6243B?	3	16	8	23	0	4	0.3	0	1	39	811	6	0
AN 6204M	0	9	7	14	0	2	0.4	21	1	21	4270	0	0
AO 6202S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AP 6191S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AQ 6172M	1	32	13	68	0	10	0.2	0	1	6	2435	0	0
AR 6169S	1	32	13	68	0	10	0.2	0	1	13	1362	0	0
AS 6095S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AT 6088M	0	9	1	14	0	3	0.1	8	1	35	4883	0	0
AU 6068S?	1	17	3	25	0	3	0.1	0	1	17	3746	0	0
AV 6053S?	4	23	7	33	0	5	0.2	2	1	27	1791	0	0
AW 6010B?	3	8	6	10	0	1	0.4	12	1	39	1689	0	0
AX 6008M	1	2	1	2	0	2	-	-	-	-	-	-	0
AY 5994B?	1	9	4	11	0	2	0.2	20	1	31	3030	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10600	(FLIGHT	18)											
AZ 5985B?	1	2	1	2	1	2	-	-	-	-	-	-	0
BA 5927S	2	15	6	30	0	4	0.1	0	1	29	1537	0	0
BB 5882B?	3	22	8	41	0	6	0.2	3	1	8	2415	0	0
BC 5866B?	5	18	13	28	0	4	0.2	8	1	18	1075	0	0
BD 5858S?	8	19	22	45	0	7	0.4	12	1	22	630	0	0
BE 5847S?	3	18	16	45	0	6	0.4	0	1	29	349	4	0
BF 5834S?	3	20	15	43	2	6	0.4	0	1	25	328	0	0
BG 5824B?	30	34	61	56	4	16	1.4	0	1	21	132	2	0
BH 5815B?	1	2	1	2	0	1	-	-	-	-	-	-	0
BI 5808B?	4	10	3	14	0	2	0.3	10	1	4	3967	0	0
BJ 5798S?	6	21	7	37	0	5	0.3	0	1	9	1616	0	0
BK 5774M	0	2	0	2	0	1	-	-	-	-	-	-	0
BL 5736M	0	2	0	2	0	3	-	-	-	-	-	-	0
BM 5727M	1	14	3	11	0	2	0.1	6	1	25	5302	0	0
BN 5723M	5	14	15	36	0	6	0.5	0	1	7	3844	0	0
BO 5715S	6	23	15	42	0	6	0.2	0	1	23	745	0	0
BP 5704D	20	35	13	32	1	5	0.7	0	1	29	740	0	0
BQ 5695B	19	19	26	41	2	7	1.3	2	1	33	371	6	0
BR 5693B	19	20	26	41	2	7	1.3	1	1	28	314	3	0
BS 5675B?	11	14	17	19	2	5	0.8	6	1	41	407	12	0
BT 5659B?	17	32	38	63	3	14	0.7	0	1	32	176	10	0
BU 5583S?	1	2	1	2	0	2	-	-	-	-	-	-	0
BV 5550S?	3	11	4	19	0	2	0.1	0	1	31	1669	0	0
BW 5517S?	6	50	22	105	0	16	0.1	0	1	11	720	0	0
BX 5508M	2	24	12	41	0	5	0.3	0	1	0	2106	0	0
BY 5505B?	4	24	18	41	0	6	0.5	4	1	8	1354	0	0
BZ 5473B	94	129	198	286	31	90	1.7	0	1	25	29	14	0
CA 5460B?	34	91	86	166	8	38	0.6	0	1	18	92	4	0

LINE 10610	(FLIGHT	19)											
A 261M	0	10	11	52	0	14	0.2	0	1	1	2765	0	410
B 267M	0	2	0	2	0	4	-	-	-	-	-	-	0
C 278M	0	2	0	2	0	3	-	-	-	-	-	-	1940
D 283B?	0	14	0	6	0	2	0.1	0	1	4	3151	0	0
E 290B?	2	7	1	5	0	1	0.2	14	1	6	3699	0	0
F 301S?	2	20	3	50	0	7	0.1	0	1	0	2376	0	40
G 306M	0	17	0	49	0	3	0.1	3	1	16	3803	0	0
H 312B?	6	9	10	29	0	5	0.5	13	1	34	1308	0	0
I 317B?	5	11	13	33	0	5	0.4	12	1	18	957	0	0
J 326M	1	2	1	2	0	1	-	-	-	-	-	-	30
K 339S?	8	5	6	12	0	8	1.9	46	1	25	809	0	90

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE	10610	(FLIGHT		19)										
L	341B?	8	5	14	12	0	8	1.9	35	1	22	951	0	0
M	352S?	4	4	8	11	0	2	0.6	8	1	32	1068	0	0
N	358M	0	2	1	2	0	2	-	-	-	-	-	-	0
O	384M	3	3	0	8	0	2	0.9	49	1	17	5321	0	530
P	394M	5	2	0	4	0	1	3.9	63	1	54	6498	0	0
Q	404M	0	2	0	2	0	4	-	-	-	-	-	-	40
R	408B?	0	7	0	35	0	4	0.1	1	1	8	3383	0	13
S	412M	0	8	0	21	0	3	0.1	1	1	8	3414	0	0
T	428M	2	1	1	6	0	1	1.8	97	1	33	5601	0	0
U	443B?	8	14	5	17	0	4	0.6	2	1	21	1129	0	0
V	449S?	3	5	6	17	0	5	0.2	0	1	24	519	0	340
W	462S?	3	49	14	64	0	13	0.2	0	1	10	773	0	0
X	466B?	9	25	18	37	0	6	0.4	0	1	20	735	0	13
Y	470D	4	15	16	37	0	3	0.5	5	1	5	3082	0	0
Z	479M	4	4	2	9	0	1	0.7	59	1	25	4417	0	0
AA	498M	0	2	0	3	0	1	0.1	5	1	19	3956	0	0
AB	518B?	0	29	0	30	0	8	0.1	4	1	0	2214	0	80
AC	523B?	0	7	0	6	0	1	0.1	0	1	0	2837	0	0
AD	526M	0	8	0	31	0	1	0.1	3	1	6	2990	0	1110
AE	530B?	6	23	10	31	0	5	0.2	6	1	0	2119	0	1100
AF	535B?	6	30	10	15	0	8	0.2	0	1	0	1986	0	0
AG	541D	7	7	0	41	0	6	0.9	28	1	0	3747	0	0
AH	545B?	10	3	12	4	0	1	6.2	30	1	25	1028	0	0
AI	548B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AJ	552M	7	5	9	20	0	4	1.6	39	1	0	3078	0	0
AK	567B?	1	10	0	19	0	3	0.1	1	1	12	3642	0	0
AL	584M	0	8	12	25	0	5	0.4	18	1	7	2557	0	0
AM	589B?	17	19	12	28	0	7	1.2	20	1	11	1084	0	120
AN	597S?	9	29	14	60	0	12	0.3	7	1	9	1057	0	0
AO	616S	3	10	6	10	0	2	0.4	25	1	10	2671	0	7
AP	626S?	3	16	6	42	0	5	0.1	0	1	24	1542	0	0
AQ	630M	3	26	5	42	0	6	0.1	0	1	3	2621	0	20
AR	641B?	1	2	1	2	0	2	-	-	-	-	-	-	14
AS	652S	1	2	1	2	0	2	-	-	-	-	-	-	0
AT	667B?	6	8	6	13	0	2	0.6	9	1	18	1706	0	0
AU	680S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AV	765B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AW	768B?	1	2	0	2	0	1	-	-	-	-	-	-	0
AX	808D	3	13	3	8	1	1	0.2	16	1	36	1462	1	0
AY	825S?	4	17	3	3	0	4	0.2	13	1	28	1293	1	0
AZ	856S?	2	21	5	51	0	7	0.1	0	1	20	2031	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10610	(FLIGHT	19)											
BA 887D	1	2	1	2	1	3	-	-	-	-	-	-	0
BB 923S	1	2	1	2	0	2	-	-	-	-	-	-	0
LINE 10611	(FLIGHT	19)											
A 1024S?	0	2	1	2	1	2	-	-	-	-	-	-	0
B 1033B?	0	25	6	43	0	7	0.1	0	1	22	1098	0	0
C 1038B?	0	2	1	2	0	4	-	-	-	-	-	-	100
D 1044S?	0	2	1	2	2	1	-	-	-	-	-	-	0
E 1072S?	13	34	29	62	2	14	0.4	0	1	13	174	0	0
F 1082B	84	76	170	120	19	54	2.6	0	1	19	28	7	0
G 1088S?	76	17	60	37	17	20	16.4	17	1	14	325	0	0
H 1093B?	11	82	50	152	0	22	0.2	0	1	12	460	0	0
I 1102B?	12	59	32	5	0	22	0.3	0	1	13	412	0	0
J 1106M	4	63	34	139	0	21	0.4	0	1	1	884	0	0
K 1114M	0	5	9	29	0	8	0.3	0	1	12	1058	0	0
L 1140M	0	1	0	4	0	0	0.1	0	1	40	6518	0	0
M 1164M	0	8	0	3	0	2	0.1	3	1	16	3920	0	0
N 1168M	0	33	4	68	0	9	0.1	0	1	9	3136	0	0
O 1172S?	0	33	6	68	0	9	0.1	0	1	0	1785	0	90
P 1210M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 1231B?	1	2	1	2	0	2	-	-	-	-	-	-	0
R 1239S?	4	19	6	37	0	5	0.1	0	1	15	913	0	0
S 1247S?	5	16	9	33	0	5	0.3	15	1	28	754	2	40
T 1254S?	1	2	1	2	0	4	-	-	-	-	-	-	0
U 1265B?	2	23	4	17	0	5	0.2	8	1	35	529	9	0
V 1289B?	1	5	40	44	1	13	1.4	0	1	22	199	1	0
W 1338M	0	2	0	2	0	1	-	-	-	-	-	-	0
X 1348S?	0	12	2	26	0	3	0.1	0	1	11	3642	0	60
Y 1371B?	0	2	1	2	0	2	-	-	-	-	-	-	0
Z 1379B?	0	14	3	37	0	5	0.1	0	1	0	3632	0	140
AA 1383B?	0	7	2	37	0	5	0.1	0	1	0	3177	0	280
AB 1388B?	0	11	2	5	0	3	0.2	28	1	10	3947	0	0
AC 1421S?	0	2	0	2	0	4	-	-	-	-	-	-	40
AD 1429B?	8	30	17	56	0	8	0.3	0	1	22	956	0	0
AE 1431B?	8	34	17	56	0	8	0.2	4	1	0	2128	0	0
AF 1442S?	6	26	18	45	0	7	0.2	0	1	12	732	0	0
AG 1451M	0	4	0	18	0	3	0.1	9	1	11	2955	0	300
AH 1456B?	0	13	0	1	0	5	0.5	7	1	147	993	0	30
AI 1458B?	0	12	0	30	0	5	0.1	10	1	22	3739	0	1160
AJ 1494B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AK 1497B?	11	24	17	49	0	9	0.5	7	1	27	479	2	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10611	(FLIGHT	19)											
AL 1501B?	22	102	72	364	0	72	0.3	0	1	13	235	0	0
AM 1505B?	54	226	210	274	17	68	0.5	0	1	12	93	0	110
AN 1508B?	54	226	210	274	20	68	0.5	0	1	20	40	9	0
AO 1514B?	126	233	311	459	20	134	1.4	1	1	17	38	8	80

LINE 10620	(FLIGHT	19)											
A 2827B?	9	12	43	15	0	3	0.7	31	1	13	482	0	0
B 2823M	9	12	43	15	0	3	0.7	28	1	0	1578	0	0
C 2816M	0	33	0	61	0	9	0.1	0	1	0	2542	0	1550
D 2807M	0	8	0	11	0	2	0.1	0	1	5	3136	0	0
E 2799B?	0	25	8	55	0	8	0.1	0	1	4	2277	0	0
F 2797B?	0	21	8	55	0	8	0.1	0	1	5	2619	0	50
G 2793B?	0	21	8	55	0	8	0.1	0	1	24	1338	0	30
H 2790B?	0	12	4	12	0	5	0.2	12	1	23	1381	0	0
I 2785S?	0	2	1	2	0	3	-	-	-	-	-	-	0
J 2764M	0	42	0	101	0	14	0.1	13	1	19	3273	0	0
K 2761S?	0	42	0	101	0	14	0.1	9	1	0	1680	0	0
L 2755B?	3	42	9	101	0	14	0.1	0	1	28	1145	0	0
M 2752B?	4	4	17	4	0	4	9.3	23	1	35	493	6	0
N 2729S?	1	2	1	2	0	3	-	-	-	-	-	-	0
O 2704S?	0	2	1	2	0	1	-	-	-	-	-	-	12
P 2691B?	5	6	9	48	0	5	0.2	0	1	48	651	13	190
Q 2688M	5	22	14	61	0	11	0.2	0	1	32	1285	0	0
R 2680B?	10	30	32	61	0	11	0.4	0	1	25	352	1	-5
S 2668M	0	1	0	9	0	2	0.1	0	1	22	4929	0	80
T 2655S?	0	2	0	2	0	2	-	-	-	-	-	-	1820
U 2635S?	2	35	15	64	0	9	0.3	0	1	17	868	0	430
V 2626M	2	27	14	47	0	7	0.3	0	1	0	3111	0	20
W 2616B?	0	14	0	21	0	3	0.1	1	1	7	3230	0	320
X 2607M	0	7	1	22	0	3	0.1	8	1	16	3161	0	0
Y 2599S?	0	38	0	69	0	9	0.1	2	1	0	2044	0	0
Z 2590B?	0	29	4	44	0	6	0.1	0	1	1	2161	0	-4
AA 2586S?	0	21	0	28	0	4	0.1	0	1	0	2452	0	0
AB 2582M	0	2	0	2	0	3	-	-	-	-	-	-	0
AC 2576B?	12	4	31	15	0	1	4.2	46	1	33	1472	1	0
AD 2571B?	12	20	31	30	0	7	0.6	10	1	30	442	5	0
AE 2563B?	13	34	22	53	0	8	0.5	5	1	35	305	12	0
AF 2561B?	13	49	22	53	0	8	0.3	0	1	24	247	4	-4
AG 2555B?	10	37	45	59	0	13	0.3	0	1	23	311	0	1400
AH 2550D	18	40	45	64	0	13	0.6	0	1	18	260	0	80
AI 2545B?	4	1	41	64	0	11	1.0	0	1	33	632	4	-4

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT

LINE 10620	(FLIGHT	19)											
AJ 2539M	4	3	29	42	0	1	0.9	0	1	9	4489	0	0
AK 2535B?	0	9	4	8	0	1	0.3	15	1	0	3907	0	1990
AL 2529B?	0	20	4	34	0	5	0.1	0	1	0	3052	0	0
AM 2527B?	0	20	4	34	0	5	0.1	0	1	0	2560	0	0
AN 2516B?	3	33	23	54	0	7	0.5	0	1	26	1019	0	650
AO 2513B?	8	33	23	54	0	7	0.2	0	1	21	567	0	0
AP 2510B?	10	31	27	54	0	6	0.3	2	1	25	484	1	0
AQ 2500H	7	4	22	8	0	5	1.7	47	1	30	387	6	0
AR 2476S	0	2	1	2	0	3	-	-	-	-	-	-	6
AS 2451M	1	2	1	2	0	4	-	-	-	-	-	-	40
AT 2447B?	2	3	4	2	0	3	2.2	73	1	24	2254	0	0
AU 2436B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AV 2419B?	6	12	5	12	0	1	0.4	12	1	42	1458	4	0
AW 2310S	1	2	1	2	0	1	-	-	-	-	-	-	50
AX 2262S?	1	17	2	24	0	3	0.1	7	1	18	3311	0	0
AY 2246S	5	21	10	35	0	5	0.2	0	1	28	966	0	0
AZ 2167S?	1	2	1	2	0	4	-	-	-	-	-	-	0
BA 2149S?	2	13	4	25	0	4	0.1	1	1	29	1179	1	0
BB 2088B?	25	37	58	67	1	19	1.0	0	1	17	146	0	0
BC 2082B?	25	34	50	70	40	7	1.1	4	1	25	187	5	0
BD 2073B	82	62	153	91	41	63	3.2	0	1	22	21	11	0
BE 2064B	189	280	434	514	24	132	2.0	0	1	10	28	1	0
BF 2049B?	26	78	70	201	0	32	0.5	0	1	10	269	0	0
BG 2041B?	7	26	70	47	0	6	0.2	5	1	2	1028	0	11
BH 2035B?	2	40	3	46	0	6	0.1	0	1	0	2943	0	0
BI 2021M	0	8	0	19	0	2	0.1	8	1	24	4086	0	0
BJ 2017S?	0	8	0	19	0	3	0.1	9	1	16	3313	0	0
BK 1961B?	0	35	0	66	0	10	0.1	0	1	0	2597	0	0
BL 1954B?	0	35	3	66	0	10	0.1	0	1	5	3117	0	0
BM 1952M	3	13	8	20	0	3	0.3	7	1	3	3330	0	140
BN 1940B?	3	21	10	33	0	5	0.3	0	1	19	1280	0	0
BO 1936B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BP 1930M	1	2	1	2	0	4	-	-	-	-	-	-	370
BQ 1924B?	7	28	13	38	0	6	0.2	0	1	29	839	1	0
BR 1921B?	9	21	13	37	0	5	0.4	9	1	38	993	6	0
BS 1911B?	3	23	7	41	0	5	0.1	0	1	21	1506	0	40
BT 1904M	1	2	1	2	0	4	-	-	-	-	-	-	0
BU 1883B?	7	12	19	27	1	8	0.5	20	1	51	376	23	0
BV 1871B?	10	14	21	24	3	9	0.8	17	1	62	285	35	0
BW 1864S?	0	2	1	2	0	3	-	-	-	-	-	-	0
BX 1802B?	0	2	1	2	0	2	-	-	-	-	-	-	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10620	(FLIGHT	19)											
BY 1783B?	1	2	1	2	0	2	-	-	-	-	-	-	12
BZ 1761S?	0	22	0	40	0	6	0.1	3	1	4	2872	0	0
CA 1756M	0	14	0	12	0	3	0.1	6	1	10	3121	0	400
CB 1743B?	0	12	0	25	0	4	0.1	6	1	13	3296	0	0
CC 1738B?	0	2	0	2	0	4	-	-	-	-	-	-	0
CD 1692D	14	29	17	33	0	6	0.6	6	1	29	966	0	0
CE 1688B?	1	2	1	2	0	4	-	-	-	-	-	-	0
CF 1685B?	8	29	14	57	0	8	0.3	0	1	22	1232	0	100
CG 1679M	4	29	5	57	0	8	0.1	0	1	10	1465	0	190
CH 1677B?	4	29	5	57	0	8	0.1	0	1	8	2263	0	0
CI 1673M	4	29	5	57	0	8	0.1	0	1	8	3146	0	0
CJ 1666B?	0	19	3	24	0	3	0.1	0	1	7	2926	0	0
CK 1663B?	0	2	0	2	0	3	-	-	-	-	-	-	0
CL 1654B?	3	21	29	57	0	8	0.7	0	1	0	2028	0	0
CM 1648S?	5	47	29	93	0	15	0.1	0	1	13	504	0	0
CN 1642B?	25	23	79	124	0	25	1.6	4	1	17	239	0	0
CO 1637S?	7	66	80	124	0	25	0.1	0	1	20	203	3	0

LINE 10630	(FLIGHT	19)											
A 2914B?	18	125	54	268	0	40	0.2	0	1	8	383	0	0
B 2917M	18	102	0	268	0	40	0.2	0	1	0	809	0	0
C 2928M	0	78	0	38	0	7	0.1	7	1	0	1060	0	0
D 2934S?	0	67	0	38	0	6	0.1	2	1	0	1417	0	0
E 2958S?	4	32	16	60	0	9	0.3	0	1	0	3255	0	0
F 2978B?	1	2	1	2	0	4	-	-	-	-	-	-	0
G 2985S?	0	30	9	60	0	8	0.1	0	1	15	1327	0	0
H 3003S?	4	12	6	23	0	4	0.2	0	1	38	667	7	0
I 3010B?	10	17	21	29	0	7	0.6	1	1	31	398	4	0
J 3014B?	1	2	1	2	0	4	-	-	-	-	-	-	0
K 3038S?	11	11	15	37	0	5	1.0	31	1	3	2761	0	0
L 3050S?	26	54	52	84	0	14	0.7	10	1	19	669	0	0
M 3055B?	26	33	52	58	0	12	1.1	1	1	27	173	7	0
N 3081S?	5	15	7	30	0	4	0.2	0	1	0	2960	0	0
O 3084M	0	15	0	30	0	4	0.1	0	1	7	3471	0	0
P 3108S?	3	17	7	25	0	4	0.2	0	1	2	3268	0	0
Q 3120S?	5	12	5	15	0	2	0.2	4	1	0	3276	0	0
R 3129M	4	17	6	36	0	5	0.1	0	1	0	2293	0	0
S 3132S	4	21	6	40	0	4	0.1	0	1	0	2582	0	0
T 3143S	9	31	17	60	0	7	0.3	0	1	9	807	0	0
U 3149S?	15	56	28	110	0	15	0.3	0	1	13	543	0	0
V 3167S?	55	95	123	168	1	37	1.1	0	1	17	105	2	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ			VERTICAL DIKE		HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10630	(FLIGHT	19)											
W 3178B?	29	47	49	45	0	13	0.9	7	1	15	213	0	0
X 3182M	29	54	49	99	0	14	0.8	5	1	9	406	0	0
Y 3192S?	24	49	45	87	1	16	0.7	0	1	17	185	0	0
Z 3203M	18	32	63	54	0	3	0.7	7	1	0	2197	0	0
AA 3211B?	0	21	0	44	0	5	0.1	1	1	0	2407	0	0
AB 3217B?	1	7	0	44	0	2	0.1	3	1	1	3342	0	0
AC 3224M	12	34	31	64	0	8	0.4	6	1	0	2039	0	0
AD 3226B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AE 3229S?	12	29	31	64	0	11	0.5	7	1	27	416	4	0
AF 3385S?	0	32	4	61	0	8	0.1	0	1	0	3225	0	0
AG 3397B?	0	14	0	25	0	3	0.1	14	1	24	3620	0	0
AH 3413S	0	2	0	2	0	3	-	-	-	-	-	-	0
AI 3436S	0	2	1	2	0	3	-	-	-	-	-	-	0
AJ 3482S	0	18	8	38	0	5	0.2	9	1	14	2856	0	0
AK 3558B?	2	21	7	19	0	4	0.3	6	1	32	1072	1	0
AL 3563S?	3	18	7	28	0	4	0.2	0	1	23	1298	0	0
AM 3579B?	4	14	4	13	0	2	0.2	0	1	27	1105	0	0
AN 3604B	31	92	140	153	5	41	0.6	0	1	15	64	1	0
AO 3614B	174	250	59	113	126	24	2.0	0	2	15	9	8	0
AP 3620B	66	60	59	113	125	24	2.3	12	1	22	12	14	0
AQ 3623B	1	2	1	2	2	4	-	-	-	-	-	-	0
AR 3627D	197	146	368	264	34	102	4.4	0	1	13	18	5	0
AS 3642B	97	189	238	356	9	67	1.2	0	1	10	62	0	0
AT 3650B?	7	78	26	35	0	6	0.1	0	1	9	621	0	0
AU 3653B?	0	28	26	35	0	6	1.0	10	1	6	1392	0	0
AV 3664D	0	2	1	2	0	2	-	-	-	-	-	-	0
AW 3683B?	0	10	3	10	0	1	0.1	8	1	16	4589	0	0
AX 3704B?	7	11	15	17	1	4	0.7	0	1	29	595	0	0
AY 3710D	6	16	15	26	0	4	0.3	7	1	29	1397	0	0
AZ 3734D	17	27	13	32	0	4	0.8	1	1	19	1059	0	0
BA 3753B?	3	11	23	9	0	1	4.1	24	1	8	3835	0	0
BB 3764S?	8	14	16	28	1	8	0.5	12	1	39	323	14	0
BC 3776B?	19	33	32	48	4	9	0.7	10	1	36	299	13	0
BD 3780B?	19	36	32	48	3	9	0.7	7	1	41	255	18	0
BE 3790B?	3	23	4	26	0	4	0.1	5	1	29	2396	0	0
BF 3865M	0	2	1	2	0	1	-	-	-	-	-	-	0
BG 3884S?	0	10	0	16	0	2	0.1	0	1	21	5107	0	0
BH 3892M	0	6	0	18	0	3	0.1	3	1	23	4428	0	0
BI 3908B	0	34	2	71	0	10	0.1	0	1	0	2045	0	0
BJ 3915B	0	16	13	81	0	12	0.2	0	1	0	1819	0	0
BK 3920B	0	53	2	9	0	5	0.1	10	1	0	2449	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ REAL QUAD REAL QUAD REAL QUAD . COND DEPTH* . COND DEPTH RESIS DEPTH FID/INTERP PPM PPM PPM PPM PPM PPM . SIEMEN M . SIEMEN M OHM-M M NT							

LINE 10630 (FLIGHT 19)							
BL 3924D 0 53 2 9 0 5 . 0.1 15 . 1 0 2235 0 0							
BM 3958S? 37 96 107 176 0 31 . 0.7 0 . 1 14 124 0 0							
BN 3970M 1 20 10 38 0 4 . 0.3 2 . 1 3 2667 0 0							
BO 3975B? 0 22 0 38 0 5 . 0.1 6 . 1 6 2754 0 0							
BP 3978M 0 22 0 38 0 5 . 0.1 4 . 1 19 4001 0 0							
BQ 3990B 119 163 254 271 27 83 . 1.8 0 . 1 21 42 10 0							
BR 3994B 107 179 205 290 27 76 . 1.4 0 . 1 17 65 5 0							

LINE 10640 (FLIGHT 19)							
A 5328B? 60 139 183 305 0 77 . 0.9 0 . 1 15 79 2 1170							
B 5325B? 92 139 183 305 0 77 . 1.5 0 . 1 17 70 4 0							
C 5322B? 44 97 183 305 0 77 . 0.8 0 . 1 17 161 0 0							
D 5310B? 0 38 3 92 0 15 . 0.1 0 . 1 0 1641 0 0							
E 5308B? 0 38 3 92 0 15 . 0.1 0 . 1 0 1938 0 0							
F 5305B? 0 19 3 30 0 5 . 0.1 0 . 1 1 2641 0 0							
G 5297B? 0 5 0 8 0 1 . 0.1 1 . 1 18 4206 0 0							
H 5294M 0 5 0 8 0 1 . 0.1 4 . 1 17 3795 0 60							
I 5284B? 0 9 0 7 0 0 . 0.1 0 . 1 17 4336 0 30							
J 5275B? 2 13 5 22 0 3 . 0.2 1 . 1 18 4359 0 0							
K 5271B? 2 10 5 22 0 3 . 0.2 0 . 1 22 1837 0 0							
L 5261M 0 1 1 2 0 0 . - - - - - 0							
M 5252S 1 2 1 2 0 2 . - - - - - -5							
N 5222S 1 16 6 36 0 6 . 0.1 0 . 1 7 1724 0 0							
O 5211S? 3 8 7 28 0 4 . 0.2 0 . 1 27 1297 0 60							
P 5199B? 4 7 11 8 0 2 . 1.4 0 . 1 46 681 9 0							
Q 5190M 0 7 2 11 0 1 . 0.1 2 . 1 33 5761 0 0							
R 5161M 0 9 0 18 0 3 . 0.1 0 . 1 17 4314 0 0							
S 5154S? 0 2 1 2 0 4 . - - - - - 150							
T 5142M 0 2 0 2 0 1 . - - - - - 0							
U 5119M 0 1 0 4 0 1 . 0.1 0 . 1 61 6538 0 590							
V 5109M 0 9 11 13 0 2 . 0.8 15 . 1 16 4899 0 250							
W 5100S? 0 23 13 39 1 7 . 0.3 0 . 1 23 1140 0 0							
X 5082S 8 48 68 94 2 14 . 0.2 0 . 1 18 390 0 0							
Y 5076S 24 71 68 132 2 22 . 0.5 0 . 1 17 193 0 -4							
Z 5068S 35 79 85 146 1 25 . 0.7 0 . 1 15 120 0 10							
AA 5053S? 23 76 79 142 2 23 . 0.4 0 . 1 13 191 0 0							
AB 5044B? 3 6 79 139 2 23 . 1.1 0 . 1 28 463 0 0							
AC 5037S? 0 23 10 42 0 6 . 0.2 0 . 1 5 2037 0 0							
AD 5033B? 0 14 7 42 0 6 . 0.1 0 . 1 20 1670 0 0							
AE 5031B? 0 8 7 42 0 6 . 0.1 0 . 1 1 2909 0 0							
AF 5029M 0 8 7 24 0 4 . 0.2 2 . 1 1 2934 0 390							

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10640	(FLIGHT	19)											
AG 5000B?	1	2	1	2	2	3	-	-	-	-	-	-	0
AH 4962S?	0	2	3	13	2	2	0.1	7	1	56	3756	6	0
AI 4929S?	0	13	1	19	0	2	0.1	10	1	36	4945	0	0
AJ 4883B?	1	16	3	20	0	3	0.1	0	1	26	3356	0	0
AK 4841S	3	14	4	26	1	4	0.1	0	1	22	2508	0	40
AL 4828M	0	12	2	19	0	3	0.1	2	1	34	5074	0	30
AM 4826S?	0	12	2	19	0	3	0.1	3	1	26	4359	0	0
AN 4798S	0	6	5	43	1	6	0.1	0	1	17	1766	0	0
AO 4775S	2	13	4	19	0	3	0.1	0	1	12	2758	0	0
AP 4738S?	2	19	3	24	0	4	0.1	0	1	24	2160	0	0
AQ 4717S	0	6	2	16	0	3	0.1	4	1	24	4173	0	0
AR 4682S?	0	2	0	2	1	2	-	-	-	-	-	-	0
AS 4659B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AT 4643B?	9	48	21	40	0	6	0.2	0	1	21	703	0	0
AU 4638B?	6	13	21	40	1	6	0.4	21	1	19	315	0	0
AV 4628B?	17	54	35	8	0	1	0.4	1	1	21	319	1	0
AW 4616B?	2	24	4	71	0	11	0.1	0	1	25	928	0	0
AX 4598B?	5	47	7	85	0	11	0.1	0	1	19	731	0	0
AY 4593B?	5	40	7	56	0	7	0.1	0	1	15	638	0	20
AZ 4579E	183	144	397	286	92	139	4.0	0	1	18	18	9	150
BA 4575B	183	43	397	77	92	139	20.6	0	1	20	12	11	90
BB 4564B	104	201	203	370	6	75	1.2	0	1	14	33	5	0
BC 4556B	180	312	327	557	50	117	1.6	0	1	12	28	3	0
BD 4543B	190	186	382	310	44	113	3.1	0	1	13	14	5	0
BE 4534B	38	77	57	47	91	37	0.8	0	1	14	13	6	0
BF 4526B	220	374	491	699	91	179	1.8	0	1	13	36	4	470
BG 4522B	141	189	491	322	6	179	2.0	0	1	14	39	4	0
BH 4507S?	5	28	11	56	0	7	0.2	0	1	9	1207	0	0
BI 4490M	0	17	0	33	0	5	0.1	9	1	8	2667	0	0
BJ 4486B?	0	17	0	33	0	5	0.1	4	1	11	3371	0	0
BK 4476B?	1	2	0	2	0	4	-	-	-	-	-	-	0
BL 4458B?	0	27	0	57	0	8	0.1	1	1	0	2364	0	0
BM 4443M	1	2	1	2	0	4	-	-	-	-	-	-	0
BN 4440B?	13	16	16	20	0	5	0.9	0	1	30	597	0	0
BO 4437B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BP 4418B?	24	33	39	89	0	14	1.1	0	1	24	409	0	0
BQ 4412M	24	16	39	37	0	5	2.5	25	1	14	3724	0	170
BR 4406B?	4	14	12	37	0	5	0.3	0	1	22	1442	0	0
BS 4369B?	1	2	1	2	2	4	-	-	-	-	-	-	60
BT 4367B?	7	16	21	26	2	7	0.4	0	1	35	376	7	0
BU 4260S?	4	40	4	91	0	11	0.1	2	1	16	2386	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10640	(FLIGHT	19)											
BV 4228M	0	10	3	20	0	3	0.1	0	1	10	4347	0	8
BW 4177S?	0	2	0	2	0	4	-	-	-	-	-	-	60
BX 4164B?	1	2	1	2	0	3	-	-	-	-	-	-	870
BY 4161B?	1	2	0	2	0	3	-	-	-	-	-	-	0
BZ 4153S?	0	16	0	30	0	3	0.1	3	1	3	2743	0	0
CA 4144S?	1	2	1	2	0	3	-	-	-	-	-	-	0
CB 4116S?	0	21	0	37	0	5	0.1	0	1	0	2921	0	0
CC 4111S?	0	30	0	62	0	9	0.1	1	1	3	2964	0	0

LINE 10650	(FLIGHT	19)											
A 5448B?	46	83	112	176	0	31	1.0	0	1	16	157	0	0
B 5452B?	34	145	139	145	0	51	0.4	0	1	20	170	4	0
C 5455B?	57	145	139	145	0	51	0.8	0	1	17	131	2	0
D 5461M	57	145	139	145	0	51	0.8	0	1	0	1616	0	0
E 5470S?	5	8	17	55	0	8	0.4	0	1	16	761	0	0
F 5485M	0	5	2	5	0	0	0.1	28	1	34	5497	0	0
G 5514B?	1	11	1	16	0	2	0.1	0	1	3	4216	0	0
H 5545M	1	2	1	2	0	1	-	-	-	-	-	-	0
I 5554M	0	1	0	8	0	1	0.1	0	1	71	7255	0	0
J 5563M	0	4	0	13	0	2	0.1	0	1	33	5675	0	0
K 5569M	0	6	0	14	0	2	0.1	1	1	26	4899	0	0
L 5575M	0	6	0	10	0	2	0.1	2	1	26	4780	0	0
M 5580M	0	6	0	12	0	2	0.1	2	1	38	5666	0	0
N 5588M	0	2	0	2	0	1	-	-	-	-	-	-	0
O 5602M	1	2	0	5	0	1	0.1	18	1	56	6538	0	0
P 5614M	0	8	0	15	0	2	0.1	0	1	23	4914	0	0
Q 5642M	0	18	0	43	0	3	0.1	1	1	20	4347	0	0
R 5644M	0	1	0	43	0	3	0.1	0	1	28	5497	0	0
S 5648M	7	6	25	6	0	1	1.0	33	1	18	4929	0	0
T 5658S?	12	47	32	80	0	15	0.3	0	1	19	299	0	0
U 5668S?	7	20	12	35	0	5	0.3	0	1	24	382	0	0
V 5671S?	5	21	12	31	0	5	0.2	0	1	27	442	1	0
W 5682B?	12	14	11	21	0	3	0.9	3	1	28	307	3	0
X 5697B?	16	36	49	77	0	13	0.6	0	1	18	286	0	0
Y 5701B?	16	42	49	77	0	13	0.5	0	1	20	351	0	0
Z 5716M	0	2	0	2	0	1	-	-	-	-	-	-	0
AA 5727B?	10	22	22	40	0	5	0.5	13	1	21	926	0	0
AB 5740S?	13	37	38	69	0	8	0.4	0	1	17	221	0	0
AC 5752S?	2	18	4	8	0	1	0.3	21	1	37	439	10	0
AD 5761S	2	15	8	13	0	4	0.5	25	1	39	890	9	0
AE 5841S	4	19	12	33	0	5	0.3	0	1	32	887	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10650	(FLIGHT 19)												
AF 5899S?	0	12	2	23	0	4	0.1	0	1	10	3257	0	0
AG 5932S?	17	74	56	155	0	22	0.3	0	1	12	268	0	0
AH 5963S	1	13	2	27	0	3	0.1	0	1	18	2950	0	0
AI 5975S	1	26	4	45	0	6	0.1	0	1	19	2048	0	0
AJ 6000S	0	13	3	23	0	3	0.1	4	1	26	2789	0	0
AK 6061S?	1	2	1	2	0	4	-	-	-	-	-	-	0
AL 6078S?	2	12	6	13	0	2	0.3	17	1	27	1105	0	0
AM 6088S	8	28	17	51	0	8	0.3	0	1	25	454	0	0
AN 6116B	154	157	167	234	64	61	2.8	0	1	18	12	9	0
AO 6120B	156	157	167	234	64	61	2.8	0	1	18	23	8	0
AP 6122B	156	117	174	234	62	61	4.0	0	1	16	28	6	0
AQ 6132B	224	427	513	835	40	183	1.6	0	1	16	22	7	0
AR 6134B	224	427	513	835	40	183	1.6	0	1	11	26	3	0
AS 6146B	83	177	146	313	57	55	1.1	0	1	15	54	4	0
AT 6160B	51	80	84	84	28	32	1.2	0	1	17	29	6	0
AU 6174B	88	50	199	91	35	56	4.6	0	1	16	33	4	0
AV 6182M	10	35	199	91	0	56	0.3	0	1	0	2187	0	0
AW 6196S?	1	10	8	19	0	3	0.3	0	1	38	1045	2	0
AX 6216S?	5	30	11	62	0	8	0.1	0	1	26	964	0	0
AY 6220M	5	30	11	62	0	8	0.1	0	1	0	2597	0	0
AZ 6236S?	37	83	76	135	1	24	0.8	0	1	11	162	0	0
BA 6244M	0	2	1	2	1	2	-	-	-	-	-	-	0
BB 6246B?	0	8	0	20	0	3	0.1	1	1	21	4382	0	0
BC 6249M	20	34	12	20	0	3	0.8	11	1	16	3894	0	0
BD 6253D	1	2	1	2	0	4	-	-	-	-	-	-	0
BE 6256D	20	21	18	49	0	7	1.3	13	1	38	1102	4	0
BF 6268D	9	30	45	46	0	7	0.3	0	1	9	1179	0	0
BG 6272D	18	25	58	42	3	14	0.9	0	1	25	410	0	0
BH 6280B?	28	24	58	36	4	14	1.9	0	1	26	108	7	0
BI 6294B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BJ 6297B?	11	15	14	21	0	6	0.8	13	1	23	932	0	0
BK 6378S	0	2	1	2	0	2	-	-	-	-	-	-	0
BL 6436B?	0	36	0	71	0	9	0.1	3	1	0	2007	0	0
BM 6439B?	2	28	4	71	0	9	0.1	0	1	0	2266	0	0
BN 6460M	0	2	1	2	0	3	-	-	-	-	-	-	0
BO 6469M	0	6	0	8	0	2	0.1	0	1	58	6737	0	0
BP 6500M	0	5	34	34	0	6	1.5	7	1	1	3198	0	0
BQ 6509S?	12	82	34	154	0	21	0.2	0	1	11	468	0	0
BR 6518B?	55	93	115	198	0	42	1.1	2	1	21	157	4	0

LINE 10660	(FLIGHT 19)												
A 7680S?	0	49	0	22	0	13	0.1	8	1	0	1467	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10660	(FLIGHT	19)											
B 7674M	8	17	43	73	0	14	0.4	21	1	0	1520	0	0
C 7655B?	140	206	347	341	5	106	1.8	0	1	16	32	6	0
D 7604S?	0	10	4	16	0	2	0.2	1	1	17	2624	0	0
E 7579M	0	2	0	2	0	1	-	-	-	-	-	-	0
F 7562S	4	5	12	8	0	2	1.6	5	1	54	435	21	0
G 7556M	4	5	12	11	0	2	1.1	30	1	27	5008	0	0
H 7543M	0	4	0	15	0	3	0.1	0	1	24	4899	0	0
I 7521M	0	6	0	26	0	5	0.1	4	1	16	3755	0	0
J 7510M	0	6	0	12	0	2	0.1	7	1	15	3517	0	0
K 7502M	0	12	0	12	0	3	0.1	5	1	17	3779	0	0
L 7499B?	0	12	0	12	0	2	0.1	2	1	19	4259	0	0
M 7496M	0	8	0	16	0	2	0.1	8	1	27	4336	0	0
N 7481M	0	2	1	2	0	1	-	-	-	-	-	-	0
O 7471S?	0	21	6	42	0	6	0.1	0	1	2	2677	0	0
P 7467B?	0	20	6	201	0	29	0.1	0	1	10	3414	0	0
Q 7462S?	13	88	48	201	0	29	0.2	0	1	2	1085	0	0
R 7459S?	13	88	48	201	0	29	0.2	0	1	20	311	0	0
S 7453B?	13	97	67	184	0	32	0.2	0	1	19	333	1	0
T 7451B?	1	2	1	2	0	4	-	-	-	-	-	-	0
U 7438B?	2	63	14	138	0	20	0.1	0	1	0	1210	0	0
V 7437B?	0	63	1	138	0	20	0.1	9	1	0	1372	0	0
W 7430M	40	161	111	310	0	49	0.5	0	1	17	641	0	0
X 7422S?	34	162	111	310	0	49	0.4	0	1	17	191	2	0
Y 7417B?	34	82	111	143	0	21	0.7	0	1	13	490	0	0
Z 7415B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AA 7407S?	3	36	15	70	0	9	0.2	0	1	16	887	0	0
AB 7400D	6	35	21	64	0	8	0.2	0	1	16	622	0	0
AC 7374B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AD 7363B?	7	50	17	89	0	14	0.1	3	1	25	670	4	0
AE 7358B?	2	81	20	170	0	23	0.1	0	1	11	829	0	0
AF 7355B?	6	81	20	170	0	24	0.1	0	1	20	538	0	0
AG 7345S	1	2	1	2	0	4	-	-	-	-	-	-	0
AH 7292S?	5	25	12	35	0	7	0.2	5	1	35	744	8	0
AI 7281S	3	9	6	17	0	3	0.3	6	1	38	805	7	0
AJ 7260B?	0	17	1	34	0	5	0.1	7	1	15	3432	0	0
AK 7253B?	0	13	1	34	0	4	0.1	6	1	25	4175	0	0
AL 7239S?	3	22	6	34	0	4	0.1	0	1	23	1857	0	0
AM 7234M	2	6	6	34	0	1	0.1	0	1	30	5685	0	0
AN 7219S?	1	9	6	11	0	2	0.4	18	1	43	1769	4	0
AO 7203B?	135	288	375	577	12	110	1.2	0	1	9	49	0	0
AP 7190S?	39	68	118	102	1	20	1.0	0	1	21	499	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10660	(FLIGHT	19)											
AQ 7175B?	7	16	10	27	0	4	0.4	14	1	32	1084	1	0
AR 7163S?	1	2	1	2	0	4	-	-	-	-	-	-	0
AS 7145S?	8	102	27	222	0	29	0.1	0	1	8	594	0	0
AT 7109B?	1	17	2	29	0	4	0.1	0	1	14	3808	0	0
AU 7098S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AV 7059B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AW 7056B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AX 7050D	18	46	30	71	0	9	0.5	4	1	21	432	0	0
AY 7033B?	9	18	13	32	0	26	0.5	12	1	22	592	0	0
AZ 7020B?	42	25	218	38	2	59	3.4	19	1	24	562	0	0
BA 7017B	272	363	620	451	35	131	2.5	0	1	11	25	3	0
BB 7008B	328	426	674	760	113	230	2.7	0	2	18	9	11	0
BC 7003B	287	426	610	760	113	230	2.3	0	1	13	21	5	0
BD 6989B?	82	179	165	376	34	61	1.0	0	1	13	99	0	0
BE 6985B	82	179	165	376	46	61	1.0	0	1	18	26	8	0
BF 6981B	75	99	148	192	46	54	1.6	0	1	20	18	10	0
BG 6955B	229	283	497	511	43	163	2.6	0	1	15	23	7	0
BH 6934B	103	109	277	431	7	89	2.3	0	1	15	69	2	0
BI 6929B	139	246	277	431	11	89	1.5	0	1	11	56	0	0
BJ 6916D	27	97	68	165	2	15	0.5	0	1	18	240	0	0
BK 6912D	25	97	68	165	2	15	0.4	0	1	11	331	0	0
BL 6901M	0	15	28	26	0	4	1.4	21	1	5	2664	0	0
BM 6891B	29	73	50	111	0	17	0.6	0	1	19	393	0	0
BN 6887B	35	206	94	448	0	61	0.3	0	1	4	263	0	0
BO 6873B?	0	21	0	44	0	6	0.1	0	1	2	3045	0	0
BP 6871B?	33	21	56	44	0	6	2.9	14	1	3	2638	0	0
BQ 6866B?	27	34	56	68	1	16	1.2	0	1	22	150	3	0
BR 6850S?	22	53	59	103	3	19	0.6	0	1	24	169	4	0
BS 6833B?	3	17	7	20	0	3	0.3	5	1	31	1774	0	0
BT 6774S	0	2	1	2	0	2	-	-	-	-	-	-	0
BU 6734B?	0	13	0	7	0	1	0.1	4	1	28	4809	0	0
BV 6716B?	0	14	0	25	0	4	0.1	9	1	24	3992	0	0
BW 6703M	0	4	0	10	0	2	0.1	6	1	17	3755	0	0
BX 6691B?	0	4	0	28	0	5	0.1	5	1	5	2806	0	0
BY 6682M	0	11	0	7	0	4	0.1	0	1	8	4175	0	0
BZ 6635S?	0	50	2	96	0	13	0.1	2	1	0	1703	0	0
CA 6618M	2	6	3	8	0	1	0.2	24	1	40	5812	0	0
CB 6613B?	2	13	3	34	0	6	0.1	0	1	15	4301	0	0
CC 6605S?	0	25	5	34	0	6	0.1	0	1	0	3078	0	0
CD 6589B?	22	118	93	224	0	41	0.3	0	1	11	378	0	0
CE 6585B?	34	122	93	212	6	45	0.5	0	1	14	158	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	COND DEPTH .SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10670	(FLIGHT	20)											
A 311S?	2	7	7	12	0	3	0.4	15	1	33	1317	0	0
B 321S?	1	9	4	12	0	2	0.2	7	1	25	2909	0	0
C 330S	0	8	2	11	0	1	0.1	2	1	20	4555	0	0
D 354S?	0	59	95	116	0	17	1.7	4	1	0	1499	0	0
E 362S?	32	63	95	126	1	21	0.8	0	1	20	108	3	0
F 383S?	26	40	72	72	5	21	1.0	0	1	16	70	0	0
G 397S	7	22	19	44	0	8	0.3	0	1	18	465	0	0
H 442M	0	13	6	44	0	5	0.1	0	1	6	3022	0	0
I 445B?	0	13	0	44	0	5	0.1	0	1	0	2641	0	0
J 460S?	0	6	0	24	0	4	0.1	10	1	8	2628	0	0
K 468B?	0	6	0	15	0	4	0.1	7	1	13	3284	0	0
L 481M	0	8	0	21	0	3	0.1	7	1	20	3877	0	0
M 501M	0	3	0	5	0	1	0.1	0	1	23	5176	0	0
N 515M	0	10	0	20	0	3	0.1	0	1	7	3894	0	0
O 516B?	0	13	0	20	0	3	0.1	0	1	1	3585	0	0
P 519B?	0	13	0	19	0	3	0.1	0	1	1	3634	0	0
Q 523S?	0	11	0	32	0	5	0.1	6	1	13	3319	0	0
R 532M	0	4	0	6	0	1	0.1	0	1	26	5437	0	0
S 542M	0	20	0	39	0	3	0.1	6	1	28	4589	0	0
T 547S?	0	20	0	39	0	5	0.1	6	1	10	3131	0	0
U 552M	0	2	1	2	0	3	-	-	-	-	-	-	0
V 557B?	20	32	42	62	0	12	0.8	9	1	25	1182	0	0
W 561B?	20	37	42	71	0	12	0.7	0	1	22	243	0	0
X 586B?	0	27	0	59	0	9	0.1	4	1	0	2435	0	0
Y 590B?	4	18	6	59	0	9	0.1	0	1	1	2880	0	0
Z 593B?	4	18	6	59	0	5	0.1	0	1	32	1390	0	0
AA 596B?	0	2	1	2	0	2	-	-	-	-	-	-	0
AB 600M	0	15	2	28	0	4	0.1	0	1	20	5340	0	0
AC 609S?	1	44	9	105	0	15	0.1	0	1	0	2524	0	0
AD 612S?	5	32	13	76	0	12	0.1	0	1	7	1284	0	0
AE 622S?	4	32	13	60	0	8	0.2	0	1	0	2090	0	0
AF 630M	9	165	7	309	0	45	0.1	0	1	0	990	0	0
AG 632B?	9	165	7	309	0	45	0.1	0	1	0	1569	0	0
AH 667B?	5	19	4	39	0	6	0.2	0	1	18	2445	0	0
AI 673B?	5	14	13	39	0	6	0.3	20	1	27	1590	0	0
AJ 680S?	7	27	11	59	0	8	0.2	10	1	15	1667	0	0
AK 751S?	10	30	18	54	0	9	0.3	0	1	27	539	1	0
AL 785S?	0	17	4	35	0	4	0.1	8	1	15	2551	1	0
AM 802B?	1	26	7	42	0	6	0.1	0	1	4	2605	0	0
AN 805S?	2	24	7	42	0	6	0.1	0	1	14	1824	0	0
AO 844B?	0	14	0	17	0	2	0.1	5	1	25	4440	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR							
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH* M	COND DEPTH* SIEMEN	COND DEPTH* M	RESIS OHM-M	DEPTH M	NT	

LINE 10670	(FLIGHT	20)												
AP 858B?	1	7	0	33	0	4	0.1	19	1	66	6498	1	0	
AQ 862B?	0	2	1	2	0	4	-	-	-	-	-	-	0	
AR 866B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
AS 869B?	9	138	41	327	0	42	0.1	0	1	6	534	0	0	
AT 886S	1	2	1	2	0	4	-	-	-	-	-	-	0	
AU 924S?	4	19	3	27	1	4	0.2	1	1	30	1122	0	0	
AV 934B?	24	69	55	138	1	21	0.5	0	1	16	251	0	0	
AW 958S	2	18	4	30	0	4	0.1	0	1	31	1290	2	0	
AX 1006B	9	13	182	140	2	15	0.7	17	1	28	499	2	0	
AY 1017B	27	146	160	495	11	78	0.3	0	1	17	73	5	0	
AZ 1023B	57	146	319	495	31	41	0.8	0	1	10	37	1	0	
BA 1030B	126	309	312	612	31	128	1.1	0	1	10	46	0	0	
BB 1042D	24	41	41	77	51	59	0.8	0	1	20	43	7	0	
BC 1053B	100	100	208	201	31	75	2.4	0	1	22	17	12	0	
BD 1062B	119	122	263	207	28	87	2.5	0	1	17	15	8	0	
BE 1064B	129	128	263	207	55	87	2.7	0	1	14	16	5	0	
BF 1071B	275	439	617	821	55	206	2.1	0	1	11	20	3	0	
BG 1077B	27	149	617	299	55	22	0.3	0	1	14	38	4	0	
BH 1081B	34	149	76	299	7	25	0.4	0	1	14	22	5	0	
BI 1091B	183	226	250	436	30	80	2.4	0	1	11	24	2	0	
BJ 1118B	134	175	288	312	48	98	2.0	0	1	14	24	4	0	
BK 1128B	461	640	1035	1159	78	343	2.9	0	1	14	28	5	0	
BL 1133B	461	640	1035	1202	90	343	2.9	0	1	9	13	2	0	
BM 1146B	78	24	98	36	17	58	10.5	0	1	13	31	1	0	
BN 1148B	78	80	98	132	17	58	2.2	0	1	21	28	9	0	
BO 1158D	1	2	1	2	2	4	-	-	-	-	-	-	0	
BP 1177B	13	21	20	26	1	6	0.7	0	1	33	464	4	0	
BQ 1187B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
BR 1189B?	36	153	92	251	5	39	0.4	0	1	19	183	3	0	
BS 1192B?	36	153	92	251	5	39	0.4	0	1	28	174	11	0	
BT 1296S	1	2	1	2	0	1	-	-	-	-	-	-	0	
BU 1386S?	0	2	1	2	0	1	-	-	-	-	-	-	0	

LINE 10675	(FLIGHT	20)												
A 1489M	0	2	0	2	0	1	-	-	-	-	-	-	0	
B 1504S?	1	18	2	24	0	4	0.1	0	1	11	2353	0	0	
C 1511S?	2	13	2	21	0	3	0.1	0	1	17	1828	0	0	
D 1521M	0	4	0	4	0	1	0.1	5	1	27	4564	0	0	
E 1526B?	0	9	0	6	0	1	0.1	3	1	23	4417	0	0	
F 1535B?	0	15	2	9	0	2	0.1	4	1	13	4155	0	0	
G 1549S	0	11	2	23	0	4	0.1	1	1	12	3371	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10675	(FLIGHT	20)											
H 1552M	0	8	0	23	0	2	0.1	5	1	13	3414	0	0
I 1557M	0	4	1	26	0	2	0.1	0	1	14	4259	0	0
J 1564B?	4	43	19	68	0	12	0.3	0	1	9	1274	0	0
K 1565B?	5	15	19	68	0	12	0.3	0	1	11	793	0	0
L 1567M	5	26	19	68	0	9	0.3	0	1	0	1666	0	0
M 1576M	0	1	58	73	0	13	1.4	5	1	3	2719	0	0
N 1580B?	32	57	65	73	2	3	0.9	0	1	24	189	5	0

LINE 10680	(FLIGHT	20)											
A 2714S	1	2	1	2	0	2	-	-	-	-	-	-	0
B 2702S?	0	21	1	46	0	6	0.1	0	1	0	2507	0	0
C 2694M	0	21	2	46	0	3	0.1	0	1	14	4577	0	0
D 2683M	0	2	1	2	0	3	-	-	-	-	-	-	0
E 2676S?	0	23	0	47	0	7	0.1	0	1	0	2584	0	0
F 2671M	5	41	35	79	0	17	0.7	0	1	0	2635	0	0
G 2664B?	10	41	35	79	0	17	0.3	0	1	18	342	0	0
H 2652B?	21	10	40	25	7	9	3.5	1	1	19	54	4	0
I 2641B?	15	14	31	29	9	10	1.5	8	1	28	79	11	0
J 2635B?	11	9	38	15	7	10	1.4	11	1	32	66	15	0
K 2618B?	1	2	1	2	0	3	-	-	-	-	-	-	0
L 2606S?	7	19	19	23	0	8	0.3	0	1	10	297	0	0
M 2584M	5	10	0	22	0	5	0.4	24	1	6	3342	0	0
N 2582B?	0	10	0	22	0	5	0.1	0	1	8	3693	0	0
O 2573M	0	4	0	5	0	2	0.1	0	1	21	5417	0	0
P 2569M	0	5	0	8	0	1	0.1	0	1	17	5437	0	0
Q 2564M	0	3	0	8	0	1	0.1	0	1	18	5722	0	0
R 2560M	0	3	0	6	0	1	0.1	0	1	33	5802	0	0
S 2533M	0	10	0	20	0	4	0.1	4	1	17	3903	0	0
T 2522M	7	10	12	36	3	6	0.6	31	1	0	2487	0	0
U 2514S?	11	23	12	37	3	10	0.5	0	1	29	212	7	0
V 2504S?	9	22	35	37	2	6	0.4	10	1	34	316	11	0
W 2494B?	6	35	30	59	3	10	0.2	0	1	0	1965	0	0
X 2490B?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 2487B?	1	13	14	59	0	3	0.2	0	1	37	669	7	0
Z 2476M	0	2	1	2	0	4	-	-	-	-	-	-	0
AA 2428M	0	3	0	4	0	1	0.1	7	1	72	6645	3	0
AB 2410M	0	2	0	2	0	2	-	-	-	-	-	-	0
AC 2390M	0	5	0	8	0	1	0.1	0	1	30	5703	0	0
AD 2374S?	4	19	5	38	0	6	0.1	0	1	17	833	0	0
AE 2360S?	9	95	39	191	0	29	0.1	0	1	5	371	0	0
AF 2345B?	2	17	5	29	0	4	0.1	0	1	21	953	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10680	(FLIGHT		20)										
AG 2342S?	2	17	5	37	0	5	0.1	0	1	20	1030	0	0
AH 2327B?	8	32	18	52	0	8	0.2	0	1	29	695	2	0
AI 2304S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AJ 2255S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AK 2249B?	4	26	9	68	0	10	0.1	0	1	31	1675	0	0
AL 2246B?	4	26	9	68	0	10	0.1	0	1	17	1386	0	0
AM 2241B?	2	50	9	68	0	9	0.1	3	1	6	2993	0	0
AN 2222B?	2	13	2	20	0	3	0.1	0	1	13	3969	0	0
AO 2196S	1	2	1	2	0	3	-	-	-	-	-	-	0
AP 2153B?	9	48	28	85	0	11	0.2	0	1	16	821	0	0
AQ 2138S?	9	18	11	32	0	5	0.5	1	1	25	863	0	0
AR 2126S	2	18	3	31	0	5	0.1	0	1	19	1830	0	0
AS 2099B?	4	37	40	11	0	9	8.9	25	1	20	974	0	0
AT 2093B?	35	87	40	136	0	20	0.7	8	1	23	479	3	0
AU 2090B?	35	64	40	136	0	20	0.9	8	1	21	668	0	0
AV 2084B	107	204	286	410	10	81	1.3	0	1	10	82	0	0
AW 2066B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AX 2039B?	9	27	13	44	0	6	0.4	0	1	11	843	0	0
AY 2028E	121	134	263	233	28	92	2.3	0	1	20	212	0	0
AZ 2022B	121	134	263	233	28	92	2.3	0	1	15	32	4	0
BA 2008B	46	155	64	293	20	13	0.6	0	1	15	33	5	0
BB 1993B	175	133	339	252	56	104	4.1	2	1	13	17	5	0
BC 1987B	152	124	306	347	56	104	3.6	1	1	14	23	5	0
BD 1982B	114	205	260	393	27	88	1.4	0	1	14	29	5	0
BE 1972B	47	47	75	79	13	20	1.9	0	1	16	31	5	0
BF 1966B	1	2	1	2	2	4	-	-	-	-	-	-	0
BG 1959B	1	2	1	2	2	4	-	-	-	-	-	-	0
BH 1952B	1	2	1	2	2	4	-	-	-	-	-	-	0
BI 1946B	70	597	254	1111	41	148	0.3	0	1	13	33	3	0
BJ 1942B	83	597	254	1111	41	148	0.4	0	1	15	39	6	0
BK 1937B	70	181	240	337	41	148	0.8	0	1	17	36	7	0
BL 1932B	49	181	108	337	37	32	0.5	0	1	15	23	5	0
BM 1923B	31	78	101	186	7	33	0.6	0	1	15	49	3	0
BN 1912B	120	189	283	371	23	91	1.6	0	1	17	29	7	0
BO 1902D	97	174	295	319	6	98	1.3	0	1	18	26	8	0
BP 1898B	62	216	295	429	21	98	0.6	0	1	13	24	4	0
BQ 1886B	81	127	194	242	1	62	1.4	0	1	17	47	5	0
BR 1870B	99	231	261	424	13	81	1.0	0	1	15	59	4	0
BS 1850M	19	50	26	74	0	9	0.5	10	1	5	2286	0	0
BT 1846B?	19	50	26	74	0	9	0.5	4	1	16	707	0	0
BU 1834B?	48	53	128	104	4	13	1.7	18	1	0	1406	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10680	(FLIGHT	20)											
BV 1828S?	48	101	128	207	4	37	0.9	0	1	20	102	5	0
BW 1815B?	1	2	1	2	0	1	-	-	-	-	-	-	0
EX 1810D	12	21	22	9	0	9	0.6	11	1	40	627	10	0
BY 1742S?	0	9	0	15	0	2	0.1	0	1	18	4945	0	0
BZ 1733S?	0	2	0	2	0	4	-	-	-	-	-	-	0
CA 1721S?	0	2	1	2	0	2	-	-	-	-	-	-	0
CB 1713S?	5	52	14	105	0	15	0.1	0	1	7	1080	0	0
CC 1682S?	0	2	0	2	0	2	-	-	-	-	-	-	0
CD 1667B?	1	2	1	2	0	2	-	-	-	-	-	-	0
CE 1658M	0	2	1	2	0	1	-	-	-	-	-	-	0
CF 1648M	0	1	0	4	0	1	0.1	0	1	42	6158	0	0

LINE 10690	(FLIGHT	20)											
A 2849B?	6	31	17	61	0	8	0.2	0	1	17	1023	0	0
B 2851B?	6	31	17	61	0	8	0.2	0	1	28	740	0	0
C 2856M	0	1	13	15	0	2	0.9	12	1	0	3426	0	1420
D 2860M	0	8	5	16	0	2	0.2	2	1	0	2888	0	0
E 2871M	0	2	1	2	0	3	-	-	-	-	-	-	1170
F 2874D	0	16	0	31	0	5	0.1	0	1	0	2802	0	0
G 2879B?	0	19	0	31	0	5	0.1	0	1	0	2212	0	0
H 2884M	0	18	0	7	0	1	0.1	0	1	0	2513	0	0
I 2886B?	0	13	0	22	0	4	0.1	0	1	0	2216	0	440
J 2887B?	0	17	0	22	0	4	0.1	0	1	0	2384	0	540
K 2903B?	138	67	289	123	32	94	6.8	0	1	16	11	7	0
L 2906B?	30	10	289	123	32	94	6.6	15	1	20	13	11	0
M 2921B?	62	38	114	53	35	42	3.8	3	1	26	22	15	0
N 2928D	22	44	50	85	26	36	0.7	4	1	25	36	13	0
O 2938B?	3	37	11	62	0	18	0.2	0	1	19	114	3	260
P 2946S	4	9	14	19	0	16	0.7	0	1	17	118	0	0
Q 2967B?	15	22	20	39	2	11	0.9	8	1	39	209	16	0
R 2975S?	9	21	28	37	2	16	0.5	8	1	36	129	18	0
S 2981M	0	2	1	2	0	4	-	-	-	-	-	-	0
T 3000B?	7	12	12	8	0	2	0.5	10	1	29	160	9	0
U 3006S?	5	16	17	23	4	2	0.8	17	1	35	277	13	100
V 3010S?	13	17	17	48	4	14	0.9	10	1	35	126	16	0
W 3012M	13	17	17	48	4	14	0.9	22	1	37	196	17	0
X 3014S?	14	25	20	48	2	14	0.6	11	1	31	186	11	280
Y 3023S?	11	18	30	39	0	8	0.7	8	1	27	287	4	0
Z 3028M	6	16	26	33	0	6	0.3	7	1	5	1799	0	590
AA 3039S?	5	24	11	47	0	7	0.2	0	1	15	1165	0	0
AB 3044M	1	2	1	2	0	2	-	-	-	-	-	-	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10690	(FLIGHT	20)											
AC 3055S?	26	54	89	94	0	32	0.7	3	1	18	149	2	0
AD 3063S?	20	31	62	66	0	9	0.9	22	1	14	377	0	0
AE 3074M	0	7	0	10	0	2	0.1	0	1	0	2791	0	0
AF 3089S?	0	7	0	17	0	2	0.1	0	1	3	3177	0	0
AG 3106S?	1	11	1	20	0	3	0.1	0	1	0	3156	0	0
AH 3118B?	9	19	25	38	0	7	0.4	0	1	17	406	0	0
AI 3125B?	12	31	32	75	0	11	0.4	0	1	14	313	0	8
AJ 3129S?	16	43	39	88	0	13	0.5	0	1	14	357	0	0
AK 3139S?	25	151	62	298	0	41	0.3	0	1	5	354	0	410
AL 3155B?	7	13	4	23	0	3	0.4	17	1	4	2745	0	100
AM 3164B?	4	19	0	22	0	6	0.1	6	1	0	2302	0	0
AN 3172D	1	2	1	2	0	4	-	-	-	-	-	-	60
AO 3180D?	2	11	7	16	0	3	0.3	1	1	26	1445	0	0
AP 3188S?	8	15	10	18	0	4	0.5	11	1	20	835	0	0
AQ 3194B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AR 3200B?	3	15	1	21	0	3	0.1	5	1	10	3336	0	20
AS 3284S?	4	8	3	18	0	3	0.4	34	1	17	3965	0	0
AT 3330S	9	22	14	40	0	6	0.4	3	1	23	875	0	0
AU 3336M	4	13	5	31	0	4	0.1	2	1	23	4057	0	100
AV 3357B	122	18	260	173	27	107	35.7	8	1	13	30	3	0
AW 3358B	122	18	260	173	27	107	35.7	10	1	13	36	3	0
AX 3364B	44	198	95	336	6	48	0.4	0	1	12	181	0	0
AY 3369B?	4	30	86	53	3	9	3.7	11	1	25	700	1	0
AZ 3377S?	1	2	1	2	1	3	-	-	-	-	-	-	10
BA 3389B?	5	7	5	10	1	1	0.6	21	1	39	803	5	0
BB 3398B?	7	4	4	19	1	0	1.7	35	1	37	1009	2	40
BC 3401B?	7	12	7	42	1	3	0.6	7	1	21	892	0	0
BD 3406B?	1	28	92	50	4	8	4.4	4	1	5	1973	0	0
BE 3410E	18	6	165	3	17	46	6.1	20	1	16	101	0	0
BF 3424B	128	228	283	419	19	99	1.4	0	1	16	32	6	220
BG 3435B	91	218	264	453	36	85	1.0	0	1	13	38	3	0
BH 3438B	21	218	113	231	36	37	0.1	0	1	18	54	6	20
BI 3444B	1	2	1	2	2	4	-	-	-	-	-	-	0
BJ 3447B	20	17	37	25	21	19	1.7	7	1	22	13	13	0
BK 3454B	37	53	144	96	30	52	1.2	0	1	17	25	7	0
BL 3460B	8	58	129	148	30	54	0.1	0	1	16	19	6	9
BM 3462B?	55	58	129	148	77	27	1.9	5	1	17	19	8	0
BN 3465B	42	58	129	356	77	27	1.3	4	1	21	17	12	50
BO 3469B	57	199	146	408	76	62	0.6	0	1	15	48	5	1060
BP 3479B	126	152	279	284	32	89	2.1	0	1	13	20	4	0
BQ 3489B	190	234	427	426	29	144	2.4	0	1	13	17	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10690	(FLIGHT	20)											
BR 3502B	59	193	289	368	26	106	0.6	0	1	15	26	5	60
BS 3504B	59	193	289	368	11	106	0.6	0	1	14	26	5	130
BT 3511B	247	410	434	716	15	129	1.9	0	1	15	22	6	0
BU 3515B	247	410	577	761	25	172	1.9	0	1	9	24	1	0
BV 3526D	18	1	4	71	7	16	49.0	20	1	23	30	10	170
BW 3529B	18	39	95	51	19	7	0.6	0	1	20	63	5	0
BX 3546B?	18	14	31	23	6	11	1.9	0	1	24	83	5	0
BY 3551B?	9	15	9	31	6	2	0.6	20	1	42	190	21	0
BZ 3555B?	9	34	36	42	4	13	0.3	0	1	35	211	14	0
CA 3562B?	2	7	11	18	3	12	0.6	20	1	25	144	8	0
CB 3569B?	30	63	72	125	7	11	0.7	0	1	21	110	5	0
CC 3578B?	9	49	57	88	4	24	0.2	0	1	28	236	8	15
CD 3582B?	28	77	37	145	9	25	0.6	0	1	22	146	6	0
CE 3591B?	36	83	81	163	7	29	0.7	1	1	21	163	4	0
CF 3592B?	1	2	1	2	2	4	-	-	-	-	-	-	0
CG 3601B?	12	21	59	156	0	24	0.6	17	1	30	445	6	0
CH 3608S?	19	69	63	143	0	23	0.4	1	1	21	176	5	0
CI 3647S?	0	17	4	34	0	4	0.1	0	1	7	2074	0	0
CJ 3659S?	0	21	0	25	0	10	0.1	6	1	0	1889	0	0
CK 3661M	0	2	1	2	0	4	-	-	-	-	-	-	0
CL 3670B?	26	32	52	50	0	15	1.2	9	1	30	178	10	0
CM 3680S?	3	8	8	7	0	4	1.2	34	1	12	1467	0	17
CN 3684S?	0	24	8	48	0	7	0.2	0	1	0	2359	0	0
CO 3701S?	6	18	10	30	0	5	0.3	0	1	15	994	0	0
CP 3708B?	11	17	13	19	0	4	0.7	7	1	19	965	0	0
CQ 3719M	0	2	0	2	0	1	-	-	-	-	-	-	120
CR 3721M	0	4	0	5	0	1	0.1	0	1	19	4501	0	180

LINE 10700	(FLIGHT	20)											
A 4804M	0	1	1037	2	59	1	999.0	0	1	40	5675	0	430
B 4802B	0	5	0	16	0	2	0.1	7	1	46	5802	0	0
C 4798M	3	5	14	16	0	2	1.0	34	1	24	3844	0	1180
D 4787S?	12	50	16	95	0	13	0.3	0	1	13	1040	0	0
E 4781B?	0	96	13	222	0	33	0.1	0	1	0	998	0	0
F 4779B?	0	82	13	222	0	33	0.1	0	1	2	1146	0	0
G 4773B?	2	32	0	76	0	11	0.1	5	1	0	1555	0	0
H 4768B?	2	14	0	76	0	4	0.1	0	1	0	2837	0	1180
I 4763B?	2	19	0	38	0	6	0.1	0	1	0	2075	0	0
J 4759B?	0	12	0	38	0	5	0.1	0	1	0	2484	0	0
K 4756M	0	12	0	27	0	5	0.1	7	1	1	2279	0	0
L 4748B?	0	19	0	31	0	4	0.1	1	1	0	2206	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10700	(FLIGHT	20)											
M 4744B?	0	18	0	86	0	16	0.1	9	1	0	1909	0	1250
N 4737B?	10	19	12	86	0	16	0.5	22	1	0	2086	0	1340
O 4721S?	28	74	62	135	0	28	0.6	0	1	14	237	0	0
P 4713M	16	9	62	16	0	4	2.5	29	1	0	2396	0	0
Q 4709B?	0	6	0	16	0	3	0.1	0	1	0	2829	0	1250
R 4706M	13	2	0	20	0	2	25.1	46	1	0	2821	0	0
S 4702D	13	18	27	20	0	21	0.9	15	1	2	2104	0	0
T 4695B?	10	66	26	124	0	21	0.2	0	1	7	794	0	0
U 4689B?	10	23	26	30	0	16	0.4	2	1	0	1745	0	0
V 4683M	0	23	0	30	0	16	0.1	1	1	6	3257	0	0
W 4675M	0	10	0	21	0	4	0.1	4	1	23	4405	0	0
X 4657M	1	2	0	4	0	1	0.2	25	1	21	5823	0	0
Y 4651M	0	2	0	2	0	2	-	-	-	-	-	-	0
Z 4642M	0	16	0	30	0	5	0.1	4	1	7	3040	0	0
AA 4640D	0	16	0	30	0	5	0.1	7	1	13	3262	0	0
AB 4626D	18	17	40	43	0	12	1.5	12	1	22	280	0	0
AC 4622B?	14	42	37	43	0	12	0.4	0	1	12	551	0	0
AD 4618B?	9	17	37	43	0	12	0.5	11	1	25	493	0	290
AE 4612B?	13	36	36	75	0	13	0.4	3	1	11	677	0	0
AF 4609B?	13	36	26	75	0	13	0.4	0	1	25	497	0	0
AG 4602B?	13	38	26	67	0	9	0.4	5	1	0	1810	0	900
AH 4599B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AI 4590B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AJ 4587M	7	27	10	39	0	6	0.2	3	1	5	2986	0	0
AK 4584B?	7	27	10	39	0	6	0.2	0	1	8	1437	0	0
AL 4575M	1	2	1	2	0	4	-	-	-	-	-	-	0
AM 4569B	13	36	75	68	1	27	0.4	0	1	22	336	0	0
AN 4566B?	24	64	75	130	1	27	0.6	0	1	18	244	0	40
AO 4563B?	39	75	77	99	1	26	0.9	1	1	22	175	5	0
AP 4547B?	6	40	61	112	0	27	0.1	0	1	25	223	6	0
AQ 4543B?	24	61	55	117	0	27	0.6	0	1	19	288	0	0
AR 4538B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AS 4535B?	8	22	16	43	0	8	0.4	0	1	13	1118	0	0
AT 4520B?	3	11	5	28	0	2	0.1	4	1	11	3035	0	20
AU 4516B?	1	18	5	28	0	3	0.1	0	1	2	2660	0	0
AV 4508M	0	7	43	16	0	3	5.7	27	1	11	2930	0	0
AW 4499S?	14	87	43	176	0	25	0.2	0	1	16	400	0	0
AX 4492B?	11	28	31	56	0	7	0.4	5	1	13	647	0	20
AY 4479S?	40	94	107	183	0	33	0.7	0	1	15	116	0	370
AZ 4463B?	35	180	108	342	2	53	0.4	0	1	7	191	0	0
BA 4406S?	4	7	6	17	1	3	0.3	6	1	43	935	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10700	(FLIGHT 20)												
BB 4388S?	6	28	8	49	1	7	0.2	1	1	25	916	0	0
BC 4379B?	4	31	5	51	0	7	0.1	0	1	12	1596	0	0
BD 4373B?	7	20	4	18	1	2	0.3	8	1	26	1573	0	0
BE 4349B?	191	215	406	365	34	138	2.7	0	1	16	23	7	0
BF 4342E	191	215	406	365	34	138	2.7	0	1	25	323	0	100
BG 4328S	5	22	8	36	2	6	0.2	0	1	27	897	0	0
BH 4300B?	148	225	325	406	75	108	1.8	1	1	17	19	9	0
BI 4297B?	148	225	325	406	8	108	1.8	0	1	21	17	12	17
BJ 4290B	94	64	24	84	8	12	3.8	4	1	22	25	12	0
BK 4286B	137	109	286	176	50	108	3.6	0	1	15	14	7	70
BL 4277B	115	220	296	460	39	123	1.3	0	1	12	32	3	0
BM 4268B	42	43	97	73	16	36	1.7	6	1	25	45	12	1250
BN 4265B	42	42	97	73	16	36	1.8	5	1	23	29	12	0
BO 4249B	206	503	508	969	28	186	1.3	0	1	10	28	1	0
BP 4219B	152	357	342	667	45	135	1.2	0	1	23	30	12	170
BQ 4213B	60	10	12	12	45	97	23.2	16	1	20	34	9	0
BR 4210B	48	178	173	352	45	64	0.5	0	1	17	44	6	0
BS 4205B	59	178	173	352	30	64	0.7	0	1	14	53	3	170
BT 4199B	17	39	25	24	32	11	0.5	2	1	22	65	9	0
BU 4185B?	39	32	62	62	13	19	2.3	7	1	24	30	12	0
BV 4177B	76	41	164	76	21	98	4.8	4	1	21	35	9	120
BW 4169B?	78	104	164	199	30	98	1.6	0	1	13	17	3	0
BX 4147B	1	2	1	2	2	4	-	-	-	-	-	-	170
BY 4138B	38	43	55	105	11	26	1.5	9	1	42	70	26	0
BZ 4129B	16	23	381	549	45	126	0.8	7	1	24	26	12	0
CA 4120B	209	346	329	682	20	122	1.8	0	1	11	36	2	0
CB 4113B	83	190	196	319	20	67	1.0	0	1	14	23	4	0
CC 4106B	1	2	1	2	2	4	-	-	-	-	-	-	0
CD 4101B	101	76	184	129	3	63	3.4	0	1	15	26	4	0
CE 4080B	28	76	84	86	2	27	0.6	0	1	13	127	0	0
CF 4077B	29	67	84	86	5	27	0.7	0	1	14	169	0	0
CG 4068B	1	2	1	2	2	4	-	-	-	-	-	-	0
CH 4064B	9	43	31	112	3	17	0.2	2	1	25	299	5	0
CI 4046B	1	2	1	2	2	4	-	-	-	-	-	-	0
CJ 4039B	43	72	86	150	13	28	1.0	9	1	26	146	10	0
CK 4025B?	9	29	54	61	9	6	0.3	3	1	31	350	8	0
CL 4024M	9	29	26	61	9	6	0.3	5	1	20	617	0	190
CM 4011B?	24	31	48	59	7	7	1.1	6	1	30	207	9	0
CN 4005B?	1	2	1	2	0	4	-	-	-	-	-	-	0
CO 3999B?	4	27	6	38	0	7	0.1	0	1	26	1359	0	0
CP 3976S	0	19	3	33	0	5	0.1	0	1	13	2191	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10700	(FLIGHT	20)											
CQ 3963S	8	16	18	31	0	5	0.5	21	1	23	1409	0	0
CR 3957S	8	21	18	36	0	6	0.4	3	1	28	537	1	0
CS 3949S?	0	20	5	20	0	3	0.2	16	1	10	2453	0	0
CT 3935S?	0	9	4	26	0	3	0.1	0	1	9	2691	0	0
CU 3922S	1	14	8	27	0	4	0.2	2	1	20	1577	0	0
CV 3909M	0	2	0	2	0	3	-	-	-	-	-	-	180
CW 3903S?	0	23	0	53	0	8	0.1	8	1	1	2151	0	100
CX 3898M	0	23	0	53	0	8	0.1	7	1	8	2864	0	30
CY 3889S?	0	10	0	35	0	5	0.1	3	1	5	2892	0	0
CZ 3823M	9	26	16	43	0	2	0.3	0	1	25	5640	0	280

LINE 10710	(FLIGHT	37)											
A 1192M	0	2	1	2	0	3	-	-	-	-	-	-	200
B 1201B?	0	6	2	8	0	1	0.1	8	1	21	3994	0	0
C 1205M	0	1	5	3	0	2	1.2	53	1	23	5041	0	0
D 1211B?	6	11	8	13	0	2	0.4	0	1	15	1115	0	0
E 1220M	0	13	0	23	0	3	0.1	6	1	11	3192	0	0
F 1222D	0	13	0	23	0	3	0.1	3	1	15	3852	0	0
G 1226D	0	14	1	52	0	5	0.1	0	1	0	3655	0	0
H 1229D	0	32	1	95	0	14	0.1	0	1	0	2606	0	0
I 1233D	0	47	0	95	0	14	0.1	1	1	0	1753	0	0
J 1236D	0	47	0	28	0	3	0.1	6	1	9	2981	0	2620
K 1253M	0	4	0	23	0	4	0.1	4	1	8	3121	0	1460
L 1259B?	0	11	0	9	0	1	0.1	0	1	6	3844	0	0
M 1265B?	0	16	0	39	0	5	0.1	0	1	0	3017	0	0
N 1267B?	0	22	0	39	0	5	0.1	2	1	0	2468	0	310
O 1273M	0	16	0	32	0	3	0.1	9	1	14	3198	0	0
P 1282M	0	2	0	2	0	3	-	-	-	-	-	-	220
Q 1287M	0	3	0	19	0	2	0.1	0	1	10	3716	0	0
R 1292D	0	8	0	21	0	3	0.1	0	1	0	3634	0	340
S 1294M	0	2	0	2	0	3	-	-	-	-	-	-	490
T 1306M	0	1	0	1	0	1	0.1	0	1	31	6008	0	0
U 1316S?	0	15	0	34	0	4	0.1	0	1	0	2930	0	190
V 1326M	0	3	0	6	0	1	0.1	0	1	21	4682	0	230
W 1340B?	0	9	0	10	0	1	0.1	0	1	22	4669	0	0
X 1351M	0	4	0	11	0	2	0.1	10	1	27	4175	0	650
Y 1366B?	0	10	0	19	0	2	0.1	2	1	17	3983	0	0
Z 1368M	0	10	0	19	0	3	0.1	0	1	8	3458	0	1590
AA 1379B?	1	14	0	19	0	3	0.1	1	1	15	3974	0	0
AB 1389B?	1	2	0	2	0	3	-	-	-	-	-	-	0
AC 1390M	2	12	0	20	0	3	0.1	0	1	3	3795	0	140

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M		COND DEPTH SIEMEN M		RESIS OHM-M	DEPTH M	NT	

LINE 10710	(FLIGHT		37)											
AD 1397D	3	15	2	32	0	4	0.1	6	1	3	2875	0	0	
AE 1399D	3	14	2	32	0	4	0.2	13	1	7	2751	0	0	
AF 1402B?	1	2	1	2	0	2	-	-	-	-	-	-	-	360
AG 1412B?	15	41	27	38	0	15	0.5	0	1	22	418	0	0	
AH 1414B?	15	21	27	38	0	9	0.9	18	1	19	544	0	100	
AI 1422S?	7	13	12	12	0	6	0.5	17	1	21	876	0	0	
AJ 1427B?	1	2	1	2	0	2	-	-	-	-	-	-	-	50
AK 1439B?	0	12	14	37	0	6	0.4	3	1	4	3068	0	0	
AL 1441M	1	2	1	2	0	4	-	-	-	-	-	-	-	320
AM 1447M	7	13	22	28	0	4	0.5	16	1	0	2147	0	0	
AN 1453S?	8	38	26	78	0	13	0.2	0	1	10	638	0	0	
AO 1479B?	3	21	5	37	0	7	0.1	0	1	0	2016	0	0	
AP 1481B?	8	19	8	20	0	2	0.4	3	1	0	2359	0	500	
AQ 1483B?	8	19	8	20	0	2	0.4	3	1	15	1390	0	0	
AR 1487B?	17	31	17	72	0	11	0.7	4	1	15	731	0	0	
AS 1492B?	1	2	1	2	0	4	-	-	-	-	-	-	-	380
AT 1497M	1	165	71	336	0	46	0.4	0	1	0	1741	0	0	
AU 1501S?	33	165	71	336	0	46	0.4	0	1	8	296	0	0	
AV 1518S?	39	60	85	117	0	22	1.1	0	1	11	110	0	0	
AW 1529S?	10	55	27	145	0	22	0.2	0	1	8	480	0	0	
AX 1561B?	7	9	11	7	0	3	0.8	23	1	28	516	1	0	
AY 1569B?	6	15	7	19	0	2	0.3	6	1	20	934	0	40	
AZ 1576B?	12	28	7	59	0	7	0.5	0	1	15	876	0	12	
BA 1586S?	2	35	3	70	0	9	0.1	0	1	0	1701	0	0	
BB 1601B?	1	2	1	2	2	4	-	-	-	-	-	-	-	0
BC 1605B?	6	34	114	337	5	39	0.2	0	1	10	84	0	0	
BD 1612B	33	71	64	419	9	74	0.8	5	1	11	62	0	0	
BE 1618B	82	165	148	296	10	56	1.1	0	1	12	55	1	30	
BF 1626B	1	2	1	2	2	4	-	-	-	-	-	-	-	15
BG 1637B	109	251	177	306	10	65	1.1	0	1	14	62	3	0	
BH 1648B	37	14	39	40	6	21	6.2	15	1	22	37	10	0	
BI 1659B	1	2	1	2	2	4	-	-	-	-	-	-	-	310
BJ 1670B	45	193	109	366	20	60	0.5	0	1	12	81	1	100	

LINE 10711	(FLIGHT		37)											
A 1814B	28	11	40	36	11	12	5.2	10	1	12	83	0	80	
B 1828B	71	359	28	1001	26	169	0.5	0	1	12	78	0	80	
C 1832M	50	360	128	797	39	108	0.3	0	1	5	127	0	0	
D 1835B	50	360	128	797	39	108	0.3	0	1	18	38	7	0	
E 1837B	46	64	103	135	44	34	1.3	1	1	15	33	4	0	
F 1848B	151	224	348	482	9	122	1.8	1	1	14	34	4	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL	HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE	SHEET		EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 10711	(FLIGHT	37)											
G 1850B	151	224	348	482	39	122	1.8	0	1	14	43	4	0
H 1855B?	31	60	22	107	31	10	0.8	7	1	17	123	2	0
I 1858B?	9	62	28	124	10	23	0.2	0	1	16	138	1	230
J 1866B	1	2	1	2	2	4	-	-	-	-	-	-	40
K 1872B	14	25	30	42	3	11	0.7	0	1	19	77	3	220
L 1884B	37	52	60	77	10	26	1.2	0	1	27	61	12	0
M 1892B	48	71	74	146	8	42	1.2	0	1	13	44	1	0
N 1902D	65	167	136	293	11	59	0.8	0	1	11	55	0	4
O 1908B	42	80	135	230	22	47	0.9	0	1	19	38	6	260
P 1912B	22	26	39	85	22	15	1.2	0	1	15	24	4	0
Q 1916B	45	74	84	106	23	27	1.1	0	1	17	25	6	0
R 1920B	44	74	22	99	20	6	1.0	4	1	20	68	7	0
S 1922D	44	74	22	99	20	6	1.0	0	1	20	42	7	0
T 1928D	61	71	131	135	12	49	1.7	3	1	27	42	15	0
U 1942D	49	19	99	37	28	37	6.6	3	1	15	26	4	0
V 1949B	19	43	48	90	7	18	0.6	0	1	14	66	0	0
W 1952B	34	40	7	30	3	7	1.4	0	1	15	78	0	0
X 1960B?	1	2	1	2	2	2	-	-	-	-	-	-	0
Y 1978B?	7	25	16	56	1	8	0.3	0	1	23	208	2	0
Z 1995B	63	154	46	232	7	6	0.8	0	1	23	101	9	0
AA 2011B	9	26	76	49	10	28	0.4	15	1	31	70	17	0
AB 2074S	0	2	0	2	0	2	-	-	-	-	-	-	0
AC 2140S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AD 2167S?	1	2	0	2	0	2	-	-	-	-	-	-	0
AE 2222B?	2	27	3	52	0	7	0.1	0	1	0	2530	0	0
AF 2228B?	5	47	10	84	0	13	0.1	0	1	6	1591	0	0
AG 2234B?	1	2	1	2	0	4	-	-	-	-	-	-	60

LINE 10720	(FLIGHT	37)											
A 2905B	186	119	293	224	50	92	5.2	3	1	13	19	4	400
B 2895B	9	7	4	124	21	0	1.5	29	1	15	79	0	60
C 2890B	17	62	49	155	15	22	0.4	0	1	14	83	0	0
D 2883B	55	113	98	129	28	40	0.9	0	1	12	60	0	0
E 2873B	47	32	43	68	27	15	3.0	10	1	23	58	10	160
F 2870B	1	2	1	2	2	4	-	-	-	-	-	-	110
G 2860B	16	25	49	60	11	18	0.8	0	1	17	69	2	0
H 2857B	14	33	39	46	4	1	0.5	0	1	20	85	4	0
I 2852B	1	2	1	2	2	4	-	-	-	-	-	-	5
J 2838B	2	11	6	15	2	3	0.3	0	1	40	275	14	0
K 2831B	1	2	1	2	1	3	-	-	-	-	-	-	0
L 2827D	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10720	(FLIGHT	37)											
M 2821D	13	18	25	34	7	9	0.8	0	1	29	192	6	0
N 2811D	9	5	9	6	6	3	2.2	5	1	45	109	22	0
O 2793B	27	55	102	145	7	38	0.7	0	1	18	123	2	0
P 2788B	40	55	102	145	8	39	1.2	0	1	17	100	1	0
Q 2767B?	0	20	9	33	0	5	0.2	7	1	0	1935	0	0
R 2736B?	16	80	12	148	22	34	0.3	0	1	28	142	11	0
S 2720B	158	97	548	276	46	144	5.2	5	1	13	16	5	0
T 2710M	1	2	1	2	2	4	-	-	-	-	-	-	7
U 2701B	20	25	24	32	5	12	1.1	12	1	43	151	23	0
V 2684B?	8	13	22	20	3	8	0.6	13	1	53	145	32	0
W 2662S	4	18	8	27	0	5	0.3	7	1	30	875	3	17
X 2653S?	0	17	5	41	0	6	0.1	0	1	7	2707	0	0
Y 2631S?	0	7	0	19	0	2	0.1	8	1	24	4155	0	5
Z 2621S?	0	8	0	15	0	2	0.1	9	1	30	4589	0	0
AA 2568S	0	8	0	16	0	2	0.1	0	1	17	4206	0	0
AB 2518S	0	2	0	2	0	1	-	-	-	-	-	-	0
AC 2502S	5	18	9	33	1	5	0.2	2	1	18	1460	0	0
AD 2491S	1	2	1	2	0	4	-	-	-	-	-	-	0
AE 2432B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AF 2425B?	11	8	18	33	0	3	1.6	40	1	37	519	11	0
AG 2408B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AH 2402B?	19	38	20	73	0	10	0.6	5	1	18	265	0	160

LINE 10721	(FLIGHT	37)											
A 3575B?	3	64	17	124	0	17	0.2	0	1	0	1112	0	0
B 3572B?	0	64	11	108	0	28	0.1	0	1	0	1165	0	50
C 3567B?	8	23	12	108	0	28	0.3	5	1	12	1154	0	0
D 3550M	0	2	0	2	0	1	-	-	-	-	-	-	1100
E 3543M	0	2	0	18	0	3	0.1	0	1	11	4086	0	320
F 3540B?	0	7	0	19	0	2	0.1	0	1	3	4249	0	0
G 3531M	0	3	0	6	0	2	0.1	0	1	61	6623	0	1120
H 3521M	0	6	0	17	0	3	0.1	0	1	37	6087	0	30
I 3510M	0	24	0	46	0	8	0.1	5	1	3	2510	0	1090
J 3497M	0	18	0	28	0	6	0.1	2	1	0	2193	0	1180
K 3495D	0	18	0	56	0	7	0.1	1	1	0	2138	0	400
L 3492B	0	33	0	56	0	6	0.1	0	1	0	2244	0	0
M 3485B	0	10	0	13	0	2	0.1	0	1	0	3844	0	0
N 3483M	0	2	0	2	0	2	-	-	-	-	-	-	250
O 3475M	0	3	0	15	0	3	0.1	0	1	6	4105	0	190
P 3472B?	0	13	0	17	0	3	0.1	0	1	0	3795	0	0
Q 3464M	0	1	0	3	0	1	0.1	5	1	31	5580	0	110

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10721	(FLIGHT	37)							
R 3443S?	0	2	0	2	0	4	-	-	0
S 3436M	0	5	6	9	0	2	0.5	29	80
T 3421B?	0	2	0	2	0	4	-	-	380
U 3418B?	0	19	0	38	0	5	0.1	0	0
V 3411M	0	4	0	7	0	1	0.1	1	50
W 3403M	0	1	0	4	0	1	0.1	2	0
X 3392S?	0	2	0	2	0	3	-	-	12
Y 3381M	0	0	0	1	0	1	0.1	31	260
Z 3375B?	0	10	0	23	0	2	0.1	0	0
AA 3368B?	0	14	0	24	0	3	0.1	0	610
AB 3366M	0	14	0	24	0	2	0.1	0	0
AC 3357M	0	6	0	12	0	2	0.1	1	70
AD 3351M	0	15	0	29	0	4	0.1	0	0
AE 3345M	0	2	0	2	0	1	-	-	0
AF 3324B?	1	2	1	2	1	1	-	-	0
AG 3318S?	3	16	4	24	0	4	0.1	0	0
AH 3289M	0	2	1	2	0	2	-	-	0
AI 3281M	0	6	2	7	0	1	0.1	19	280
AJ 3274M	0	6	0	17	0	3	0.1	8	0
AK 3266M	0	7	1	11	0	2	0.1	0	0
AL 3249B?	0	33	0	233	0	32	0.1	19	0
AM 3243B?	0	48	0	233	0	32	0.1	16	0
AN 3235B?	0	73	5	153	0	20	0.1	0	0
AO 3227B?	12	118	20	238	0	33	0.1	0	0
AP 3213B?	7	27	10	60	0	7	0.2	0	0
AQ 3205B?	25	66	66	136	1	25	0.6	0	0
AR 3196S?	33	82	121	184	0	39	0.7	0	0
AS 3181B?	14	32	31	63	3	10	0.5	0	0
AT 3175S?	20	72	36	151	3	21	0.4	0	0
AU 3158B?	12	18	24	40	2	8	0.7	14	0
AV 3147B?	8	22	14	44	1	14	0.4	8	210
AW 3141B?	17	45	8	87	0	24	0.5	1	0
AX 3127B?	5	19	6	24	1	4	0.2	0	0
AY 3105B	127	437	269	497	64	94	0.8	0	0
AZ 3095B?	46	246	157	493	9	65	0.4	0	90
BA 3092B?	84	246	157	493	5	65	0.8	0	50
BB 3088B	44	93	47	177	24	12	0.9	0	0
BC 3083B	124	141	279	277	25	46	2.3	0	0
BD 3081B	124	141	279	277	50	46	2.3	2	0
BE 3075B	74	112	182	255	45	37	1.4	9	150
BF 3070B	153	206	299	360	53	63	2.0	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL	COPLANAR	COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG			
	6368 HZ	7294 HZ	864 HZ		DIKE		SHEET	EARTH		CORR			
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*	COND DEPTH	RESIS	DEPTH			
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M OHM-M	M	NT	

LINE 10721	(FLIGHT	37)											
BG 3063B	131	117	231	169	5	81	3.0	0	1	10	22	1	0
BH 3062B	128	117	231	169	42	81	2.9	0	1	12	20	3	0

LINE 10730	(FLIGHT	22)											
A 1941S?	7	25	25	58	7	10	0.3	0	1	28	112	11	0
B 1931S?	4	16	11	32	7	5	0.3	0	1	27	137	7	-6
C 1926S?	12	4	29	14	4	6	4.7	20	1	22	113	3	-6
D 1919S?	7	5	29	54	3	12	1.6	35	1	38	158	17	120
E 1890B?	10	12	25	30	7	10	0.9	3	1	19	88	2	0
F 1882B?	20	22	18	46	8	7	1.3	7	1	25	132	7	330
G 1862B?	25	45	46	77	0	23	0.8	0	1	20	110	4	0
H 1857B?	1	2	1	2	2	4	-	-	-	-	-	-	-6
I 1836B?	1	2	1	2	2	1	-	-	-	-	-	-	110
J 1829B?	22	24	24	46	8	16	1.3	0	1	20	90	3	0
K 1808B	50	32	92	104	8	32	3.3	8	1	19	54	6	0
L 1790B?	10	20	5	39	4	10	0.5	3	1	32	283	8	0
M 1762S?	8	19	19	30	0	7	0.4	0	1	26	369	0	-4
N 1742S	1	12	2	23	0	3	0.1	0	1	14	3020	0	20
O 1732S	0	10	1	17	0	2	0.1	0	1	8	4063	0	30
P 1722S	0	16	1	31	0	4	0.1	0	1	5	3900	0	0
Q 1711S	0	2	0	2	0	2	-	-	-	-	-	-	0
R 1634S	1	2	1	2	0	2	-	-	-	-	-	-	120
S 1624S	5	9	10	16	0	3	0.5	11	1	39	625	9	0
T 1611S	1	2	0	2	0	2	-	-	-	-	-	-	0
U 1596S?	5	17	11	31	0	4	0.3	7	1	9	2642	0	0
V 1573S?	10	6	11	10	1	3	2.0	21	1	46	194	22	0

LINE 10731	(FLIGHT	21)											
A 3130S?	4	14	11	28	0	5	0.4	0	1	24	1054	0	50
B 3124M	1	2	1	2	0	1	-	-	-	-	-	-	0
C 3109M	0	6	1	15	0	3	0.1	0	1	1	3747	0	920
D 3089B?	0	4	0	19	0	3	0.1	0	1	17	4766	0	0
E 3073M	0	10	0	9	0	3	0.1	0	1	26	5302	0	0
F 3072B?	0	10	0	9	0	3	0.1	0	1	25	5074	0	0
G 3067B?	0	7	0	4	0	1	0.1	0	1	15	4795	0	0
H 3061M	0	3	0	9	0	1	0.1	0	1	19	4489	0	0
I 3057B?	0	14	0	8	0	2	0.1	0	1	8	3693	0	730
J 3049M	0	2	0	2	0	2	-	-	-	-	-	-	0
K 3043B?	2	10	0	24	0	4	0.1	0	1	0	3724	0	0
L 3027M	0	4	0	10	0	2	0.1	0	1	26	5074	0	1620
M 2998S	6	6	12	10	0	3	0.9	17	1	43	577	10	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10731	(FLIGHT	21)											
N 2990M	0	2	0	2	0	1	-	-	-	-	-	-	0
O 2972M	0	1	0	5	0	1	0.1	0	1	50	6266	0	0
P 2966M	0	5	0	6	0	1	0.1	0	1	28	5631	0	60
Q 2960M	0	7	0	5	0	2	0.1	0	1	29	5176	0	0
R 2955M	0	2	0	5	0	1	0.1	0	1	42	6060	0	0
S 2950M	0	1	0	3	0	0	0.1	0	1	49	6385	0	140
T 2939B?	0	8	0	10	0	1	0.1	0	1	32	5781	0	0
U 2930M	0	1	1	52	0	7	0.1	0	1	26	5631	0	0
V 2924B?	5	42	15	66	0	8	0.1	0	1	23	1012	0	0
W 2920S?	5	28	15	45	0	6	0.2	0	1	17	815	0	0
X 2913S?	0	14	4	21	0	3	0.1	8	1	10	2993	0	0
Y 2910B?	1	16	10	21	0	3	0.4	10	1	21	1985	0	0
Z 2908B?	1	16	10	21	0	2	0.4	0	1	33	960	0	0
AA 2899B?	6	20	10	29	0	4	0.3	0	1	22	1094	0	0
AB 2895B?	0	2	1	2	0	4	-	-	-	-	-	-	40
AC 2878M	0	2	1	2	0	2	-	-	-	-	-	-	0
AD 2852S?	0	9	7	16	0	3	0.4	2	1	17	1299	0	50
AE 2846B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AF 2841M	0	0	0	21	0	4	0.1	2	1	7	3151	0	1060
AG 2799S?	0	2	1	2	0	4	-	-	-	-	-	-	0
AH 2793S?	0	2	1	2	0	3	-	-	-	-	-	-	0
AI 2786B?	1	2	1	2	0	0	-	-	-	-	-	-	0
AJ 2778B?	5	13	4	23	0	4	0.3	14	1	33	1088	2	0
AK 2769B?	0	22	0	30	0	5	0.1	0	1	0	2701	0	790
AL 2764B?	0	26	0	26	0	5	0.1	6	1	0	2106	0	0
AM 2759B?	0	16	0	31	0	5	0.1	0	1	0	2146	0	0
AN 2755B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AO 2751B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AP 2746B?	8	31	9	40	0	7	0.2	0	1	18	822	0	0
AQ 2703B?	9	20	11	28	0	5	0.4	7	1	33	741	4	0
AR 2699B?	6	20	17	28	0	5	0.3	0	1	41	545	10	0
AS 2686M	0	11	47	43	0	17	1.8	19	1	4	2167	0	120
AT 2676B	160	442	712	770	80	241	1.1	0	1	10	21	2	0
AU 2651B	57	104	137	192	18	62	1.1	2	1	23	29	12	0
AV 2644B	54	82	146	149	10	48	1.2	1	1	18	37	7	0

LINE 10740	(FLIGHT	21)											
A 148B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 162B?	32	54	92	102	7	30	0.9	0	1	18	79	3	100
C 174B?	15	38	26	67	4	12	0.5	0	1	22	103	5	230
D 180B?	20	30	46	61	7	16	0.9	0	1	18	59	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10740	(FLIGHT	21)											
E 182B?	20	31	46	61	6	16	0.9	0	1	19	68	4	0
F 188B?	21	36	36	56	14	11	0.8	0	1	25	117	7	0
G 195B?	17	29	27	55	2	17	0.7	2	1	34	157	14	0
H 234B?	5	20	23	27	0	8	1.1	0	1	34	131	13	0
I 240B?	1	2	1	2	2	4	-	-	-	-	-	-	0
J 251B?	1	2	1	2	0	2	-	-	-	-	-	-	60
K 265S?	11	13	20	16	2	6	0.9	0	1	34	79	15	20
L 270B?	10	14	20	16	2	6	0.8	0	1	26	124	5	40
M 273B?	11	14	20	15	2	6	0.9	0	1	25	100	3	0
N 283S?	5	28	11	54	1	6	0.2	0	1	29	368	5	0
O 289S?	7	23	17	53	1	8	0.3	0	1	21	394	0	0
P 302S	6	10	11	18	1	4	0.5	13	1	39	339	12	0
Q 337S	1	2	1	2	0	3	-	-	-	-	-	-	0
R 348S?	1	2	1	2	0	2	-	-	-	-	-	-	0
S 378S	1	2	1	2	0	1	-	-	-	-	-	-	0
T 394S	1	2	1	2	0	2	-	-	-	-	-	-	0
U 438B?	1	2	1	2	1	1	-	-	-	-	-	-	0
V 460S	0	2	1	2	0	2	-	-	-	-	-	-	0
W 497S?	5	10	10	21	0	4	0.4	0	1	29	662	0	0
X 518B?	7	4	5	9	0	2	2.0	33	1	52	422	21	0
Y 553B?	5	22	12	38	1	5	0.3	0	1	0	3867	0	0

LINE 10741	(FLIGHT	21)											
A 3170S?	1	2	1	2	0	4	-	-	-	-	-	-	240
B 3182M	0	7	0	15	0	2	0.1	3	1	38	5666	0	0
C 3201M	0	14	5	24	0	4	0.2	0	1	8	4086	0	680
D 3206B?	0	14	1	53	0	8	0.1	0	1	0	3017	0	0
E 3210M	0	14	6	53	0	8	0.1	0	1	0	2023	0	0
F 3213B?	0	14	6	53	0	8	0.1	0	1	7	1834	0	0
G 3221B?	0	11	0	19	0	3	0.1	2	1	11	3537	0	0
H 3223M	0	11	0	19	0	3	0.1	1	1	16	4010	0	0
I 3223M	0	11	0	19	0	3	0.1	1	1	16	4048	0	0
J 3231M	0	1	0	6	0	1	0.1	0	1	17	4795	0	430
K 3244M	0	7	0	13	0	2	0.1	0	1	3	3709	0	770
L 3252B?	0	10	1	12	0	2	0.1	0	1	1	4655	0	0
M 3261M	0	2	0	2	0	0	0.1	0	1	29	5935	0	490
N 3270M	0	4	0	7	0	1	0.1	0	1	14	5517	0	1430
O 3289M	0	1	0	2	0	1	0.1	0	1	58	7001	0	280
P 3320M	2	4	1	5	0	1	0.3	36	1	46	6332	0	0
Q 3335B?	1	2	1	2	0	2	-	-	-	-	-	-	0
R 3339B?	1	2	1	2	0	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND .SIEMEN	DEPTH* M	COND .SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10741	(FLIGHT	21)											
S 3346S?	4	18	8	46	0	6	0.2	0	1	14	2159	0	0
T 3355M	0	0	0	11	0	1	0.1	35	1	22	4868	0	0
U 3363B?	6	5	13	36	0	2	1.2	38	1	26	1457	0	0
V 3368S?	10	27	13	36	0	4	0.4	4	1	23	988	0	0
W 3377S?	4	12	3	23	0	3	0.2	2	1	15	1834	0	6
X 3388S?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 3399B?	1	12	1	20	0	3	0.1	0	1	0	2964	0	0
Z 3411S?	2	4	1	15	0	2	0.3	40	1	8	3389	0	0
AA 3444B?	3	14	3	26	0	5	0.1	0	1	8	2663	0	90
AB 3446B?	2	3	4	26	0	4	0.1	0	1	4	2589	0	40
AC 3448M	2	20	4	26	0	6	0.1	0	1	1	3151	0	0
AD 3450B?	0	20	5	26	0	6	0.1	0	1	0	2648	0	0
AE 3477M	0	5	0	14	0	2	0.1	3	1	23	4440	0	0
AF 3487S?	0	12	0	28	0	5	0.1	1	1	11	3578	0	240
AG 3506S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AH 3529M	0	5	0	13	0	2	0.1	0	1	17	5378	0	1140
AI 3562S?	4	16	7	33	0	5	0.2	0	1	31	799	1	0
AJ 3583S?	0	12	6	35	0	4	0.1	0	1	16	1303	0	0
AK 3594B?	1	16	8	6	0	2	1.2	41	1	33	927	3	0
AL 3612B	115	179	471	572	71	79	1.6	0	1	13	28	4	18
AM 3620B	208	117	290	203	71	138	6.4	5	1	18	21	10	0
AN 3635B	26	42	57	70	10	19	0.9	3	1	25	66	11	0
AO 3643B	9	22	10	22	2	7	0.4	5	1	30	98	13	0
AP 3645B	10	26	78	12	2	15	0.4	4	1	32	96	15	0
AQ 3652B	30	19	72	36	17	26	2.8	0	1	22	27	9	0

LINE 10750	(FLIGHT	21)											
A 977B?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 971B?	3	8	36	26	8	12	2.2	0	1	25	83	8	40
C 967B?	13	22	34	37	7	12	0.7	0	1	25	88	8	40
D 940B?	12	13	31	38	2	9	1.0	9	1	29	343	4	0
E 935B?	1	1	1	2	2	4	-	-	-	-	-	-	0
F 897B?	2	15	19	16	1	7	1.5	18	1	46	320	21	7
G 891B?	1	2	1	2	2	4	-	-	-	-	-	-	30
H 885B?	13	15	20	24	3	8	1.0	4	1	27	147	7	0
I 875B?	1	2	1	2	1	4	-	-	-	-	-	-	0
J 870B?	9	36	38	71	2	14	0.2	0	1	28	203	7	50
K 784S?	0	2	1	2	0	1	-	-	-	-	-	-	0
L 687S	1	2	1	2	0	2	-	-	-	-	-	-	0
M 646S?	5	19	1	34	0	5	0.2	0	1	27	741	0	0
N 637S?	11	26	22	47	2	8	0.4	0	1	26	234	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10751	(FLIGHT	21)											
A 4206S?	2	15	9	41	0	7	0.2	0	1	2	2990	0	450
B 4177M	0	6	0	15	0	3	0.1	0	1	27	5211	0	0
C 4171B?	13	42	31	69	0	15	0.4	0	1	22	645	0	0
D 4167B?	1	2	1	2	0	4	-	-	-	-	-	-	300
E 4160M	0	4	0	6	0	1	0.1	0	1	1	3161	0	170
F 4155M	0	1	0	5	0	1	0.1	20	1	8	3301	0	400
G 4151S?	0	17	0	34	0	5	0.1	5	1	0	2210	0	330
H 4143M	0	5	6	15	0	3	0.3	19	1	1	2530	0	1290
I 4139B?	0	5	18	6	0	3	5.0	34	1	0	2214	0	0
J 4137S?	3	19	19	43	0	9	0.5	0	1	18	692	0	0
K 4126B?	6	23	20	65	0	11	0.2	0	1	22	582	0	0
L 4112M	0	0	0	2	0	1	-	-	-	-	-	-	0
M 4110M	0	3	0	11	0	1	0.1	0	1	20	4945	0	0
N 4101B?	3	15	9	31	0	4	0.3	0	1	14	1274	0	0
O 4089M	0	1	3	2	0	0	0.8	53	1	31	6173	0	0
P 4076M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 4062S?	10	60	41	106	0	15	0.2	0	1	21	290	0	0
R 4059B?	6	60	41	106	0	15	0.1	0	1	12	679	0	10
S 4044S?	5	25	23	65	1	11	0.2	0	1	20	525	0	5
T 4024M	0	3	8	6	1	1	1.1	34	1	26	5127	0	20
U 4014M	0	28	0	42	0	3	0.1	3	1	21	4270	0	0
V 4010B?	1	28	14	42	0	6	0.3	4	1	30	979	2	0
W 4004B?	2	19	14	15	0	2	1.0	27	1	39	1010	8	0
X 3999B?	4	18	7	17	1	2	0.3	1	1	24	842	0	11
Y 3993S?	3	28	13	47	0	7	0.3	0	1	27	722	0	0
Z 3991S?	3	28	13	47	0	7	0.3	0	1	28	589	1	50
AA 3966M	0	2	0	2	0	3	-	-	-	-	-	-	170
AB 3958S?	0	6	6	13	0	5	0.3	21	1	7	3031	0	0
AC 3936B?	0	14	6	17	0	3	0.3	0	1	25	1490	0	0
AD 3927M	0	2	0	2	0	1	-	-	-	-	-	-	0
AE 3919B?	0	2	1	2	0	4	-	-	-	-	-	-	1090
AF 3915S?	1	0	21	45	0	6	0.5	0	1	20	553	0	0
AG 3912M	0	23	21	45	0	7	0.5	0	1	10	1037	0	0
AH 3905M	0	6	13	14	0	1	1.0	22	1	4	3900	0	0
AI 3895M	0	4	9	8	0	0	1.0	12	1	5	2412	0	650
AJ 3880M	0	32	6	79	0	11	0.1	0	1	0	2628	0	0
AK 3876B?	0	32	0	79	0	11	0.1	3	1	0	1749	0	260
AL 3835S	0	2	1	2	0	2	-	-	-	-	-	-	0
AM 3775B	7	12	134	33	46	48	0.6	9	1	19	73	4	0
AN 3768B	52	30	80	56	31	23	3.9	2	1	19	20	9	0
AO 3755B?	11	106	19	171	17	27	0.1	0	1	16	119	2	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10751	(FLIGHT	21)											
AP 3750B?	37	34	50	54	10	16	1.9	6	1	20	84	5	130
AQ 3747B?	1	2	1	2	2	4	-	-	-	-	-	-	0

LINE 10760	(FLIGHT	21)											
A 1033D	1	2	1	2	2	4	-	-	-	-	-	-	0
B 1040B?	21	17	62	21	0	26	1.8	22	1	22	133	6	0
C 1060S?	3	11	12	27	0	5	0.4	0	1	32	281	8	0
D 1064B?	11	10	9	18	1	6	1.3	8	1	28	254	3	0
E 1079B?	8	8	23	19	5	5	1.0	3	1	25	220	1	0
F 1091B?	9	28	31	31	7	18	0.3	0	1	28	86	10	100
G 1095D	23	26	31	31	7	18	1.3	0	1	33	84	15	0
H 1215S	0	2	1	2	0	0	-	-	-	-	-	-	18
I 1244S?	3	12	2	14	0	4	0.1	6	1	54	1162	17	0
J 1263S	2	17	6	28	0	4	0.2	0	1	20	1536	0	0
K 1287B?	5	31	2	38	0	4	0.1	0	1	0	3493	0	16
L 1290M	0	2	1	2	0	4	-	-	-	-	-	-	0
M 1306S?	15	19	14	56	0	8	0.9	14	1	20	644	0	0

LINE 10761	(FLIGHT	23)											
A 466M	0	6	0	16	0	3	0.1	0	1	15	4538	0	390
B 471M	0	3	0	3	0	1	0.1	0	1	9	4476	0	350
C 474M	0	2	1	2	0	1	-	-	-	-	-	-	0
D 479B?	0	8	4	9	0	2	0.2	14	1	17	4710	0	0
E 489M	0	2	0	6	0	1	0.1	0	1	29	5359	0	0
F 505S?	18	3	34	26	3	10	14.5	9	1	26	148	5	90
G 515M	2	9	7	2	0	2	3.2	48	1	3	2052	0	0
H 516B?	2	9	7	3	0	1	2.2	45	1	16	1130	0	0
I 518M	2	9	7	3	0	2	2.5	45	1	0	2858	0	150
J 523M	3	6	8	13	0	1	0.5	7	1	6	1834	0	430
K 537S	3	8	19	37	0	7	0.6	0	1	19	397	0	0
L 579M	0	7	0	7	0	2	0.1	0	1	3	3550	0	30
M 581S?	0	2	1	2	0	2	-	-	-	-	-	-	80
N 588M	0	5	7	12	0	2	0.4	15	1	0	3246	0	0
O 615S	4	44	44	90	0	15	0.7	0	1	17	227	0	0
P 627B?	3	10	4	5	0	2	0.6	32	1	26	1473	0	0
Q 640M	4	4	5	6	0	1	0.5	30	1	14	4710	0	100
R 658B?	1	2	1	2	0	4	-	-	-	-	-	-	0
S 664S?	11	31	17	54	0	8	0.4	0	1	14	542	0	0
T 678S?	8	17	15	32	1	5	0.4	0	1	16	547	0	0
U 718S?	1	35	12	90	0	12	0.1	0	1	4	1273	0	0
V 726M	3	8	9	9	0	2	1.0	34	1	6	3102	0	240

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10761	(FLIGHT	23)							
W 742B?	1	2	1	2	0	2	-	-	0
X 766B?	1	8	9	23	0	4	0.3	0	0
Y 779B?	11	26	19	28	0	5	0.4	0	0
Z 788M	0	8	4	18	0	2	0.1	0	580
AA 793B?	0	20	3	44	0	10	0.1	0	0
AB 797M	0	26	3	44	0	9	0.1	0	0
AC 801B?	1	39	15	62	0	9	0.3	0	320
AD 811M	0	23	0	42	0	5	0.1	1	150
AE 814S?	0	23	0	39	0	5	0.1	1	0
AF 820M	0	31	0	68	0	10	0.1	1	260
AG 822B?	0	31	0	68	0	10	0.1	0	14
AH 859M	0	1	0	6	0	0	0.1	24	0
AI 876B?	0	5	0	4	0	1	0.1	9	0
AJ 925B?	0	20	5	12	0	5	0.3	19	0
AK 929B?	2	9	8	12	0	3	0.5	27	0
AL 937S?	1	2	1	2	0	4	-	-	0
AM 941M	0	12	11	17	0	3	0.6	21	0
AN 953S	2	15	2	28	0	3	0.1	0	0
AO 961S	4	10	10	16	1	3	0.6	0	0
AP 980B	156	42	304	30	88	119	15.7	0	0
AQ 984B	40	24	82	58	88	27	3.3	12	0
AR 990B	20	78	85	115	57	29	0.4	0	0
AS 1008B?	14	16	31	30	17	14	1.1	10	0

LINE 10770	(FLIGHT	21)							
A 1638B?	13	15	21	31	7	14	1.0	2	0
B 1620B?	1	2	1	2	2	4	-	-	70
C 1575S	1	10	2	18	0	2	0.1	0	9
D 1506S	0	2	1	2	0	3	-	-	0
E 1486B?	4	15	6	21	0	3	0.2	0	40
F 1463B?	1	2	0	2	0	1	-	-	0
G 1451B?	2	27	6	37	0	5	0.1	0	0
H 1422S?	6	14	7	23	0	4	0.3	3	0
I 1410S?	3	8	6	10	0	3	0.5	15	0

LINE 10771	(FLIGHT	23)							
A 1507M	0	2	1	2	0	2	-	-	570
B 1495M	0	3	2	2	0	2	0.7	77	0
C 1478M	1	2	1	2	0	4	-	-	0
D 1472S?	33	106	102	256	0	42	0.5	0	0
E 1459S?	49	24	96	35	9	22	4.7	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10771	(FLIGHT	23)											
F 1389M	0	2	1	2	0	3	-	-	-	-	-	-	0
G 1384M	0	6	1	22	0	2	0.1	0	1	11	4655	0	230
H 1378M	0	2	0	2	0	1	-	-	-	-	-	-	90
I 1368M	0	2	0	2	0	1	-	-	-	-	-	-	0
J 1366B?	0	7	0	6	0	1	0.1	0	1	34	5996	0	40
K 1351B?	23	5	55	80	2	16	13.8	20	1	21	146	3	60
L 1337S?	3	9	4	16	1	2	0.2	0	1	32	1155	0	0
M 1326B	9	57	22	69	0	14	0.2	0	1	23	533	1	19
N 1324B	15	30	28	69	0	14	0.6	16	1	20	480	0	0
O 1320B	15	9	26	54	2	9	2.2	26	1	29	385	4	0
P 1307B?	4	15	3	10	0	1	0.2	2	1	37	1588	0	11
Q 1280M	0	3	0	14	0	1	0.1	2	1	36	5631	0	0
R 1276B?	2	12	7	28	0	5	0.2	0	1	41	1205	6	70
S 1270S?	3	4	19	10	1	6	2.9	22	1	26	600	0	0
T 1265B?	1	2	1	1	0	4	-	-	-	-	-	-	0
U 1260M	0	6	0	28	0	1	0.1	0	1	23	5247	0	130
V 1252M	0	3	0	7	0	1	0.1	0	1	27	5194	0	380
W 1241B?	0	7	0	14	0	2	0.1	2	1	17	4086	0	80
X 1238B?	0	2	0	2	0	2	-	-	-	-	-	-	0
Y 1227M	0	2	3	4	0	1	0.5	44	1	11	4564	0	450
Z 1216B?	1	2	1	2	0	4	-	-	-	-	-	-	50
AA 1213B?	3	35	13	61	0	9	0.2	0	1	14	1009	0	100
AB 1203M	0	1	10	7	0	1	1.6	37	1	14	4076	0	710
AC 1198S	7	20	14	29	0	4	0.3	0	1	17	968	0	0
AD 1188M	0	2	1	2	0	4	-	-	-	-	-	-	1590
AE 1187B?	4	9	7	21	0	3	0.3	1	1	7	3929	0	1590
AF 1180M	4	1	7	3	0	0	2.3	43	1	25	5781	0	210
AG 1173M	4	19	11	33	0	5	0.3	1	1	2	2947	0	110
AH 1165S	4	12	12	25	0	4	0.4	6	1	32	983	1	0
AI 1139S?	14	21	29	27	1	12	0.8	13	1	21	315	0	80
AJ 1126B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AK 1121B?	109	134	248	256	16	65	2.0	0	1	13	38	2	30
AL 1113B?	8	24	64	91	1	5	0.3	6	1	24	215	5	0
AM 1112B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 1109B?	37	66	72	137	3	21	0.9	0	1	16	163	0	0
AO 1093B	93	79	202	150	78	63	2.9	0	1	14	12	6	0
AP 1091B	93	79	202	150	29	63	2.9	0	1	14	15	5	12
AQ 1088B	93	79	202	150	29	63	2.9	0	1	26	18	16	0
AR 1082B?	13	68	42	136	6	24	0.2	0	1	22	55	10	0
AS 1072B?	37	42	97	75	8	36	1.5	1	1	22	24	11	0

LINE 10784	(FLIGHT	43)											
A 6326D	29	32	42	66	10	16	1.4	0	1	17	89	1	90

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10784	(FLIGHT	43)											
B 6331B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 6374M	0	2	0	2	0	1	-	-	-	-	-	-	0
D 6386B?	3	8	4	10	0	2	0.3	23	1	32	1665	1	7
E 6410S?	0	2	1	2	0	2	-	-	-	-	-	-	0
F 6460S?	1	2	1	2	0	2	-	-	-	-	-	-	0
G 6509B?	1	2	1	2	0	2	-	-	-	-	-	-	16

LINE 10788	(FLIGHT	47)											
A 3224M	0	15	4	24	0	4	0.1	0	1	0	3517	0	600
B 3226B?	0	15	4	25	0	4	0.1	0	1	0	3283	0	0
C 3239S?	4	21	13	45	0	6	0.3	0	1	16	1082	0	0
D 3244M	1	2	8	7	0	2	1.1	38	1	2	3022	0	0
E 3251B?	0	29	2	51	0	7	0.1	0	1	0	3233	0	0
F 3258B?	25	31	43	52	1	9	1.1	5	1	24	384	0	0
G 3260B?	18	27	43	52	1	9	0.9	4	1	19	439	0	0
H 3272B?	1	2	1	2	0	1	-	-	-	-	-	-	0
I 3276B?	12	7	18	18	0	8	2.5	16	1	22	276	0	0
J 3288M	0	2	1	2	0	1	-	-	-	-	-	-	240
K 3298S?	1	14	1	24	0	3	0.1	0	1	0	3811	0	110
L 3321M	0	2	0	2	0	2	-	-	-	-	-	-	0
M 3329S?	0	2	0	2	0	1	-	-	-	-	-	-	0
N 3334S?	2	8	3	15	0	2	0.1	0	1	0	2951	0	0
O 3348M	1	1	1	2	0	1	-	-	-	-	-	-	300
P 3366S?	5	3	16	11	1	6	2.4	28	1	18	268	0	0
Q 3377B?	7	29	14	67	0	9	0.2	4	1	5	1662	0	17
R 3380B?	9	18	14	67	0	9	0.5	12	1	20	994	0	0
S 3384M	4	13	13	12	0	3	1.1	28	1	0	2715	0	0
T 3386B?	4	13	7	12	0	3	0.5	16	1	19	1400	0	0
U 3390B?	7	13	11	8	0	2	0.4	19	1	27	1119	0	0
V 3392B?	1	2	1	2	1	4	-	-	-	-	-	-	0
W 3396B?	17	20	26	37	0	8	1.1	7	1	17	563	0	0
X 3413B?	1	2	1	2	0	1	-	-	-	-	-	-	0
Y 3418B?	3	7	3	8	0	1	0.3	11	1	13	2710	0	13
Z 3430B?	3	7	3	13	0	2	0.1	7	1	15	2478	0	0
AA 3438B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AB 3451B?	11	34	18	64	0	9	0.4	1	1	18	755	0	0
AC 3465S?	9	25	11	40	0	5	0.4	13	1	16	1368	0	0
AD 3470B?	3	8	8	41	0	5	0.2	0	1	21	1495	0	0
AE 3475M	1	5	4	4	0	4	0.8	52	1	6	2587	0	0
AF 3479B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AG 3495M	0	4	6	3	0	4	1.6	39	1	0	3747	0	950

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10788	(FLIGHT	47)											
AH 3504B?	5	26	14	40	0	5	0.4	0	1	0	2590	0	0
AI 3511M	0	4	24	9	0	4	4.9	33	1	18	3938	0	0
AJ 3515B?	32	38	24	125	0	10	1.4	6	1	23	575	0	0
AK 3518B?	13	38	30	125	0	10	0.4	0	1	0	1186	0	1070
AL 3524B?	6	23	9	35	0	4	0.2	7	1	2	1491	0	0
AM 3530B?	6	32	12	160	0	22	0.2	6	1	7	1205	0	0
AN 3535B?	2	68	0	160	0	22	0.1	0	1	0	2691	0	0
AO 3554M	1	2	1	2	0	2	-	-	-	-	-	-	170
AP 3556B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AQ 3558B?	9	7	14	27	0	6	1.5	35	1	24	1314	0	0
AR 3564S?	5	17	14	15	0	5	0.3	8	1	21	1231	0	0
AS 3583E	29	136	62	125	0	35	0.4	0	1	27	221	9	360
AT 3594B	46	96	181	236	135	72	0.9	4	1	11	11	4	18
AU 3614B?	51	57	74	104	7	20	1.7	0	1	17	106	2	12
AV 3618B?	16	27	74	59	4	9	0.7	4	1	17	202	0	0
AW 3625B	104	55	207	99	64	78	5.4	1	1	23	21	13	0
AX 3630B	56	63	118	193	9	43	1.7	10	1	21	33	10	0
AY 3637B	60	58	137	103	33	52	2.1	3	1	18	18	9	0
AZ 3643B	34	31	63	64	21	25	1.9	9	1	18	25	8	0
BA 3653B	137	180	425	350	40	147	2.0	0	1	14	20	5	0

LINE 10794	(FLIGHT	43)											
A 6122B?	0	2	1	2	0	2	-	-	-	-	-	-	0
B 6106M	0	4	0	18	0	1	0.1	0	1	28	5477	0	0
C 6095M	0	13	0	60	0	8	0.1	11	1	9	2563	0	40
D 6089S?	6	40	18	74	0	9	0.1	0	1	12	962	0	0
E 6046M	0	4	0	7	0	1	0.1	5	1	69	6580	1	14

LINE 10795	(FLIGHT	43)											
A 6183B?	18	9	28	14	8	11	3.5	4	1	38	95	18	0
B 6162M	0	6	10	17	2	2	0.5	22	1	21	4238	0	180

LINE 10797	(FLIGHT	47)											
A 4328B?	0	24	1	78	0	12	0.1	4	1	0	2167	0	480
B 4325D	0	28	0	78	0	12	0.1	10	1	0	1919	0	30
C 4316D	1	10	0	5	0	1	0.1	6	1	10	3151	0	0
D 4309B?	6	15	13	26	0	4	0.3	5	1	22	1088	0	0
E 4295B?	1	13	1	27	0	4	0.1	0	1	4	2896	0	330
F 4289M	0	2	0	2	0	4	-	-	-	-	-	-	0
G 4288B?	0	8	0	6	0	3	0.1	6	1	11	3187	0	540
H 4278B?	10	27	17	34	0	4	0.4	7	1	23	855	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10797	(FLIGHT		47)											
I 4275M	10	27	17	34	0	3	0.4	4	1	1	2964	0	0	
J 4272B?	0	5	0	17	0	3	0.1	0	1	4	3402	0	0	
K 4265B?	0	18	11	29	0	4	0.3	2	1	0	2407	0	0	
L 4259B?	9	6	24	26	0	5	1.8	20	1	26	483	0	0	
M 4248M	0	2	0	2	0	4	-	-	-	-	-	-	0	
N 4228M	0	2	1	2	0	1	-	-	-	-	-	-	0	
O 4223B?	4	4	7	5	0	1	1.2	17	1	40	627	6	0	
P 4209S?	0	7	8	23	0	3	0.3	1	1	6	3649	0	0	
Q 4194B?	0	6	7	4	1	1	2.0	33	1	45	1057	6	0	
R 4173S?	4	3	7	33	0	4	0.2	0	1	24	739	0	0	
S 4167B?	1	2	1	2	0	0	-	-	-	-	-	-	0	
T 4163M	10	25	1	51	0	8	0.4	10	1	31	1241	1	150	
U 4161B?	10	25	29	51	1	8	0.4	2	1	29	444	4	0	
V 4155B?	0	11	22	29	0	1	0.9	13	1	57	1210	19	0	
W 4149S?	0	2	1	2	0	4	-	-	-	-	-	-	1270	
X 4142M	5	31	12	51	0	6	0.2	1	1	6	2754	0	140	
Y 4140B?	5	31	12	51	0	6	0.2	0	1	16	1003	0	0	
Z 4131S?	0	19	4	37	0	5	0.1	0	1	13	1923	0	5	
AA 4129B?	0	2	1	2	0	4	-	-	-	-	-	-	40	
AB 4122S?	0	22	9	45	0	7	0.2	0	1	27	1054	0	0	
AC 4118B?	1	20	14	45	1	6	0.3	0	1	32	439	6	0	
AD 4114B?	4	11	12	14	1	2	0.9	9	1	32	460	4	0	
AE 4110B?	0	2	1	2	0	1	-	-	-	-	-	-	0	
AF 4106M	0	2	12	8	0	1	1.8	46	1	18	3359	0	4	
AG 4094S?	0	36	0	36	0	9	0.1	9	1	0	1832	0	1060	
AH 4089D	0	12	5	25	0	1	0.1	0	1	26	2282	0	0	
AI 4077B?	0	41	18	92	0	15	0.2	1	1	0	1584	0	0	
AJ 4073B?	0	41	14	92	0	15	0.2	0	1	33	800	4	0	
AK 4068B?	0	15	14	26	0	3	0.5	16	1	3	2554	0	0	
AL 4064M	0	4	0	4	0	1	0.1	5	1	14	3484	0	450	
AM 4055B?	4	19	23	32	0	6	0.9	7	1	14	1228	0	0	
AN 4052B?	1	2	1	2	0	4	-	-	-	-	-	-	60	
AO 4047D	14	17	20	31	0	12	0.9	0	1	50	267	23	0	
AP 4039B?	0	2	1	2	0	1	-	-	-	-	-	-	290	
AQ 4032S?	0	2	1	2	0	4	-	-	-	-	-	-	0	
AR 4028S?	0	2	1	2	0	3	-	-	-	-	-	-	0	
AS 4023S?	2	17	6	26	0	4	0.2	0	1	27	780	0	0	
AT 4006B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
AU 4000H	227	141	468	174	90	171	5.8	0	2	16	9	8	0	
AV 3985B?	90	63	178	189	12	11	3.6	0	1	12	55	0	0	
AW 3982B?	101	162	178	232	12	50	1.5	0	1	12	54	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10797	(FLIGHT	47)											
AX 3980B?	84	162	178	232	12	50	1.1	0	1	11	96	0	0
AY 3974D	16	50	43	75	2	24	0.4	0	1	14	276	0	11
AZ 3970D	26	46	9	67	0	8	0.8	0	1	14	295	0	30
BA 3967B?	9	49	9	67	1	8	0.2	0	1	20	321	1	0
BB 3966B?	10	43	5	67	1	8	0.3	3	1	20	309	1	0
BC 3961B?	24	56	28	125	3	17	0.6	2	1	11	234	0	0
BD 3954B	138	67	271	124	45	80	6.8	0	1	16	21	6	0
BE 3953B	138	68	271	124	45	80	6.7	0	1	16	25	6	0
BF 3946B	230	249	524	732	23	155	3.0	0	1	9	25	1	0
BG 3942B	198	40	425	865	17	140	25.8	4	1	13	28	4	0
BH 3939B	88	77	325	424	17	102	2.7	0	1	18	36	7	0
BI 3933B	49	117	102	232	24	32	0.8	0	1	15	45	3	0

LINE 10800	(FLIGHT	37)											
A 3758B?	11	44	20	63	0	10	0.3	0	1	12	712	0	1110
B 3763B?	16	45	29	76	0	13	0.5	1	1	21	340	0	0
C 3765B?	5	26	41	76	0	13	0.2	0	1	18	535	0	20
D 3771B?	3	20	10	115	0	17	0.1	0	1	20	928	0	0
E 3776B	25	71	38	118	0	17	0.5	0	1	13	401	0	0
F 3782B	7	44	21	75	0	10	0.1	0	1	22	596	0	0
G 3792B?	0	15	16	29	0	4	0.6	2	1	0	2504	0	880
H 3797D	13	25	16	28	0	3	0.6	2	1	18	846	0	0
I 3809B?	0	2	0	2	0	2	-	-	-	-	-	-	0
J 3813S?	7	21	14	24	0	5	0.3	0	1	12	836	0	0
K 3821M	0	2	0	2	0	4	-	-	-	-	-	-	0
L 3840M	1	2	0	2	0	2	-	-	-	-	-	-	230
M 3844D	2	18	3	26	0	3	0.1	0	1	3	3262	0	0
N 3880S?	0	27	0	40	0	6	0.1	4	1	0	2349	0	0
O 3890B?	0	19	0	41	0	7	0.1	11	1	9	2533	0	110
P 3892B?	0	2	0	2	0	4	-	-	-	-	-	-	200
Q 3900D	7	16	6	17	0	2	0.4	11	1	2	3208	0	0
R 3909B?	2	20	6	31	0	4	0.1	2	1	15	2289	0	0
S 3919D	1	2	1	2	0	3	-	-	-	-	-	-	0
T 3927S?	1	2	1	2	0	3	-	-	-	-	-	-	0
U 3942S?	1	2	1	2	0	4	-	-	-	-	-	-	0
V 3943S?	23	53	33	99	0	15	0.6	0	1	19	333	0	0
W 3955D	3	10	10	17	0	2	0.5	20	1	7	3131	0	0
X 3958B?	3	10	5	17	0	2	0.2	11	1	15	2161	0	0
Y 3964S?	3	17	6	30	0	4	0.1	0	1	17	1275	0	0
Z 3967S?	5	19	6	25	0	3	0.2	0	1	16	1108	0	40
AA 3973S?	3	17	1	18	0	2	0.1	0	1	14	1843	0	7

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10800	(FLIGHT	37)											
AB 3980B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AC 3983D	12	34	15	54	0	7	0.4	0	1	12	996	0	0
AD 3994B?	1	20	3	19	0	3	0.1	11	1	16	2973	0	0
AE 3998S?	4	1	0	38	0	5	4.1	87	1	7	2758	0	0
AF 4025B?	0	3	0	9	0	0	0.1	19	1	40	5141	0	0
AG 4027M	1	2	1	2	0	1	-	-	-	-	-	-	0
AH 4034B?	5	6	3	1	0	1	0.8	29	1	17	2675	0	0
AI 4040M	5	12	9	46	0	7	0.2	0	1	0	2293	0	150
AJ 4040S?	5	12	9	46	0	7	0.2	0	1	0	2197	0	150
AK 4045B?	5	9	11	37	0	5	0.4	32	1	19	1187	0	0
AL 4048B?	7	19	15	37	0	5	0.3	13	1	20	774	0	0
AM 4050B?	7	18	15	26	0	5	0.3	14	1	15	1034	0	0
AN 4051M	7	18	15	26	0	5	0.4	16	1	0	2894	0	0
AO 4055S?	8	25	17	56	0	8	0.3	4	1	24	696	0	0
AP 4064S?	1	9	1	18	0	2	0.1	1	1	15	3646	0	0
AQ 4074M	3	2	8	5	0	1	1.7	31	1	22	5741	0	1680
AR 4085B?	2	12	3	20	0	3	0.1	0	1	32	1323	0	0
AS 4093B?	8	21	11	37	1	6	0.4	5	1	30	590	3	0
AT 4101B?	1	2	1	2	1	3	-	-	-	-	-	-	0
AU 4106B?	6	21	19	13	1	6	0.3	2	1	23	606	0	0
AV 4112S?	7	19	24	40	2	7	0.3	0	1	21	260	0	0
AW 4121B?	9	23	15	35	1	6	0.4	4	1	32	469	6	0
AX 4135S?	4	16	43	27	1	15	2.8	13	1	36	657	7	0
AY 4143B	99	70	213	20	21	68	3.6	0	1	16	19	6	100
AZ 4157B	44	40	181	218	2	62	2.1	0	1	21	178	1	0
BA 4160B	95	92	184	267	8	39	2.5	3	1	19	59	6	0
BB 4163B	35	92	76	267	9	39	0.6	0	1	11	81	0	0
BC 4175B	225	433	531	845	29	192	1.6	0	1	10	31	1	1220
BD 4185B	312	565	673	1108	30	262	1.9	0	1	12	28	4	60
BE 4195B	106	164	247	323	14	89	1.5	0	1	14	34	4	610
BF 4203B	34	27	65	55	17	21	2.3	0	1	18	39	5	0
BG 4222B	28	65	11	132	5	30	0.7	0	1	25	81	10	0

LINE 10810	(FLIGHT	21)											
A 1355M	0	19	15	13	0	2	1.4	29	1	4	2852	0	0
B 1352D	0	19	0	13	0	2	0.1	0	1	1	2852	0	60
C 1345S?	3	11	4	18	0	3	0.1	0	1	20	1104	0	0
D 1337M	0	2	4	2	0	0	1.9	57	1	0	3523	0	680
E 1332M	0	52	22	84	0	12	0.3	0	1	0	2684	0	0
F 1328D	13	52	22	84	0	12	0.3	0	1	23	719	0	0
G 1320M	0	2	0	5	0	1	0.1	0	1	17	5657	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10810	(FLIGHT	21)											
H 1301M	0	2	0	4	0	1	0.1	0	1	26	5685	0	0
I 1291M	0	1	0	1	0	1	-	-	-	-	-	-	130
J 1281M	0	7	4	9	0	2	0.3	17	1	9	4206	0	0
K 1278B?	0	7	7	19	0	2	0.3	0	1	0	4062	0	0
L 1273S?	0	9	7	15	0	3	0.4	4	1	0	2876	0	310
M 1232M	0	2	1	2	0	2	-	-	-	-	-	-	550
N 1227B?	4	8	5	6	0	1	0.7	31	1	29	1312	0	0
O 1198S?	20	50	54	95	1	22	0.5	0	1	23	91	7	60
P 1187S?	11	13	25	30	3	4	1.0	18	1	23	167	4	0
Q 1182S?	22	26	46	49	0	6	1.2	10	1	18	263	0	0
R 1176B?	24	10	46	51	1	3	4.2	18	1	26	187	6	0
S 1171S?	11	25	4	39	0	6	0.5	0	1	23	573	0	30
T 1068M	0	6	10	16	0	2	0.6	8	1	3	4076	0	0
U 1060M	3	1	19	38	0	3	0.6	0	1	5	2116	0	0
V 1055S?	10	24	21	43	0	7	0.4	0	1	14	454	0	0
W 1046S?	6	17	7	10	0	4	0.3	6	1	30	1112	0	0
X 1033S	0	2	1	2	1	2	-	-	-	-	-	-	0
Y 1013S	1	9	3	17	0	2	0.1	0	1	24	2000	0	0
Z 992B?	1	2	1	2	1	4	-	-	-	-	-	-	40
AA 964B	116	230	292	436	9	101	1.2	0	1	11	39	1	0
AB 943B	43	133	61	264	33	25	0.6	0	1	15	36	5	0
AC 934B	94	177	223	338	15	77	1.2	0	1	14	46	3	0
AD 923B	31	33	69	56	15	22	1.5	0	1	16	33	3	0
AE 915B	4	33	21	57	3	10	0.4	0	1	18	105	1	0
AF 898B	1	2	1	2	2	4	-	-	-	-	-	-	0

LINE 10820	(FLIGHT	21)											
A 1499S?	12	25	21	52	6	14	0.5	0	1	24	98	7	0
B 1501D	12	30	21	52	5	14	0.4	0	1	27	147	8	0
C 1504D	15	20	12	47	3	14	0.9	11	1	25	350	2	0
D 1513B?	5	15	12	38	0	4	0.3	2	1	19	611	0	0
E 1517B?	0	15	14	38	0	4	0.4	0	1	12	1130	0	0
F 1520B?	1	9	15	4	0	0	6.6	38	1	25	786	0	0
G 1525M	0	25	13	70	0	2	0.2	0	1	0	2163	0	0
H 1527D	0	25	13	70	0	11	0.2	0	1	0	2069	0	0
I 1554M	0	1	0	2	0	0	0.1	0	1	86	8043	0	0
J 1566B?	0	8	0	16	0	2	0.1	0	1	26	5713	0	0
K 1570S?	0	2	0	2	0	2	-	-	-	-	-	-	0
L 1579S?	0	2	0	2	0	2	-	-	-	-	-	-	0
M 1594M	0	5	4	10	0	2	0.3	8	1	7	4393	0	0
N 1601S?	0	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT

LINE 10820	(FLIGHT	21)											
O 1605M	0	8	6	19	0	3	0.2	0	1	0	3517	0	0
P 1637B?	1	2	1	2	0	1	-	-	-	-	-	-	0
Q 1640M	7	8	12	11	0	2	0.9	22	1	0	3664	0	0
R 1647S?	7	10	12	17	0	2	0.6	19	1	28	851	0	0
S 1658S?	2	10	4	16	0	2	0.2	1	1	28	1134	0	0
T 1677S?	9	15	12	26	1	6	0.6	0	1	23	332	0	0
U 1683S?	1	2	1	2	0	3	-	-	-	-	-	-	0
V 1688S?	10	16	15	30	0	4	0.7	2	1	14	721	0	0
W 1698M	14	60	33	127	0	18	0.3	0	1	12	1041	0	0
X 1700S?	14	60	33	127	0	18	0.3	0	1	13	503	0	0
Y 1710B?	3	37	44	70	0	19	0.9	0	1	17	303	0	0
Z 1713B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AA 1810S	1	10	1	22	0	3	0.1	0	1	9	3877	0	0
AB 1839S?	0	3	5	12	0	1	0.3	0	1	6	5019	0	0
AC 1850M	0	3	3	6	0	1	0.2	30	1	23	4616	0	0
AD 1861B?	5	14	3	15	0	2	0.3	0	1	26	1713	0	0
AE 1864B?	4	12	6	15	0	2	0.3	0	1	19	1430	0	0
AF 1908S	1	2	1	2	0	2	-	-	-	-	-	-	0
AG 1945S?	4	11	5	23	0	3	0.1	0	1	20	995	0	0
AH 1958S?	1	27	27	53	2	9	0.7	0	1	19	293	0	0
AI 1962S?	9	21	27	31	2	5	0.5	0	1	15	335	0	0
AJ 1978H	36	61	106	67	12	27	0.9	0	1	19	52	5	0
AK 1987B	34	82	169	178	17	56	0.7	0	1	18	40	4	0
AL 1994B	37	119	152	206	26	75	0.5	0	1	13	34	3	0
AM 2001B	28	50	96	88	26	30	0.8	1	1	24	50	11	0
AN 2011B	30	85	91	168	14	33	0.6	0	1	17	58	4	0

LINE 10830	(FLIGHT	21)											
A 2637B?	1	13	2	23	0	4	0.1	0	1	14	3747	0	0
B 2633M	0	1	20	9	0	4	3.2	29	1	5	3262	0	0
C 2625B?	36	38	23	55	6	32	1.6	8	1	28	136	11	0
D 2622B?	15	38	23	55	5	32	0.5	4	1	23	101	7	0
E 2612B?	11	15	22	28	1	4	0.9	4	1	24	322	0	0
F 2609S?	5	15	22	28	1	4	0.3	5	1	21	465	0	0
G 2598S?	4	18	10	26	0	5	0.3	0	1	33	711	4	0
H 2584S?	12	36	19	65	0	8	0.4	0	1	23	449	0	0
I 2581S?	7	26	19	65	0	8	0.3	0	1	22	751	0	0
J 2575B?	0	5	2	5	0	1	0.2	21	1	13	4266	0	0
K 2570M	0	3	2	30	0	0	0.1	0	1	15	4752	0	0
L 2565S?	1	21	7	44	0	6	0.1	0	1	8	1819	0	0
M 2555S?	7	23	12	33	0	4	0.3	0	1	18	990	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10830	(FLIGHT	21)											
N 2548M	0	2	6	3	0	0	2.2	52	1	12	4382	0	0
O 2534M	0	3	0	14	0	1	0.1	0	1	14	4476	0	0
P 2497M	0	2	4	5	0	1	0.5	39	1	43	6144	0	230
Q 2474S?	6	19	12	35	0	6	0.3	0	1	23	531	0	70
R 2469S?	1	2	1	2	0	4	-	-	-	-	-	-	0
S 2459B?	1	2	1	2	1	2	-	-	-	-	-	-	0
T 2454B?	17	34	37	62	0	12	0.6	0	1	20	268	0	50
U 2431B?	23	32	56	55	2	15	1.0	1	1	28	344	4	0
V 2393B?	3	10	2	11	1	2	0.2	1	1	40	1372	2	0
W 2386S?	1	2	1	2	0	2	-	-	-	-	-	-	60
X 2374M	0	5	3	16	0	2	0.1	6	1	19	4186	0	280
Y 2354M	0	2	1	2	0	1	-	-	-	-	-	-	120
Z 2342D	12	26	20	37	0	6	0.5	0	1	28	924	0	0
AA 2337B?	2	7	20	6	0	6	6.3	24	1	14	1702	0	0
AB 2316M	0	5	0	7	0	1	0.1	0	1	12	4105	0	0
AC 2286B?	6	11	8	16	0	3	0.4	0	1	28	1068	0	0
AD 2274S	1	2	1	2	0	2	-	-	-	-	-	-	0
AE 2248D	7	21	6	17	0	3	0.3	0	1	21	2811	0	0
AF 2213S	4	16	11	53	0	7	0.2	0	1	22	925	0	0
AG 2204S	3	16	4	23	1	3	0.1	0	1	19	970	0	0
AH 2189S?	14	55	40	120	2	18	0.3	0	1	14	290	0	0
AI 2179B	33	58	81	108	8	24	0.9	0	1	20	69	5	0
AJ 2165B	33	30	57	52	27	36	1.8	0	1	24	30	11	0
AK 2161B	32	30	64	52	11	20	1.8	0	1	14	25	2	0
AL 2150B	36	31	76	51	16	30	2.0	0	1	22	25	11	0

LINE 10840	(FLIGHT	21)											
A 2754H	28	9	35	45	6	17	7.4	18	1	27	76	11	0
B 2784D	28	35	78	64	2	26	1.2	1	1	27	131	8	0
C 2786D	39	37	78	64	2	26	1.8	2	1	25	135	7	0
D 2790D	8	28	55	83	0	20	0.3	0	1	27	769	0	0
E 2796M	0	2	0	5	0	1	0.1	0	1	15	4538	0	0
F 2807B?	1	2	1	2	0	1	-	-	-	-	-	-	0
G 2817B?	0	7	0	10	0	1	0.1	0	1	7	4538	0	0
H 2822M	0	4	0	2	0	2	0.1	0	1	20	4824	0	0
I 2826M	0	3	0	9	0	1	0.1	0	1	22	5024	0	0
J 2837M	0	3	0	6	0	1	0.1	0	1	32	5538	0	0
K 2847S?	0	3	0	15	0	2	0.1	4	1	19	4105	0	0
L 2865M	0	2	1	2	0	1	-	-	-	-	-	-	0
M 2873S	5	6	2	8	0	2	0.7	17	1	42	754	7	0
N 2885S	1	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 10840	(FLIGHT	21)												
O 2939B?	20	44	46	74	0	14	0.6	0	1	17	288	0	0	
P 2955S?	1	2	1	2	0	1	-	-	-	-	-	-	0	
Q 2967B?	5	13	7	22	0	3	0.3	16	1	25	1830	0	0	
R 2970B?	3	9	6	22	0	3	0.2	3	1	22	1812	0	0	
S 2980B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
T 2987B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
U 2992B?	5	17	7	15	0	3	0.3	7	1	27	1265	0	0	
V 3010S?	1	23	8	64	0	8	0.1	0	1	19	1353	0	0	
W 3014B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
X 3017B?	1	2	1	2	0	1	-	-	-	-	-	-	0	
Y 3019B?	1	2	1	2	0	1	-	-	-	-	-	-	0	
Z 3038S?	4	10	7	31	0	5	0.2	0	1	30	811	0	0	
AA 3070B?	1	2	0	2	0	0	-	-	-	-	-	-	0	
AB 3091B?	2	6	2	10	1	1	0.1	0	1	48	860	11	0	
AC 3108S?	2	8	2	17	0	2	0.1	0	1	36	840	5	0	
AD 3115B?	7	8	6	6	0	1	0.8	12	1	34	780	0	0	
AE 3131D	5	12	3	12	0	1	0.3	10	1	40	1524	3	0	
AF 3160S?	1	2	1	2	0	2	-	-	-	-	-	-	0	
AG 3180S	3	11	4	17	0	3	0.1	0	1	28	980	0	0	
AH 3198B?	9	5	17	8	1	3	2.1	8	1	26	393	0	0	
AI 3199M	1	2	1	2	1	3	-	-	-	-	-	-	0	
AJ 3217B	70	159	241	283	11	78	0.9	0	1	16	46	4	0	
AK 3233B	116	135	117	235	39	82	2.2	0	1	15	23	5	0	
AL 3257B	74	79	141	150	41	49	2.0	0	1	16	14	8	0	
AM 3265B	167	159	330	298	64	109	3.1	0	1	13	13	5	0	

LINE 10850	(FLIGHT	21)												
A 3923S?	6	33	35	64	0	12	0.2	0	1	22	269	1	0	
B 3911B?	79	51	159	87	24	51	3.8	0	1	21	16	11	0	
C 3903B?	21	56	66	96	12	32	0.5	0	1	15	102	0	0	
D 3899B?	22	56	44	96	0	22	0.6	0	1	19	257	0	0	
E 3891D	16	25	20	20	0	7	0.8	7	1	27	577	1	0	
F 3885B?	1	14	3	32	0	4	0.1	0	1	8	3762	0	0	
G 3873M	0	5	0	12	0	2	0.1	0	1	25	5176	0	530	
H 3866S?	1	8	3	7	0	2	0.3	10	1	11	2717	0	0	
I 3847S?	0	12	6	36	0	5	0.1	0	1	2	2705	0	0	
J 3834B?	2	7	6	14	0	1	0.3	0	1	13	5666	0	0	
K 3830M	1	2	0	2	0	2	-	-	-	-	-	-	600	
L 3810M	0	1	0	4	0	1	0.1	2	1	37	5812	0	210	
M 3803D	10	8	13	13	0	4	1.3	8	1	32	982	0	0	
N 3786D	3	25	6	40	0	5	0.1	0	1	25	834	0	11	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10850	(FLIGHT	21)											
O 3783D	6	11	6	40	0	5	0.4	18	1	28	844	0	0
P 3780B?	3	10	5	8	0	2	0.5	25	1	21	916	0	0
Q 3773S	11	22	23	40	0	6	0.5	0	1	17	385	0	90
R 3766S?	1	25	15	53	0	7	0.3	0	1	8	1457	0	0
S 3764E	3	28	8	53	0	7	0.1	0	1	7	1726	0	40
T 3754S	1	2	1	2	0	1	-	-	-	-	-	-	4
U 3742S?	13	37	24	69	0	10	0.4	0	1	14	539	0	50
V 3735S	3	7	5	10	0	2	0.3	11	1	26	1350	0	8
W 3727B?	2	10	4	8	0	2	0.3	22	1	26	2110	0	0
X 3709S?	4	8	8	12	0	3	0.6	19	1	31	975	0	30
Y 3678B?	6	13	5	22	0	4	0.4	13	1	32	1526	0	0
Z 3672D	5	16	5	27	0	4	0.1	3	1	30	1060	2	0
AA 3669B?	6	16	5	30	0	4	0.3	4	1	31	716	1	60
AB 3664B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AC 3661D	13	31	12	55	0	8	0.5	0	1	21	695	0	0
AD 3640S?	2	15	5	36	0	5	0.1	1	1	6	2527	0	16
AE 3616S	0	2	0	2	0	2	-	-	-	-	-	-	0
AF 3600M	0	1	0	2	0	1	-	-	-	-	-	-	0
AG 3557S	3	18	5	29	0	3	0.1	0	1	21	1156	0	70
AH 3548S	2	13	2	16	0	3	0.1	0	1	25	1929	0	0
AI 3535D	8	32	7	20	0	4	0.3	0	1	21	1610	0	30
AJ 3510S	0	8	3	15	0	2	0.1	8	1	23	4321	0	10
AK 3496S	0	2	1	2	0	2	-	-	-	-	-	-	20
AL 3452S?	0	19	5	7	0	5	0.4	41	1	6	2729	0	0
AM 3446S?	0	5	3	12	0	4	0.2	20	1	12	3039	0	0
AN 3423S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AO 3413S?	4	19	4	26	0	3	0.2	8	1	36	784	8	0
AP 3396S?	19	45	36	87	0	13	0.6	0	1	11	287	0	0
AQ 3359B?	32	59	77	144	3	26	0.9	0	1	17	175	0	0
AR 3350B	355	540	744	993	101	104	2.4	0	1	10	22	2	1100
AS 3346B	100	305	379	609	77	125	0.8	0	1	12	25	4	0
AT 3340B	16	74	24	200	23	54	0.3	0	1	19	28	9	0
AU 3334B	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 3328B	204	244	453	442	22	161	2.5	0	1	10	16	2	2000
AW 3321B	76	245	306	434	8	106	0.7	0	1	13	31	3	350

LINE 10860	(FLIGHT	21)											
A 4020B?	25	25	49	65	9	27	1.6	9	1	26	58	12	0
B 4024B?	42	42	49	65	9	27	1.8	0	1	17	131	0	0
C 4032B?	13	22	13	40	0	4	0.7	4	1	22	342	0	0
D 4035D	13	25	13	40	0	4	0.6	1	1	23	348	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10860	(FLIGHT	21)											
E 4045B?	46	35	84	50	22	30	2.5	0	1	26	32	13	0
F 4054B	134	172	251	307	5	93	2.0	0	1	13	27	4	750
G 4062D	28	9	68	97	2	8	7.1	18	1	29	177	8	0
H 4065D	42	78	68	66	1	8	0.9	0	1	22	216	3	0
I 4070B?	10	27	9	66	0	18	0.4	8	1	25	746	0	0
J 4073B?	3	11	11	20	0	9	0.5	14	1	31	1067	0	0
K 4078M	0	1	1	14	0	1	0.1	0	1	0	3543	0	630
L 4085S?	0	9	3	13	0	4	0.1	0	1	0	3054	0	140
M 4092M	0	2	0	2	0	2	-	-	-	-	-	-	0
N 4098M	0	5	4	5	0	1	0.5	31	1	12	4710	0	1410
O 4106B?	1	2	1	2	0	2	-	-	-	-	-	-	1070
P 4108B?	0	12	0	19	0	3	0.1	0	1	9	3956	0	0
Q 4118M	0	1	0	2	0	1	0.1	0	1	28	5823	0	290
R 4121B?	0	0	0	0	0	0	-	-	-	-	-	-	0
S 4144B?	8	11	14	21	0	4	0.7	10	1	28	914	0	0
T 4160B?	5	13	5	18	1	3	0.4	9	1	37	658	6	0
U 4164B?	1	2	1	2	1	3	-	-	-	-	-	-	0
V 4177S?	4	20	9	34	0	5	0.2	0	1	19	926	0	0
W 4211S?	1	9	3	17	0	2	0.1	6	1	31	2841	0	0
X 4236M	4	3	4	7	0	1	1.6	65	1	24	4669	0	110
Y 4244S?	4	11	7	18	0	3	0.3	1	1	34	938	1	60
Z 4261S	1	2	1	2	1	1	-	-	-	-	-	-	0
AA 4272B?	1	2	1	2	1	4	-	-	-	-	-	-	0
AB 4276D	1	2	1	2	0	3	-	-	-	-	-	-	4
AC 4282B?	2	17	9	13	0	4	0.6	21	1	34	735	4	0
AD 4286B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AE 4298M	1	2	1	2	0	1	-	-	-	-	-	-	70
AF 4350S?	1	2	1	2	1	1	-	-	-	-	-	-	0
AG 4372S?	3	13	5	36	0	5	0.1	0	1	20	2057	0	0
AH 4391S	0	2	1	2	0	2	-	-	-	-	-	-	0
AI 4413B?	5	10	5	10	0	2	0.4	17	1	17	2650	0	0
AJ 4503S	1	2	1	2	1	2	-	-	-	-	-	-	0
AK 4515S	2	21	5	39	0	5	0.1	0	1	17	1150	0	0
AL 4533S?	2	13	18	26	2	4	0.8	8	1	19	1002	0	130
AM 4542B	55	137	231	207	22	71	0.8	0	1	15	36	4	0
AN 4554B	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 4563B	1	2	1	2	2	4	-	-	-	-	-	-	250
AP 4566B	56	123	105	253	30	37	0.9	0	1	13	44	2	440
AQ 4574B	52	48	225	109	50	80	2.1	0	1	13	16	4	0

LINE 10870	(FLIGHT	21)											
A 5629B?	51	44	98	63	25	35	2.3	0	1	27	36	14	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10870	(FLIGHT	21)											
B 5621B?	74	72	147	124	25	50	2.3	0	1	23	48	10	0
C 5615E	74	72	147	124	25	50	2.3	0	1	22	91	6	0
D 5605B?	14	20	13	32	17	3	0.8	6	1	23	336	0	0
E 5595B?	28	103	173	149	26	72	0.5	0	1	20	24	9	0
F 5582B?	54	82	102	136	12	39	1.2	0	1	25	105	9	0
G 5579B?	42	74	102	132	12	39	1.0	0	1	22	203	3	0
H 5570M	0	2	1	6	0	1	0.1	14	1	23	4929	0	0
I 5561M	0	2	0	2	0	2	-	-	-	-	-	-	0
J 5556B?	3	6	4	11	0	3	0.2	5	1	20	2912	0	0
K 5545M	0	7	0	15	0	2	0.1	0	1	18	4428	0	0
L 5538M	0	3	2	7	0	1	0.1	8	1	31	5823	0	0
M 5530M	0	6	2	6	0	1	0.1	10	1	30	5823	0	0
N 5503B?	5	13	11	21	0	3	0.4	11	1	33	1333	0	0
O 5494S?	6	20	14	38	0	6	0.3	0	1	21	785	0	0
P 5485B?	8	15	11	23	0	3	0.5	16	1	41	881	9	0
Q 5471S?	2	19	21	33	1	7	0.7	0	1	35	337	8	0
R 5468B?	9	19	21	33	1	7	0.5	2	1	42	415	14	0
S 5462D	5	17	21	19	0	4	0.3	0	1	44	990	8	0
T 5454M	5	2	10	10	0	1	3.7	69	1	41	5771	0	0
U 5448S	0	13	6	26	0	3	0.2	0	1	16	2999	0	0
V 5423S	2	14	5	21	0	3	0.2	0	1	23	1300	0	0
W 5377S	0	14	3	26	0	3	0.1	0	1	37	1519	5	0
X 5355B?	14	50	26	78	0	11	0.3	0	1	21	621	0	0
Y 5349B?	4	27	26	39	0	6	0.8	8	1	36	741	7	0
Z 5342S?	5	26	2	43	0	6	0.2	0	1	25	719	0	0
AA 5326M	0	8	10	16	0	3	0.5	18	1	16	4155	0	0
AB 5308B?	0	15	5	24	0	3	0.2	0	1	21	2345	0	0
AC 5300M	0	10	1	13	0	1	0.1	0	1	25	4795	0	0
AD 5283S?	0	2	1	2	0	4	-	-	-	-	-	-	0
AE 5257S?	1	2	1	2	0	1	-	-	-	-	-	-	0
AF 5247S?	1	19	3	32	0	4	0.1	0	1	8	3202	0	0
AG 5241S	0	2	1	2	0	3	-	-	-	-	-	-	0
AH 5229S	1	2	1	2	0	2	-	-	-	-	-	-	0
AI 5205S	2	18	4	26	0	4	0.1	0	1	8	3911	0	0
AJ 5197S?	4	27	6	39	0	6	0.1	0	1	10	1843	0	0
AK 5168S	1	2	1	2	0	2	-	-	-	-	-	-	0
AL 5113S?	0	2	1	2	0	3	-	-	-	-	-	-	0
AM 5089S	0	15	6	28	0	4	0.2	0	1	7	3877	0	0
AN 5079S?	4	24	13	53	0	10	0.3	0	1	10	1283	0	0
AO 5075S?	4	13	13	21	0	3	0.6	6	1	20	926	0	0
AP 5065B?	1	2	1	2	2	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10870	(FLIGHT	21)											
AQ 5059B	118	142	236	231	25	78	2.1	0	1	17	70	3	0
AR 5056B	118	142	236	231	25	78	2.1	0	1	15	39	4	0
AS 5053B	118	142	236	231	25	78	2.1	0	1	18	50	6	0
AT 5047B	71	146	148	213	35	49	1.0	0	1	20	54	7	0
AU 5041B	124	222	300	418	35	100	1.4	0	1	15	27	5	0
AV 5030B	31	39	58	64	22	19	1.3	0	1	22	54	8	0
AW 5014B	145	424	351	773	0	159	1.0	0	1	10	51	0	0
LINE 10880	(FLIGHT	21)											
A 5673H	9	14	16	24	1	5	0.7	12	1	33	114	14	0
B 5683B?	13	22	27	41	0	7	0.7	4	1	29	112	11	0
C 5687B?	1	2	1	2	1	4	-	-	-	-	-	-	0
D 5695B?	74	63	142	103	21	52	2.7	0	1	23	31	12	0
E 5700B?	51	59	76	84	23	48	1.7	0	1	21	44	8	0
F 5704B?	51	59	76	84	14	19	1.6	5	1	22	160	5	0
G 5707D	26	42	11	84	3	13	0.9	1	1	21	185	2	0
H 5712D	17	24	11	41	3	19	0.9	2	1	26	320	2	0
I 5726M	0	3	0	5	0	1	0.1	0	1	12	4564	0	310
J 5732B?	0	2	0	2	0	1	-	-	-	-	-	-	70
K 5737B?	0	5	0	10	0	1	0.1	0	1	4	4780	0	0
L 5739B?	0	8	0	15	0	2	0.1	0	1	3	4669	0	80
M 5742M	0	8	2	15	0	2	0.1	0	1	9	4602	0	410
N 5760B?	5	9	5	13	0	2	0.5	12	1	28	1428	0	0
O 5782B?	3	22	4	33	0	4	0.1	0	1	19	1334	0	0
P 5785B?	1	2	1	2	0	4	-	-	-	-	-	-	0
Q 5790B?	7	12	7	16	0	2	0.5	13	1	29	700	0	0
R 5801B?	3	11	6	17	0	3	0.2	7	1	32	1387	0	0
S 5803B?	1	2	1	2	0	3	-	-	-	-	-	-	0
T 5818M	5	1	5	2	0	1	2.7	64	1	32	5631	0	0
U 5824B?	5	11	3	13	0	2	0.4	8	1	8	3601	0	0
V 5840S	3	8	3	17	0	2	0.1	1	1	25	2584	0	0
W 5862D	3	13	9	6	0	1	1.5	37	1	43	1464	6	0
X 5868B?	7	6	9	9	0	2	1.1	36	1	29	1198	0	0
Y 5877B?	1	2	1	2	0	1	-	-	-	-	-	-	0
Z 5894S	2	10	2	24	0	3	0.2	10	1	38	1490	3	18
AA 5906B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AB 5934S?	6	8	10	32	0	5	0.7	30	1	37	581	8	0
AC 5995S?	1	2	1	2	0	1	-	-	-	-	-	-	0
AD 6043B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AE 6047B?	1	17	3	19	0	3	0.1	0	1	12	3097	0	0
AF 6055S?	2	24	9	50	0	7	0.2	0	1	11	1113	0	40

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10880	(FLIGHT 21)												
AG 6066S?	2	11	4	20	0	3	0.1	0	1	26	1279	0	0
AH 6076B?	6	36	6	60	0	7	0.1	0	1	15	1191	0	6
AI 6089M	5	6	9	16	0	2	0.4	14	1	10	3852	0	0
AJ 6096S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AK 6130B	42	68	14	148	13	9	1.1	0	1	17	199	0	0
AL 6137D	35	7	27	358	21	56	15.3	19	1	25	37	12	110
AM 6141D	68	193	258	385	20	56	0.8	0	1	10	50	0	0
AN 6144B	125	111	258	209	20	79	3.0	0	1	13	25	4	0
AO 6152B	149	115	319	203	33	33	3.8	0	1	13	24	4	0
AP 6155B	146	115	319	219	33	86	3.7	0	1	24	25	13	0
AQ 6159B	21	51	203	87	28	17	0.6	5	1	19	264	1	190
AR 6165B	47	51	112	98	11	19	1.7	3	1	23	66	9	0
AS 6173B	25	39	3	78	8	16	0.9	1	1	19	103	3	1950

LINE 10890	(FLIGHT 21)												
A 6749B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 6742B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 6728S	12	27	24	47	0	7	0.5	0	1	16	379	0	0
D 6719S?	1	2	1	2	0	2	-	-	-	-	-	-	100
E 6683D	33	36	58	57	10	17	1.5	4	1	30	118	12	0
F 6678D	45	15	15	12	10	6	7.7	8	1	38	41	23	0
G 6677D	45	15	68	12	10	22	7.7	7	1	39	41	24	19
H 6674D	1	2	1	2	2	4	-	-	-	-	-	-	0
I 6669D	1	2	1	2	0	4	-	-	-	-	-	-	30
J 6655B?	20	77	28	146	0	21	0.4	0	1	13	528	0	0
K 6650B?	1	2	1	2	0	4	-	-	-	-	-	-	0
L 6637M	0	2	1	2	0	1	-	-	-	-	-	-	0
M 6625S?	0	14	5	22	0	3	0.2	0	1	40	1131	6	0
N 6610S?	0	12	4	13	0	2	0.2	0	1	19	2762	0	30
O 6603S	0	2	1	2	0	1	-	-	-	-	-	-	0
P 6598B?	0	43	16	110	0	14	0.2	0	1	11	914	0	0
Q 6587S?	0	17	6	31	0	4	0.2	4	1	27	1720	0	0
R 6575B?	4	15	1	20	0	2	0.2	9	1	39	1099	7	0
S 6541S?	4	24	13	38	0	6	0.3	0	1	24	748	0	0
T 6532S	0	2	1	2	0	2	-	-	-	-	-	-	0
U 6511S?	3	43	23	80	0	11	0.4	0	1	17	505	0	7
V 6501S?	1	2	1	2	0	4	-	-	-	-	-	-	0
W 6477S?	1	2	1	2	0	1	-	-	-	-	-	-	0
X 6449S?	0	56	7	112	0	15	0.1	0	1	2	1621	0	40
Y 6429S	0	10	3	13	0	1	0.1	4	1	23	2594	0	0
Z 6421S	0	8	3	13	0	1	0.1	5	1	28	2243	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10890	(FLIGHT	21)											
AA 6401S?	0	7	3	4	0	1	0.4	43	1	34	3091	0	0
AB 6377S	5	33	15	65	0	9	0.3	0	1	17	567	0	19
AC 6372S?	1	2	1	2	1	1	-	-	-	-	-	-	0
AD 6360S?	18	96	63	194	0	28	0.3	0	1	10	295	0	0
AE 6345S?	0	24	9	48	0	6	0.2	0	1	15	1372	0	0
AF 6341B?	1	14	5	48	0	3	0.1	0	1	18	1846	0	0
AG 6334B?	5	24	10	36	0	4	0.2	0	1	17	1435	0	0
AH 6317B	1	2	1	2	2	4	-	-	-	-	-	-	9
AI 6315B	13	46	10	89	5	6	0.3	0	1	16	77	3	0
AJ 6306B	96	122	118	219	18	84	1.8	5	1	17	42	7	0
AK 6300B	23	47	13	128	5	21	0.7	2	1	17	67	4	350
AL 6295B	34	12	67	101	8	16	6.0	15	1	22	69	8	0
AM 6283B	18	19	13	34	0	11	1.2	19	1	22	96	7	0
AN 6274B	78	59	189	258	17	58	3.1	6	1	14	43	3	0
AO 6268B	37	140	40	126	6	41	0.5	0	1	23	100	9	0

LINE 10900	(FLIGHT	31)											
A 164B	13	6	16	11	7	5	3.4	13	1	37	98	17	0
B 179B?	1	2	1	2	1	1	-	-	-	-	-	-	0
C 188B	33	53	99	97	12	33	1.0	0	1	24	62	9	0
D 194B	21	23	44	41	10	12	1.2	3	1	26	49	12	14
E 202B	16	29	19	49	7	4	0.7	0	1	25	90	8	40
F 206B	19	56	33	82	2	8	0.5	0	1	23	109	7	0
G 210B	34	31	12	82	4	23	1.9	7	1	28	225	7	0
H 223M	1	1	2	7	0	1	0.1	4	1	28	5935	0	100
I 241D	4	3	22	11	11	8	3.0	0	1	57	72	37	11
J 247D	10	8	13	7	10	4	1.5	8	1	59	114	36	0
K 260D	16	10	8	5	0	2	2.2	13	1	29	1071	0	0
L 271S?	5	21	2	38	0	5	0.2	4	1	0	2548	0	50
M 280B?	0	13	0	11	0	2	0.1	0	1	8	3755	0	0
N 294M	1	2	0	2	0	0	-	-	-	-	-	-	140
O 315B?	7	22	11	32	0	5	0.3	0	1	16	1139	0	0
P 319B?	1	2	1	2	0	3	-	-	-	-	-	-	0
Q 323B?	2	10	0	26	0	4	0.1	14	1	17	3747	0	30
R 349S?	2	10	4	19	0	3	0.1	0	1	12	3659	0	0
S 362S	0	2	1	2	0	2	-	-	-	-	-	-	0
T 448B?	4	15	5	18	0	3	0.2	0	1	30	2087	0	0
U 471S?	0	26	3	53	1	7	0.1	0	1	7	2381	0	17
V 497S?	3	17	8	29	0	4	0.3	0	1	25	924	0	12
W 501S?	1	2	1	2	0	4	-	-	-	-	-	-	0
X 505E	4	22	17	50	0	10	0.4	0	1	9	927	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE	10900	(FLIGHT 31)													
Y	507S	4	22	17	50	0	10	0.4	0	1	10	632	0	70	
Z	524B?	1	2	1	2	0	4	-	-	-	-	-	-	130	
AA	530B?	24	71	73	138	2	24	0.5	0	1	18	236	0	50	
AB	536B?	11	42	22	80	2	11	0.3	0	1	21	390	0	0	
AC	538B?	1	2	1	2	0	4	-	-	-	-	-	-	30	
AD	563S?	1	2	1	2	0	1	-	-	-	-	-	-	0	
AE	573S	4	8	4	6	0	1	0.4	18	1	39	1338	2	10	
AF	580S	1	2	1	2	1	0	-	-	-	-	-	-	0	
AG	594S?	6	11	6	20	0	3	0.5	21	1	35	1790	0	0	
AH	602B?	7	25	8	38	1	5	0.3	0	1	15	967	0	0	
AI	612B	54	43	117	73	7	37	2.6	0	1	19	40	6	0	
AJ	616B	54	43	117	73	8	37	2.6	0	1	23	36	10	0	
AK	618B	1	2	1	2	2	4	-	-	-	-	-	-	0	
AL	628B	38	74	86	130	8	26	0.9	0	1	23	116	7	0	
AM	646B	29	112	48	223	0	28	0.4	0	1	10	261	0	140	

LINE	10910	(FLIGHT 37)													
A	4879B	19	61	14	97	3	7	0.4	3	1	24	292	5	0	
B	4876D	19	53	15	97	9	7	0.5	5	1	25	210	7	14	
C	4866B	27	18	52	34	18	23	2.6	14	1	29	44	16	16	
D	4841B	34	42	55	77	4	15	1.4	0	1	16	107	0	0	
E	4834D	20	12	27	17	8	6	2.7	13	1	35	112	16	0	
F	4831D	22	12	27	31	8	6	3.1	11	1	34	88	16	0	
G	4826B	25	19	53	35	7	17	2.1	11	1	31	121	12	0	
H	4822D	6	24	53	23	2	17	0.2	0	1	28	494	3	0	
I	4819D	3	14	25	5	1	1	10.8	33	1	40	601	12	0	
J	4813B	29	63	63	109	17	24	0.7	0	1	19	185	1	0	
K	4811B	33	63	63	109	23	24	0.8	4	1	27	160	9	80	
L	4801B	71	37	122	54	31	46	5.0	7	1	34	16	24	0	
M	4798D	1	2	1	2	2	4	-	-	-	-	-	-	20	
N	4790D	27	22	17	15	4	7	2.1	18	1	46	275	22	0	
O	4785D	15	15	20	24	1	5	1.2	19	1	28	1112	0	0	
P	4777S?	2	20	6	34	0	5	0.1	0	1	1	2919	0	20	
Q	4771M	0	2	1	2	0	2	-	-	-	-	-	-	220	
R	4733M	0	8	4	14	0	2	0.2	16	1	37	5302	0	8	
S	4726S?	0	20	5	38	0	5	0.1	0	1	10	2859	0	0	
T	4718B?	0	2	1	2	0	1	-	-	-	-	-	-	0	
U	4705S?	0	19	5	41	0	6	0.1	0	1	3	2625	0	13	
V	4683S	0	2	1	2	1	1	-	-	-	-	-	-	0	
W	4656S	2	14	3	18	0	3	0.1	0	1	30	2663	0	0	
X	4634B?	1	12	2	16	0	2	0.1	0	1	20	4019	0	0	

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10910	(FLIGHT	37)											
Y 4624S	0	14	3	26	0	3	0.1	0	1	18	3883	0	6
Z 4615S?	0	17	1	28	0	3	0.1	0	1	14	3811	0	11
AA 4589S?	2	18	5	44	0	7	0.1	0	1	11	1379	0	40
AB 4586B?	3	19	5	10	0	7	0.3	18	1	14	1535	0	6
AC 4582B?	0	2	3	23	0	3	0.1	0	1	14	2833	0	0
AD 4561B?	9	16	4	12	0	9	0.6	10	1	24	317	1	0
AE 4556S	6	3	4	9	0	9	2.5	52	1	28	200	7	30
AF 4547S	9	8	23	12	0	11	1.3	36	1	31	253	9	0
AG 4532S	3	20	12	31	0	5	0.4	0	1	19	715	0	0
AH 4521M	0	2	1	2	0	4	-	-	-	-	-	-	0
AI 4518S	0	32	14	59	0	8	0.2	0	1	11	1090	0	0
AJ 4505M	5	27	21	60	0	10	0.4	0	1	21	502	0	0
AK 4502S?	3	27	26	59	0	10	0.6	0	1	19	442	0	0
AL 4495B?	0	15	6	18	0	2	0.2	10	1	19	1965	0	0
AM 4493B?	0	10	7	18	0	2	0.3	9	1	21	1639	0	0
AN 4487B?	0	12	6	18	0	2	0.2	8	1	7	3295	0	0
AO 4479M	0	19	54	192	0	21	0.5	0	1	8	2622	0	0
AP 4473B	45	62	122	188	6	30	1.3	1	1	17	103	2	6
AQ 4467B	29	55	62	106	6	22	0.8	0	1	22	135	4	0
AR 4458D	7	41	9	78	2	9	0.2	0	1	17	551	0	0
AS 4453B	13	32	91	182	2	34	0.5	0	1	17	442	0	100
AT 4450B	34	27	37	58	2	13	2.3	9	1	14	215	0	50
AU 4444B	172	288	370	589	18	112	1.7	0	1	9	33	0	140
AV 4432B	28	94	40	156	10	13	0.5	0	1	14	80	0	80

LINE 10920	(FLIGHT	3)											
A 5916B	4	29	63	51	3	26	2.4	0	1	29	48	14	0
B 5899B	4	30	29	49	4	13	0.8	0	1	27	137	8	0
C 5874B	11	9	24	17	2	8	1.4	14	1	34	92	15	15
D 5860B	1	2	1	2	1	3	-	-	-	-	-	-	0
E 5844D	4	19	13	37	1	5	0.3	0	1	17	198	0	160
F 5829B	6	13	18	27	12	8	0.4	5	1	26	182	6	0
G 5821B	22	12	44	21	21	21	3.1	0	1	35	30	21	0
H 5804B	7	4	16	9	7	7	1.9	23	1	49	170	24	0
I 5785S	0	2	1	2	0	3	-	-	-	-	-	-	0
J 5735S	0	2	1	2	0	2	-	-	-	-	-	-	0
K 5724S?	1	2	1	2	0	2	-	-	-	-	-	-	0
L 5717S	1	2	1	2	0	1	-	-	-	-	-	-	-10
M 5706S?	1	2	1	2	0	4	-	-	-	-	-	-	0
N 5591S?	1	2	0	2	0	3	-	-	-	-	-	-	0
O 5516S	1	19	9	16	0	6	0.5	13	1	18	731	0	12

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10920	(FLIGHT	3)											
P 5486S	1	2	1	2	0	4	-	-	-	-	-	-	0
Q 5451S	4	3	5	6	0	4	0.6	35	1	19	669	0	0
R 5423S	2	8	3	14	0	2	0.1	0	1	18	1170	0	0
S 5410S	0	17	9	20	0	4	0.4	0	1	14	1358	0	0
T 5398M	0	1	0	1	0	0	-	-	-	-	-	-	110
U 5383S?	0	2	1	2	0	1	-	-	-	-	-	-	0
V 5371B	19	28	10	53	5	17	0.9	0	1	13	178	0	0
W 5364B	1	2	1	2	2	4	-	-	-	-	-	-	16
X 5338M	0	2	1	2	2	1	-	-	-	-	-	-	70
Y 5332B	26	23	62	79	4	21	1.8	0	1	10	150	0	0
Z 5320B	57	6	121	107	21	44	52.6	1	1	12	48	0	0
AA 5311B	24	1	48	4	8	13	4.7	6	3	19	17	0	0
AB 5291B	20	21	23	26	11	14	1.4	0	1	25	73	8	0
AC 5274B	55	9	12	41	1	11	25.5	2	1	14	41	1	14
AD 5267B	38	1	53	24	15	35	211.7	4	1	14	32	2	0
AE 5249B?	9	10	17	40	6	5	0.9	11	1	23	169	2	0

LINE 10930	(FLIGHT	24)											
A 809B?	13	18	38	33	10	15	0.8	0	1	44	65	26	0
B 830S?	5	10	15	26	0	10	0.4	24	1	21	412	0	0
C 841B?	12	47	31	93	1	15	0.3	0	1	22	264	1	20
D 852B?	11	20	27	37	4	7	0.6	14	1	37	135	18	0
E 854B?	14	7	27	37	4	7	3.3	26	1	29	111	11	0
F 860B?	4	32	21	65	4	9	0.4	0	1	23	208	4	200
G 871D	9	20	72	32	21	26	0.5	18	1	49	35	36	0
H 876D	17	20	0	6	7	5	1.1	13	1	38	34	25	0
I 879D	17	36	20	60	16	29	0.6	9	1	45	32	32	0
J 897S	1	9	8	11	1	1	0.6	24	1	35	1094	2	0
K 910S	1	2	1	2	0	2	-	-	-	-	-	-	0
L 922M	0	14	7	21	0	3	0.3	12	1	5	2715	0	1280
M 924S?	0	14	7	21	0	3	0.3	11	1	20	1657	0	0
N 927S?	4	13	11	45	0	6	0.2	1	1	8	2385	0	0
O 941B?	1	2	1	2	0	0	-	-	-	-	-	-	20
P 944M	0	2	0	2	0	1	-	-	-	-	-	-	70
Q 970S?	0	12	4	29	0	4	0.1	4	1	15	3553	0	0
R 973M	0	12	3	29	0	3	0.1	0	1	14	3471	0	150
S 976B?	0	0	1	2	0	0	-	-	-	-	-	-	0
T 987S	0	2	1	2	0	2	-	-	-	-	-	-	0
U 997M	0	2	0	2	0	1	-	-	-	-	-	-	0
V 1013S	1	11	3	17	0	2	0.1	0	1	10	4449	0	0
W 1053S?	4	13	9	21	0	4	0.4	0	1	23	1222	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10930	(FLIGHT	24)												
X 1070S	2	34	11	35	0	9	0.3	7	1	10	1379	0	0	
Y 1080S?	0	59	10	131	0	18	0.1	0	1	6	1107	0	0	
Z 1092S	1	2	1	2	0	4	-	-	-	-	-	-	11	
AA 1103M	3	6	6	13	0	2	0.4	35	1	32	4145	3	0	
AB 1123B?	5	8	5	13	0	1	0.3	12	1	43	1652	5	0	
AC 1126M	5	5	5	13	0	2	0.3	15	1	15	4145	0	110	
AD 1145S?	6	26	10	40	0	7	0.2	5	1	0	1911	0	40	
AE 1178S	18	55	43	86	0	17	0.4	0	1	16	257	0	0	
AF 1186B?	5	9	26	44	0	5	0.7	0	1	29	598	1	0	
AG 1189B?	1	2	1	2	0	4	-	-	-	-	-	-	17	
AH 1202B?	4	15	0	32	0	4	0.2	9	1	5	3026	0	0	
AI 1205M	0	12	0	43	0	6	0.1	11	1	14	2947	0	0	
AJ 1211B?	15	29	32	45	0	8	0.6	5	1	0	2772	0	0	
AK 1219B?	8	7	91	66	4	22	1.3	34	1	20	98	4	70	
AL 1226B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
AM 1254B?	46	108	24	242	4	45	0.8	0	1	16	213	0	70	
AN 1257B?	46	55	24	242	8	45	1.5	4	1	17	99	2	0	
AO 1267B?	39	170	72	371	14	73	0.4	0	1	17	94	4	0	
AP 1280D	30	15	87	65	26	43	3.7	8	1	36	57	20	0	
AQ 1289B	130	91	199	274	81	69	4.1	2	1	24	13	16	0	
AR 1292B	112	126	223	274	81	69	2.2	4	1	21	28	11	0	
AS 1297B	70	54	98	59	30	9	3.0	7	1	22	35	11	0	
AT 1301B	74	54	111	58	45	35	3.2	2	1	21	27	10	0	
AU 1308B	50	17	377	294	49	124	7.6	13	1	25	38	12	0	
AV 1311B	153	170	377	294	49	124	2.5	0	1	16	17	8	0	
AW 1321B?	22	37	32	53	9	12	0.8	1	1	26	110	9	0	
AX 1336B	12	39	7	61	1	12	0.3	0	1	35	215	13	0	

LINE 10940	(FLIGHT	24)												
A 2108B	4	31	18	5	0	10	7.0	41	1	38	984	8	0	
B 2102B	3	15	21	14	0	10	1.9	33	1	33	537	9	16	
C 2096B	43	41	73	63	7	21	1.9	0	1	20	86	4	0	
D 2085S?	11	8	8	71	0	14	1.8	35	1	28	259	7	0	
E 2069B?	12	18	18	31	1	6	0.7	2	1	31	251	7	0	
F 2054S?	1	2	1	2	2	4	-	-	-	-	-	-	0	
G 2041B?	6	22	23	70	1	10	0.2	0	1	28	151	9	0	
H 2034B	16	21	31	35	12	15	0.9	9	1	33	75	17	0	
I 2032B	4	16	31	35	12	15	1.3	2	1	34	69	18	0	
J 2023B	42	22	94	27	28	33	4.1	3	1	30	18	19	0	
K 2014B?	14	12	30	18	9	11	1.6	13	1	38	143	17	20	
L 2006B?	7	12	14	24	0	4	0.5	4	1	32	592	2	40	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10940	(FLIGHT	24)											
M 1988S?	26	135	144	224	0	51	0.3	0	1	16	86	3	0
N 1977S?	17	43	20	31	0	19	0.5	0	1	18	290	0	5
O 1962S	1	8	8	19	0	2	0.3	13	1	27	1759	0	0
P 1957S?	1	2	1	2	0	4	-	-	-	-	-	-	0
Q 1942S?	0	3	2	17	0	2	0.1	1	1	30	4929	0	0
R 1909S?	2	9	5	11	0	2	0.3	0	1	17	2478	0	40
S 1897M	0	2	0	7	0	1	0.1	4	1	48	5923	0	110
T 1881M	1	2	1	2	0	1	-	-	-	-	-	-	0
U 1870S	4	9	4	15	0	2	0.3	3	1	25	1425	0	0
V 1841S	6	27	37	50	0	10	0.2	0	1	24	221	3	0
W 1820S	3	11	7	11	0	4	0.5	26	1	27	549	2	30
X 1805S	4	3	5	5	0	6	0.7	34	1	29	467	3	0
Y 1788M	1	3	2	8	0	1	0.2	17	1	20	4724	0	70
Z 1779S	1	2	1	2	0	1	-	-	-	-	-	-	100
AA 1770S?	1	2	1	2	0	1	-	-	-	-	-	-	0
AB 1759S	3	7	6	10	0	2	0.5	13	1	32	1251	0	0
AC 1745S	1	2	1	2	1	1	-	-	-	-	-	-	0
AD 1724B?	3	9	4	11	0	1	0.2	17	1	38	1382	5	0
AE 1696S	14	37	36	70	0	15	0.5	4	1	27	218	7	0
AF 1679S?	5	35	6	70	1	9	0.1	0	1	10	759	0	0
AG 1673S	1	2	1	2	0	4	-	-	-	-	-	-	0
AH 1667B?	17	41	33	70	0	11	0.5	0	1	21	468	0	110
AI 1664D	17	41	33	70	0	11	0.5	0	1	17	274	0	0
AJ 1661D	4	10	2	3	0	0	0.3	19	1	22	381	0	0
AK 1641B?	17	37	31	55	1	10	0.6	0	1	21	281	0	0
AL 1638D	1	2	1	2	2	4	-	-	-	-	-	-	0
AM 1635D	26	29	47	45	4	12	1.4	7	1	26	119	9	0
AN 1624B?	15	44	23	78	2	13	0.4	1	1	30	218	10	0
AO 1614B?	17	44	58	85	20	3	0.5	0	1	28	108	11	0
AP 1610D	9	16	66	43	30	11	0.5	16	1	27	38	15	70
AQ 1608D	64	16	66	43	30	11	13.0	7	1	26	23	15	60
AR 1598B	34	33	44	41	24	15	1.7	0	1	17	28	6	0
AS 1594B	1	2	1	2	2	4	-	-	-	-	-	-	690
AT 1577B	61	69	124	167	2	37	1.8	2	1	17	74	3	150
AU 1562B	13	26	28	235	0	33	0.6	21	1	18	157	4	0
AV 1553B	24	53	39	149	0	22	0.6	11	1	18	129	4	0
AW 1525B	37	77	68	125	3	23	0.8	0	1	18	96	3	16
AX 1510M	0	6	49	52	0	18	1.6	20	1	0	1387	0	0
AY 1496D	23	118	93	196	0	36	0.3	0	1	16	134	2	0
AZ 1467B?	30	120	39	3	0	26	0.4	2	1	19	281	2	0
BA 1454B	14	96	45	135	3	16	0.2	0	1	9	932	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 10940		(FLIGHT		24)											
BB	1446B?	10	18	14	41	4	7	0.5	14	1	32	199	11	0	
BC	1431B	41	46	66	112	4	25	1.6	6	1	19	96	4	90	

LINE 10950		(FLIGHT		24)											
A	2215B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
B	2217B?	5	13	8	16	1	2	0.4	11	1	37	580	8	9	
C	2224B?	9	18	12	30	2	4	0.5	3	1	36	344	10	8	
D	2232B?	5	18	14	40	2	4	0.2	0	1	32	451	5	13	
E	2237S?	5	13	14	19	2	3	0.3	4	1	27	331	3	12	
F	2267S?	10	21	11	9	2	8	0.5	3	1	32	149	12	4	
G	2276B	21	23	27	64	2	20	1.3	8	1	34	54	19	0	
H	2279B	1	2	1	2	2	4	-	-	-	-	-	-	0	
I	2287B	41	24	82	48	10	28	3.5	0	1	30	21	18	0	
J	2295B	15	8	16	14	5	10	2.9	21	1	48	121	27	0	
K	2304D	9	10	18	19	0	6	1.0	18	1	32	532	3	60	
L	2315M	18	61	56	115	0	16	0.4	3	1	0	2300	0	0	
M	2323S?	14	48	29	85	0	13	0.4	0	1	16	192	0	0	
N	2332S	10	43	46	106	0	12	0.3	0	1	14	198	0	0	
O	2348M	0	4	15	47	0	2	0.3	0	1	23	4682	0	0	
P	2366M	0	2	1	2	0	1	-	-	-	-	-	-	70	
Q	2378M	0	2	1	2	0	0	-	-	-	-	-	-	0	
R	2383B?	0	7	2	7	0	1	0.1	12	1	26	5254	0	20	
S	2426S	0	16	1	29	0	5	0.1	4	1	21	721	0	0	
T	2454M	1	2	1	2	0	2	-	-	-	-	-	-	530	
U	2459M	0	8	3	9	0	2	0.2	22	1	24	4217	0	160	
V	2481B?	1	16	5	24	0	3	0.1	0	1	5	3457	0	0	
W	2497M	0	3	0	14	0	2	0.1	4	1	23	4325	0	0	
X	2510M	0	7	0	14	0	1	0.1	4	1	27	4752	0	0	
Y	2520M	0	7	4	17	0	2	0.1	0	1	10	4019	0	1320	
Z	2522B?	0	2	4	2	0	2	2.0	68	1	19	2441	0	0	
AA	2527B?	2	9	6	12	0	2	0.4	14	1	25	1651	0	0	
AB	2533B?	3	10	7	13	0	2	0.4	15	1	29	1671	0	0	
AC	2540S?	1	2	1	2	0	2	-	-	-	-	-	-	210	
AD	2564S	1	2	1	2	0	2	-	-	-	-	-	-	70	
AE	2574S	1	2	1	2	0	2	-	-	-	-	-	-	0	
AF	2589S?	0	0	5	4	0	7	1.0	63	1	4	2015	0	9	
AG	2602M	9	4	20	42	0	1	2.7	50	1	0	2657	0	0	
AH	2606M	0	2	0	2	0	4	-	-	-	-	-	-	150	
AI	2610B?	8	12	13	63	0	7	0.6	37	1	19	1109	0	1240	
AJ	2614B?	5	47	42	117	0	23	0.6	3	1	8	824	0	0	
AK	2618B?	14	31	42	117	0	24	0.6	9	1	15	375	0	0	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10950	(FLIGHT	24)											
AL 2635B?	18	10	47	27	0	15	2.8	25	1	19	312	0	0
AM 2637B?	16	10	47	27	0	15	2.2	24	1	15	287	0	4
AN 2644D	19	39	30	71	0	7	0.6	5	1	22	212	3	0
AO 2654D	31	58	37	99	0	15	0.8	4	1	24	185	5	0
AP 2660B	114	77	275	399	27	100	4.1	0	1	20	39	8	0
AQ 2664M	114	210	275	399	27	100	1.3	0	1	17	52	6	250
AR 2669B?	30	33	193	358	20	84	1.4	7	1	29	47	16	0
AS 2673D	23	15	64	83	11	18	2.5	5	1	25	39	11	0
AT 2677B	47	77	76	77	27	22	1.1	0	1	19	41	7	0
AU 2680B	1	2	1	2	2	4	-	-	-	-	-	-	0
AV 2682B	38	89	97	77	25	19	0.7	0	1	18	62	5	0
AW 2694B	42	76	62	117	10	23	0.9	0	1	18	74	3	0
AX 2701B	12	46	50	73	4	9	0.3	2	1	24	156	7	0
AY 2707B	33	27	53	31	4	9	2.1	14	1	23	97	8	0
AZ 2721B?	81	148	173	372	7	66	1.2	0	1	12	92	0	0
BA 2726B	28	91	49	69	5	16	0.5	0	1	18	140	3	40
BB 2732B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 2739D	1	2	1	2	2	1	-	-	-	-	-	-	0
BD 2753B?	22	56	37	102	2	17	0.6	0	1	24	193	5	0
BE 2760B?	22	22	44	50	7	14	1.4	0	1	27	85	10	0
BF 2771M	13	26	16	55	2	8	0.6	2	1	19	229	0	80
BG 2778S?	18	15	38	30	4	9	1.8	0	1	13	107	0	70
BH 2782M	18	14	38	22	3	9	1.9	22	1	39	412	13	70
BI 2791B?	16	26	21	44	0	8	0.7	1	1	27	279	4	0
BJ 2808B?	48	31	92	29	17	27	3.3	11	1	37	34	25	0
BK 2820B?	7	5	11	13	3	7	1.3	37	1	42	160	20	0
BL 2826S?	11	25	8	48	1	9	0.5	9	1	32	619	5	0

LINE 10960	(FLIGHT	24)											
A 3266M	2	13	6	25	0	3	0.2	4	1	9	3301	0	250
B 3262S?	2	13	6	25	0	3	0.2	2	1	36	1490	2	0
C 3246S	1	19	5	21	0	6	0.2	11	1	24	1402	0	0
D 3226M	1	2	3	5	0	1	0.3	53	1	46	5666	0	0
E 3210S	1	5	1	9	0	1	0.1	18	1	40	3404	5	0
F 3199S?	2	17	8	71	0	13	0.1	0	1	20	1329	0	0
G 3195S	0	18	3	71	0	13	0.1	2	1	14	1353	0	0
H 3177M	0	26	130	145	9	32	2.0	0	1	0	2278	0	130
I 3173B?	65	69	169	145	15	34	2.0	0	1	17	67	4	0
J 3171B?	65	69	169	145	15	34	2.0	0	1	21	34	9	0
K 3158B?	27	44	64	85	2	16	0.9	0	1	20	76	4	0
L 3153B?	20	20	47	25	6	13	1.4	10	1	23	49	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL	COPLANAR	COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG		
		6368 HZ	7294 HZ	864 HZ		DIKE		SHEET	EARTH		CORR		
ANOMALY/	REAL QUAD	REAL QUAD	REAL QUAD		COND DEPTH*	COND DEPTH	RESIS	DEPTH					
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 10960	(FLIGHT	24)											
M 3142B?	83	86	184	144	14	43	2.2	0	1	18	30	7	0
N 3126B	26	35	63	69	14	25	1.1	0	1	24	30	12	0
O 3092B	71	66	146	209	0	47	2.3	0	1	13	83	0	0
P 3090B	12	46	146	209	2	47	0.3	0	1	23	86	8	0
Q 3088B	1	2	1	2	2	4	-	-	-	-	-	-	590
R 3076D	15	29	19	11	3	6	0.6	5	1	32	263	10	0
S 3066D	18	52	14	1	4	10	0.5	5	1	25	165	8	0
T 3053D	1	2	1	2	2	4	-	-	-	-	-	-	0
U 3041D	6	42	11	83	0	12	0.1	0	1	21	391	2	0
V 3008M	16	46	48	148	0	20	0.4	12	1	0	1073	0	0
W 3008B	16	46	49	148	0	20	0.4	11	1	0	1083	0	0
X 3000B	20	53	33	100	1	17	0.5	1	1	23	182	5	480
Y 2996B	17	24	2	99	1	0	0.9	0	1	30	148	10	0
Z 2991B	16	80	37	158	0	22	0.3	0	1	14	227	0	0
AA 2975B	28	71	63	147	1	24	0.6	0	1	14	146	0	260
AB 2962B	10	48	69	43	2	19	0.2	0	1	20	260	1	0
AC 2957B	66	128	153	224	7	47	1.0	0	1	20	73	6	60
AD 2940S?	18	22	39	61	4	14	1.1	0	1	27	166	6	180
AE 2928S?	3	16	8	39	0	5	0.2	0	1	0	2460	0	0
AF 2921S?	3	13	8	15	0	2	0.4	22	1	6	2934	0	0

LINE 10961	(FLIGHT	24)											
A 3730S	6	31	14	27	1	8	0.2	0	1	32	545	7	0
B 3712S	5	37	17	73	1	10	0.1	0	1	24	328	2	10
C 3705S	3	17	7	33	5	4	0.2	0	1	28	352	5	0
D 3697S?	4	17	7	32	3	6	0.2	3	1	42	356	17	0
E 3686S	1	2	1	2	0	3	-	-	-	-	-	-	0
F 3668S?	27	25	67	51	1	28	1.7	15	1	17	107	2	11
G 3655B	32	21	61	31	8	16	2.8	11	1	26	57	12	40
H 3643B?	19	34	51	45	12	11	0.7	11	1	34	50	21	0
I 3637B?	5	32	12	28	19	2	0.4	5	1	39	184	18	0
J 3627S	8	6	15	9	0	3	1.4	28	1	51	310	24	40
K 3613M	0	2	1	2	0	2	-	-	-	-	-	-	0
L 3610S?	1	2	1	2	0	2	-	-	-	-	-	-	0
M 3606S?	3	9	5	10	0	1	0.4	22	1	31	1601	0	0
N 3601M	1	2	1	2	0	0	-	-	-	-	-	-	190
O 3599B?	5	6	10	10	0	2	0.7	33	1	42	1087	7	0
P 3594M	1	25	11	39	0	6	0.3	3	1	3	2995	0	140
Q 3585D	29	44	4	72	0	17	1.0	6	1	24	227	4	0
R 3565D	3	9	29	10	10	3	5.5	26	1	79	419	47	0
S 3559D	32	20	45	27	10	15	2.8	18	1	57	183	34	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT				

LINE 10961	(FLIGHT	24)											
T 3552D	3	11	1	22	0	1	0.2	9	1	59	1770	17	0
U 3547S?	3	16	9	36	0	5	0.2	0	1	21	1224	0	0
V 3530S?	0	25	8	71	0	16	0.1	0	1	10	1341	0	0
W 3512S?	1	2	1	2	0	4	-	-	-	-	-	-	30
X 3497D	8	11	4	14	0	4	0.6	16	1	43	603	12	0
Y 3490M	0	6	4	12	0	2	0.2	24	1	24	3852	0	20
Z 3482M	1	11	5	18	0	3	0.2	5	1	4	3167	0	460
AA 3479B?	5	7	5	18	0	3	0.6	34	1	50	650	18	0
AB 3470S?	1	15	9	30	0	6	0.3	0	1	14	1467	0	230
AC 3432M	0	11	0	18	0	1	0.1	0	1	53	6350	0	0
AD 3428S?	0	11	0	18	0	2	0.1	4	1	27	4696	0	0
AE 3411S	0	2	1	2	0	1	-	-	-	-	-	-	0

LINE 10970	(FLIGHT	24)											
A 3823B?	9	28	9	23	3	4	0.3	8	1	38	522	12	9
B 3835S?	5	24	15	42	2	7	0.2	0	1	35	415	10	0
C 3846S?	2	34	8	61	2	8	0.1	0	1	24	580	0	30
D 3855S	0	2	1	2	2	3	-	-	-	-	-	-	0
E 3872B?	51	154	138	299	7	57	0.7	0	1	19	79	6	17
F 3887B	45	41	97	77	11	33	2.1	1	1	22	39	10	16
G 3894B?	23	17	39	29	2	12	2.2	13	1	35	49	20	15
H 3899D	17	2	72	37	10	12	26.5	30	1	46	54	30	0
I 3902D	37	35	46	37	10	24	1.9	5	1	36	56	21	0
J 3905B?	1	2	1	2	2	4	-	-	-	-	-	-	0
K 3914B?	7	11	13	21	0	4	0.6	11	1	41	631	9	40
L 3936D	25	42	28	5	0	14	0.9	12	1	30	364	8	0
M 3944S?	8	42	21	67	0	10	0.2	4	1	18	382	0	0
N 3956D	28	26	35	45	0	10	1.8	22	1	30	231	10	0
O 3974H	1	2	1	2	0	4	-	-	-	-	-	-	30
P 3989H	6	20	15	15	0	10	0.3	6	1	34	412	9	0
Q 4041S?	0	2	0	2	0	2	-	-	-	-	-	-	580
R 4049S?	1	2	1	2	0	3	-	-	-	-	-	-	150
S 4062S	7	13	14	25	0	4	0.5	0	1	17	719	0	0
T 4069S	3	16	9	25	0	4	0.3	0	1	0	2717	0	0
U 4082M	1	2	0	2	0	1	-	-	-	-	-	-	80
V 4086B?	2	15	0	19	0	2	0.1	0	1	10	3983	0	0
W 4092M	0	6	0	19	0	1	0.1	7	1	27	4428	0	150
X 4119B?	3	16	10	24	0	7	0.4	2	1	23	1508	0	0
Y 4125S?	8	52	22	110	0	17	0.2	0	1	10	688	0	0
Z 4132S	1	2	1	2	0	4	-	-	-	-	-	-	0
AA 4144S	2	16	4	28	0	4	0.1	0	1	21	1885	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 10970	(FLIGHT	24)											
AB 4158S	3	33	10	58	0	8	0.2	0	1	14	1401	0	0
AC 4183B?	24	62	49	112	0	24	0.6	6	1	30	249	10	0
AD 4200B	30	106	105	201	29	49	0.5	0	1	22	62	9	220
AE 4203B	53	106	105	201	29	49	0.9	0	1	29	35	17	0
AF 4205B	53	12	105	174	29	27	14.1	21	1	38	31	26	0
AG 4211B	37	77	50	172	19	20	0.8	7	1	27	101	12	0
AH 4217B	47	42	126	159	9	35	2.2	11	1	21	39	9	0
AI 4218B	51	42	126	159	10	35	2.4	11	1	19	41	8	0
AJ 4225B?	35	29	116	22	9	6	2.1	18	1	30	78	16	290
AK 4230B	61	44	153	72	18	7	3.1	17	1	26	143	10	0
AL 4233B	61	66	159	84	11	21	1.9	4	1	24	50	11	0
AM 4238B	37	23	46	25	12	21	3.1	13	1	27	43	14	17
AN 4244B	18	28	35	52	6	11	0.8	4	1	21	73	7	0
AO 4253B	44	18	90	66	11	24	5.9	7	1	24	57	9	0
AP 4260B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AQ 4273S?	11	24	24	49	0	10	0.5	0	1	22	227	1	60
AR 4278B?	9	27	17	49	0	6	0.4	0	1	31	242	8	0
AS 4292B?	8	10	10	14	0	2	0.7	4	1	27	548	0	1060
AT 4301S?	8	19	12	39	0	5	0.4	0	1	21	499	0	0
AU 4327B	13	28	5	220	0	44	0.5	7	1	31	171	12	0
AV 4333M	45	118	116	228	0	45	0.7	0	1	13	124	0	0
AW 4337B	45	88	116	228	7	45	0.9	0	1	17	86	3	0
AX 4345B	23	39	50	64	11	16	0.8	4	1	26	77	11	0
AY 4352B	34	52	79	82	14	44	1.1	5	1	25	50	12	0
AZ 4368M	1	2	1	2	0	1	-	-	-	-	-	-	0
BA 4379B	18	85	47	123	2	19	0.3	0	1	17	486	0	6
BB 4397M	0	2	0	2	0	1	-	-	-	-	-	-	0
BC 4405M	0	1	0	2	0	1	0.1	4	1	25	4589	0	0
BD 4434B?	1	1	1	1	0	0	-	-	-	-	-	-	40
BE 4463S	0	2	1	2	0	0	-	-	-	-	-	-	0
LINE 10980	(FLIGHT	24)											
A 5215B?	6	30	18	64	1	9	0.2	0	1	28	556	0	0
B 5209B?	0	13	18	64	2	9	0.3	5	1	41	767	13	0
C 5205B?	3	11	3	7	3	3	0.2	10	1	50	573	20	0
D 5203B?	4	16	3	21	3	3	0.2	0	1	35	571	6	20
E 5196B?	3	17	3	29	2	3	0.1	0	1	29	675	1	20
F 5145B	105	74	266	166	38	87	3.8	0	1	17	19	8	40
G 5124B	63	17	122	61	27	41	11.4	12	1	34	39	20	0
H 5117B?	6	6	8	7	0	1	0.9	37	1	38	1124	4	0
I 5114M	1	2	1	2	0	1	-	-	-	-	-	-	80

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10980		(FLIGHT		24)										
J	5110S?	6	10	9	8	0	1	0.5	26	1	35	1406	2	0
K	5105B?	1	2	1	2	0	0	-	-	-	-	-	-	12
L	5103M	4	12	8	12	0	1	0.6	31	1	14	3414	0	0
M	5093D	11	9	6	8	0	6	1.6	35	1	13	2342	0	0
N	5076M	1	2	0	2	0	2	-	-	-	-	-	-	100
O	5067M	2	8	10	11	0	2	0.8	29	1	18	3077	0	140
P	5065B?	1	2	1	2	0	2	-	-	-	-	-	-	0
Q	5052B?	68	187	174	394	1	59	0.8	0	1	10	113	0	0
R	5041B?	35	34	63	52	0	29	1.8	23	1	23	372	4	40
S	5038B?	35	50	63	52	0	29	1.1	15	1	28	231	10	0
T	5031S	11	20	25	14	0	12	0.6	15	1	35	379	11	0
U	5014S	5	20	12	45	0	6	0.3	0	1	19	910	0	40
V	4987M	1	4	3	17	0	1	0.1	0	1	23	5266	0	320
W	4981M	1	9	3	26	0	4	0.1	0	1	8	3336	0	240
X	4973S?	6	12	11	5	0	3	0.5	0	1	76	940	0	20
Y	4968M	3	12	7	22	1	3	0.2	3	1	3	3230	0	0
Z	4957S?	0	2	0	2	0	3	-	-	-	-	-	-	0
AA	4948M	0	2	2	3	0	1	0.3	40	1	17	5703	0	410
AB	4939M	0	2	0	7	0	2	0.1	0	1	25	4899	0	0
AC	4932M	2	5	14	60	0	3	0.3	0	1	14	4086	0	70
AD	4926B?	2	8	14	64	0	10	0.2	0	1	0	2270	0	0
AE	4923M	1	8	6	64	0	10	0.1	0	1	0	2212	0	0
AF	4874S	1	12	3	22	1	3	0.1	0	1	23	2038	0	0
AG	4867B?	4	14	4	18	1	2	0.2	11	1	29	1286	0	0
AH	4859B?	4	23	12	30	0	4	0.4	2	1	16	1382	0	1070
AI	4858B?	4	23	12	30	0	4	0.4	3	1	18	996	0	0
AJ	4853B?	2	16	11	19	0	2	0.6	31	1	13	2628	0	0
AK	4849B?	1	2	1	2	1	1	-	-	-	-	-	-	0
AL	4846B?	3	10	11	13	1	2	0.8	21	1	22	1145	0	0
AM	4841B?	1	2	1	2	1	1	-	-	-	-	-	-	0
AN	4830S	10	28	17	54	3	10	0.4	0	1	24	356	1	70
AO	4818S?	19	11	39	20	7	13	2.9	19	1	33	105	15	0
AP	4815M	19	9	39	5	8	6	3.6	38	1	45	237	23	100
AQ	4798B?	39	30	81	58	9	12	2.5	13	1	39	82	22	0
AR	4791S?	0	30	56	74	0	5	1.3	16	1	0	1317	0	120
AS	4781B	51	41	71	66	9	24	2.5	14	1	34	93	18	40
AT	4774B	37	48	90	108	8	16	1.3	5	1	20	128	3	0
AU	4771B	37	46	91	108	8	25	1.3	5	1	26	65	12	0
AV	4768B	45	35	91	49	7	27	2.5	9	1	32	40	19	0
AW	4757B?	21	69	49	144	0	21	0.4	0	1	20	149	4	0
AX	4753D	100	111	185	205	0	71	2.2	5	1	18	72	6	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10980	(FLIGHT	24)											
AY 4750B	60	152	185	288	0	71	0.8	0	1	18	91	5	0
AZ 4742B?	15	26	26	69	0	13	0.7	13	1	25	233	5	0
BA 4739B?	25	33	55	69	4	13	1.1	20	1	26	312	7	0
BB 4737B?	1	2	1	2	2	4	-	-	-	-	-	-	0
BC 4735B?	29	6	109	96	4	18	14.4	31	1	28	129	11	0
BD 4731B	29	91	52	173	8	32	0.5	0	1	21	100	7	20
BE 4729B	29	91	52	173	8	32	0.5	0	1	17	124	3	0
BF 4717B?	14	23	11	17	2	6	0.7	7	1	30	194	9	0
BG 4704M	5	11	24	105	0	20	0.4	26	1	0	1989	0	240
BH 4699B?	0	50	30	120	0	22	0.4	0	1	0	1039	0	0
BI 4694B?	4	50	30	120	0	22	0.4	0	1	22	511	0	0
BJ 4674B?	7	31	26	8	2	12	0.2	0	1	28	283	6	110
BK 4671D	7	15	26	8	12	23	0.5	10	1	23	251	2	90
BL 4666B?	35	6	29	32	12	23	19.5	13	1	20	68	5	70
BM 4663B?	8	20	29	45	9	23	0.4	3	1	25	96	8	0
BN 4654B?	11	10	49	20	5	14	1.3	14	1	26	88	8	520
BO 4647B	26	50	103	125	12	35	0.7	0	1	22	73	7	4
BP 4645D	62	71	103	125	9	35	1.8	0	1	23	81	8	0
BQ 4630B?	10	33	24	65	4	11	0.3	0	1	30	372	5	0
BR 4618M	0	2	1	2	2	1	-	-	-	-	-	-	4
BS 4594S?	0	21	0	50	0	6	0.1	12	1	5	2153	0	0
BT 4586S?	0	2	1	2	0	3	-	-	-	-	-	-	0
BU 4568S?	0	12	4	24	0	3	0.1	6	1	12	3082	0	120
BV 4551S	0	2	1	2	0	1	-	-	-	-	-	-	0

LINE 10990	(FLIGHT	24)											
A 5317S?	4	10	8	18	4	3	0.4	0	1	37	507	8	0
B 5349B	17	40	29	92	2	31	0.5	4	1	23	67	9	0
C 5358B	26	17	114	71	28	44	2.7	9	1	25	15	15	0
D 5359B	26	27	114	71	28	44	1.5	1	1	25	13	16	7
E 5366D	1	2	1	2	2	4	-	-	-	-	-	-	0
F 5371B?	1	2	1	2	0	3	-	-	-	-	-	-	0
G 5380B	62	45	128	80	26	40	3.0	0	1	27	36	15	0
H 5387S?	1	24	3	44	0	6	0.1	0	1	21	653	0	30
I 5396S?	7	10	12	19	0	3	0.6	21	1	34	438	7	60
J 5407B?	9	19	18	44	0	8	0.4	7	1	21	464	0	0
K 5419S?	1	2	1	2	0	4	-	-	-	-	-	-	15
L 5433M	0	4	0	6	0	1	0.1	0	1	26	5923	0	460
M 5463D	19	22	33	32	2	10	1.2	9	1	49	336	22	0
N 5498S?	5	13	4	18	0	2	0.3	8	1	19	2426	0	0
O 5504M	1	2	0	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10990	(FLIGHT	24)											
P 5515M	0	8	0	20	0	3	0.1	0	1	14	4038	0	0
Q 5525S?	4	10	2	19	0	3	0.3	19	1	9	3755	0	430
R 5535S?	6	11	5	14	0	2	0.4	0	1	9	1977	0	0
S 5542S?	1	2	1	2	0	1	-	-	-	-	-	-	0
T 5553S?	0	10	0	22	0	3	0.1	4	1	11	3313	0	0
U 5557M	0	7	0	17	0	2	0.1	11	1	24	3894	0	1160
V 5566B?	0	25	0	67	0	11	0.1	13	1	4	1969	0	0
W 5572B?	0	2	0	2	0	1	-	-	-	-	-	-	0
X 5573M	0	6	0	10	0	1	0.1	0	1	3	3336	0	290
Y 5580B?	5	21	15	64	0	9	0.3	0	1	14	1035	0	100
Z 5583S?	4	21	15	64	0	9	0.3	0	1	10	606	0	0
AA 5589S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AB 5593M	1	2	1	2	0	2	-	-	-	-	-	-	20
AC 5600S?	1	21	3	66	0	8	0.1	5	1	2	1799	0	11
AD 5608B?	4	10	13	4	0	1	4.5	38	1	27	1484	0	0
AE 5614B?	4	25	14	53	0	7	0.3	0	1	8	1486	0	0
AF 5615M	4	25	14	53	0	7	0.3	0	1	19	932	0	0
AG 5621B?	10	12	21	22	0	4	0.9	0	1	34	348	6	0
AH 5623D	9	12	21	22	0	4	0.8	10	1	28	754	0	280
AI 5641B	64	20	113	25	32	65	9.8	6	1	28	11	19	0
AJ 5646D	8	20	7	29	32	24	0.4	0	1	31	17	20	70
AK 5651B	54	45	97	73	8	37	2.4	8	1	31	25	20	20
AL 5671B?	26	21	51	38	4	9	2.0	11	1	37	53	22	0
AM 5676B	5	21	5	45	15	11	0.2	1	1	61	98	41	0
AN 5680S?	4	21	5	45	15	11	0.1	0	1	42	256	20	0
AO 5691B?	21	19	34	25	3	6	1.6	22	1	38	113	21	80
AP 5695B?	40	115	153	239	8	55	0.6	0	1	29	67	15	0
AQ 5698B?	50	115	153	239	3	55	0.8	0	1	21	63	9	15
AR 5700B?	52	115	153	239	0	55	0.9	1	1	27	56	14	0
AS 5715D	1	2	1	2	2	4	-	-	-	-	-	-	0
AT 5718B?	7	10	18	27	3	7	0.7	27	1	30	122	12	30
AU 5720B?	6	7	18	27	0	7	0.7	34	1	36	153	16	0
AV 5723B?	17	9	25	17	0	4	2.8	30	1	30	172	11	5
AW 5727B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AX 5732B?	40	44	79	72	0	13	1.6	9	1	23	126	6	0
AY 5736B	13	65	47	147	0	22	0.2	0	1	15	276	0	15
AZ 5742B	4	18	14	16	0	6	1.0	17	1	24	477	0	0
BA 5745B	4	15	15	16	0	7	1.0	16	1	24	468	0	110
BB 5763B	1	2	1	2	0	4	-	-	-	-	-	-	0
BC 5764B	28	82	56	173	0	30	0.5	0	1	27	210	7	0
BD 5773B?	8	18	31	56	0	13	0.4	2	1	25	330	1	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10990	(FLIGHT	24)											
BE 5781B	1	2	1	2	0	4	-	-	-	-	-	-	80
BF 5786B	23	21	52	41	4	18	1.7	7	1	25	98	8	0
BG 5789B	15	34	52	41	4	18	0.5	1	1	37	89	20	0
BH 5794B	1	2	1	2	2	4	-	-	-	-	-	-	130
BI 5796B	23	31	60	62	8	18	1.0	0	1	28	87	12	0
BJ 5812B	20	13	35	31	16	25	2.3	3	1	28	33	14	0
BK 5829D	33	36	59	44	2	16	1.5	8	1	29	173	10	0
BL 5834B?	2	27	32	47	0	8	1.0	14	1	10	2868	0	0
BM 5858S?	1	2	1	2	0	4	-	-	-	-	-	-	0
BN 5864S	1	2	1	2	0	1	-	-	-	-	-	-	0
BO 5871S?	0	18	0	35	0	4	0.1	6	1	5	2677	0	100
BP 5888S?	1	12	2	35	0	5	0.1	0	1	1	2648	0	120
BQ 5896M	0	10	0	24	0	3	0.1	6	1	15	3503	0	0
BR 5946S?	1	12	6	23	0	3	0.2	4	1	5	3757	0	14
BS 5966S	2	9	1	15	1	2	0.1	8	1	21	3607	0	0
BT 5977S	1	2	1	2	0	1	-	-	-	-	-	-	30
BU 5990M	0	5	0	13	0	2	0.1	7	1	22	4057	0	0
BV 5997M	3	2	5	6	0	1	0.6	40	1	20	4452	0	0
BW 6006S?	2	22	6	36	0	5	0.1	2	1	5	2504	0	0
BX 6031S	8	4	22	8	1	8	2.3	31	1	18	410	0	0
BY 6053S?	2	54	6	120	0	16	0.1	0	1	0	1481	0	0
BZ 6067S?	3	25	10	49	0	7	0.2	0	1	3	2240	0	0

LINE 10991	(FLIGHT	24)											
A 6188S?	1	2	1	2	0	2	-	-	-	-	-	-	0
B 6208E	8	8	23	12	0	11	1.1	31	1	26	643	0	0
C 6212S?	8	8	23	12	0	11	1.1	41	1	5	2018	0	0

LINE 11000	(FLIGHT	3)											
A 6100B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 6125B?	16	17	28	31	4	12	1.1	0	1	25	94	7	0
C 6135B?	10	11	21	15	3	8	0.9	11	1	36	160	14	0
D 6138B?	11	10	21	16	4	8	1.4	10	1	32	84	14	0
E 6159D	1	2	1	2	2	1	-	-	-	-	-	-	0
F 6166D	25	7	2	49	15	14	9.0	16	1	44	117	23	0
G 6172B	7	6	52	43	5	23	1.4	31	1	25	132	6	0
H 6184B?	5	6	8	0	0	1	178.1	43	1	29	1496	0	0
I 6188B?	7	8	14	11	1	4	0.9	13	1	41	462	10	0
J 6193D	2	13	14	11	1	5	1.5	9	1	27	742	0	0
K 6209B?	11	9	8	15	0	2	1.4	8	1	22	911	0	0
L 6223B?	1	2	1	2	0	1	-	-	-	-	-	-	40

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11000	(FLIGHT	3)											
M 6243S	1	2	1	2	0	3	-	-	-	-	-	-	0
N 6271D	19	10	23	19	8	9	3.2	8	1	32	1447	0	0
O 6315S	1	2	0	2	0	2	-	-	-	-	-	-	0
P 6332S?	0	3	0	16	0	2	0.1	0	1	0	3827	0	0
LINE 11001	(FLIGHT	3)											
A 6709S?	4	8	6	19	0	3	0.3	0	1	0	3192	0	1530
B 6717S	1	2	1	2	0	2	-	-	-	-	-	-	0
C 6727M	0	3	0	11	0	1	0.1	0	1	3	3517	0	210
D 6739S?	0	6	0	11	0	5	0.1	0	1	0	2864	0	0
E 6750M	0	2	0	2	0	2	-	-	-	-	-	-	0
F 6762M	0	5	0	12	0	1	0.1	0	1	18	4853	0	0
G 6772M	0	2	1	11	0	1	0.1	0	1	35	5751	0	4
H 6780S	2	11	7	23	0	4	0.2	0	1	5	1548	0	0
I 6784M	0	2	1	2	0	1	-	-	-	-	-	-	0
J 6803S?	0	8	5	15	0	1	0.3	0	1	9	2135	0	0
K 6829B?	20	25	67	47	6	14	1.1	0	1	31	46	16	0
L 6837B?	8	9	30	54	5	8	0.9	8	1	39	85	20	0
M 6844S?	15	25	43	45	4	16	0.7	0	1	15	119	0	680
N 6866S	10	12	25	22	1	9	0.9	1	1	22	71	5	0
O 6877B?	1	2	1	2	2	4	-	-	-	-	-	-	0
P 6880B?	16	26	3	48	2	12	0.7	1	1	29	102	11	0
Q 6905B	13	14	16	26	7	12	1.1	18	1	48	121	28	40
R 6930S?	10	21	12	45	2	7	0.5	4	1	24	227	3	0
S 6940S?	13	14	13	21	0	5	1.2	16	1	28	269	5	0
T 6956S?	15	26	23	42	2	9	0.7	3	1	19	223	0	0
U 6981S	1	2	1	2	0	4	-	-	-	-	-	-	60
V 7005S	1	2	1	2	0	2	-	-	-	-	-	-	0
W 7029B?	1	2	1	2	2	4	-	-	-	-	-	-	0
X 7032B?	18	18	39	22	5	10	1.4	5	1	24	113	6	0
Y 7042B?	1	2	1	2	2	4	-	-	-	-	-	-	0
LINE 11002	(FLIGHT	3)											
A 7644S	0	11	5	18	0	3	0.2	0	1	5	2024	0	0
B 7792S?	5	6	10	11	0	2	0.7	15	1	17	706	0	0
C 7888M	0	1	0	2	0	2	-	-	-	-	-	-	120
D 7898S?	1	2	1	2	0	3	-	-	-	-	-	-	0
E 7963S?	1	2	1	2	0	3	-	-	-	-	-	-	0
F 7998S?	1	6	0	30	0	1	0.1	0	1	22	5517	0	0
G 8011S?	0	15	3	27	0	6	0.1	0	1	2	2947	0	0
LINE 11010	(FLIGHT	4)											
A 641H	9	15	9	30	6	8	0.6	3	1	23	319	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11010	(FLIGHT	4)											
B 659H	13	13	25	27	5	10	1.2	7	1	28	159	7	0
C 674H	11	15	26	34	3	6	0.8	0	1	21	101	2	0
D 685B?	10	8	19	20	1	6	1.4	19	1	33	207	10	0
E 696D	15	17	28	59	2	11	1.1	2	1	24	305	0	0
F 702D	1	2	1	2	2	4	-	-	-	-	-	-	0
G 709B	6	9	92	18	34	4	0.6	13	1	25	75	9	0
H 713B	6	9	92	18	34	4	0.6	12	1	24	45	10	0
I 718D	6	9	92	20	35	32	0.6	14	1	34	43	20	0
J 754M	0	2	0	2	0	2	-	-	-	-	-	-	0
K 799M	0	9	0	13	0	2	0.1	0	1	30	5802	0	290
L 809S	0	5	0	6	0	2	0.1	0	1	13	5517	0	0
M 819S?	4	8	3	8	1	1	0.3	0	1	12	1900	0	0
N 890M	1	1	1	2	0	1	-	-	-	-	-	-	0
O 958S?	18	32	33	63	1	13	0.7	0	1	12	327	0	0
P 962M	18	32	33	63	0	13	0.7	7	1	0	2688	0	500
Q 972M	1	2	1	0	0	2	-	-	-	-	-	-	0
R 988M	0	2	3	2	0	2	1.2	51	1	39	6478	0	0
S 994M	1	2	0	2	0	1	-	-	-	-	-	-	0
T 1006S	5	8	9	12	0	4	0.5	0	1	23	763	0	0
U 1052B	1	2	1	2	2	4	-	-	-	-	-	-	0
V 1061B	11	46	37	94	23	7	0.3	0	1	32	59	16	0
W 1077B	7	25	11	52	1	8	0.2	0	1	14	137	0	4
X 1101B?	1	2	1	2	0	4	-	-	-	-	-	-	210
Y 1115B	21	17	34	40	11	13	1.7	1	1	25	69	8	0
Z 1134B	1	17	8	21	2	3	0.3	0	1	28	118	8	0
AA 1143D	15	17	32	30	7	11	1.1	7	1	36	217	13	0
AB 1155B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 1165B	13	11	23	35	2	14	1.5	23	1	39	245	16	0
AD 1179B	18	25	54	40	15	21	0.9	0	1	34	85	16	0
AE 1183D	33	25	54	40	15	21	2.4	0	1	31	84	13	0
AF 1215B?	9	8	19	2	4	5	1.3	9	1	45	188	20	0
AG 1222B?	1	2	1	2	2	3	-	-	-	-	-	-	90
AH 1266B?	57	43	58	75	6	15	2.8	0	1	12	40	0	0
AI 1273B?	41	35	26	61	10	26	2.2	0	1	18	65	3	0
AJ 1283B?	25	16	30	9	2	2	2.6	1	1	25	90	8	0
AK 1354M	0	5	0	0	0	3	0.1	4	1	41	5732	0	70
AL 1365M	0	2	0	11	0	0	0.1	5	1	34	5176	0	0
AM 1373M	0	2	0	2	0	2	-	-	-	-	-	-	0
AN 1381B?	0	2	0	2	0	1	-	-	-	-	-	-	-90
AO 1401B?	0	8	3	10	0	2	0.1	0	1	7	4642	0	40
AP 1410S?	0	2	0	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11010	(FLIGHT	4)											
AQ 1478B?	1	2	1	2	1	4	-	-	-	-	-	-	0
AR 1500B?	1	2	1	2	1	3	-	-	-	-	-	-	0
AS 1507B?	4	10	5	18	1	3	0.2	0	1	17	1612	0	11
AT 1645B?	15	56	21	98	0	16	0.3	0	1	17	677	0	0
AU 1655B?	7	64	9	107	0	12	0.1	0	1	14	626	0	250
AV 1667B?	13	17	16	21	0	8	0.9	0	1	5	708	0	0

LINE 11021	(FLIGHT	5)											
A 969S?	9	18	19	53	1	6	0.5	0	1	21	202	0	40
B 940B?	12	29	32	55	15	14	0.5	0	1	21	119	3	-9760
C 906S?	39	47	110	82	12	32	1.4	0	1	10	48	0	0
D 880D	52	21	101	37	24	37	6.2	0	1	25	40	12	0
E 876D	27	30	151	44	66	63	1.4	5	1	33	14	23	0
F 863S?	0	20	2	38	2	7	0.1	0	1	26	1191	0	60
G 850M	0	2	0	1	0	0	-	-	-	-	-	-	350
H 817B?	0	22	4	43	0	6	0.1	0	1	0	2715	0	0
I 810M	0	3	0	5	0	1	0.1	0	1	34	5732	0	220
J 796M	0	2	0	5	0	1	0.1	1	1	47	6008	0	130
K 780M	0	3	0	9	0	1	0.1	5	1	44	5761	0	0
L 760S?	5	12	8	19	1	4	0.4	0	1	10	1011	0	0
M 742M	0	4	0	7	0	1	0.1	0	1	60	6623	0	100
N 705B?	1	2	1	2	1	2	-	-	-	-	-	-	0
O 685D?	2	9	1	4	1	2	0.1	8	1	37	1890	0	4
P 669S?	0	2	1	2	0	4	-	-	-	-	-	-	120
Q 649B?	17	33	27	80	0	14	0.6	0	1	6	559	0	210
R 642M	12	31	10	40	0	5	0.4	8	1	10	1474	0	0
S 637M	1	31	12	40	0	5	0.3	0	1	0	2420	0	5
T 630M	0	5	1	1	0	2	0.8	105	1	14	3771	0	550
U 612B?	1	8	0	7	0	1	0.1	0	1	3	3886	0	0
V 604B?	6	11	5	27	0	5	0.4	12	1	7	3642	0	0
W 601M	6	11	15	27	0	5	0.4	13	1	0	2787	0	100
X 594B?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 585B	68	14	148	86	49	62	18.6	4	1	20	34	8	0
Z 578B	14	16	43	37	13	16	1.0	9	1	17	25	6	70
AA 574B	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 559B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 550D	50	39	83	74	13	30	2.6	0	1	17	39	5	0
AD 542B	20	45	23	96	13	13	0.6	0	1	18	89	3	900
AE 531B	31	30	49	63	15	17	1.7	10	1	16	96	2	0
AF 523B	8	8	11	8	9	4	1.0	32	1	21	125	4	0
AG 519B	20	35	34	52	12	12	0.8	1	1	18	104	2	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL		QUAD		REAL		QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11021	(FLIGHT 5)													
AH 507B?		15	54	26	112	17	19	0.4	0	1	17	155	0	650
AI 503B		15	54	26	112	17	19	0.4	0	1	17	86	2	0
AJ 486B		46	34	80	124	11	38	2.6	4	1	17	45	5	0
AK 481B		1	2	1	2	2	4	-	-	-	-	-	-	0
AL 478B		10	51	26	107	17	16	0.2	0	1	15	143	0	0
AM 473B		35	21	65	90	15	20	3.3	14	1	21	61	8	0
AN 471B		35	48	65	90	15	20	1.2	0	1	16	71	2	0
AO 459B		25	11	40	16	14	16	4.4	13	1	25	38	12	80
AP 453B		1	2	1	2	2	4	-	-	-	-	-	-	0
AQ 450E		35	37	6	70	14	32	1.6	6	1	34	83	17	0
AR 404B		9	15	13	23	6	5	0.6	4	1	39	162	17	0
AS 389B		11	19	36	34	8	17	0.6	9	1	44	58	28	0
AT 380B		8	16	14	30	1	8	0.5	9	1	40	98	22	0
AU 369B		20	6	18	11	6	14	6.7	18	1	42	49	26	0
AV 367B		20	6	18	11	6	14	6.7	22	1	46	58	30	0
AW 355B?		8	13	13	19	0	3	0.6	12	1	24	432	0	0
AX 345D		34	51	50	84	0	15	1.1	0	1	16	225	0	0
AY 333B?		11	15	13	20	0	3	0.8	13	1	24	541	0	0
AZ 320B		18	42	52	89	7	19	0.6	0	1	19	201	0	0
BA 312B?		1	2	1	2	1	2	-	-	-	-	-	-	200
BB 299B		32	31	60	72	4	21	1.7	0	1	21	91	5	0
BC 296B		1	2	1	2	2	4	-	-	-	-	-	-	20
BD 288B?		5	15	8	21	3	1	0.3	0	1	33	214	11	60
BE 281S?		8	15	28	51	3	12	0.6	12	1	25	233	4	0
BF 261S		1	2	1	2	0	3	-	-	-	-	-	-	0
BG 160S?		4	5	5	17	0	3	0.2	3	1	35	1270	1	0
BH 145S?		0	11	3	14	0	2	0.1	5	1	3	2900	0	0
BI 125M		0	2	1	2	0	3	-	-	-	-	-	-	0
BJ 123S?		0	14	2	26	0	4	0.1	0	1	3	3318	0	20
BK 105D		5	17	5	19	0	3	0.2	0	1	24	1564	0	10
BL 86S?		0	2	1	2	0	4	-	-	-	-	-	-	90
BM 72B?		0	9	0	14	0	3	0.1	0	1	17	4616	0	30
BN 22S?		0	13	6	24	0	4	0.2	0	1	18	2859	0	0

LINE 11030	(FLIGHT 5)													
A 1141B?		20	21	46	43	6	15	1.4	0	1	29	60	12	0
B 1165B?		30	28	77	42	9	26	1.8	0	1	28	53	13	0
C 1173B?		1	2	1	2	2	4	-	-	-	-	-	-	0
D 1188B?		1	2	1	2	2	4	-	-	-	-	-	-	30
E 1195D		36	21	77	61	8	21	3.3	0	1	15	77	0	0
F 1201D		6	11	77	18	3	1	0.4	17	1	28	488	2	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11030	(FLIGHT	5)											
G 1207D	9	18	15	29	1	4	0.5	4	1	21	368	0	220
H 1211D	15	24	15	29	2	4	0.8	3	1	28	327	4	0
I 1217D	17	20	16	21	3	5	1.1	9	1	21	463	0	0
J 1225D	1	2	1	2	1	4	-	-	-	-	-	-	6
K 1229D	26	32	12	20	1	3	1.2	0	1	22	307	0	0
L 1237D	43	17	66	20	28	26	5.8	0	1	36	62	19	0
M 1241B?	1	2	1	2	2	4	-	-	-	-	-	-	0
N 1255S?	4	9	7	22	0	6	0.3	0	1	12	818	0	0
O 1312M	0	4	0	10	0	2	0.1	9	1	41	5397	0	0
P 1342M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 1355S?	5	29	0	55	0	8	0.1	0	1	0	2347	0	0
R 1377M	0	6	0	11	0	2	0.1	0	1	17	4440	0	14
S 1383S?	0	5	0	11	0	1	0.1	0	1	20	4551	0	0
T 1386M	0	4	0	11	0	1	0.1	0	1	26	5008	0	0
U 1417B?	16	48	26	83	0	15	0.4	0	1	1	552	0	0
V 1491M	0	9	0	16	0	3	0.1	6	1	34	5090	0	0
W 1557M	0	2	0	11	0	2	0.1	3	1	23	4464	0	0
X 1572B?	0	6	0	14	0	1	0.1	0	1	16	4186	0	0
Y 1578M	0	3	1	19	0	1	0.1	0	1	12	3747	0	0
Z 1610B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AA 1620B?	1	2	1	2	1	3	-	-	-	-	-	-	0
AB 1679B?	10	26	59	43	2	3	0.4	0	1	14	472	0	0
AC 1684B?	23	42	59	47	6	32	0.8	0	1	12	161	0	0
AD 1696D	102	127	180	228	31	72	1.9	0	1	14	26	3	0
AE 1701B	142	127	293	228	42	112	3.1	0	1	10	20	1	13
AF 1716B	7	10	8	19	3	4	0.7	15	1	22	75	6	19
AG 1725B	56	54	114	97	20	44	2.1	0	1	17	47	4	130
AH 1745S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AI 1763S	3	10	4	21	2	3	0.1	0	1	27	792	0	0
AJ 1772B?	5	17	15	36	2	8	0.3	0	1	27	601	0	0
AK 1785B	34	23	43	90	18	37	2.6	5	1	17	86	1	890
AL 1795B	38	32	83	61	16	30	2.2	0	1	17	42	4	0
AM 1811B	19	23	36	44	6	15	1.1	0	1	22	94	5	1230
AN 1816B	44	28	83	48	40	31	3.2	0	1	20	34	7	0
AO 1825B	15	23	46	40	40	17	0.8	0	1	17	24	5	0
AP 1832B	50	40	109	71	31	42	2.5	0	1	21	29	8	0
AQ 1846S?	0	10	4	14	1	2	0.2	7	1	13	2646	0	0
AR 1858S?	7	26	19	50	0	9	0.3	0	1	17	541	0	0
AS 1889B	26	20	29	36	14	20	2.1	6	1	38	95	20	0
AT 1904B	9	14	9	29	9	7	0.6	9	1	38	188	16	0
AU 1927S?	8	16	12	27	0	8	0.5	10	1	23	442	0	190

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11030	(FLIGHT	5)											
AV 1939S?	9	35	68	68	0	6	0.3	0	1	14	573	0	0
AW 1945B?	33	46	68	85	1	21	1.1	0	1	17	150	0	0
AX 1949B?	25	36	68	84	1	20	1.0	1	1	18	148	1	0
AY 1959B?	17	27	30	56	3	11	0.8	4	1	19	183	0	0
AZ 1971B?	8	4	14	30	5	7	2.4	38	1	19	141	1	0
BA 1978B?	32	24	72	54	3	10	2.3	3	1	15	148	0	140
BB 1981B?	22	43	72	54	3	10	0.7	0	1	18	245	0	0
BC 2004S	2	12	4	20	0	4	0.1	0	1	8	3405	0	80
BD 2060S	1	2	1	2	0	4	-	-	-	-	-	-	0
BE 2091S	1	11	5	21	0	3	0.2	0	1	6	2546	0	0
BF 2113S	0	2	1	2	0	2	-	-	-	-	-	-	0
BG 2134S	1	2	1	2	0	4	-	-	-	-	-	-	30
BH 2156D	9	43	4	60	0	10	0.2	0	1	0	2225	0	0
BI 2166M	0	1	0	60	0	6	0.1	4	1	1	2507	0	0
BJ 2172M	0	23	0	42	0	3	0.1	4	1	0	2468	0	0
BK 2180M	0	14	0	22	0	4	0.1	0	1	2	3026	0	60
BL 2199B?	1	2	1	2	0	3	-	-	-	-	-	-	0
BM 2204S	1	2	1	2	0	3	-	-	-	-	-	-	0
BN 2226M	0	10	3	14	0	3	0.1	0	1	9	4249	0	0
BO 2243B?	0	9	0	10	0	1	0.1	0	1	23	5041	0	0
BP 2258M	0	2	0	2	0	3	-	-	-	-	-	-	0

LINE 11040	(FLIGHT	5)											
A 3555B	122	6	83	22	73	41	174.7	0	1	13	14	3	0
B 3549B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 3542D	43	9	70	91	12	21	15.6	4	1	8	15	0	0
D 3539D	66	95	144	91	12	21	1.4	0	1	7	24	0	0
E 3533B	67	67	131	122	29	50	2.1	0	1	16	41	3	0
F 3505B	1	2	1	2	2	4	-	-	-	-	-	-	9
G 3490B?	8	9	24	15	3	11	1.0	7	1	29	414	0	170
H 3486B?	12	16	24	15	4	11	0.9	0	1	35	214	11	0
I 3483D	18	30	28	27	4	11	0.7	0	1	27	313	3	0
J 3478D	8	22	17	21	2	9	0.4	0	1	29	344	3	0
K 3474D	9	4	74	85	26	38	2.6	34	1	38	451	9	10
L 3467B	53	55	103	97	26	43	1.9	0	1	31	103	14	0
M 3464B	45	45	103	97	26	43	1.9	0	1	20	107	2	0
N 3443S	0	2	1	2	0	4	-	-	-	-	-	-	0
O 3422S?	0	2	0	2	0	2	-	-	-	-	-	-	0
P 3395B?	0	17	1	27	0	4	0.1	0	1	0	3510	0	0
Q 3390B?	0	2	1	2	0	4	-	-	-	-	-	-	0
R 3370M	0	6	0	6	0	1	0.1	0	1	20	4752	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11040	(FLIGHT	5)											
S 3359S?	0	7	0	20	0	3	0.1	2	1	12	3620	0	50
T 3342S?	0	2	0	2	0	1	-	-	-	-	-	-	0
U 3323S	11	40	16	60	0	13	0.3	0	1	6	430	0	0
V 3264S?	0	3	0	18	0	1	0.1	8	1	75	6713	5	0
W 3144S?	1	2	0	2	1	2	-	-	-	-	-	-	0
X 3129S	1	2	1	2	1	4	-	-	-	-	-	-	0
Y 3082B?	53	50	88	163	17	28	2.1	0	1	13	135	0	230
Z 3071D	49	55	35	103	29	18	1.7	0	1	14	87	0	0
AA 3063B	64	70	137	144	17	42	1.9	0	1	14	43	1	0
AB 3053B	28	82	31	202	14	26	0.5	0	1	10	149	0	0
AC 3049B	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 3035B	101	150	288	267	47	115	1.6	0	1	13	26	2	1140
AE 3011B?	8	23	9	34	0	4	0.3	0	1	0	3175	0	150
AF 2991D	20	54	36	93	2	18	0.5	0	1	17	467	0	0
AG 2976M	6	11	1	27	0	5	0.5	23	1	11	1010	0	0
AH 2957S?	1	2	1	2	0	4	-	-	-	-	-	-	0
AI 2943B?	22	12	42	76	0	19	3.1	21	1	17	335	0	70
AJ 2932B	11	82	46	166	0	38	0.2	0	1	10	247	0	880
AK 2925B	38	47	98	166	17	15	1.4	7	1	14	183	0	0
AL 2922B	43	47	85	142	17	33	1.6	0	1	19	79	4	0
AM 2916B	61	72	85	129	15	33	1.7	0	1	14	79	1	0
AN 2910B	61	42	85	154	15	23	3.3	6	1	16	114	0	1060
AO 2903B	27	66	61	125	7	26	0.6	0	1	14	164	0	140
AP 2875D	42	53	141	110	20	24	1.4	9	1	24	84	10	400
AQ 2870D	16	24	139	110	33	46	0.8	4	1	26	95	9	0
AR 2862B	70	52	139	107	33	46	3.1	0	1	18	33	6	0
AS 2856B	23	39	111	71	1	38	0.8	0	1	16	27	4	30
AT 2850B	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 2840B	46	19	79	37	41	35	5.8	0	1	13	95	0	0
AV 2835B	44	32	77	65	6	19	2.7	0	1	17	179	0	12
AW 2827B?	27	31	77	51	4	8	1.3	4	1	13	461	0	0
AX 2823M	27	31	54	51	4	8	1.3	7	1	0	2337	0	210
AY 2803S?	7	28	18	28	0	14	0.2	0	1	18	330	0	0
AZ 2789S?	5	21	11	29	9	4	0.4	3	1	28	534	3	0
BA 2782S?	7	16	28	24	9	7	0.4	9	1	37	226	14	70
BB 2768S?	13	17	23	28	7	8	0.9	19	1	37	660	9	80
BC 2751S	1	2	1	2	2	4	-	-	-	-	-	-	0
BD 2738B?	22	21	27	31	9	10	1.5	16	1	29	133	11	50
BE 2735B?	18	11	27	31	10	10	2.5	22	1	32	140	13	410
BF 2729B?	14	32	17	69	10	8	0.5	2	1	17	273	0	0
BG 2716B	38	26	76	50	5	18	2.7	3	1	19	64	4	320

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ			VERTICAL DIKE			HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR		
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT

LINE 11040	(FLIGHT 5)													
BH 2703B?	31 39	64	77	3	21	1.3	3	1	23	207	3	0		
BI 2682B?	19 30	34	45	0	8	0.8	0	1	17	353	0	30		
BJ 2670M	9 13	16	19	0	2	0.7	19	1	0	1975	0	590		
BK 2655B?	11 27	12	51	2	10	0.4	0	1	28	861	0	0		
BL 2641M	0 2	0	2	0	2	-	-	-	-	-	-	240		
BM 2632M	0 3	0	11	0	1	0.1	3	1	68	6623	0	140		
BN 2621S?	0 16	2	35	0	5	0.1	0	1	10	3894	0	60		
BO 2605S?	3 16	2	28	0	6	0.1	6	1	6	2973	0	70		
BP 2583S	1 2	1	2	2	4	-	-	-	-	-	-	0		
BQ 2536S	0 13	5	25	0	4	0.1	0	1	1	3336	0	80		
BR 2523S	0 17	4	34	0	6	0.1	0	1	0	2430	0	50		
BS 2477S	0 23	1	40	0	6	0.1	2	1	0	2399	0	0		
BT 2470M	0 20	0	40	0	6	0.1	8	1	4	2433	0	0		
BU 2456M	0 7	0	13	0	2	0.1	4	1	13	3530	0	190		
BV 2443S?	0 17	0	30	0	5	0.1	0	1	0	2438	0	0		
BW 2432M	0 19	0	27	0	7	0.1	9	1	12	3063	0	0		
BX 2418S?	0 2	0	2	0	3	-	-	-	-	-	-	50		
BY 2414M	0 9	0	17	0	3	0.1	0	1	11	3965	0	0		
BZ 2380S?	0 10	0	21	0	3	0.1	7	1	9	2934	0	0		
CA 2366S?	0 29	0	53	0	8	0.1	12	1	13	2856	0	0		

LINE 11050	(FLIGHT 5)													
A 3657B	3 34	32	64	4	3	0.7	0	1	24	180	4	0		
B 3669B	21 38	47	44	5	21	0.7	0	1	18	157	0	0		
C 3689B	1 2	1	2	2	4	-	-	-	-	-	-	0		
D 3700B	17 10	37	31	8	20	2.7	6	1	29	13	19	0		
E 3705B	1 2	1	2	2	4	-	-	-	-	-	-	0		
F 3711B	2 20	61	36	5	3	3.5	0	1	19	79	3	30		
G 3727D	11 13	6	27	4	2	0.9	6	1	18	241	0	30		
H 3732D	15 9	23	13	3	3	2.2	11	1	25	248	1	0		
I 3740B?	1 2	1	2	2	0	-	-	-	-	-	-	0		
J 3745D	19 11	45	5	10	17	2.7	6	1	43	165	19	0		
K 3749B	19 13	45	5	10	17	2.2	0	1	32	272	6	0		
L 3770S?	7 3	8	19	0	4	2.8	27	1	16	1148	0	0		
M 3794M	0 0	0	1	0	2	-	-	-	-	-	-	0		
N 3805S?	1 2	0	2	0	3	-	-	-	-	-	-	0		
O 3813M	0 2	0	2	0	1	-	-	-	-	-	-	0		
P 3854B	30 67	50	175	0	27	0.7	0	1	1	352	0	20		
Q 3860M	0 12	0	132	0	22	0.1	0	1	0	2482	0	0		
R 3912M	0 2	0	2	0	2	-	-	-	-	-	-	0		
S 3992B?	8 12	2	25	0	1	0.6	8	1	7	408	0	4		

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11050	(FLIGHT	5)											
T 4006B	7	5	21	19	9	14	1.4	18	1	22	58	6	4
U 4024B	1	24	12	21	0	3	0.5	9	1	4	1334	0	0
V 4029D?	0	2	1	2	2	4	-	-	-	-	-	-	0
W 4033B	109	87	228	167	31	82	3.3	0	1	17	131	0	0
X 4038B	15	79	39	182	9	18	0.3	0	1	14	46	2	0
Y 4040B	12	79	39	182	9	18	0.2	0	1	11	63	0	0
Z 4049B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 4052B	1	2	1	2	2	4	-	-	-	-	-	-	0
AB 4052B	1	2	1	2	2	4	-	-	-	-	-	-	0
AC 4062B?	32	26	5	55	14	27	2.2	3	1	18	61	3	110
AD 4073B	49	85	99	175	10	47	1.0	0	1	15	70	2	0
AE 4089B?	4	4	43	133	8	22	0.5	0	1	28	173	9	810
AF 4124B	1	2	1	2	1	4	-	-	-	-	-	-	0
AG 4128B	16	15	59	34	11	13	1.4	13	1	16	121	0	0
AH 4135B	14	29	33	65	11	13	0.6	0	1	17	127	0	0
AI 4144B	20	23	42	52	0	15	1.1	8	1	16	130	0	0
AJ 4150B	19	25	14	43	9	8	1.0	8	1	19	128	2	370
AK 4161B	52	85	119	133	2	44	1.1	0	1	13	93	0	0
AL 4176B	43	153	77	300	22	94	0.5	0	1	24	26	12	70
AM 4178B	43	153	77	300	2	94	0.5	0	1	13	43	1	170
AN 4182B	62	76	138	146	19	44	1.7	0	1	13	48	1	0
AO 4196B	55	10	104	41	32	33	21.0	0	1	17	27	6	0
AP 4203B	20	26	42	59	21	17	1.1	0	1	14	41	2	20
AQ 4206B	30	51	68	98	13	25	0.9	0	1	15	34	3	90
AR 4209B	1	2	1	2	2	4	-	-	-	-	-	-	0
AS 4214B	6	3	12	3	15	26	5.5	0	3	35	18	14	40
AT 4223B?	38	30	83	63	20	10	2.4	0	1	23	114	5	70
AU 4234B?	44	35	102	72	13	39	2.4	0	1	26	54	11	7
AV 4250B?	18	17	42	13	11	11	1.4	11	1	29	86	12	0
AW 4259B?	29	9	48	26	12	16	6.8	18	1	37	77	20	0
AX 4270S	15	22	33	43	4	14	0.8	3	1	31	163	10	0
AY 4278S?	3	9	4	17	4	2	0.2	0	1	42	482	13	110
AZ 4292B?	23	72	23	122	6	20	0.5	0	1	43	126	23	0
BA 4296S?	3	72	24	122	8	20	0.3	0	1	24	167	6	0
BB 4310D	10	9	7	14	0	8	1.3	26	1	39	282	15	0
BC 4332B?	7	32	17	68	0	11	0.2	0	1	16	374	0	0
BD 4346B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BE 4350B?	20	39	40	67	0	14	0.7	0	1	17	145	0	20
BF 4358B?	10	12	10	25	4	2	0.9	26	1	22	234	3	210
BG 4365B?	10	30	23	12	3	11	0.4	0	1	22	261	1	0
BH 4374D	9	19	27	4	4	13	0.4	0	1	36	282	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11050	(FLIGHT	5)											
BI 4412B?	11	19	6	55	0	8	0.6	9	1	11	1073	0	0
BJ 4416B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BK 4423S?	3	25	6	52	0	8	0.1	0	1	4	1198	0	60
BL 4429S	1	2	1	2	1	4	-	-	-	-	-	-	11
BM 4473S	3	8	6	9	0	2	0.5	14	1	16	1617	0	0
BN 4496M	0	5	1	5	0	1	0.1	25	1	34	5559	0	130
BO 4505S	0	2	0	2	0	2	-	-	-	-	-	-	70
BP 4517D	2	18	2	20	0	4	0.1	0	1	4	3722	0	0
BQ 4566S	1	2	1	2	0	1	-	-	-	-	-	-	0
BR 4578S	0	16	2	27	0	4	0.1	0	1	0	2951	0	0
BS 4587M	0	7	0	26	0	1	0.1	2	1	25	4669	0	470
BT 4595S	0	2	0	2	0	2	-	-	-	-	-	-	0
BU 4610S	0	2	0	2	0	2	-	-	-	-	-	-	0

LINE 11060	(FLIGHT	5)											
A 5673B	5	23	18	43	3	9	0.2	0	1	30	144	10	0
B 5659B	61	23	116	44	47	54	7.2	6	1	41	18	30	0
C 5657B	61	23	116	44	47	54	7.2	0	1	28	25	16	0
D 5638H	1	2	1	2	2	4	-	-	-	-	-	-	0
E 5614D	36	42	36	67	5	12	1.4	0	1	15	351	0	0
F 5598S?	0	16	5	25	0	4	0.2	0	1	0	2236	0	30
G 5590D?	1	15	7	7	0	1	0.7	21	1	21	1512	0	0
H 5586B?	0	8	11	29	0	4	0.3	0	1	30	1022	0	0
I 5578M	0	15	11	22	0	3	0.4	2	1	0	3257	0	0
J 5570S?	1	34	11	66	0	10	0.2	0	1	5	1135	0	0
K 5566M	1	34	11	66	0	10	0.2	0	1	0	2197	0	5
L 5561M	0	34	0	66	0	3	0.1	0	1	5	3452	0	0
M 5553D?	0	19	0	7	0	2	0.1	1	1	14	3877	0	7
N 5546M	0	6	0	11	0	2	0.1	0	1	11	3795	0	70
O 5532M	0	6	0	11	0	2	0.1	4	1	16	3803	0	180
P 5508S?	23	102	61	222	0	34	0.4	0	1	3	305	0	0
Q 5496M	0	48	0	78	0	11	0.1	3	1	2	2631	0	0
R 5493B?	0	48	0	78	0	11	0.1	3	1	0	1743	0	0
S 5477B?	3	16	17	37	0	7	0.5	0	1	29	1007	0	0
T 5474B?	8	21	17	37	0	7	0.4	0	1	19	681	0	0
U 5463S?	34	100	57	209	0	29	0.6	0	1	4	251	0	0
V 5454S?	15	62	30	136	1	21	0.3	0	1	10	380	0	0
W 5446D	1	2	1	2	2	4	-	-	-	-	-	-	0
X 5441B?	41	90	69	186	1	36	0.8	0	1	13	179	0	0
Y 5438B?	41	90	69	186	1	36	0.8	0	1	7	200	0	0
Z 5431D	16	24	69	12	0	36	0.8	2	1	13	509	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11060	(FLIGHT	5)											
AA 5426D	34	42	43	67	30	13	1.3	1	1	13	268	0	0
AB 5420D	78	81	202	145	37	68	2.1	0	1	14	93	0	0
AC 5418D	118	87	202	27	37	68	3.7	0	1	15	46	3	0
AD 5415D	118	75	202	27	37	68	4.5	0	1	15	37	4	330
AE 5410B?	23	86	6	142	37	3	0.4	0	1	18	69	5	0
AF 5403B	72	150	146	284	5	71	1.0	0	1	12	47	0	0
AG 5400B	102	150	207	284	14	71	1.6	0	1	10	40	0	0
AH 5388B	18	27	34	58	19	17	0.9	2	1	21	61	7	190
AI 5383B	40	55	128	191	32	54	1.3	0	1	17	42	5	0
AJ 5378B	33	101	126	191	32	51	0.6	0	1	13	74	0	0
AK 5354B	24	22	47	38	15	18	1.7	0	1	25	63	9	0
AL 5342B	44	44	50	86	13	17	1.9	0	1	15	86	0	130
AM 5334B?	10	66	50	103	13	18	0.2	0	1	8	464	0	5
AN 5316D	48	41	72	48	3	19	2.3	0	1	16	123	0	480
AO 5310D	35	53	68	253	0	73	1.1	2	1	22	145	5	0
AP 5301B	75	134	195	257	0	66	1.2	0	1	11	79	0	1050
AQ 5286B	41	69	104	173	7	34	1.0	2	1	16	130	0	0
AR 5272B	15	48	38	106	10	21	0.4	0	1	17	152	1	250
AS 5262B	83	53	159	95	26	53	4.0	0	1	17	25	7	230
AT 5254B	1	2	1	2	2	4	-	-	-	-	-	-	0
AU 5251B	84	91	153	153	17	62	2.1	0	1	16	31	5	0
AV 5245B	93	150	186	293	15	72	1.4	0	1	10	43	0	0
AW 5224B?	46	92	92	173	19	37	0.9	0	1	13	55	0	0
AX 5187B	101	83	219	170	33	82	3.1	0	1	15	27	4	30
AY 5177B	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 5166B	91	81	176	154	19	65	2.7	0	1	18	22	8	0
BA 5157B	47	5	87	11	28	13	43.0	8	1	29	36	16	40
BB 5128B	22	32	44	50	2	17	0.9	0	1	28	129	9	50
BC 5118B	34	29	110	101	8	37	2.1	6	1	20	55	6	0
BD 5105S	8	18	19	19	2	8	0.5	0	1	29	246	6	0
BE 5078B?	38	42	29	79	5	29	1.6	0	1	27	76	11	0
BF 5071B?	6	3	2	4	14	1	2.4	56	1	34	132	16	120
BG 5061B	47	79	93	147	0	37	1.1	1	1	24	137	7	40
BH 5054M	47	79	93	147	0	37	1.1	6	1	0	2218	0	80
BI 5040B?	3	27	0	48	0	10	0.1	0	1	1	2648	0	0
BJ 5030M	13	22	24	56	0	8	0.7	18	1	7	2464	0	0
BK 5024S?	14	32	24	56	0	8	0.5	7	1	16	623	0	0
BL 5014S?	25	3	30	10	0	4	34.3	31	1	28	223	8	0
BM 5004B?	21	47	23	78	0	14	0.6	5	1	28	493	4	0
BN 4990S	7	16	5	27	0	4	0.4	5	1	24	997	0	0
BO 4975S?	1	2	1	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11060	(FLIGHT	5)											
BP 4956S?	5	16	6	32	0	4	0.2	0	1	10	1798	0	30
BQ 4928S	5	7	8	15	0	2	0.6	33	1	31	1339	0	30
BR 4918S	7	24	17	51	0	8	0.3	0	1	19	725	0	240
BS 4913M	3	24	17	51	0	8	0.4	0	1	25	4868	0	1050
BT 4907M	1	2	1	2	0	1	-	-	-	-	-	-	210
BU 4893S	1	2	1	2	0	1	-	-	-	-	-	-	0
BV 4883S	2	13	2	27	0	4	0.1	1	1	3	3283	0	0
BW 4874S?	2	9	0	10	0	2	0.1	14	1	31	4868	0	0
BX 4864S	0	5	2	8	0	2	0.1	7	1	25	5320	0	0
BY 4854M	0	2	0	2	0	1	-	-	-	-	-	-	60
BZ 4830M	0	5	0	7	0	2	0.1	0	1	29	5517	0	160
CA 4826M	0	4	1	4	0	2	0.1	30	1	36	5732	0	130
CB 4816M	0	9	0	18	0	3	0.1	0	1	3	3763	0	120
CC 4805S	4	20	11	37	0	9	0.3	0	1	14	1047	0	0
CD 4790M	1	2	0	2	0	4	-	-	-	-	-	-	40
CE 4772S?	0	2	0	2	0	1	-	-	-	-	-	-	0
CF 4756M	0	7	0	12	0	2	0.1	1	1	12	3656	0	110
CG 4751M	0	7	0	12	0	0	0.1	3	1	26	4696	0	280
CH 4727M	0	3	0	2	0	2	0.1	0	1	28	5090	0	0

LINE 11070	(FLIGHT	29)											
A 1323S	5	17	7	33	0	4	0.2	0	1	24	326	0	0
B 1333B	13	15	22	24	15	8	1.0	6	1	31	124	11	0
C 1352B	51	23	107	43	30	34	5.4	3	1	43	23	30	12
D 1366D	20	26	7	37	3	6	1.1	10	1	20	326	0	0
E 1372B	17	31	14	53	1	11	0.7	9	1	20	240	1	0
F 1379B	24	29	70	67	6	17	1.2	4	1	21	73	6	50
G 1389D	61	68	75	139	14	31	1.9	1	1	17	194	0	0
H 1398B?	1	2	1	2	0	1	-	-	-	-	-	-	0
I 1402B	9	18	13	33	0	6	0.5	3	1	15	656	0	20
J 1405B	4	16	13	37	0	6	0.3	0	1	17	1069	0	0
K 1418M	7	9	8	16	0	3	0.8	35	1	4	2960	0	50
L 1432M	14	1	23	45	0	10	58.4	54	1	6	2560	0	320
M 1436B?	15	43	23	76	0	10	0.4	0	1	7	617	0	0
N 1444M	0	8	0	5	0	1	0.1	2	1	11	3530	0	80
O 1447M	0	8	0	17	0	2	0.1	2	1	3	2868	0	130
P 1456M	0	2	0	2	0	2	-	-	-	-	-	-	200
Q 1464S?	7	19	11	30	0	6	0.4	0	1	16	544	0	100
R 1472B?	9	18	9	44	0	7	0.5	5	1	20	732	0	0
S 1475B?	5	24	9	44	1	7	0.2	3	1	18	991	0	70
T 1489S?	26	41	53	78	4	18	0.9	0	1	17	146	0	20

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE	11070	(FLIGHT		29)											
U	1498B?	19	24	41	46	5	12	1.1	0	1	18	133	0	0	
V	1514B?	13	18	26	43	3	9	0.8	17	1	25	216	5	0	
W	1519D	22	23	17	17	4	24	1.4	13	1	23	199	4	0	
X	1524B	64	49	66	76	36	28	2.9	0	1	18	57	4	0	
Y	1530B	40	268	176	543	30	79	0.3	0	1	21	34	10	0	
Z	1533B	40	268	176	543	30	79	0.3	0	1	11	47	1	0	
AA	1537B	38	128	150	542	18	74	0.5	0	1	20	67	7	1050	
AB	1544B	20	5	22	18	16	10	8.1	30	1	26	37	13	0	
AC	1554B	32	24	28	51	3	8	2.4	11	1	19	60	6	0	
AD	1559B	30	53	90	97	26	17	0.9	12	1	26	89	12	0	
AE	1577B?	23	159	54	337	18	54	0.2	0	1	13	137	0	0	
AF	1591B?	34	49	48	81	0	16	1.1	9	1	20	275	1	0	
AG	1600B	29	45	96	94	4	21	1.0	3	1	21	223	1	0	
AH	1603B	48	45	96	94	7	21	2.0	1	1	14	123	0	0	
AI	1609B	23	33	62	69	8	20	1.0	2	1	19	58	5	440	
AJ	1626B	1	2	1	2	2	4	-	-	-	-	-	-	0	
AK	1636B	42	108	90	204	13	42	0.7	0	1	22	102	7	5	
AL	1642B	45	73	94	123	18	42	1.1	0	1	21	102	6	0	
AM	1649D	10	28	4	35	6	4	0.4	0	1	28	148	10	720	
AN	1659B	54	28	151	117	16	49	4.5	3	1	17	29	5	13	
AO	1663B	91	74	162	131	43	60	3.0	0	1	18	24	7	0	
AP	1674B	21	62	6	121	12	9	0.5	0	1	12	195	0	160	
AQ	1677B	22	102	22	194	2	29	0.3	0	1	14	291	0	0	
AR	1693B	23	13	37	13	34	44	3.1	7	1	24	20	13	0	
AS	1700B	23	43	47	84	3	21	0.8	0	1	26	67	11	70	
AT	1712B	33	52	53	35	5	19	1.0	0	1	24	61	10	0	
AU	1716B	1	2	1	2	2	4	-	-	-	-	-	-	0	
AV	1719B	46	92	103	207	12	38	0.9	0	1	17	89	3	0	
AW	1727B	35	22	56	76	17	24	3.0	16	1	37	56	22	0	
AX	1730B	19	36	27	76	0	16	0.7	9	1	28	160	10	0	
AY	1737B?	24	33	41	57	0	12	1.0	14	1	23	131	7	60	
AZ	1742B	108	111	230	236	25	71	2.4	0	1	16	34	5	0	
BA	1749B?	17	25	22	34	5	3	0.9	0	1	23	68	8	4	
BB	1767S	9	19	19	29	4	7	0.5	6	1	40	188	18	0	
BC	1787B?	16	18	44	50	5	22	1.2	11	1	34	60	19	0	
BD	1794B	33	47	67	86	6	25	1.2	0	1	22	74	7	0	
BE	1798B	31	30	67	86	6	25	1.7	1	1	22	100	6	0	
BF	1804B?	10	10	17	18	1	4	1.1	7	1	23	133	3	0	
BG	1815B?	9	8	13	17	4	4	1.3	27	1	40	152	19	0	
BH	1821B?	16	12	30	20	0	6	1.8	25	1	34	276	12	110	
BI	1832D	17	12	23	23	0	5	2.1	28	1	31	429	6	0	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11070	(FLIGHT	29)											
BJ 1842B?	9	11	20	38	0	7	0.8	28	1	30	518	5	0
BK 1863S?	1	2	1	2	0	4	-	-	-	-	-	-	0
BL 1878B?	9	6	17	16	3	7	1.8	32	1	40	237	16	0
BM 1884B?	12	10	18	33	3	7	1.3	28	1	43	346	17	19
BN 1901M	0	2	5	3	0	1	1.6	54	1	28	5517	0	0
BO 1914S	1	11	2	5	0	2	0.2	35	1	14	3029	0	0
BP 1919S	1	7	2	10	0	2	0.1	13	1	17	2698	0	0
BQ 1967M	0	2	0	2	0	4	-	-	-	-	-	-	0
BR 1975M	0	25	1	51	0	7	0.1	10	1	4	2227	0	4
BS 1986M	0	11	0	14	0	2	0.1	8	1	26	4336	0	0
BT 1989B?	0	11	0	14	0	2	0.1	6	1	20	3886	0	0
BU 1995M	0	2	0	6	0	1	0.1	3	1	20	4227	0	60
BV 2001S?	0	6	0	16	0	2	0.1	0	1	6	3402	0	0
BW 2007S?	0	22	0	48	0	7	0.1	10	1	7	2536	0	0
BX 2009M	1	2	0	2	0	4	-	-	-	-	-	-	0
BY 2020S	0	6	2	11	0	2	0.1	0	1	19	4665	0	0
BZ 2024M	0	4	0	5	0	1	0.1	4	1	40	5666	0	0
CA 2042S	0	5	0	7	0	1	0.1	0	1	10	4125	0	0
CB 2050M	0	14	0	26	0	1	0.1	8	1	30	4616	0	370
CC 2052B?	0	14	0	26	0	4	0.1	10	1	18	3414	0	5

LINE 11080	(FLIGHT	29)											
A 2888S?	15	73	38	137	5	21	0.3	0	1	22	200	4	20
B 2879B	7	13	26	27	11	4	0.5	8	1	31	147	11	0
C 2862B	84	57	162	98	42	60	3.7	6	1	27	106	11	40
D 2858B	84	37	162	65	42	60	6.4	0	1	21	20	11	170
E 2852S	8	24	8	43	1	7	0.3	1	1	24	490	0	12
F 2837B?	5	34	19	59	3	12	0.1	0	1	10	683	0	0
G 2826D	22	30	39	54	4	13	1.1	1	1	22	223	1	0
H 2824D	22	16	20	54	3	7	2.2	9	1	21	312	0	0
I 2819S?	8	33	14	54	0	8	0.3	0	1	14	528	0	0
J 2816S?	4	21	14	54	0	8	0.3	0	1	24	951	0	0
K 2809B?	1	2	1	2	0	2	-	-	-	-	-	-	16
L 2806B?	1	2	1	2	0	1	-	-	-	-	-	-	0
M 2798B?	3	15	10	27	0	4	0.4	0	1	20	1028	0	14
N 2795M	3	15	10	27	0	4	0.4	0	1	0	3414	0	14
O 2782B?	24	32	56	58	0	18	1.1	0	1	17	205	0	0
P 2781B?	24	32	56	58	0	18	1.1	2	1	16	341	0	0
Q 2776M	0	0	0	29	0	5	0.1	5	1	1	2417	0	0
R 2768S?	0	34	0	74	0	10	0.1	12	1	0	1509	0	70
S 2760B?	16	61	32	112	0	15	0.3	0	1	9	519	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 11080	(FLIGHT	29)												
T 2758M	16	61	32	112	0	15	0.3	0	1	0	2001	0	150	
U 2754B?	8	15	19	9	0	1	0.5	25	1	22	965	0	0	
V 2749B?	12	92	112	173	9	31	0.2	0	1	12	159	0	0	
W 2744B?	56	69	112	119	9	37	1.6	0	1	13	74	0	0	
X 2726S?	11	55	15	90	0	12	0.2	0	1	13	542	0	0	
Y 2706B?	41	48	206	343	27	64	1.5	7	1	14	54	2	0	
Z 2693B?	5	11	19	28	5	6	0.4	3	1	28	125	9	0	
AA 2685B?	6	12	14	35	6	5	0.5	8	1	26	180	6	0	
AB 2674B?	14	19	28	42	8	10	0.8	5	1	27	133	8	0	
AC 2665S?	1	2	1	2	2	4	-	-	-	-	-	-	30	
AD 2652B?	44	94	168	101	12	57	0.8	0	1	17	39	5	50	
AE 2646B?	27	36	19	82	12	20	1.1	2	1	19	71	4	0	
AF 2628S?	30	90	64	178	7	33	0.5	0	1	17	135	2	0	
AG 2616S?	10	57	18	99	8	14	0.2	0	1	22	205	3	50	
AH 2610S?	15	34	30	60	10	10	0.6	0	1	20	107	3	0	
AI 2603S?	25	48	49	91	10	23	0.7	0	1	19	97	3	0	
AJ 2583S?	16	61	34	87	10	11	0.3	0	1	8	706	0	410	
AK 2568B?	19	10	27	15	10	19	3.1	7	1	19	41	5	14	
AL 2558B?	21	50	85	87	22	35	0.6	0	1	19	46	6	0	
AM 2550B	6	81	22	203	1	16	0.1	0	1	9	130	0	11	
AN 2548B	43	90	22	203	1	16	0.8	0	1	8	158	0	17	
AO 2544B	19	88	49	177	0	25	0.3	0	1	10	249	0	0	
AP 2541B	9	45	25	177	0	25	0.2	0	1	14	432	0	5	
AQ 2534S?	15	57	37	93	4	15	0.3	0	1	10	285	0	110	
AR 2529B?	35	39	29	95	18	5	1.5	0	1	16	105	0	5	
AS 2524B?	35	39	18	83	21	20	1.5	0	1	28	46	13	0	
AT 2521B?	15	39	29	83	16	20	0.5	2	1	25	110	9	100	
AU 2509B?	30	30	14	61	15	11	1.6	5	1	24	57	10	0	
AV 2498B	24	95	101	268	10	59	0.4	0	1	16	52	4	12	
AW 2495B	100	145	171	268	15	59	1.6	0	1	14	62	2	0	
AX 2488B?	27	3	43	29	7	13	38.1	29	1	25	136	8	7	
AY 2469B	43	44	143	73	14	33	1.8	0	1	24	38	11	0	
AZ 2460B?	21	23	36	52	0	11	1.2	13	1	20	162	3	4	
BA 2444B?	30	47	41	86	6	33	1.0	6	1	23	77	9	0	
BB 2424B	37	29	80	92	11	32	2.3	7	1	36	24	24	0	
BC 2417B?	15	31	27	55	16	27	0.6	0	1	26	75	10	0	
BD 2401D	13	20	4	21	0	3	0.7	9	1	30	1238	0	0	
BE 2385B?	16	17	22	21	0	6	1.2	5	1	19	636	0	0	
BF 2351B?	9	12	31	14	0	10	0.7	28	1	35	249	14	0	
BG 2325B?	1	2	1	2	0	4	-	-	-	-	-	-	12	
BH 2284B?	32	61	76	121	0	30	0.8	9	1	25	195	8	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR					
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT				
LINE 11080	(FLIGHT 29)												
BI 2257S	1	8	1	9	0	1	0.1	5	1	22	4944	0	0
BJ 2255M	1	2	1	2	0	1	-	-	-	-	-	-	340
BK 2246M	1	2	1	3	0	1	0.1	26	1	36	5823	0	80
BL 2241M	0	6	0	7	0	1	0.1	0	1	24	5194	0	80
BM 2232M	0	3	0	9	0	1	0.1	0	1	24	5008	0	100
BN 2209M	0	7	0	4	0	1	0.1	0	1	26	5229	0	60
BO 2202M	0	2	0	2	0	0	-	-	-	-	-	-	80
BP 2199S	0	2	0	1	0	0	-	-	-	-	-	-	0
BQ 2184M	0	4	0	4	0	1	0.1	0	1	45	5971	0	220
BR 2174M	0	3	0	6	0	2	0.1	0	1	44	6021	0	4
LINE 11090	(FLIGHT 29)												
A 2996S	1	2	1	2	1	4	-	-	-	-	-	-	0
B 3004S	15	35	34	70	4	12	0.5	0	1	21	179	2	30
C 3016B	1	2	1	2	2	1	-	-	-	-	-	-	0
D 3024B?	3	17	3	34	6	4	0.1	0	1	28	403	3	110
E 3031B	1	2	1	2	2	4	-	-	-	-	-	-	0
F 3035B	22	17	49	27	12	15	2.0	0	1	26	34	13	0
G 3052S	6	18	5	40	1	6	0.3	3	1	21	320	0	60
H 3054B?	10	27	21	54	0	9	0.4	8	1	29	384	6	0
I 3056B?	10	27	21	54	0	9	0.4	9	1	26	456	3	0
J 3058B?	3	36	21	43	0	6	0.6	7	1	12	1160	0	0
K 3068S?	10	28	24	49	0	7	0.4	0	1	14	324	0	0
L 3085S?	3	12	11	16	0	2	0.7	5	1	18	608	0	0
M 3089S?	6	21	13	34	0	6	0.3	0	1	12	564	0	0
N 3100B?	1	15	8	25	0	3	0.3	3	1	0	3103	0	0
O 3107S?	12	26	25	48	0	7	0.5	0	1	15	477	0	0
P 3112M	0	25	24	48	0	7	0.6	1	1	0	2501	0	0
Q 3132S?	1	2	1	2	2	4	-	-	-	-	-	-	0
R 3142B	45	58	76	92	12	28	1.4	0	1	21	76	6	0
S 3154B?	7	17	28	79	1	11	0.4	5	1	19	375	0	0
T 3157S?	12	43	28	79	1	11	0.3	0	1	11	263	0	0
U 3163B?	11	8	41	99	0	11	1.7	38	1	16	574	0	0
V 3166M	11	76	30	155	0	31	0.2	0	1	0	1878	0	0
W 3169B?	10	76	30	155	0	31	0.1	0	1	3	549	0	0
X 3185S	20	47	36	68	3	12	0.6	0	1	19	323	0	5
Y 3192B	155	165	97	348	21	90	2.6	0	1	14	62	2	310
Z 3194B	155	172	97	348	21	90	2.5	0	1	15	37	5	0
AA 3198B	22	1	199	229	14	60	49.0	26	1	21	47	8	0
AB 3208B	56	143	104	201	9	39	0.8	0	1	13	64	0	0
AC 3218B	10	45	25	130	13	32	0.3	0	1	23	91	8	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11090	(FLIGHT		29)											
AD 3254S?	19	138	52	273	7	39	0.2	0	1	10	196	0	0	
AE 3272S?	6	40	50	91	6	16	0.1	0	1	15	687	0	0	
AF 3278B	64	121	137	222	9	42	1.1	0	1	17	99	3	0	
AG 3294M	7	2	38	40	5	8	4.6	67	1	4	2407	0	0	
AH 3307B	37	80	53	172	11	27	0.8	4	1	7	341	0	0	
AI 3318D	48	178	106	299	16	57	0.5	0	1	12	155	0	0	
AJ 3331B	16	31	43	20	2	13	0.6	6	1	25	209	5	0	
AK 3340M	56	105	147	178	1	25	1.0	2	1	11	187	0	570	
AL 3345B	69	33	147	178	1	25	5.4	12	1	16	68	3	0	
AM 3351B	31	99	73	245	8	42	0.5	0	1	13	140	0	1470	
AN 3365B	3	37	198	210	23	76	2.5	0	1	22	33	10	0	
AO 3367B	42	44	62	264	20	49	1.7	7	1	26	39	14	0	
AP 3370B	42	44	62	299	22	49	1.7	8	1	16	34	6	0	
AQ 3377B	118	194	247	326	29	93	1.5	0	1	17	31	7	0	
AR 3379B	118	194	247	326	29	93	1.5	0	1	13	45	2	0	
AS 3387D	20	45	24	98	6	10	0.6	6	1	12	376	0	0	
AT 3389D	20	27	24	98	6	10	1.0	12	1	15	264	0	120	
AU 3399B	118	111	237	211	47	93	2.8	0	1	15	32	5	0	
AV 3403B	50	49	237	76	46	28	2.0	7	1	20	36	9	0	
AW 3409B	28	35	58	72	12	18	1.2	2	1	16	42	3	0	
AX 3416B	26	31	47	56	17	17	1.3	5	1	17	43	5	0	
AY 3419B	30	48	128	69	17	18	0.9	0	1	18	51	5	0	
AZ 3447B?	39	13	74	21	14	23	7.1	6	1	33	37	19	0	
BA 3459B	10	7	23	13	2	5	1.7	22	1	32	95	13	20	
BB 3462B	4	6	23	8	2	1	5.0	16	1	36	165	14	0	
BC 3472B	54	21	98	35	27	40	6.7	0	1	23	13	13	0	
BD 3476B	1	2	1	2	1	4	-	-	-	-	-	-	0	
BE 3483B	29	15	57	27	20	24	3.6	0	1	26	20	15	5	
BF 3489B	8	13	12	22	8	4	0.6	0	1	29	87	11	5	
BG 3494B	24	9	6	14	10	13	5.8	8	1	37	92	18	0	
BH 3505D	9	20	9	23	1	3	0.5	4	1	28	1608	0	0	
BI 3514M	0	1	1	2	0	1	-	-	-	-	-	-	0	
BJ 3522S?	0	3	6	8	0	1	0.5	29	1	27	5417	0	80	
BK 3528D	10	10	12	10	2	2	1.0	12	1	38	1223	0	0	
BL 3538S	1	2	1	2	0	2	-	-	-	-	-	-	0	
BM 3563S	1	2	1	2	0	3	-	-	-	-	-	-	13	
BN 3599S	0	2	0	2	0	3	-	-	-	-	-	-	0	
BO 3605M	0	2	0	2	0	1	-	-	-	-	-	-	0	
BP 3618B?	5	11	6	16	0	2	0.3	10	1	32	2450	0	0	
BQ 3627B?	1	2	1	2	0	1	-	-	-	-	-	-	0	
BR 3648S?	1	7	2	10	0	1	0.1	0	1	14	4265	0	40	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11090	(FLIGHT 29)														
BS 3659D	11 16	10	23	0	5	0.7	8	1	27	1118	0	0			
BT 3673B?	0 5	0	3	0	1	0.1	3	1	14	3771	0	0			
BU 3676B?	0 7	0	6	0	1	0.1	3	1	14	3671	0	0			
BV 3679M	0 7	0	6	0	1	0.1	6	1	17	3709	0	0			
BW 3689M	1 2	1	2	0	4	-	-	-	-	-	-	0			
BX 3697S?	6 23	1	44	0	9	0.2	11	1	21	775	0	0			
BY 3704B?	10 9	16	12	0	6	1.2	33	1	39	287	16	0			
BZ 3730S?	0 11	0	33	0	6	0.1	10	1	2	2088	0	0			

LINE 11100	(FLIGHT 29)														
A 4556B?	6 19	11	39	6	17	0.3	5	1	31	261	9	0			
B 4552D	8 18	6	24	6	4	0.4	4	1	25	285	3	7			
C 4545B?	1 2	1	2	2	3	-	-	-	-	-	-	0			
D 4537B?	7 15	5	31	13	4	0.4	17	1	35	399	10	0			
E 4530B	24 15	52	24	23	26	2.6	19	1	44	39	30	0			
F 4512B?	26 53	44	102	0	14	0.7	0	1	24	374	0	0			
G 4508S?	0 37	31	74	0	9	0.6	2	1	0	2121	0	180			
H 4500S?	7 33	15	54	0	7	0.2	0	1	10	790	0	40			
I 4497S?	4 33	5	54	0	7	0.1	0	1	17	837	0	0			
J 4490B?	13 31	36	38	3	7	0.5	1	1	21	267	1	0			
K 4487B?	10 18	36	21	3	2	0.6	9	1	24	309	1	0			
L 4479D	40 34	54	52	7	16	2.1	4	1	21	182	2	0			
M 4467S?	7 56	15	109	0	14	0.1	0	1	11	457	0	100			
N 4461S?	20 40	42	106	0	14	0.7	2	1	12	228	0	9			
O 4439B	70 44	120	83	27	46	3.8	1	1	22	26	11	410			
P 4428B	13 71	89	141	15	17	0.2	0	1	13	226	0	0			
Q 4424D	52 4	89	193	15	20	64.9	9	1	24	35	11	250			
R 4420B?	45 101	75	193	14	27	0.8	0	1	10	196	0	0			
S 4417D	25 113	76	167	5	28	0.4	0	1	17	210	0	0			
T 4414D	25 46	76	167	5	28	0.8	1	1	17	267	0	4			
U 4405S?	4 38	15	79	0	11	0.2	0	1	0	1850	0	170			
V 4374B?	19 40	17	96	21	10	0.6	3	1	17	138	1	140			
W 4368B	9 25	48	35	16	15	0.4	1	1	24	56	10	0			
X 4356B	11 54	28	116	7	16	0.2	0	1	16	106	1	200			
Y 4350B	35 45	62	50	7	19	1.3	0	1	20	75	5	0			
Z 4338B	8 10	19	18	5	6	0.8	24	1	34	133	15	20			
AA 4322H	16 56	42	110	5	16	0.4	0	1	18	172	0	200			
AB 4311H	15 33	36	74	4	12	0.6	0	1	16	112	0	1190			
AC 4291S?	12 16	24	35	0	6	0.8	13	1	26	262	4	0			
AD 4275B?	11 15	11	19	2	4	0.8	15	1	32	315	8	0			
AE 4266S?	14 29	18	67	11	12	0.5	2	1	29	137	11	0			

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11100	(FLIGHT	29)											
AF 4259B	1	2	1	2	2	4	-	-	-	-	-	-	0
AG 4255B	12	16	4	226	11	35	0.9	6	1	24	94	7	0
AH 4251B?	22	113	34	234	11	36	0.3	0	1	15	175	0	90
AI 4236B?	15	43	31	86	9	18	0.4	0	1	21	179	3	100
AJ 4229B?	40	56	70	113	17	24	1.2	2	1	20	75	6	0
AK 4218B	12	50	32	95	6	14	0.3	0	1	21	40	9	210
AL 4203B	72	53	69	97	21	56	3.2	2	1	23	33	12	0
AM 4185B?	25	41	32	60	13	13	0.9	0	1	20	128	3	0
AN 4178B	57	8	95	32	37	79	28.5	7	1	22	23	11	0
AO 4176B	89	131	105	340	37	48	1.5	0	1	13	52	2	0
AP 4172B	57	104	105	340	19	48	1.0	2	1	25	67	11	1300
AQ 4169B?	26	43	31	48	7	42	0.9	6	1	16	98	2	80
AR 4153D	28	42	16	54	0	10	1.0	5	1	22	366	0	0
AS 4127B	48	47	125	91	19	40	1.9	3	1	28	32	16	0
AT 4114B	26	28	44	54	8	13	1.4	6	1	26	63	12	0
AU 4096B	78	60	165	103	8	50	3.1	8	1	23	37	12	0
AV 4086B?	8	39	29	79	0	22	0.2	0	1	34	110	17	0
AW 4074B?	16	53	45	92	3	14	0.4	0	1	23	186	4	0
AX 4072B?	26	19	45	106	0	27	2.2	16	1	22	139	5	0
AY 4071B?	26	19	45	106	0	27	2.2	16	1	21	139	4	0
AZ 4064B?	6	14	51	22	5	15	0.4	13	1	18	1510	0	0
BA 4055D	10	15	4	11	0	3	0.7	16	1	13	2779	0	0
BB 4037B?	16	24	14	37	0	6	0.8	8	1	17	1124	0	0
BC 4024S?	1	2	0	2	0	2	-	-	-	-	-	-	0
BD 4011S	3	10	5	22	0	3	0.2	1	1	20	1552	0	0
BE 3985S	0	2	0	2	0	3	-	-	-	-	-	-	100
BF 3979M	0	10	0	24	0	2	0.1	5	1	32	5041	0	30
BG 3965M	0	3	0	10	0	1	0.1	4	1	31	5074	0	8
BH 3951S	0	2	0	2	0	1	-	-	-	-	-	-	0
BI 3931S	1	2	0	2	0	2	-	-	-	-	-	-	0
BJ 3906S	1	2	1	2	0	2	-	-	-	-	-	-	0
BK 3901M	1	2	0	2	0	3	-	-	-	-	-	-	50
BL 3898D	3	16	0	18	0	3	0.1	3	1	10	3656	0	0
BM 3897M	3	16	0	18	0	3	0.1	4	1	11	3656	0	360
BN 3892M	0	2	0	2	0	0	0.1	10	1	25	4696	0	190
BO 3864M	1	2	1	2	0	1	-	-	-	-	-	-	80
BP 3859S?	2	12	1	15	0	2	0.1	0	1	5	3699	0	70
BQ 3852M	1	3	0	9	0	0	0.1	8	1	27	5141	0	0
BR 3833D?	5	8	5	2	0	1	2.6	60	1	37	922	5	0

LINE 11110	(FLIGHT	29)											
A 4630B?	7	18	9	29	3	4	0.4	1	1	24	363	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11110	(FLIGHT	29)											
B 4637B?	7	13	9	23	3	4	0.5	10	1	27	343	3	4
C 4654B	38	21	78	35	23	31	3.6	1	1	32	27	19	0
D 4661D	17	21	32	34	11	21	1.0	5	1	28	405	2	0
E 4666B?	2	5	10	31	0	6	0.3	0	1	17	2794	0	80
F 4673S?	8	8	18	33	0	6	1.0	39	1	1	2435	0	0
G 4686B?	1	2	1	2	2	4	-	-	-	-	-	-	0
H 4688B?	13	22	23	27	1	8	0.7	1	1	25	145	6	0
I 4694B?	8	12	10	27	1	3	0.7	12	1	25	221	3	0
J 4700D	19	33	17	47	3	6	0.7	3	1	22	249	1	0
K 4707D	37	37	31	85	3	16	1.7	11	1	25	294	4	40
L 4714D	10	18	9	9	1	4	0.6	18	1	22	911	0	15
M 4719B?	4	16	22	24	6	2	1.1	1	1	23	754	0	140
N 4729B	103	100	139	99	28	69	2.5	0	1	23	31	12	0
O 4737B?	9	13	33	61	11	12	0.7	19	1	30	93	13	7
P 4740D	54	36	33	61	11	12	3.2	15	1	28	95	13	0
Q 4744D	10	28	6	53	8	12	0.4	12	1	43	103	25	250
R 4753D	7	17	5	28	10	1	0.4	0	1	23	201	2	60
S 4761B	85	76	171	126	27	55	2.6	0	1	20	22	9	0
T 4779B?	16	24	25	57	0	9	0.8	0	1	9	495	0	7
U 4781B?	16	19	25	57	0	9	1.1	5	1	13	664	0	0
V 4786M	1	7	14	29	0	5	0.5	8	1	11	3671	0	70
W 4795B?	10	12	20	23	0	3	0.9	33	1	13	3557	0	0
X 4803D	79	179	198	376	2	70	1.0	0	1	14	89	1	0
Y 4808D	104	162	203	373	13	65	1.5	0	1	10	78	0	0
Z 4822B?	6	33	6	93	3	14	0.2	5	1	14	244	0	40
AA 4855B?	13	78	28	145	2	21	0.2	0	1	18	193	2	1150
AB 4873B?	22	71	47	149	5	21	0.4	0	1	16	178	0	0
AC 4884B	25	19	49	87	12	14	2.1	15	1	22	105	6	0
AD 4912B?	11	41	19	75	3	6	0.3	0	1	19	201	1	5
AE 4917B?	7	12	7	22	3	2	0.5	24	1	19	201	1	0
AF 4921B?	8	10	12	18	4	2	0.8	31	1	21	180	3	0
AG 4927B?	5	83	39	132	2	19	0.1	0	1	15	184	0	1220
AH 4936B?	13	23	37	32	8	11	0.6	18	1	25	522	3	1330
AI 4947D	25	85	46	142	8	22	0.5	0	1	19	206	2	0
AJ 4955B	90	142	192	252	36	70	1.4	0	1	21	34	9	0
AK 4956B	116	142	192	252	36	70	2.0	0	1	17	42	6	6
AL 4970B	126	164	197	698	30	102	2.0	0	1	12	42	1	0
AM 4974B	63	164	197	698	24	102	0.8	0	1	11	50	1	0
AN 4987B?	11	59	28	112	4	15	0.2	0	1	21	305	1	0
AO 5000B	51	49	90	76	30	46	2.1	0	1	24	38	11	0
AP 5002B	48	89	90	145	30	46	1.0	0	1	23	34	10	1440

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M		COND DEPTH SIEMEN M		RESIS OHM-M	DEPTH M	NT	

LINE 11110	(FLIGHT	29)												
AQ 5005B?	48	89	90	145	30	24	1.0	2	1	17	217	0	310	
AR 5009B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
AS 5013B	50	58	95	115	20	36	1.6	1	1	24	55	10	0	
AT 5019D	27	34	86	48	7	15	1.2	2	1	28	82	12	0	
AU 5025D	33	103	194	207	50	35	0.5	0	1	10	127	0	0	
AV 5030B	16	67	197	73	50	70	0.3	0	1	20	18	10	0	
AW 5041B	38	11	70	23	20	26	9.3	10	1	29	21	18	0	
AX 5049B	27	23	39	19	5	10	2.0	2	1	24	55	9	0	
AY 5052B	1	2	1	2	2	4	-	-	-	-	-	-	0	
AZ 5060B?	38	39	61	68	17	24	1.7	7	1	31	46	18	0	
BA 5067B	8	15	20	94	3	6	0.5	25	1	26	105	11	5	
BB 5071B	32	53	158	94	5	62	1.0	10	1	29	60	16	0	
BC 5074B	90	89	181	147	6	70	2.4	6	1	31	24	20	0	
BD 5081B?	39	40	74	80	16	15	1.7	12	1	33	133	15	0	
BE 5088B?	0	37	35	74	3	15	0.7	8	1	0	1823	0	0	
BF 5104M	0	17	0	36	0	6	0.1	6	1	2	2430	0	140	
BG 5115M	0	2	1	2	0	3	-	-	-	-	-	-	110	
BH 5123D	14	25	11	46	0	6	0.7	14	1	21	957	0	7	
BI 5152M	0	2	2	6	0	2	0.2	28	1	39	5771	0	0	
BJ 5171S	0	2	0	2	0	3	-	-	-	-	-	-	40	
BK 5182S	0	2	0	2	0	1	-	-	-	-	-	-	0	
BL 5195S?	0	13	0	23	0	3	0.1	2	1	11	3497	0	0	
BM 5208B?	0	17	9	23	1	2	0.3	9	1	6	3203	0	250	
BN 5217S	4	12	8	12	0	3	0.5	7	1	35	781	2	50	
BO 5248M	0	2	0	5	0	1	0.1	4	1	37	5517	0	0	
BP 5262D	6	25	5	17	0	4	0.2	0	1	17	3290	0	0	
BQ 5278M	0	0	0	0	0	0	0.4	86	1	29	5866	0	270	
BR 5296S	1	2	1	2	0	2	-	-	-	-	-	-	0	
BS 5306M	0	2	1	2	0	4	-	-	-	-	-	-	60	
BT 5307B?	0	18	8	30	0	5	0.2	4	1	5	2958	0	0	
BU 5320S?	12	19	22	44	0	7	0.7	11	1	18	445	0	0	

LINE 11120	(FLIGHT	29)												
A 6130S?	5	24	12	45	2	9	0.3	0	1	22	411	0	40	
B 6125S?	5	5	11	35	4	4	0.3	0	1	25	385	1	0	
C 6109B	9	5	29	7	13	10	2.1	31	1	39	98	20	0	
D 6093B	3	21	18	49	0	11	0.4	0	1	22	542	0	0	
E 6087B	16	23	18	49	0	11	0.8	12	1	22	321	1	0	
F 6082B	21	43	36	77	3	15	0.7	0	1	22	129	5	0	
G 6079D	1	2	1	2	2	4	-	-	-	-	-	-	0	
H 6071S	5	16	11	28	1	6	0.3	0	1	28	531	0	5	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR					
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	RESIS OHM-M	DEPTH M	NT
LINE 11120	(FLIGHT	29)											
I 6061B	12	16	12	29	2	4	0.8	7	1	26	472	0	0
J 6053B	19	9	28	12	13	11	3.7	8	1	43	183	19	4
K 6051B	18	9	28	7	13	11	3.4	0	1	26	55	9	0
L 6043B	36	18	72	34	24	29	4.0	3	1	32	19	20	0
M 6039B?	7	13	61	33	16	1	0.4	7	1	21	191	1	70
N 6034B	41	10	72	30	23	24	11.1	3	1	22	48	7	0
O 6032B	40	10	72	154	23	24	10.5	0	1	20	19	9	0
P 6022B	89	85	144	214	15	38	2.5	0	1	18	40	6	550
Q 6016D	26	41	35	70	7	10	1.0	6	1	26	143	9	200
R 6004B	87	45	163	60	33	57	5.4	1	1	19	28	8	0
S 5999B	156	188	155	369	6	113	2.3	0	1	17	29	7	560
T 5990S	0	9	2	11	1	2	0.1	8	1	24	2258	0	8
U 5981S	0	11	1	18	0	2	0.1	4	1	20	2554	0	0
V 5968S?	5	14	6	48	1	8	0.1	0	1	20	549	0	20
W 5957B	92	82	207	165	44	74	2.7	0	1	21	34	9	0
X 5948B	30	41	40	67	15	28	1.1	8	1	25	114	9	220
Y 5941B?	2	19	27	28	8	2	1.3	18	1	23	313	3	0
Z 5937B?	12	37	25	51	2	8	0.4	7	1	25	227	7	40
AA 5935B?	16	71	58	51	5	8	0.3	0	1	27	193	9	0
AB 5921S	13	67	31	161	2	21	0.2	0	1	10	518	0	0
AC 5905D	30	82	72	132	3	24	0.6	0	1	16	276	0	0
AD 5901B	17	82	35	70	11	11	0.3	0	1	18	118	3	0
AE 5894D	14	30	146	273	7	50	0.5	4	1	19	110	3	0
AF 5887B	24	36	187	333	10	68	0.9	14	1	12	59	1	0
AG 5864B	63	86	122	171	16	44	1.5	0	1	16	70	2	0
AH 5858B	35	27	107	68	16	28	2.4	8	1	17	27	6	0
AI 5847B?	40	101	84	205	20	32	0.7	0	1	12	66	0	0
AJ 5839B	61	37	104	58	35	36	3.8	5	1	17	32	6	0
AK 5833B	91	71	181	131	28	64	3.2	0	1	17	28	6	0
AL 5814M	15	43	87	91	2	13	0.4	7	1	19	72	6	200
AM 5809D	33	60	55	124	32	14	0.9	5	1	13	48	2	8
AN 5805D	18	10	28	32	32	6	2.7	30	1	15	41	4	0
AO 5791M	24	2	38	24	0	3	37.4	43	1	14	403	0	4
AP 5787B	24	102	38	190	0	26	0.4	0	1	17	302	0	0
AQ 5774B	245	315	484	562	68	167	2.5	0	1	11	26	2	0
AR 5755B	26	14	38	16	9	3	3.2	12	1	33	204	11	1130
AS 5745B	16	1	126	82	52	33	49.0	29	1	24	15	14	0
AT 5737D	46	45	22	95	34	9	2.0	12	1	31	39	19	0
AU 5734D	38	47	77	88	34	36	1.4	13	1	33	47	20	5
AV 5725S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 5719B?	28	52	170	309	19	68	0.8	2	1	27	28	16	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 11120 (FLIGHT 29)															
AX	5714B	25	19	52	31	12	20	2.1	12	1	25	25	14	0	
AY	5702B	80	26	154	39	62	59	9.4	1	2	20	8	12	0	
AZ	5695B?	37	35	118	58	48	57	1.9	7	1	28	53	14	5	
BA	5682B?	63	79	108	145	20	41	1.6	5	1	25	57	12	0	
BB	5679S?	21	61	38	114	13	36	0.5	7	1	32	195	13	6	
BC	5668S?	15	24	17	48	10	7	0.7	20	1	35	358	12	60	
BD	5660B	90	100	188	187	13	57	2.1	1	1	20	47	8	0	
BE	5657B?	1	2	1	2	2	4	-	-	-	-	-	-	210	
BF	5654D	29	27	24	45	5	33	1.7	18	1	35	166	16	570	
BG	5650B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
BH	5646M	0	35	0	74	0	11	0.1	5	1	0	1996	0	0	
BI	5644S?	3	35	2	74	0	11	0.1	0	1	0	1785	0	0	
BJ	5630B?	6	32	6	32	0	8	0.1	0	1	0	3324	0	0	
BK	5623B?	6	18	7	33	0	8	0.3	13	1	3	1714	0	0	
BL	5612S	4	11	9	11	0	3	0.7	25	1	6	1475	0	0	
BM	5581S	0	25	0	47	0	6	0.1	1	1	0	2193	0	30	
BN	5575M	0	17	0	35	0	4	0.1	6	1	1	2311	0	0	
BO	5568S?	0	2	0	2	0	4	-	-	-	-	-	-	0	
BP	5563M	0	4	0	8	0	1	0.1	0	1	9	3755	0	0	
BQ	5557S?	0	2	0	2	0	3	-	-	-	-	-	-	0	
BR	5546M	3	6	5	40	0	7	0.1	0	1	1	2354	0	70	
BS	5543S?	2	6	5	40	0	6	0.1	0	1	0	2564	0	0	
BT	5536S?	0	28	4	56	0	9	0.1	0	1	0	2548	0	0	
BU	5526S?	1	20	3	41	0	6	0.1	0	1	1	2765	0	190	
BV	5519S?	0	2	0	2	0	2	-	-	-	-	-	-	17	
BW	5509M	0	1	0	2	0	1	-	-	-	-	-	-	0	
BX	5505S	0	11	0	17	0	2	0.1	0	1	20	4538	0	0	
BY	5498B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
BZ	5496D	20	32	22	16	0	7	0.8	8	1	41	1071	7	0	
CA	5490M	0	2	1	2	0	3	-	-	-	-	-	-	0	
CB	5482S	0	9	1	31	0	4	0.1	3	1	3	2661	0	0	
CC	5477S?	0	18	0	37	0	7	0.1	8	1	3	2316	0	1260	
CD	5468M	0	7	0	12	0	2	0.1	0	1	4	3251	0	0	
CE	5460S?	0	19	5	62	0	10	0.1	0	1	0	2385	0	0	
CF	5444M	0	14	0	25	0	4	0.1	5	1	9	3063	0	170	
CG	5437S?	5	36	24	82	0	12	0.1	0	1	17	619	0	0	
CH	5430S?	12	12	31	22	0	5	1.1	32	1	21	450	0	0	
CI	5423M	1	2	1	1	0	4	-	-	-	-	-	-	0	
CJ	5419M	2	20	11	37	0	5	0.3	5	1	0	1860	0	240	
CK	5412M	1	15	9	34	0	5	0.2	4	1	0	2017	0	0	
LINE 11130 (FLIGHT 29)															
A	6216B	28	21	80	40	29	29	2.2	5	1	31	24	19	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11130	(FLIGHT	29)											
B 6228D	14	4	7	6	10	8	6.2	20	1	35	121	15	0
C 6233B?	11	6	6	21	4	9	2.7	31	1	34	387	8	0
D 6252S?	9	17	5	28	1	6	0.6	0	1	22	336	0	0
E 6262B?	1	2	1	2	1	4	-	-	-	-	-	-	0
F 6267D	27	34	47	71	0	15	1.2	5	1	24	233	4	0
G 6282D	66	9	126	70	43	45	32.8	4	1	22	37	9	0
H 6289B	18	7	17	0	31	6	119.1	2	3	36	16	14	0
I 6303B	25	118	133	112	23	80	0.3	0	1	14	26	3	340
J 6315B	95	44	190	79	67	79	6.4	0	1	19	12	10	0
K 6320B	100	50	189	100	61	78	5.7	2	1	18	17	9	110
L 6329B	40	53	90	111	6	22	1.3	0	1	14	42	2	0
M 6338B	103	86	189	156	46	68	3.0	0	1	16	23	7	0
N 6341B	58	130	254	254	46	68	0.9	0	1	15	38	4	280
O 6350M	1	2	1	2	0	2	-	-	-	-	-	-	50
P 6355S?	1	2	1	2	0	1	-	-	-	-	-	-	7
Q 6362D	11	30	13	31	0	4	0.4	0	1	20	1098	0	120
R 6368D	7	12	7	27	0	2	0.5	15	1	26	1028	0	0
S 6373S	3	15	0	28	0	3	0.1	8	1	19	1724	0	0
T 6379B?	6	15	13	35	0	6	0.3	8	1	21	836	0	0
U 6382B	2	19	68	35	2	6	4.2	12	1	0	2147	0	40
V 6388B	61	68	123	123	6	30	1.8	0	1	17	89	2	210
W 6397B	100	100	195	201	43	65	2.4	2	1	15	61	3	0
X 6399B	60	100	195	201	43	65	1.2	0	1	23	36	12	70
Y 6410B	40	38	87	47	7	23	1.9	18	1	22	76	9	0
Z 6414B	26	49	86	47	1	23	0.8	12	1	17	232	1	770
AA 6426S?	4	18	8	38	0	5	0.2	0	1	21	698	0	20
AB 6433S?	5	17	10	29	1	4	0.3	4	1	17	636	0	0
AC 6438M	1	2	1	2	1	4	-	-	-	-	-	-	130
AD 6441B	102	173	191	303	13	64	1.4	0	1	14	88	1	0
AE 6453B	5	12	1	15	2	1	0.4	14	1	17	126	1	0
AF 6459B	22	79	67	171	3	27	0.4	0	1	18	109	3	0
AG 6466B	17	29	37	63	7	12	0.8	0	1	18	95	2	0
AH 6474B	22	39	76	82	16	24	0.8	3	1	24	107	7	0
AI 6477B	36	39	76	82	12	24	1.6	0	1	25	65	10	0
AJ 6481B	14	47	68	77	11	10	0.4	0	1	18	343	0	0
AK 6488D	32	17	22	90	11	29	3.7	0	1	23	128	4	0
AL 6495B	29	117	84	237	4	36	0.4	0	1	15	83	1	350
AM 6504B	1	2	1	2	2	4	-	-	-	-	-	-	0
AN 6513B	1	2	1	2	2	4	-	-	-	-	-	-	80
AO 6525B	47	49	133	101	15	40	1.8	8	1	14	37	3	0
AP 6543M	26	19	52	134	2	22	2.2	24	1	9	691	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN M	COND DEPTH SIEMEN M	RESIS OHM-M	DEPTH M	NT		
LINE 11130	(FLIGHT	29)											
AQ 6552B	57	35	119	66	34	42	3.7	0	1	22	42	9	0
AR 6559B	19	39	21	87	33	2	0.6	0	1	25	60	10	310
AS 6566B	40	53	94	135	18	29	1.3	0	1	18	59	4	0
AT 6581B	54	11	42	28	4	42	15.9	6	1	23	22	12	0
AU 6590D	21	51	37	90	11	11	0.6	0	1	21	79	6	0
AV 6595D	38	23	71	77	10	16	3.3	8	1	25	29	14	0
AW 6598D	45	45	71	77	12	19	1.9	0	1	19	44	7	0
AX 6615B	23	7	57	72	22	18	7.2	25	1	21	18	11	200
AY 6632B	24	28	54	53	2	20	1.2	10	1	39	63	23	6
AZ 6638B?	2	14	6	45	12	16	0.1	0	1	56	143	34	6
BA 6640B?	26	27	52	45	11	33	1.5	19	1	41	285	18	70
BB 6643B	26	40	61	66	0	19	1.0	15	1	50	69	34	0
BC 6646B	32	40	61	66	0	19	1.3	18	1	42	88	26	0
BD 6651B	24	9	24	64	19	9	5.6	30	1	46	37	33	0
BE 6657B	11	22	22	42	0	18	0.5	15	1	40	100	23	6
BF 6664D	42	11	71	27	11	15	10.8	15	1	37	91	19	0
BG 6670M	0	8	44	36	2	3	2.0	21	1	1	1941	0	5
BH 6674S?	0	16	0	32	0	4	0.1	6	1	0	2049	0	0
BI 6696B?	7	10	4	9	0	1	0.6	24	1	18	1467	0	0
BJ 6716S	0	14	0	26	0	3	0.1	5	1	1	2402	0	40
BK 6727M	0	9	0	14	0	5	0.1	11	1	4	2218	0	0
BL 6750S	0	2	1	2	0	2	-	-	-	-	-	-	0
BM 6764S?	1	25	10	55	0	8	0.2	0	1	0	2090	0	210
BN 6771M	0	21	4	36	0	6	0.1	0	1	0	2204	0	60
BO 6773S?	0	17	4	36	0	5	0.1	0	1	7	2689	0	30
BP 6780M	0	8	1	8	0	6	0.1	17	1	5	2420	0	40
BQ 6796S?	1	19	2	39	0	6	0.1	1	1	10	2901	0	110
BR 6810S?	0	2	0	2	0	3	-	-	-	-	-	-	18
BS 6821D	6	31	3	45	0	7	0.2	3	1	0	2204	0	0
BT 6826M	0	8	0	16	0	5	0.1	11	1	14	2981	0	890
BU 6838S	1	17	4	33	0	4	0.1	0	1	8	2382	0	0
BV 6840M	1	17	4	33	0	4	0.1	0	1	7	3284	0	0
BW 6847S?	2	14	7	22	0	3	0.2	2	1	15	1599	0	0
BX 6854M	1	2	1	2	0	2	-	-	-	-	-	-	0
BY 6860S?	1	21	9	44	0	6	0.2	0	1	10	1338	0	0
BZ 6872S?	6	30	6	66	0	10	0.2	4	1	6	1970	0	0
CA 6880S	4	14	18	28	0	5	0.8	11	1	24	757	0	0
CB 6885M	0	1	14	27	0	5	0.5	8	1	1	3116	0	180
CC 6894M	0	13	0	14	0	5	0.1	6	1	23	4227	0	220
LINE 11140	(FLIGHT	29)											
A 7666B	11	12	9	50	31	18	1.0	18	1	38	27	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL QUAD		REAL QUAD		REAL QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11140	(FLIGHT 29)													
B 7650B	30	18	54	31	9	15		3.2	17	1	35	50	21	0
C 7644B	19	18	38	34	4	10		1.4	7	1	23	74	7	230
D 7641B	23	18	38	34	4	10		1.9	4	1	19	63	4	0
E 7635B?	42	59	90	119	5	25		1.2	0	1	14	71	1	0
F 7625B	31	23	37	42	6	10		2.4	6	1	21	89	5	0
G 7618B	17	0	36	50	14	8		49.0	21	1	20	54	5	0
H 7611B	50	56	114	121	32	42		1.7	3	1	28	26	17	0
I 7606B	21	43	42	83	27	9		0.7	2	1	26	40	14	210
J 7603B	21	43	42	83	15	9		0.7	0	1	21	42	9	200
K 7599D	27	33	51	77	3	19		1.2	6	1	19	52	6	0
L 7590B	67	80	133	154	17	50		1.7	1	1	18	40	7	300
M 7588B	67	80	133	154	17	50		1.7	0	1	16	31	5	0
N 7581B	39	68	58	103	20	25		1.0	6	1	26	59	13	0
O 7572B	97	102	209	155	8	71		2.3	0	1	15	20	6	0
P 7570B	97	66	209	127	24	71		3.8	1	1	20	22	10	40
Q 7565B	1	2	1	2	2	4		-	-	-	-	-	-	0
R 7556B	63	74	135	153	12	42		1.7	0	1	20	61	6	70
S 7545M	8	34	25	59	1	8		0.3	2	1	0	1967	0	90
T 7534S?	7	61	6	128	0	16		0.1	0	1	14	909	0	6
U 7528B?	8	40	14	72	0	9		0.2	1	1	10	713	0	0
V 7522B?	15	26	15	57	0	8		0.7	12	1	11	485	0	70
W 7513S?	11	44	21	91	1	12		0.3	0	1	13	389	0	0
X 7502B	109	95	214	205	22	69		3.0	0	1	19	38	7	0
Y 7497B	44	11	88	21	18	30		11.4	20	1	20	39	9	0
Z 7493B	59	81	9	38	8	39		1.4	0	1	18	83	4	0
AA 7489B	42	55	9	94	8	39		1.3	3	1	21	181	3	0
AB 7475S	3	20	7	32	1	4		0.2	0	1	18	640	0	0
AC 7466B?	14	32	17	52	1	10		0.5	8	1	23	485	0	0
AD 7465B?	15	32	15	52	1	10		0.6	11	1	23	401	2	60
AE 7457B	102	178	208	368	26	82		1.3	0	1	15	66	3	0
AF 7446B	48	105	71	176	13	29		0.8	1	1	15	84	3	310
AG 7442B	76	105	71	176	14	29		1.5	0	1	18	97	3	0
AH 7434B?	9	26	14	39	3	7		0.3	1	1	34	510	7	0
AI 7412B?	18	45	36	87	0	15		0.5	0	1	18	314	0	0
AJ 7401B?	17	156	47	317	0	43		0.2	0	1	10	484	0	0
AK 7397B?	16	156	47	317	0	43		0.1	0	1	13	556	0	0
AL 7383B	25	57	33	92	1	19		0.6	1	1	17	226	0	0
AM 7380B	9	15	37	181	1	33		0.6	21	1	20	190	3	0
AN 7378B	20	51	37	181	2	33		0.5	3	1	14	172	0	30
AO 7364D	21	15	45	144	1	21		2.1	29	1	0	1748	0	590
AP 7361B?	21	104	55	181	0	25		0.3	0	1	19	438	0	30

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11140	(FLIGHT		29)											
AQ 7358B	29	104	55	181	0	6	0.5	1	1	12	382	0	0	
AR 7351B	58	58	72	191	12	31	2.0	11	1	17	109	3	40	
AS 7348B	32	58	72	191	17	31	0.9	7	1	23	96	9	0	
AT 7336B	31	25	51	47	7	15	2.1	11	1	21	80	7	0	
AU 7329B	155	122	281	196	40	90	3.8	0	1	17	23	7	0	
AV 7320B	16	28	34	55	21	14	0.7	1	1	19	37	7	0	
AW 7304B	11	59	25	121	0	20	0.2	0	1	16	175	1	0	
AX 7296B?	49	118	116	272	0	47	0.8	5	1	4	365	0	0	
AY 7285B?	14	66	6	141	0	20	0.3	0	1	24	144	8	0	
AZ 7279B	100	158	234	339	19	75	1.5	1	1	13	51	2	0	
BA 7271B	133	150	281	301	46	90	2.3	0	1	21	25	11	0	
BB 7259D	80	108	163	189	2	59	1.6	6	1	26	48	15	30	
BC 7256D	69	145	163	258	0	65	1.0	2	1	21	93	8	0	
BD 7254D	68	145	131	258	0	65	1.0	0	1	21	77	8	0	
BE 7246B	83	112	168	218	0	57	1.6	5	1	24	53	12	0	
BF 7242B	46	60	100	218	0	57	1.4	13	1	34	104	18	0	
BG 7240B	39	13	75	108	0	24	7.7	31	1	39	131	22	0	
BH 7233B	16	18	31	37	0	4	1.2	31	1	21	685	0	0	
BI 7228B	23	30	45	55	0	15	1.1	25	1	32	326	12	5	
BJ 7225B	15	22	29	55	0	16	0.8	27	1	14	1300	0	120	
BK 7221B	17	3	26	5	0	2	14.9	46	1	34	425	11	0	
BL 7214D	19	26	61	45	0	23	1.0	18	1	41	148	22	550	
BM 7206M	0	2	0	2	0	1	-	-	-	-	-	-	0	
BN 7195M	0	6	0	16	0	2	0.1	5	1	0	2189	0	0	
BO 7188B?	0	16	0	30	0	3	0.1	4	1	0	2100	0	0	
BP 7179D	15	39	20	49	0	10	0.5	1	1	17	919	0	0	
BQ 7177B	1	2	1	2	0	4	-	-	-	-	-	-	0	
BR 7169S	0	16	2	26	0	3	0.1	0	1	2	2628	0	0	
BS 7161S?	0	10	0	20	0	3	0.1	6	1	2	2420	0	30	
BT 7145B?	3	7	5	12	0	0	0.2	7	1	18	2237	0	0	
BU 7129S?	0	20	0	46	0	6	0.1	5	1	0	2123	0	0	
BV 7112S?	0	5	0	11	0	3	0.1	11	1	17	3301	0	0	
BW 7099S	5	23	11	40	0	6	0.3	0	1	28	879	0	8	
BX 7090S	2	7	3	10	0	1	0.2	15	1	25	2344	0	0	
BY 7063M	1	16	1	28	0	2	0.1	7	1	27	4513	0	4	
BZ 7059S?	0	16	0	28	0	4	0.1	8	1	14	3246	0	120	
CA 7050D	4	20	2	23	0	4	0.2	0	1	0	2872	0	0	
CB 7045M	0	1	1	2	0	1	0.1	54	1	24	4217	0	140	
CC 7035S?	0	37	5	82	0	13	0.1	0	1	0	1601	0	0	
CD 7032M	0	37	14	82	0	13	0.2	0	1	1	2468	0	110	
CE 7014B?	0	20	6	74	0	9	0.1	0	1	1	1765	0	70	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11140		(FLIGHT 29)													
CF	7001M	1	6	6	11	0	2	0.4	29	1	12	3471	0	60	
CG	6989S?	0	6	3	27	0	4	0.1	0	1	0	2990	0	0	
CH	6978M	0	3	0	4	0	1	0.1	0	1	35	5713	0	250	

LINE 11150		(FLIGHT 29)													
A	7738B	51	12	98	18	40	6	12.7	11	1	38	22	27	0	
B	7754B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
C	7764B?	19	30	44	52	6	12	0.9	6	1	26	162	7	0	
D	7780B	41	32	72	56	9	22	2.4	5	1	21	70	7	0	
E	7796B	16	48	27	111	5	12	0.4	0	1	20	191	1	0	
F	7802B	73	36	133	67	9	79	5.1	2	1	25	21	14	0	
G	7805B	68	17	136	13	19	32	13.6	7	1	17	14	8	0	
H	7813B	32	16	88	21	34	14	4.0	18	1	20	32	9	0	
I	7824B	67	60	137	119	9	42	2.4	1	1	16	33	5	0	
J	7826B	63	63	137	119	9	42	2.1	1	1	16	38	5	0	
K	7835B	52	99	112	194	2	40	1.0	0	1	18	56	6	60	
L	7841B	1	2	1	2	2	4	-	-	-	-	-	-	0	
M	7848B	15	40	55	73	23	84	0.5	6	1	21	28	11	0	
N	7852B	24	99	211	163	44	65	0.4	0	1	23	21	13	0	
O	7855B	24	99	211	163	44	65	0.4	0	1	22	29	11	0	
P	7860B	41	62	87	135	19	29	1.1	7	1	19	146	3	60	
Q	7877B?	11	22	20	30	0	4	0.5	16	1	0	2394	0	50	
R	7881B?	11	22	30	30	0	4	0.5	6	1	26	639	0	0	
S	7885B	21	20	32	31	1	4	1.5	6	1	14	382	0	20	
T	7889B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
U	7896B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
V	7901B?	15	37	17	66	0	10	0.5	5	1	15	361	0	0	
W	7911D	5	33	13	60	0	7	0.1	2	1	19	950	0	20	
X	7924B	94	102	209	176	12	56	2.2	0	1	13	51	1	0	
Y	7926B	94	102	209	176	12	56	2.2	0	1	13	39	1	0	
Z	7944B	32	29	127	167	8	42	1.9	17	1	16	81	3	0	
AA	7960B?	2	9	2	21	0	2	0.1	12	1	33	778	4	0	
AB	7962B?	3	13	2	21	0	2	0.1	5	1	29	804	1	0	
AC	7967D	2	16	4	26	1	2	0.1	0	1	28	766	0	9	
AD	7979D	48	61	47	117	4	18	1.4	0	1	21	160	3	0	
AE	7988B	14	10	19	35	5	14	1.8	7	1	23	180	2	0	
AF	7998B?	11	27	3	52	1	15	0.4	11	1	26	581	2	0	
AG	8026M	0	22	14	47	0	6	0.3	0	1	5	3365	0	230	
AH	8028B?	0	22	14	47	0	6	0.3	0	1	7	1184	0	170	
AI	8032B?	1	2	1	2	1	4	-	-	-	-	-	-	0	
AJ	8037S?	2	7	1	20	1	3	0.1	5	1	17	1873	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11150	(FLIGHT	29)											
AK 8051B	5	15	15	8	2	5	0.3	0	1	40	515	10	0
AL 8055B	9	5	15	8	2	6	1.9	25	1	29	337	3	5
AM 8059B	5	9	15	12	2	3	1.4	27	1	38	565	10	0
AN 8070B?	13	49	2	93	0	13	0.3	0	1	15	404	0	5
AO 8075B?	7	8	12	26	0	5	0.8	35	1	17	306	0	0
AP 8082B?	18	14	30	2	0	21	1.8	31	1	16	254	0	0
AQ 8086B	29	85	21	223	0	28	0.5	3	1	14	218	0	70
AR 8088B	8	85	21	223	0	28	0.1	0	1	12	202	0	0
AS 8098B	20	31	30	54	13	13	0.9	8	1	35	106	17	0
AT 8110B	25	18	138	43	12	41	2.3	19	1	22	104	7	0
AU 8113B	72	18	138	43	11	41	14.1	13	1	23	45	11	0
AV 8117B	80	89	126	154	20	46	2.0	4	1	17	49	6	0
AW 8136B	20	26	22	43	4	12	1.1	0	1	21	71	6	0
AX 8149B	1	2	1	2	2	4	-	-	-	-	-	-	200
AY 8153B	1	2	1	2	2	4	-	-	-	-	-	-	0
AZ 8161B?	1	2	1	2	2	2	-	-	-	-	-	-	0
BA 8168B	21	44	46	30	10	12	0.6	6	1	33	88	17	0
BB 8172B	30	53	57	107	20	18	0.8	0	1	25	79	10	0
BC 8180B	59	66	123	127	30	44	1.8	4	1	28	34	17	0
BD 8190B	11	14	10	23	19	9	0.9	24	1	46	29	34	0
BE 8192B	29	14	43	23	0	9	4.0	30	1	48	43	34	130
BF 8197B	19	19	33	33	0	8	1.4	27	1	42	104	25	0
BG 8200B	11	16	18	33	0	4	0.8	28	1	39	144	21	0
BH 8203B	1	2	1	2	0	4	-	-	-	-	-	-	0
BI 8207B	8	15	12	23	0	4	0.5	26	1	43	160	23	0
BJ 8211B	11	19	8	39	0	3	0.6	23	1	34	207	15	0
BK 8215B	33	29	73	44	0	26	2.0	17	1	41	105	24	500
BL 8224B	0	8	0	15	0	2	0.1	4	1	11	3330	0	0
BM 8230M	0	5	0	9	0	1	0.1	9	1	25	4135	0	310
BN 8233S?	0	16	0	24	0	3	0.1	9	1	11	2930	0	50
BO 8235M	0	2	0	2	0	4	-	-	-	-	-	-	4
BP 8244B?	0	23	6	41	0	6	0.1	0	1	1	2473	0	0
BQ 8254S?	4	28	15	63	0	10	0.3	0	1	11	1316	0	0
BR 8268M	0	10	6	16	0	2	0.3	21	1	6	2374	0	0
BS 8273M	0	8	7	34	0	9	0.1	2	1	9	2643	0	30
BT 8275M	0	16	11	34	0	9	0.3	11	1	0	1996	0	7
BU 8281S?	5	28	10	31	0	7	0.3	8	1	31	1240	2	0
BV 8301D	0	7	1	10	0	2	0.1	3	1	50	6173	0	0
BW 8317S?	2	17	3	19	0	5	0.1	5	1	24	1637	0	40
BX 8328S	2	9	2	11	0	4	0.1	1	1	26	1236	0	0
BY 8342S?	0	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11150	(FLIGHT	29)											
BZ 8358S?	0	14	0	35	0	6	0.1	8	1	4	2422	0	40
CA 8366S?	0	4	0	19	0	6	0.1	12	1	2	1838	0	0
CB 8372M	0	12	0	16	0	5	0.1	9	1	5	2457	0	0
CC 8378M	0	10	0	30	0	3	0.1	7	1	13	3219	0	0
CD 8384M	0	5	0	11	0	2	0.1	11	1	19	3458	0	0
CE 8394M	1	2	1	2	0	2	-	-	-	-	-	-	80
CF 8414M	1	2	1	2	0	2	-	-	-	-	-	-	40
CG 8420S?	0	7	5	17	0	3	0.2	7	1	24	4839	0	30
CH 8428S?	0	2	0	2	0	2	-	-	-	-	-	-	0

LINE 11160	(FLIGHT	29)											
A 9324B?	22	31	34	64	22	14	1.0	0	1	50	39	35	0
B 9313B?	18	10	35	18	8	9	2.8	31	1	38	140	19	0
C 9297B	21	37	39	66	5	20	0.8	1	1	21	77	6	0
D 9288B	56	52	111	99	15	28	2.2	3	1	19	47	7	0
E 9281D	45	15	63	170	19	14	8.1	19	1	21	74	7	0
F 9278B?	45	55	63	92	16	14	1.5	3	1	24	114	7	0
G 9275D	26	55	32	96	17	5	0.7	0	1	35	27	23	0
H 9272D	36	47	43	96	5	62	1.3	2	1	23	69	9	0
I 9268D	124	130	221	270	23	64	2.5	0	1	14	27	5	0
J 9258B	36	60	51	164	25	23	1.0	0	1	19	18	9	0
K 9245B	99	408	192	605	17	104	0.6	0	1	10	49	0	0
L 9239B	79	97	351	706	32	122	1.8	1	1	21	55	8	0
M 9233B	18	26	34	53	15	2	0.9	12	1	32	94	15	0
N 9223B	113	74	239	139	65	84	4.3	0	1	13	17	4	0
O 9219B	35	97	239	191	65	40	0.6	1	1	19	177	3	20
P 9207S?	1	30	4	54	0	7	0.1	0	1	8	1740	0	0
Q 9203M	21	0	45	3	1	1	999.0	46	1	11	3208	0	0
R 9198B?	21	76	58	154	2	26	0.4	0	1	13	341	0	30
S 9183B?	2	23	4	29	1	4	0.1	0	1	24	1775	0	14
T 9175S?	3	35	7	81	0	10	0.1	0	1	7	1852	0	0
U 9170S?	1	2	1	2	0	4	-	-	-	-	-	-	0
V 9151B?	23	51	57	112	3	20	0.6	0	1	16	228	0	0
W 9137B?	4	11	2	15	1	2	0.2	14	1	40	827	9	0
X 9128B?	7	18	12	35	1	5	0.4	8	1	32	562	5	0
Y 9121B?	10	29	13	22	3	12	0.4	8	1	29	402	7	0
Z 9115B?	26	29	19	52	5	7	1.4	16	1	21	225	3	0
AA 9110B?	21	75	45	167	6	25	0.4	0	1	13	202	0	19
AB 9090B?	1	2	1	2	1	4	-	-	-	-	-	-	0
AC 9076M	0	2	1	2	2	4	-	-	-	-	-	-	50
AD 9069S	19	8	39	33	3	9	4.3	28	1	23	275	2	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11160	(FLIGHT	29)											
AE 9064M	1	2	1	2	1	4	-	-	-	-	-	-	0
AF 9055S?	12	29	19	61	4	11	0.4	1	1	32	305	8	0
AG 9030B?	18	72	26	85	2	20	0.3	0	1	24	437	1	0
AH 9028B?	18	72	26	85	2	20	0.3	0	1	15	455	0	0
AI 9022M	1	2	1	2	0	4	-	-	-	-	-	-	5
AJ 9016S	2	59	32	120	0	26	0.4	0	1	17	145	2	0
AK 8993B	17	163	29	320	27	53	0.1	0	1	26	54	12	780
AL 8989B	56	167	63	92	27	98	0.7	0	1	16	65	4	0
AM 8987B	56	167	63	92	26	101	0.7	0	1	18	61	6	0
AN 8983B	163	280	294	521	6	112	1.6	0	1	13	51	2	0
AO 8973B	19	21	28	32	6	12	1.2	20	1	37	75	21	0
AP 8966B	32	21	57	31	17	19	2.7	22	1	35	84	19	110
AQ 8964B	32	21	57	31	19	19	2.7	19	1	29	72	14	0
AR 8954B	45	130	96	267	17	51	0.7	0	1	24	81	10	0
AS 8952B	45	130	96	267	17	51	0.7	0	1	19	93	6	0
AT 8947B	40	5	86	256	17	51	27.6	29	1	42	61	27	0
AU 8939M	27	34	81	65	0	7	1.2	23	1	31	238	12	0
AV 8930M	126	218	270	444	10	109	1.5	4	1	27	56	15	0
AW 8928B?	126	218	270	444	0	109	1.5	3	1	19	51	9	0
AX 8925M	126	218	270	444	7	109	1.5	0	1	28	203	10	0
AY 8918S?	7	23	9	46	7	8	0.3	7	1	31	259	10	0
AZ 8909M	47	35	84	63	0	32	2.7	20	1	32	167	15	0
BA 8908B?	47	43	84	48	0	32	2.1	17	1	36	90	20	0
BB 8906B?	41	43	83	48	0	32	1.7	15	1	33	111	17	1060
BC 8902B?	15	26	36	44	0	12	0.7	17	1	33	133	16	0
BD 8901B?	15	26	36	44	0	12	0.7	17	1	37	95	20	0
BE 8891S?	15	12	27	50	0	7	1.7	38	1	16	1402	0	8
BF 8882S?	14	10	19	17	2	15	1.8	31	1	53	123	33	0
BG 8873B?	5	10	12	19	2	13	0.4	22	1	43	241	19	320
BH 8865B?	0	27	0	44	0	4	0.1	9	1	7	2542	0	0
BI 8863B?	0	27	0	44	0	8	0.1	8	1	2	2244	0	5
BJ 8858M	0	5	0	20	0	5	0.1	10	1	15	3203	0	190
BK 8848M	0	6	0	13	0	3	0.1	6	1	22	4115	0	440
BL 8820B	12	7	2	17	2	2	2.3	15	1	46	447	15	0
BM 8761S?	0	15	1	18	0	2	0.1	0	1	28	5041	0	11
BN 8738S	1	2	1	2	1	4	-	-	-	-	-	-	0
BO 8726S?	4	33	8	71	0	10	0.1	0	1	12	1508	0	16
BP 8706M	0	1	1	1	0	2	-	-	-	-	-	-	0
BQ 8700S?	0	15	4	30	0	4	0.1	0	1	9	3359	0	0
BR 8694M	0	14	4	31	0	3	0.1	0	1	17	3974	0	40
BS 8689S	0	2	0	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11160	(FLIGHT	29)											
BT 8676M	0	4	2	5	0	1	0.1	22	1	26	5176	0	100
BU 8668M	0	11	0	17	0	3	0.1	0	1	21	4501	0	5
BV 8656M	0	2	1	2	0	2	-	-	-	-	-	-	0
BW 8638B?	4	15	4	26	0	4	0.1	0	1	26	1429	0	40
BX 8614M	0	5	0	7	0	2	0.1	1	1	18	4165	0	140
BY 8605B?	2	14	6	25	0	4	0.2	11	1	17	3458	0	0
BZ 8586M	0	1	2	3	0	0	0.3	41	1	103	4644	13	0
CA 8577M	0	4	0	3	0	1	0.1	0	1	57	6713	0	0
CB 8562B?	0	21	0	20	0	3	0.1	0	1	19	4452	0	0

LINE 11170	(FLIGHT	30)											
A 378B	1	2	1	2	2	4	-	-	-	-	-	-	13
B 388B	75	75	167	144	12	51	2.2	0	1	17	33	6	0
C 398S?	30	50	54	102	27	11	0.9	3	1	18	123	2	0
D 402S?	19	85	54	119	14	23	0.3	0	1	17	197	0	0
E 412B?	9	34	11	63	20	5	0.3	0	1	19	143	1	0
F 421B	31	11	50	31	21	23	6.5	0	1	25	17	14	170
G 433B	49	64	99	117	44	40	1.4	0	1	20	19	9	0
H 449B	46	120	96	237	36	39	0.7	0	1	14	47	3	0
I 460B	105	100	187	198	36	39	2.6	6	1	17	54	5	0
J 464B	1	2	1	2	2	4	-	-	-	-	-	-	70
K 473B?	10	52	105	187	33	24	0.2	3	1	21	182	5	0
L 478B	65	31	109	187	33	38	5.4	0	1	24	32	11	0
M 483B?	65	36	109	64	33	15	4.3	13	1	26	321	5	5
N 487B?	2	19	109	35	0	15	9.6	10	1	17	1030	0	0
O 497S?	16	54	33	105	0	16	0.4	0	1	14	468	0	0
P 505B?	6	16	30	15	0	3	0.4	11	1	31	804	2	0
Q 509S?	1	16	13	19	0	3	0.7	21	1	19	1705	0	4
R 513B?	7	17	6	16	0	2	0.4	11	1	19	1355	0	0
S 521B?	6	14	5	10	0	1	0.4	13	1	20	1509	0	0
T 526B?	3	12	4	17	0	4	0.2	15	1	14	2984	0	9
U 532B?	8	29	6	41	0	5	0.3	5	1	18	1462	0	15
V 546B?	1	2	1	2	0	1	-	-	-	-	-	-	0
W 552S?	9	25	18	49	1	9	0.4	0	1	22	516	0	4
X 555S?	9	25	13	49	1	9	0.4	0	1	24	423	0	0
Y 580B	41	64	86	115	11	34	1.1	0	1	23	94	7	0
Z 601B?	9	28	18	51	2	7	0.3	14	1	33	318	12	0
AA 607B?	10	53	26	101	2	17	0.2	0	1	21	516	0	0
AB 644B?	7	17	11	25	1	5	0.4	5	1	36	821	5	0
AC 654B?	3	10	15	16	3	3	1.1	13	1	52	534	20	80
AD 663S?	7	29	21	62	3	11	0.2	0	1	28	336	5	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11170	(FLIGHT	30)											
AE 673S?	6	44	10	55	2	8	0.1	0	1	22	464	0	0
AF 693S?	10	63	7	113	0	18	0.2	0	1	10	549	0	0
AG 716S?	33	83	67	160	3	40	0.7	1	1	19	155	3	8
AH 720M	33	83	67	160	0	40	0.7	2	1	24	156	7	6
AI 730B	46	26	82	42	32	31	3.8	12	1	26	43	13	0
AJ 735B	39	44	80	82	32	31	1.5	4	1	30	57	16	0
AK 741B?	39	25	80	82	10	13	3.0	9	1	32	133	14	0
AL 744B?	1	2	1	2	2	4	-	-	-	-	-	-	80
AM 759S?	51	60	110	104	12	42	1.6	11	1	35	83	19	0
AN 763B?	62	60	133	104	12	43	2.2	5	1	40	30	27	0
AO 771M	39	9	82	20	12	19	13.1	31	1	0	1795	0	120
AP 777S?	19	37	62	79	2	12	0.7	6	1	20	414	0	0
AQ 785S	20	38	58	85	7	14	0.7	1	1	22	202	3	0
AR 797B?	64	114	129	212	8	44	1.1	2	1	21	128	5	0
AS 803B?	14	58	30	99	0	44	0.3	0	1	24	367	3	0
AT 809S?	17	51	38	99	6	16	0.5	7	1	10	1056	0	0
AU 824S?	3	22	34	43	0	10	1.1	16	1	6	2449	0	150
AV 834S?	1	2	1	2	1	4	-	-	-	-	-	-	4
AW 842M	1	2	1	2	1	4	-	-	-	-	-	-	0
AX 862M	0	7	0	17	0	2	0.1	0	1	22	4602	0	0
AY 875M	0	6	0	15	0	2	0.1	0	1	23	5074	0	0
AZ 884M	0	11	0	18	0	3	0.1	0	1	14	4629	0	110
BA 890M	0	4	0	10	0	2	0.1	0	1	32	5477	0	4
BB 914M	0	3	0	3	0	0	0.1	0	1	81	7187	0	0
BC 926M	28	40	25	55	2	11	1.1	7	1	36	5722	0	380
BD 929B?	28	39	25	55	1	11	1.1	10	1	39	443	13	0
BE 948M	0	8	2	12	0	2	0.1	14	1	52	5959	0	0
BF 963B?	2	14	6	21	1	3	0.2	3	1	55	3222	8	0
BG 968B?	3	22	6	33	0	5	0.1	0	1	28	2190	0	4
BH 973B?	5	12	4	32	1	4	0.3	24	1	40	2346	5	4
BI 1001B?	3	8	2	5	1	1	0.3	6	1	62	5471	0	10
BJ 1048S	6	22	17	45	1	7	0.3	0	1	28	531	0	0
BK 1121S	3	8	8	4	0	3	1.7	31	1	24	1218	0	0
BL 1160M	0	2	0	4	0	0	0.1	0	1	45	6021	0	0
BM 1205M	0	3	0	3	0	1	0.1	3	1	45	5900	0	0
BN 1240B?	3	18	0	22	0	3	0.1	2	1	15	3755	0	0
BO 1249B?	6	19	7	7	0	4	0.3	0	1	3	2450	0	0
BP 1258B?	5	23	6	21	0	3	0.2	5	1	10	3389	0	0
BQ 1260B?	3	20	4	21	0	3	0.1	3	1	15	3550	0	0
BR 1274B?	7	20	6	41	0	5	0.4	13	1	2	2572	0	0
BS 1288M	1	14	0	18	0	4	0.1	6	1	16	3620	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11170	(FLIGHT	30)											
BT 1293S?	8	6	6	15	0	2	1.5	49	1	17	3763	0	0
BU 1305S?	1	2	1	2	0	3	-	-	-	-	-	-	0
BV 1310S?	6	8	0	16	0	3	0.6	28	1	16	4476	0	0
BW 1332M	3	38	0	52	0	8	0.1	0	1	0	2210	0	360
BX 1356M	0	5	0	10	0	2	0.1	6	1	34	5124	0	0

LINE 11180	(FLIGHT	30)											
A 2664B	32	6	9	11	13	25	14.6	15	1	44	66	27	3060
B 2646B	88	35	187	137	30	60	7.4	6	1	18	34	7	1210
C 2634B	65	50	139	93	14	45	2.9	1	1	21	24	11	390
D 2624B	126	106	311	204	52	102	3.2	0	1	15	15	7	0
E 2617B	67	43	134	74	22	44	3.7	0	1	16	20	5	0
F 2609B	35	31	75	53	32	29	1.9	3	1	21	30	9	30
G 2599B	63	40	135	64	35	52	3.7	1	1	20	17	10	0
H 2575B	78	208	284	403	25	106	0.9	0	1	14	43	3	5
I 2567B?	57	114	122	216	19	46	1.0	0	1	18	85	4	1120
J 2553B	40	38	85	69	21	33	1.9	3	1	30	80	14	0
K 2534S	0	2	1	2	1	4	-	-	-	-	-	-	0
L 2513D	0	19	4	40	0	5	0.1	0	1	26	1412	0	0
M 2510D	0	23	7	15	0	8	0.4	23	1	27	1498	0	70
N 2504D	4	16	11	152	1	13	0.1	0	1	31	906	4	0
O 2499D	26	63	58	152	1	13	0.6	6	1	15	454	0	12
P 2490B	8	77	39	145	0	22	0.1	0	1	20	341	1	0
Q 2485B?	2	20	39	44	2	6	1.4	11	1	24	496	1	0
R 2474B?	25	83	38	107	3	17	0.5	0	1	21	271	2	0
S 2468S?	12	51	26	95	1	15	0.3	0	1	17	439	0	0
T 2449S	1	14	7	24	1	3	0.3	0	1	29	1455	0	20
U 2442S	0	16	1	29	0	4	0.1	2	1	29	1813	0	0
V 2427B?	0	5	1	12	0	3	0.1	2	1	56	6250	0	0
W 2361S?	1	2	1	2	1	2	-	-	-	-	-	-	5
X 2321B?	13	74	34	127	0	20	0.2	0	1	9	856	0	0
Y 2317B?	16	68	34	40	0	7	0.3	0	1	17	505	0	0
Z 2313B?	17	78	40	40	0	7	0.3	0	1	15	406	0	0
AA 2303B?	36	51	63	97	4	23	1.1	7	1	23	139	7	60
AB 2299B?	36	51	63	97	4	23	1.1	4	1	29	146	11	0
AC 2285S?	14	22	30	43	2	17	0.7	14	1	31	188	11	170
AD 2277S?	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 2265B	12	12	22	25	14	7	1.2	15	1	53	94	33	0
AF 2258D	18	12	27	25	13	9	2.2	21	1	46	129	26	640
AG 2238B?	21	20	49	37	0	20	1.5	26	1	29	551	5	5
AH 2234B?	14	20	36	37	0	21	0.8	22	1	19	428	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11180	(FLIGHT 30)												
AI 2225M	11	29	35	57	0	6	0.4	13	1	2	2150	0	0
AJ 2223B?	5	29	18	57	0	6	0.2	4	1	0	2095	0	6
AK 2205B	84	59	178	99	30	61	3.5	0	1	24	22	13	50
AL 2196M	1	2	1	2	2	4	-	-	-	-	-	-	270
AM 2195B?	12	23	27	35	3	8	0.5	11	1	18	1055	0	0
AN 2180M	1	2	1	2	0	4	-	-	-	-	-	-	40
AO 2165S?	4	11	12	23	4	6	0.5	16	1	7	3073	0	60
AP 2160S?	1	2	1	2	1	3	-	-	-	-	-	-	0
AQ 2154S?	1	2	1	2	1	4	-	-	-	-	-	-	0
AR 2144M	0	7	0	13	0	3	0.1	0	1	14	4057	0	230
AS 2137M	0	9	0	15	0	2	0.1	0	1	11	3886	0	50
AT 2127M	0	4	0	5	0	2	0.1	1	1	35	5622	0	0
AU 2106B?	0	2	0	2	0	1	-	-	-	-	-	-	0
AV 2092M	0	2	0	2	0	2	-	-	-	-	-	-	0
AW 2082M	0	6	0	7	0	1	0.1	0	1	13	4382	0	0
AX 2071M	0	2	0	2	0	1	-	-	-	-	-	-	0
AY 2054D	33	34	48	53	7	17	1.6	2	1	32	251	10	0
AZ 2000M	0	1	0	1	0	0	0.1	0	1	164	8388	0	0
BA 1940M	0	2	0	9	0	3	0.1	17	1	71	6250	11	0
BB 1907M	0	8	3	13	1	2	0.2	17	1	35	5194	0	0
BC 1858B?	0	11	0	20	0	3	0.1	7	1	31	4738	0	4
BD 1856M	0	2	1	2	1	3	-	-	-	-	-	-	50
BE 1849B?	0	11	4	9	2	1	0.3	22	1	39	2742	0	0
BF 1833S	0	2	1	2	0	2	-	-	-	-	-	-	0
BG 1722M	0	10	2	35	0	5	0.1	0	1	32	4992	0	4
BH 1682M	0	2	0	2	0	2	-	-	-	-	-	-	0
BI 1639S	4	24	13	47	0	7	0.3	0	1	16	906	0	0
BJ 1620B?	0	9	0	6	0	1	0.1	0	1	28	5378	0	0
BK 1605M	0	6	1	10	0	2	0.1	2	1	38	5675	0	200
BL 1580B?	1	2	1	2	0	4	-	-	-	-	-	-	0
BM 1561B?	0	19	4	36	0	5	0.1	0	1	5	3408	0	40
BN 1554B?	2	14	5	36	0	5	0.1	0	1	20	2025	0	0
BO 1550M	2	14	5	36	0	2	0.1	0	1	25	4839	0	110
BP 1535M	5	15	3	11	0	2	0.3	12	1	24	4766	0	0
BQ 1528D	5	15	11	13	0	4	0.3	0	1	24	1343	0	0
BR 1521S?	3	15	11	24	0	4	0.4	12	1	9	3354	0	110
BS 1502S	1	2	0	2	0	3	-	-	-	-	-	-	0
BT 1488M	0	8	0	10	0	3	0.1	2	1	43	5833	0	460
BU 1476M	0	6	0	10	0	3	0.1	3	1	67	6601	0	350
BV 1444M	0	2	0	2	0	2	-	-	-	-	-	-	0

LINE 11190	(FLIGHT 30)												
A 2733B	12	9	28	17	5	8	1.7	12	1	26	121	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11190	(FLIGHT	30)											
B 2749B	117	100	231	193	43	77	3.1	0	1	21	31	10	5
C 2753B	128	74	245	217	43	84	5.2	3	1	20	32	9	0
D 2762B	78	44	179	127	42	62	4.4	6	1	18	25	8	0
E 2774B	19	76	30	73	4	6	0.4	0	1	21	125	6	5
F 2783B	45	60	112	130	20	40	1.4	0	1	20	36	8	0
G 2791B	1	2	1	2	2	3	-	-	-	-	-	-	0
H 2796B	38	37	55	66	7	23	1.8	3	1	30	43	16	0
I 2804B	123	108	257	192	18	81	3.0	0	1	16	17	7	0
J 2825B?	16	71	85	141	9	29	0.3	0	1	20	204	2	0
K 2828B	43	71	85	141	2	29	1.0	2	1	12	188	0	0
L 2831B	48	50	85	91	15	29	1.8	8	1	21	101	6	0
M 2838B	72	95	118	177	23	48	1.6	2	1	24	64	10	0
N 2847B	24	3	46	158	12	13	22.9	1	1	30	54	13	0
O 2859B?	3	22	6	58	0	5	0.1	0	1	15	1265	0	4
P 2865B?	5	23	5	34	0	4	0.1	1	1	24	1181	0	0
Q 2883B?	18	46	29	83	0	12	0.5	0	1	19	466	0	0
R 2910B	17	25	37	47	1	11	0.9	0	1	27	244	4	0
S 2919M	0	14	37	40	0	0	1.4	3	1	0	3126	0	450
T 2931B	6	41	12	74	0	9	0.1	5	1	14	1493	0	0
U 2944B?	7	10	12	20	0	3	0.7	27	1	26	823	0	120
V 2961M	2	21	3	30	0	4	0.1	0	1	36	5935	0	0
W 3060M	0	2	1	2	0	2	-	-	-	-	-	-	100
X 3087B?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 3094B	1	2	1	2	2	4	-	-	-	-	-	-	0
Z 3097B	25	79	10	75	2	23	0.5	0	1	16	318	0	0
AA 3101M	1	2	1	2	0	4	-	-	-	-	-	-	0
AB 3105B?	26	25	55	49	6	13	1.6	14	1	32	98	15	0
AC 3107B?	26	17	55	49	6	13	2.6	21	1	34	117	17	0
AD 3112M	26	3	55	46	0	13	27.3	34	1	36	270	15	0
AE 3120M	4	22	28	42	0	7	0.9	11	1	26	437	3	0
AF 3135B?	28	20	56	54	4	16	2.4	15	1	38	79	21	0
AG 3144B?	54	21	107	38	19	27	6.6	8	1	34	41	21	530
AH 3154B	74	53	147	112	27	39	3.3	16	1	21	429	2	940
AI 3159M	1	2	1	2	0	4	-	-	-	-	-	-	0
AJ 3174M	30	8	57	65	7	5	9.7	25	1	46	352	20	19
AK 3189B?	91	218	229	452	4	87	1.0	0	1	15	87	3	0
AL 3201M	4	14	12	192	0	33	0.1	0	1	33	906	5	0
AM 3213M	17	12	30	24	9	6	2.1	36	1	17	3510	0	0
AN 3224S?	9	35	15	70	3	11	0.3	2	1	0	2272	0	0
AO 3241B?	10	33	17	63	0	12	0.3	10	1	1	2054	0	0
AP 3245B?	10	33	17	63	0	11	0.3	0	1	38	551	9	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11190	(FLIGHT	30)											
AQ 3246M	1	2	1	2	0	4	-	-	-	-	-	-	0
AR 3255M	0	6	3	13	0	2	0.1	6	1	16	4096	0	0
AS 3269M	0	2	0	8	0	1	0.1	0	1	37	5781	0	0
AT 3278M	0	1	0	8	0	1	0.1	1	1	38	5722	0	0
AU 3288M	0	3	0	8	0	1	0.1	1	1	35	5601	0	310
AV 3298B?	0	6	0	9	0	1	0.1	0	1	48	6074	0	520
AW 3317M	0	2	0	5	0	1	0.1	0	1	51	6440	0	370
AX 3334M	1	1	1	2	0	1	-	-	-	-	-	-	0
AY 3340M	1	2	1	2	0	2	-	-	-	-	-	-	0
AZ 3345B?	11	10	10	21	0	4	1.4	17	1	45	893	9	0
BA 3349B?	10	14	10	21	0	4	0.7	17	1	42	1349	5	0
BB 3468S?	1	2	1	2	1	4	-	-	-	-	-	-	0
BC 3486B?	4	12	4	25	0	3	0.2	10	1	11	3864	0	16
BD 3594B?	0	2	1	2	0	1	-	-	-	-	-	-	0
BE 3613S?	4	21	9	41	0	6	0.2	0	1	12	1223	0	0
BF 3621S?	2	9	9	53	0	10	0.1	0	1	7	1591	0	14
BG 3629M	0	14	9	53	0	4	0.1	2	1	17	3313	0	4
BH 3634M	0	14	0	14	0	3	0.1	10	1	29	4347	0	4
BI 3665S?	0	2	0	2	0	3	-	-	-	-	-	-	9
BJ 3680B?	1	9	0	14	0	2	0.1	0	1	19	4696	0	0
BK 3708M	0	2	2	16	0	2	0.1	3	1	11	3342	0	0
BL 3718B?	0	13	2	36	0	1	0.1	0	1	7	3342	0	0
BM 3727M	0	13	3	36	0	5	0.1	0	1	7	3213	0	0
BN 3748B?	4	19	9	29	0	5	0.3	9	1	20	3903	0	100
BO 3757B?	4	5	7	15	0	3	0.3	7	1	62	6811	0	0
BP 3788M	0	8	0	15	0	3	0.1	0	1	26	5321	0	730
BQ 3796M	0	6	0	8	0	1	0.1	0	1	62	6538	0	0
BR 3805M	0	1	0	2	0	1	0.1	0	1	116	8388	0	0
BS 3830M	0	1	0	1	0	0	0.1	0	1	167	8388	0	0

LINE 11200	(FLIGHT	30)											
A 5168S?	1	2	1	2	2	4	-	-	-	-	-	-	0
B 5165S?	7	50	26	99	3	17	0.1	0	1	23	314	2	0
C 5146B	86	107	167	201	11	56	1.8	0	1	18	55	6	0
D 5139B	18	12	55	31	27	17	2.3	14	1	24	29	12	510
E 5134B	53	45	55	72	27	17	2.4	0	1	24	97	8	0
F 5127B	53	72	88	125	16	27	1.4	0	1	17	114	1	19
G 5110B	151	203	323	371	37	105	2.0	0	1	16	36	5	0
H 5106B	96	85	194	156	37	67	2.8	0	1	16	55	4	0
I 5099B	62	39	120	58	45	43	3.6	6	1	24	27	13	0
J 5092B	31	82	70	166	22	31	0.6	0	1	26	44	14	260

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL QUAD		REAL QUAD		REAL QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11200	(FLIGHT 30)													
K 5088S?	31 82	70	166	22	31	0.6	2	1	20	118	5	0		
L 5079B	83 163	313	300	34	91	1.1	0	1	17	33	7	0		
M 5076B	143 163	313	300	34	91	2.4	0	1	13	24	4	110		
N 5067S?	27 66	53	128	25	21	0.6	2	1	23	128	7	20		
O 5058B	17 164	54	345	25	48	0.1	0	1	14	176	0	130		
P 5053B	52 73	54	122	8	48	1.3	2	1	21	124	5	0		
Q 5047D	24 7	34	122	9	22	7.8	15	1	29	132	10	0		
R 5043B	16 16	20	30	4	8	1.3	22	1	36	206	15	0		
S 5034B?	15 49	29	89	2	14	0.4	0	1	25	298	3	0		
T 5020S?	3 30	9	57	0	7	0.1	0	1	20	1020	0	0		
U 5005B?	2 31	12	54	0	8	0.2	3	1	22	1074	0	0		
V 4995B?	22 38	57	71	2	15	0.8	0	1	25	214	5	0		
W 4987M	0 3	57	6	2	1	37.7	12	1	1	3313	0	770		
X 4977S	1 2	1	2	0	4	-	-	-	-	-	-	0		
Y 4967S	11 29	20	47	0	7	0.4	8	1	29	477	5	11		
Z 4871M	1 2	1	2	1	2	-	-	-	-	-	-	20		
AA 4867D	4 16	4	23	1	3	0.2	0	1	17	3095	0	13		
AB 4844M	3 9	10	14	0	3	0.7	24	1	13	3739	0	0		
AC 4838D?	9 9	10	15	1	1	1.0	18	1	35	903	2	0		
AD 4826B	22 64	34	162	3	23	0.5	0	1	17	453	0	0		
AE 4821B	13 112	27	215	3	46	0.1	0	1	5	1040	0	0		
AF 4817B	40 68	27	132	0	46	1.0	11	1	22	208	5	0		
AG 4809B	20 3	31	39	0	46	16.5	45	1	26	493	4	0		
AH 4805B	0 18	0	39	0	4	0.1	12	1	0	1356	0	0		
AI 4799M	3 81	58	169	0	22	0.6	5	1	0	960	0	0		
AJ 4797S?	3 82	58	169	0	22	0.6	3	1	0	939	0	230		
AK 4793M	29 82	58	169	0	22	0.6	5	1	32	237	12	0		
AL 4789B?	44 49	89	169	2	18	1.6	13	1	36	112	19	500		
AM 4781B?	81 79	105	137	24	28	2.3	4	1	26	65	12	310		
AN 4776B	81 79	105	137	24	28	2.3	0	1	43	40	28	0		
AO 4764B	31 29	58	50	6	16	1.7	12	1	35	134	16	0		
AP 4758B	35 29	64	43	10	12	2.2	4	1	35	73	18	0		
AQ 4748S?	3 31	7	60	6	5	0.1	0	1	15	926	0	5		
AR 4738S?	19 17	36	33	8	3	1.5	12	1	41	132	21	0		
AS 4733S?	19 23	36	41	8	10	1.1	15	1	35	464	9	0		
AT 4710B	62 60	130	109	27	43	2.2	0	1	24	38	11	0		
AU 4694B	10 13	21	24	9	9	0.9	16	1	53	166	30	0		
AV 4687S?	17 18	31	36	7	7	1.3	19	1	33	752	4	0		
AW 4678S?	6 6	8	12	0	4	0.8	45	1	11	3336	0	0		
AX 4657B	47 352	94	357	0	123	0.3	0	1	7	259	0	0		
AY 4652B	97 352	202	357	8	123	0.7	0	1	18	120	5	90		

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11200	(FLIGHT	30)											
AZ 4636M	0	5	71	200	3	35	0.7	0	1	19	4710	0	0
BA 4603M	0	2	0	2	0	1	-	-	-	-	-	-	0
BB 4574M	0	5	0	8	0	1	0.1	0	1	65	6690	0	0
BC 4522M	0	15	0	37	0	3	0.1	13	1	21	3464	0	0
BD 4504S?	0	17	0	41	0	4	0.1	4	1	29	4899	0	0
BE 4493M	0	13	0	34	0	6	0.1	11	1	59	6060	3	0
BF 4481M	0	13	0	34	0	6	0.1	2	1	86	7290	2	0
BG 4477M	0	2	0	4	0	1	0.1	0	1	63	6623	0	30
BH 4458B?	4	10	5	15	1	3	0.2	0	1	42	2201	0	0
BI 4372S?	3	6	7	24	0	4	0.2	3	1	27	1565	0	5
BJ 4358S?	2	8	4	10	1	1	0.3	11	1	43	5422	0	0
BK 4343B?	7	32	9	51	1	7	0.2	0	1	12	1550	0	0
BL 4328M	0	21	6	55	0	7	0.1	0	1	1	3045	0	80
BM 4325B?	2	30	6	55	0	4	0.1	0	1	9	1805	0	0
BN 4175M	0	2	0	2	0	3	-	-	-	-	-	-	0
BO 4165S?	1	17	6	29	0	4	0.2	0	1	0	2587	0	0
BP 4159S?	0	2	1	2	0	4	-	-	-	-	-	-	0
BQ 4156M	0	17	0	31	0	1	0.1	0	1	11	3894	0	0
BR 4123M	0	8	0	8	0	2	0.1	3	1	38	5640	0	0
BS 4106S?	0	2	1	2	0	3	-	-	-	-	-	-	0
BT 4066M	0	2	1	2	0	3	-	-	-	-	-	-	0
BU 4056M	3	6	6	27	0	4	0.2	0	1	1	3290	0	0
BV 4048M	0	7	0	12	0	2	0.1	3	1	39	5685	0	0
BW 4029S?	0	17	1	31	0	4	0.1	8	1	16	3301	0	0
BX 4016M	0	1	0	3	0	1	0.1	0	1	57	6367	0	0
BY 4008M	0	2	0	2	0	2	-	-	-	-	-	-	0
BZ 3992M	0	11	0	39	0	6	0.1	5	1	19	3974	0	0
CA 3990M	0	20	0	39	0	6	0.1	4	1	9	3182	0	0
CB 3976B?	0	58	0	89	0	12	0.1	8	1	0	1747	0	0

LINE 11210	(FLIGHT	25)											
A 900B	57	189	128	302	53	54	0.6	0	1	33	16	23	0
B 906B	162	189	228	302	34	96	2.4	0	1	17	29	7	0
C 914B	38	93	79	165	30	35	0.7	1	1	26	63	13	0
D 917M	38	93	79	165	23	35	0.7	0	1	34	64	20	520
E 923B	71	155	121	294	45	42	1.0	0	1	19	27	8	50
F 931B	92	155	234	294	46	71	1.4	0	1	16	33	5	0
G 937B	92	25	85	48	40	16	13.0	6	1	22	62	8	60
H 951B	85	110	155	234	22	55	1.7	5	1	24	52	12	0
I 956B	101	169	221	350	24	72	1.4	0	1	14	64	2	0
J 962B	64	94	89	172	19	20	1.4	0	1	17	44	6	17

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11210	(FLIGHT	25)												
K 974B	67	44	122	71	41	48	3.6	13	1	27	21	17	-4	
L 982B	128	120	259	198	48	99	2.9	2	1	21	18	12	-5	
M 994B	32	209	112	384	9	55	0.3	0	1	21	34	10	110	
N 1001B	35	48	83	100	16	29	1.2	4	1	23	62	9	30	
O 1010B	19	60	52	135	9	26	0.4	0	1	19	114	4	0	
P 1019B	31	52	58	104	17	26	0.9	3	1	22	95	7	0	
Q 1032M	42	119	116	210	15	44	0.7	0	1	17	216	1	150	
R 1036B	42	91	116	210	15	44	0.8	0	1	19	94	4	0	
S 1048S?	16	37	16	66	0	6	0.5	7	1	16	799	0	0	
T 1058B?	11	30	10	17	0	2	0.4	7	1	18	1018	0	0	
U 1062B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
V 1088S?	1	36	16	50	0	8	0.3	0	1	28	593	0	0	
W 1134S?	1	2	1	2	0	3	-	-	-	-	-	-	0	
X 1248M	1	0	0	2	0	1	-	-	-	-	-	-	0	
Y 1349B	18	8	33	16	18	15	3.9	17	1	46	59	29	-4	
Z 1360B	28	81	185	186	18	84	0.5	0	1	31	27	19	0	
AA 1364B	93	81	185	186	18	84	2.8	0	1	16	34	5	740	
AB 1368B	93	54	185	100	20	84	4.6	2	1	28	61	14	270	
AC 1372B	1	2	1	2	2	1	-	-	-	-	-	-	0	
AD 1381B	43	10	81	27	37	24	12.9	1	1	42	12	32	0	
AE 1389M	43	8	81	26	37	24	16.5	26	1	4	2722	0	310	
AF 1397S?	5	15	11	25	0	5	0.4	10	1	23	1065	0	0	
AG 1406B?	18	52	54	97	0	29	0.5	0	1	27	215	7	0	
AH 1422B	1	2	1	2	2	4	-	-	-	-	-	-	30	
AI 1430B	31	71	59	114	9	27	0.7	0	1	24	105	8	-4	
AJ 1438B	39	52	305	120	12	93	1.3	2	1	28	78	12	0	
AK 1446B	146	144	305	253	43	93	2.8	0	1	17	29	6	0	
AL 1460B?	24	23	42	60	7	12	1.6	25	1	0	1800	0	330	
AM 1468M	24	8	42	15	7	9	6.4	27	1	46	307	20	60	
AN 1488M	0	2	1	2	0	4	-	-	-	-	-	-	230	
AO 1500B	49	37	83	59	6	32	2.7	0	1	40	57	24	0	
AP 1513M	3	4	20	10	0	1	3.0	25	1	28	5457	0	160	
AQ 1537M	0	1	0	2	0	1	-	-	-	-	-	-	-4	
AR 1576M	0	2	0	6	0	1	0.1	0	1	45	6266	0	340	
AS 1734S?	2	24	5	49	0	6	0.1	0	1	6	2671	0	0	
AT 1758M	1	2	1	10	0	2	0.4	79	1	51	6144	0	370	
AU 1830B?	8	24	13	33	0	5	0.4	0	1	21	1611	0	0	
AV 1836B?	1	2	1	2	0	4	-	-	-	-	-	-	0	
AW 1938S	11	22	15	46	0	7	0.5	2	1	26	819	0	10	
AX 1940M	1	2	1	2	0	4	-	-	-	-	-	-	11	
AY 1948M	4	12	8	24	0	4	0.3	10	1	12	3471	0	160	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH		
	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 11210	(FLIGHT	25)												
AZ 2064B?	5	16	6	3	0	3	0.3	8	1	18	2369	0	0	
BA 2092M	1	7	2	10	0	2	0.1	2	1	20	5041	0	300	
BB 2128M	0	2	0	2	0	2	-	-	-	-	-	-	0	
BC 2144S	0	2	0	2	0	2	-	-	-	-	-	-	0	
BD 2167M	0	6	2	4	0	1	0.2	14	1	37	6559	0	310	

LINE 11220	(FLIGHT	25)												
A 3310D	35	52	54	87	21	20	1.1	0	1	21	240	1	0	
B 3304B	34	52	55	87	21	8	1.1	0	1	28	15	18	0	
C 3300B	41	40	49	65	25	16	1.8	0	1	30	40	15	0	
D 3296B	22	40	49	65	25	16	0.7	0	1	25	39	11	140	
E 3292B	29	32	49	58	25	16	1.4	0	1	22	42	8	0	
F 3282B	36	26	71	45	20	26	2.5	0	1	19	23	8	0	
G 3275B	9	44	22	85	20	6	0.2	0	1	18	110	2	150	
H 3271B	41	72	86	137	8	29	1.0	0	1	18	54	5	0	
I 3269B	44	72	86	137	8	29	1.1	0	1	18	58	5	0	
J 3263B	46	43	84	79	13	23	2.0	0	1	20	37	8	-4	
K 3256B	54	49	102	84	22	34	2.2	0	1	20	26	9	0	
L 3250B	39	27	61	84	22	28	2.7	6	1	31	24	20	-4	
M 3236B	83	51	157	77	46	59	4.1	0	1	23	20	13	0	
N 3221B	6	20	14	46	9	7	0.3	0	1	31	152	11	0	
O 3211B	18	36	48	66	14	19	0.6	0	1	30	109	12	0	
P 3204B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
Q 3200S?	13	56	32	95	7	18	0.3	0	1	22	319	1	0	
R 3184S	0	2	1	2	2	3	-	-	-	-	-	-	0	
S 3177S?	2	4	6	4	2	1	1.4	13	1	48	522	13	0	
T 3158S?	0	6	8	9	2	1	0.8	4	1	52	543	17	0	
U 3061D	27	112	24	114	2	16	0.4	3	1	28	571	7	0	
V 3011S?	1	4	10	29	1	4	0.3	11	1	41	1752	7	0	
W 2996M	1	2	1	2	2	4	-	-	-	-	-	-	0	
X 2988B?	20	59	55	114	3	9	0.5	0	1	25	244	5	0	
Y 2985B?	20	59	55	114	3	9	0.5	4	1	15	487	0	7	
Z 2979M	11	27	91	114	0	7	0.5	14	1	0	1645	0	30	
AA 2969B	51	8	103	10	24	23	23.8	15	1	42	34	28	0	
AB 2962B	14	17	117	52	28	13	1.0	19	1	39	25	27	0	
AC 2954B	63	44	114	60	30	39	3.3	1	1	37	24	25	0	
AD 2950B	59	41	117	55	30	41	3.2	3	1	38	36	25	400	
AE 2942D	9	21	128	33	4	50	0.4	4	1	32	422	7	230	
AP 2937B	66	39	128	62	27	50	4.0	0	1	31	22	19	0	
AG 2913B	17	21	28	50	14	13	1.0	0	1	53	55	36	0	
AH 2908B	27	5	57	4	10	28	13.7	22	1	46	53	30	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11220	(FLIGHT	25)												
AI 2898B	27	29	53	65	13	22	1.4	12	1	28	102	12	0	
AJ 2889B	16	19	75	205	16	113	1.0	24	1	26	83	12	0	
AK 2885B	169	96	210	205	59	113	5.8	4	1	17	34	7	0	
AL 2882B	169	86	210	152	59	113	6.7	3	1	17	20	8	520	
AM 2873B	91	122	178	214	38	63	1.7	0	1	17	17	8	0	
AN 2856B	43	62	97	119	8	33	1.2	0	1	24	66	9	0	
AO 2853M	43	62	97	119	6	33	1.2	4	1	32	103	16	0	
AP 2848D	14	19	97	32	6	33	0.9	4	1	33	172	12	1070	
AQ 2840B	27	26	54	40	6	16	1.6	8	1	33	67	18	0	
AR 2837B	27	26	52	39	7	16	1.6	4	1	29	74	13	11	
AS 2828M	1	2	1	2	2	4	-	-	-	-	-	-	100	
AT 2824B	51	70	111	116	12	41	1.3	0	1	28	72	13	0	
AU 2788M	0	4	0	11	0	2	0.1	0	1	38	5900	0	0	
AV 2772M	0	4	2	9	0	2	0.1	0	1	32	6047	0	110	
AW 2750M	0	1	0	4	0	1	0.1	1	1	76	7001	0	440	
AX 2706M	0	2	0	6	0	1	0.1	15	1	96	7935	0	50	
AY 2670M	8	6	5	5	1	2	1.5	34	1	43	6144	0	260	
AZ 2614B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
BA 2566M	0	3	0	6	0	1	0.1	0	1	67	7091	0	130	
BB 2532B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
BC 2520B?	4	7	10	14	1	3	0.6	20	1	51	780	18	0	
BD 2465M	0	2	1	2	0	1	-	-	-	-	-	-	0	
BE 2432S	3	10	8	9	0	3	0.7	21	1	34	1387	0	0	
BF 2392M	0	6	0	11	0	2	0.1	0	1	36	5866	0	0	
BG 2340B?	0	8	2	4	0	1	0.1	25	1	59	6623	0	0	
BH 2327S	1	2	1	2	0	2	-	-	-	-	-	-	0	
BI 2314B?	0	14	5	23	0	3	0.2	0	1	7	3645	0	0	
BJ 2308M	0	5	2	15	0	2	0.1	0	1	11	4165	0	330	
BK 2292M	0	2	0	2	0	4	-	-	-	-	-	-	0	
BL 2290B?	0	18	0	33	0	6	0.1	0	1	0	2787	0	0	
BM 2284M	0	12	0	33	0	6	0.1	0	1	33	5559	0	70	

LINE 11230	(FLIGHT	25)												
A 3403B?	7	25	17	52	0	6	0.3	0	1	23	352	0	0	
B 3415D	14	16	15	29	4	6	1.1	4	1	39	153	17	0	
C 3419B?	1	2	1	2	2	4	-	-	-	-	-	-	0	
D 3429B	7	43	26	100	3	27	0.1	0	1	20	177	3	0	
E 3434B	115	293	294	596	5	114	1.0	0	1	16	64	5	0	
F 3445D	28	7	18	514	38	6	9.3	20	1	20	94	5	0	
G 3453B	239	245	440	426	38	139	3.2	0	1	18	22	9	0	
H 3458B	64	245	440	426	38	139	0.6	0	1	32	43	20	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11230	(FLIGHT	25)											
I 3471B	65	141	132	292	15	54	0.9	0	1	24	59	11	0
J 3482D	23	83	81	285	29	22	0.4	0	1	29	53	16	90
K 3486D	31	150	81	285	29	22	0.4	0	1	21	90	8	60
L 3489B	45	150	102	285	35	33	0.6	0	1	20	91	6	140
M 3506B	445	787	978	1555	56	350	2.2	0	1	23	11	15	760
N 3511B	445	787	978	1555	64	350	2.2	0	1	16	22	7	0
O 3527D	17	52	37	85	1	7	0.4	3	1	29	170	11	0
P 3535B	1	2	1	2	2	4	-	-	-	-	-	-	0
Q 3542B	40	19	68	35	13	16	4.5	4	1	28	90	10	0
R 3557B	4	100	46	191	0	23	0.4	0	1	2	1140	0	0
S 3576B?	21	67	52	161	0	20	0.4	10	1	0	914	0	0
T 3578B?	0	101	0	161	0	20	0.1	15	1	0	956	0	0
U 3601B?	9	20	7	49	0	6	0.5	13	1	31	726	3	0
V 3607B?	1	2	1	2	0	4	-	-	-	-	-	-	0
W 3619S	9	7	19	17	0	3	1.5	28	1	21	466	0	120
X 3661S	5	10	6	17	1	3	0.3	2	1	39	1344	2	0
Y 3717S?	5	26	8	40	0	6	0.2	0	1	16	1393	0	0
Z 3719S?	1	2	1	2	0	4	-	-	-	-	-	-	0
AA 3734B?	2	12	3	20	0	3	0.1	0	1	24	1418	0	0
AB 3748B?	5	9	7	13	0	3	0.4	15	1	39	811	6	0
AC 3763B?	7	42	20	90	0	15	0.2	0	1	24	527	0	70
AD 3781B	54	83	96	92	15	31	1.2	0	1	28	74	13	0
AE 3784B	52	83	108	149	15	40	1.2	0	1	21	78	6	0
AF 3801B	18	20	41	41	0	9	1.1	9	1	30	240	7	0
AG 3814B	27	121	113	234	0	42	0.4	0	1	16	312	0	0
AH 3817B	42	121	113	234	0	42	0.6	0	1	17	148	1	0
AI 3826B	7	25	22	42	0	7	0.3	1	1	22	740	0	0
AJ 3834M	8	15	22	23	0	2	0.5	18	1	0	2726	0	90
AK 3853B	129	134	294	245	38	100	2.5	1	1	22	30	12	190
AL 3857B?	139	143	272	192	38	90	2.6	0	1	15	95	1	0
AM 3860D	139	152	272	251	35	90	2.5	0	1	15	28	5	0
AN 3863D	139	152	272	251	35	90	2.5	0	1	23	23	13	0
AO 3879B	29	39	61	82	11	16	1.1	9	1	27	105	11	0
AP 3891B	36	58	82	106	4	20	1.0	0	1	20	80	6	260
AQ 3903D	27	19	26	17	53	5	2.4	8	1	30	109	12	0
AR 3910B	130	94	275	147	54	97	3.9	0	1	21	14	12	730
AS 3922B	16	68	49	133	32	26	0.3	0	1	19	232	2	0
AT 3926B	13	68	49	133	7	26	0.2	0	1	20	99	4	200
AU 3939B	55	103	74	153	4	46	1.0	0	1	19	81	4	0
AV 3963M	0	6	0	15	0	1	0.1	1	1	34	5497	0	0
AW 3992M	0	6	0	12	0	3	0.1	4	1	38	5538	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11230		(FLIGHT 25)													
AX	3994B?	0	6	0	12	0	3	0.1	0	1	43	5900	0	0	
AY	4004M	0	4	0	9	0	2	0.1	0	1	41	6203	0	0	
AZ	4034M	0	1	0	4	0	1	0.1	2	1	59	6538	0	0	
BA	4041M	0	2	0	2	0	2	-	-	-	-	-	-	0	
BB	4066M	0	2	0	2	0	0	-	-	-	-	-	-	-	550
BC	4080M	0	7	0	13	0	2	0.1	0	1	18	5640	0	110	
BD	4087B?	0	3	0	11	0	1	0.1	0	1	81	7603	0	0	
BE	4093M	0	2	0	2	0	2	-	-	-	-	-	-	0	
BF	4121D	25	28	54	93	2	21	1.3	17	1	36	264	14	0	
BG	4130D	17	27	54	93	0	21	0.8	15	1	47	661	17	9	
BH	4171B?	4	27	3	24	0	3	0.1	0	1	15	3967	0	0	
BI	4179B?	1	2	1	2	0	2	-	-	-	-	-	-	0	
BJ	4237D	1	2	1	2	1	2	-	-	-	-	-	-	0	
BK	4247B?	6	11	14	13	1	3	0.4	0	1	34	483	1	0	
BL	4281M	0	2	0	2	0	2	-	-	-	-	-	-	0	
BM	4289B?	0	2	0	2	0	2	-	-	-	-	-	-	0	
BN	4325B?	1	5	5	21	0	3	0.2	0	1	11	2039	0	220	
BO	4332B?	0	2	0	2	0	4	-	-	-	-	-	-	0	
BP	4337B?	0	2	0	2	0	4	-	-	-	-	-	-	60	
BQ	4349M	0	2	0	2	0	1	-	-	-	-	-	-	0	
BR	4365S?	0	2	0	2	0	3	-	-	-	-	-	-	30	
BS	4431B?	1	2	0	2	0	4	-	-	-	-	-	-	0	
BT	4435B?	0	35	0	60	0	13	0.1	9	1	18	3523	0	0	
BU	4439M	0	35	0	60	0	13	0.1	14	1	4	1845	0	0	
BV	4443S?	0	11	0	41	0	11	0.1	11	1	0	1807	0	0	
BW	4451B?	0	19	0	5	0	3	0.1	6	1	7	2837	0	0	
BX	4453M	0	19	0	5	0	3	0.1	6	1	5	2705	0	0	
BY	4456M	0	19	0	5	0	2	0.1	4	1	11	3284	0	0	
BZ	4464B?	1	20	3	30	0	4	0.1	0	1	0	3135	0	0	
CA	4467M	0	2	1	2	0	4	-	-	-	-	-	-	0	
CB	4474M	0	3	0	5	0	1	0.1	0	1	39	5855	0	0	

LINE 11240		(FLIGHT 25)													
A	5552M	1	2	1	2	0	3	-	-	-	-	-	-	3030	
B	5548D	21	24	40	33	1	8	1.2	6	1	27	383	2	0	
C	5534B?	13	16	17	36	7	5	0.9	0	1	29	98	10	0	
D	5524D	8	7	8	14	1	6	1.2	20	1	55	147	31	0	
E	5518D	9	11	9	12	9	0	0.8	14	1	48	287	21	0	
F	5512D	23	10	27	16	12	9	4.2	0	1	30	65	12	0	
G	5506D	11	10	26	11	9	9	1.3	0	1	34	43	17	40	
H	5500D	5	10	7	10	7	3	0.6	11	1	65	146	41	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11240	(FLIGHT	25)											
I 5487B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5484B	8	40	35	67	24	16	0.2	0	1	34	62	18	0
K 5479B	15	60	75	106	9	34	0.3	0	1	24	54	10	0
L 5461B	28	27	54	40	15	19	1.6	0	1	21	19	10	500
M 5445B	14	42	22	79	10	11	0.4	0	1	25	112	9	0
N 5442B	1	2	1	2	2	4	-	-	-	-	-	-	0
O 5437B	9	60	95	101	8	33	0.2	0	1	28	77	13	190
P 5419S?	8	42	50	79	1	19	0.2	0	1	24	125	6	0
Q 5391S?	4	3	4	11	0	2	0.2	0	1	39	717	6	0
R 5369S	1	2	1	2	0	3	-	-	-	-	-	-	0
S 5358S?	5	20	11	37	0	6	0.2	7	1	6	2642	0	11
T 5347S?	6	37	10	55	0	10	0.1	0	1	12	1536	0	60
U 5314S	0	12	4	22	0	5	0.1	3	1	8	3529	0	0
V 5273S	3	8	4	11	0	2	0.2	15	1	33	1216	2	0
W 5265M	1	2	1	2	0	3	-	-	-	-	-	-	90
X 5247D	62	69	130	119	0	55	1.8	6	1	29	67	15	0
Y 5233B	55	160	146	308	10	56	0.7	0	1	16	57	4	0
Z 5231B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 5226B	5	36	131	120	4	64	0.1	0	1	16	67	4	110
AB 5187B?	1	2	0	2	0	1	-	-	-	-	-	-	0
AC 5174B?	1	2	1	2	0	3	-	-	-	-	-	-	50
AD 5168S?	10	6	19	22	0	6	1.8	29	1	34	322	9	0
AE 5153B	17	52	4	81	15	49	0.4	0	1	26	36	13	0
AF 5149B	56	56	4	90	18	49	2.0	9	1	37	39	24	520
AG 5136B?	20	32	45	63	5	15	0.8	0	1	22	101	5	0
AH 5124B	48	118	102	228	21	41	0.8	0	1	17	169	1	0
AI 5121B	57	58	102	110	21	31	1.9	0	1	21	52	8	4
AJ 5106D	52	61	66	54	12	28	1.6	4	1	22	104	7	0
AK 5100B	75	142	118	242	0	34	1.1	0	1	13	97	0	700
AL 5094B	48	117	97	280	7	50	0.8	0	1	20	88	6	0
AM 5090D	14	12	97	4	9	44	2.0	0	1	49	95	14	0
AN 5083B	35	86	71	132	10	30	0.7	0	1	31	63	17	240
AO 5080B	53	56	121	87	13	45	1.8	0	1	30	47	16	430
AP 5066M	0	3	0	2	0	1	0.1	0	1	52	6234	0	0
AQ 5056M	0	7	0	8	0	2	0.1	0	1	21	4752	0	0
AR 5054B?	0	7	0	8	0	2	0.1	1	1	24	4655	0	320
AS 5028M	0	2	0	31	0	0	0.1	0	1	30	5631	0	0
AT 5021S?	0	17	0	37	0	6	0.1	5	1	6	2837	0	0
AU 5013M	5	6	6	9	0	1	0.5	23	1	18	4945	0	60
AV 5003S?	0	12	0	23	0	3	0.1	0	1	4	3510	0	370
AW 4993M	0	6	0	17	0	1	0.1	0	1	14	4417	0	-250

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11240	(FLIGHT	25)											
AX 4955M	0	3	0	28	0	10	0.1	13	1	17	3126	0	400
AY 4935M	0	2	0	8	0	1	0.1	6	1	27	4551	0	0
AZ 4927M	0	4	0	5	0	1	0.1	0	1	17	4669	0	0
BA 4917B	33	41	70	58	4	10	1.3	15	1	47	346	23	0
BB 4914B	34	41	70	58	7	21	1.4	6	1	59	116	38	0
BC 4906B?	6	18	7	17	1	3	0.3	2	1	43	1414	6	0
BD 4880S?	5	9	7	15	1	3	0.4	15	1	27	2426	0	0
BE 4869B?	11	27	13	33	1	7	0.5	7	1	47	422	20	90
BF 4860B?	8	17	17	26	2	6	0.4	0	1	35	372	6	0
BG 4747S?	1	2	1	2	0	2	-	-	-	-	-	-	460
BH 4737S?	3	19	3	38	0	5	0.1	1	1	4	3354	0	50
BI 4724M	0	12	0	22	0	3	0.1	5	1	20	4057	0	0
BJ 4661M	0	2	0	2	0	4	-	-	-	-	-	-	270
BK 4652M	0	28	0	39	0	8	0.1	10	1	1	1986	0	0
BL 4649B?	0	27	0	23	0	12	0.1	10	1	0	1883	0	200
BM 4647B?	0	27	0	23	0	12	0.1	10	1	0	1695	0	0
BN 4644M	0	27	0	23	0	10	0.1	11	1	5	2233	0	70
BO 4636M	0	12	0	8	0	1	0.1	5	1	29	4780	0	170
BP 4630M	0	20	0	37	0	6	0.1	7	1	10	3063	0	70

LINE 11250	(FLIGHT	25)											
A 5704B	1	2	1	2	2	4	-	-	-	-	-	-	1060
B 5723B	25	49	50	98	31	29	0.7	6	1	33	50	19	0
C 5738B	15	54	38	106	2	17	0.4	0	1	17	113	2	15
D 5752B	27	94	78	196	10	34	0.5	0	1	16	89	2	14
E 5763B	13	39	16	83	17	18	0.4	1	1	34	82	18	70
F 5766B	13	39	34	83	17	18	0.4	0	1	28	26	15	0
G 5776B	25	79	58	160	2	20	0.5	0	1	24	83	9	0
H 5782B	59	24	130	42	21	36	6.3	12	1	25	29	14	0
I 5786B	1	2	1	2	2	4	-	-	-	-	-	-	0
J 5794B	32	23	71	43	4	23	2.5	0	1	22	24	11	0
K 5801B	8	7	3	123	8	2	1.3	26	1	36	64	19	440
L 5812B	17	34	30	53	0	9	0.6	14	1	18	198	1	0
M 5817B?	1	2	1	2	0	4	-	-	-	-	-	-	0
N 5840S?	6	25	8	43	0	6	0.2	0	1	25	796	0	0
O 5847S?	7	15	5	15	0	2	0.4	15	1	25	1216	0	0
P 5867B?	0	16	0	15	0	4	0.1	6	1	1	2318	0	0
Q 5880M	1	2	1	2	0	2	-	-	-	-	-	-	120
R 5905M	1	2	1	2	0	3	-	-	-	-	-	-	4
S 5915M	0	2	0	2	0	2	-	-	-	-	-	-	40
T 5988B?	3	19	3	40	0	5	0.1	0	1	0	2708	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11250	(FLIGHT	25)											
U 6036B?	6	38	13	74	0	11	0.2	0	1	11	1314	0	0
V 6044B?	22	5	44	9	3	8	10.8	33	1	55	168	33	0
W 6057B	121	353	284	672	13	141	0.9	0	1	11	61	1	0
X 6060B	13	353	284	672	13	141	0.1	0	1	19	45	7	0
Y 6091M	0	14	3	27	0	3	0.1	0	1	2	2560	0	0
Z 6101M	0	1	2	1	0	1	1.3	93	1	5	2880	0	130
AA 6130B	11	25	37	37	0	22	0.5	9	1	18	1247	0	0
AB 6136B	106	98	84	264	0	20	2.7	7	1	23	101	8	0
AC 6138B	106	127	84	264	29	20	2.0	1	1	20	39	9	110
AD 6140B	21	127	84	264	29	20	0.2	0	1	29	28	18	90
AE 6141B	54	66	84	264	29	20	1.6	8	1	32	35	20	340
AF 6146B	13	5	89	98	34	39	3.6	32	1	42	26	29	0
AG 6149B	17	68	37	148	31	19	0.3	0	1	38	62	23	0
AH 6153B?	16	68	78	136	31	28	0.3	1	1	26	128	11	1090
AI 6158B	16	29	78	130	21	33	0.7	0	1	33	27	21	0
AJ 6172B	6	16	11	62	22	6	0.4	0	1	43	64	25	0
AK 6177B?	31	40	11	69	21	15	1.2	6	1	26	208	7	0
AL 6185M	0	3	0	56	0	7	0.1	6	1	4	2597	0	0
AM 6189B?	0	34	0	62	0	8	0.1	7	1	0	1677	0	0
AN 6192B?	0	29	0	62	0	8	0.1	5	1	0	1665	0	0
AO 6194M	0	2	0	2	0	4	-	-	-	-	-	-	0
AP 6201B?	0	1	0	113	0	17	0.1	9	1	0	1759	0	0
AQ 6209B	45	85	110	154	0	30	0.9	0	1	25	89	10	0
AR 6214B?	2	21	61	32	0	7	4.0	11	1	1	2880	0	0
AS 6218M	0	21	8	32	0	5	0.2	0	1	9	3543	0	0
AT 6228S?	0	12	0	31	0	5	0.1	0	1	0	3008	0	0
AU 6253M	0	2	0	2	0	3	-	-	-	-	-	-	0
AV 6262M	0	20	0	28	0	4	0.1	0	1	4	3983	0	0
AW 6265B?	0	20	0	28	0	4	0.1	0	1	0	3008	0	0
AX 6270M	0	7	0	21	0	4	0.1	0	1	21	4809	0	100
AY 6289B?	0	15	0	47	0	7	0.1	2	1	0	2482	0	0
AZ 6306M	0	14	0	18	0	5	0.1	4	1	10	3240	0	260
BA 6310M	0	4	0	11	0	2	0.1	0	1	27	5321	0	0
BB 6328M	0	1	0	2	0	1	-	-	-	-	-	-	0
BC 6345B?	1	13	1	25	0	3	0.1	0	1	6	3458	0	0
BD 6349M	0	7	0	25	0	2	0.1	0	1	29	5497	0	1640
BE 6355M	0	2	0	2	0	1	-	-	-	-	-	-	0
BF 6371B	27	41	50	67	2	17	1.0	1	1	32	213	10	0
BG 6380B?	2	13	7	3	0	2	2.8	60	1	41	5761	0	50
BH 6396M	1	2	0	2	0	1	-	-	-	-	-	-	0
BI 6406S	8	13	4	19	0	3	0.6	13	1	26	2155	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	
LINE 11250 (FLIGHT 25)															
BJ	6423S	1	2	0	2	0	1	-	-	-	-	-	-	-	0
LINE 11251 (FLIGHT 25)															
A	6590B?	1	2	1	2	0	3	-	-	-	-	-	-	-	0
B	6598S?	0	11	5	18	0	4	0.2	0	1	2	2853	0	280	
C	6609M	0	2	1	2	0	2	-	-	-	-	-	-	-	0
D	6694M	0	2	1	2	0	4	-	-	-	-	-	-	-	300
E	6697D	6	28	7	26	0	7	0.2	0	1	0	2984	0	0	
F	6702M	2	5	7	4	0	3	1.5	49	1	19	4428	0	0	
G	6716M	0	2	1	5	0	1	0.1	0	1	54	6667	0	360	
LINE 11260 (FLIGHT 25)															
A	7566S?	0	7	0	17	0	3	0.1	4	1	17	3860	0	0	
B	7551B?	6	21	8	28	1	4	0.3	6	1	38	933	7	0	
C	7543S	1	2	1	2	0	3	-	-	-	-	-	-	-	50
D	7524B?	5	18	7	12	2	4	0.3	7	1	36	1224	4	0	
E	7522B?	5	7	6	12	2	4	0.4	21	1	40	1038	7	0	
F	7507B	2	31	63	72	19	40	1.5	1	1	41	43	27	80	
G	7505B	1	2	1	2	2	4	-	-	-	-	-	-	-	0
H	7494B	45	128	120	256	9	46	0.7	0	1	18	60	6	0	
I	7492B	94	144	205	247	9	12	1.5	0	1	20	57	8	11	
J	7481S?	1	2	1	2	0	4	-	-	-	-	-	-	-	0
K	7463M	0	13	0	19	0	3	0.1	1	1	9	3503	0	9	
L	7437M	5	17	11	38	0	5	0.3	0	1	0	2920	0	310	
M	7435B?	5	17	11	38	0	5	0.3	0	1	29	855	0	260	
N	7418B	34	58	132	137	26	53	0.9	3	1	25	59	12	310	
O	7416B	0	58	205	137	26	54	4.4	0	1	35	24	23	0	
P	7412B	142	122	279	190	40	96	3.3	0	1	19	14	10	0	
Q	7399B	1	24	35	41	6	11	1.3	0	1	33	167	11	0	
R	7378S?	0	10	6	18	0	3	0.3	5	1	8	3827	0	0	
S	7368M	0	2	1	2	0	4	-	-	-	-	-	-	-	220
T	7367S?	1	32	7	56	0	8	0.1	0	1	0	2210	0	0	
U	7358M	0	33	0	66	0	10	0.1	3	1	0	1969	0	0	
V	7356S?	4	32	0	66	0	10	0.1	0	1	0	1943	0	370	
W	7354B?	4	25	5	66	0	10	0.1	0	1	0	2443	0	0	
X	7348M	0	2	0	4	0	1	0.1	4	1	22	4270	0	440	
Y	7341M	0	27	2	53	0	8	0.1	0	1	0	2266	0	840	
Z	7339B?	0	27	2	53	0	8	0.1	0	1	1	2628	0	0	
AA	7331M	0	1	0	3	0	1	0.1	0	1	32	5666	0	0	
AB	7326B?	0	9	0	9	0	3	0.1	2	1	37	5622	0	390	
AC	7323M	0	5	0	9	0	3	0.1	3	1	33	5266	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11260	(FLIGHT	25)											
AD 7296M	0	2	0	13	0	1	0.1	0	1	65	6737	0	0
AE 7263M	0	2	0	1	0	1	0.1	3	1	161	8388	0	0
AF 7250M	0	2	0	2	0	2	-	-	-	-	-	-	0
AG 7237M	0	3	2	5	0	1	0.2	22	1	26	5457	0	0
AH 7133M	0	7	0	11	0	1	0.1	3	1	28	4868	0	0
AI 7116S?	3	14	7	27	1	4	0.2	2	1	20	1479	0	0
AJ 7100D	16	15	22	19	4	7	1.4	1	1	41	226	16	0
AK 7086B?	1	2	1	2	2	3	-	-	-	-	-	-	0
AL 7078B?	7	35	18	54	1	8	0.2	0	1	30	499	4	0
AM 6968B?	4	15	4	13	0	2	0.2	10	1	10	3402	0	0
AN 6960S?	2	15	10	31	0	4	0.3	0	1	15	1183	0	0
AO 6897S?	0	16	3	31	0	4	0.1	0	1	4	3319	0	0
AP 6888M	0	4	2	3	0	1	0.3	51	1	25	4868	0	140
AQ 6884M	0	4	0	8	0	1	0.1	1	1	37	5703	0	0
AR 6872M	0	1	0	9	0	0	0.1	0	1	77	7220	0	0
AS 6834M	0	2	1	2	0	2	-	-	-	-	-	-	430

LINE 11261	(FLIGHT	25)											
A 7928B	6	78	6	145	22	8	0.1	0	1	25	43	12	0
B 7905B	8	23	6	43	3	8	0.3	0	1	33	150	13	0
C 7891B?	11	49	100	182	9	48	0.3	0	1	25	134	7	4
D 7888B	1	2	1	2	0	4	-	-	-	-	-	-	0
E 7886B?	1	2	1	2	2	4	-	-	-	-	-	-	40
F 7876B	18	9	37	103	17	14	3.0	30	1	17	63	5	4
G 7861B	17	51	44	102	3	24	0.4	0	1	22	96	7	620
H 7839B	32	12	44	26	14	16	6.1	13	1	26	35	13	4
I 7831B	27	26	54	43	15	20	1.6	8	1	30	64	15	0
J 7820B	13	61	37	114	10	15	0.3	0	1	20	156	3	0
K 7804B?	1	2	1	2	0	4	-	-	-	-	-	-	0
L 7793B?	9	33	19	63	2	9	0.3	0	1	22	436	0	0
M 7790B?	2	19	19	63	1	8	0.4	0	1	27	475	2	0
N 7772M	0	1	0	2	0	1	0.1	0	1	33	5675	0	440
O 7764B?	0	18	11	13	1	2	0.8	27	1	32	980	3	0
P 7762B?	0	7	11	13	1	4	0.8	29	1	32	1117	3	0
Q 7743B?	0	7	0	17	0	0	0.1	0	1	25	5866	0	0
R 7740M	0	8	1	17	0	3	0.1	0	1	17	4976	0	0
S 7728M	0	2	1	2	0	1	-	-	-	-	-	-	10
T 7706B?	0	9	6	13	0	1	0.4	23	1	19	1840	0	0
U 7686B?	9	12	6	25	2	2	0.8	9	1	27	433	0	0
V 7679B?	3	25	28	25	0	6	1.5	9	1	34	568	6	0

LINE 11271	(FLIGHT	42)											
A 3875B	107	85	227	106	26	66	3.2	1	1	23	30	12	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND. DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT		

LINE 11271	(FLIGHT	42)											
B 3883B	12	40	16	32	0	8	0.4	0	1	25	548	1	0
C 3886B	9	26	9	43	0	7	0.4	5	1	10	1487	0	0
D 3899B?	1	63	2	124	0	19	0.1	8	1	0	1354	0	120
E 3901B?	0	40	0	91	0	15	0.1	13	1	0	1398	0	0
F 3903M	0	2	0	2	0	4	-	-	-	-	-	-	520
G 3920S?	0	45	0	96	0	14	0.1	12	1	0	1297	0	0
H 3929B	16	56	23	125	0	20	0.4	1	1	10	705	0	0
I 3934M	0	57	0	125	0	20	0.1	12	1	0	1156	0	100
J 3939B?	0	70	0	129	0	19	0.1	9	1	0	1350	0	30
K 3953B	11	33	23	62	0	20	0.4	6	1	20	234	2	0
L 3964B	62	64	138	107	17	40	2.0	9	1	26	61	13	60
M 3967B	1	2	1	2	2	4	-	-	-	-	-	-	0
N 3972B	69	28	151	60	26	45	6.9	11	1	38	26	26	90
O 3974B	69	28	151	60	26	44	6.9	12	1	31	29	19	0
P 3981B	12	37	11	65	0	2	0.4	4	1	27	308	6	0
Q 3985B	19	17	14	17	5	13	1.5	5	1	28	145	8	20
R 3988B?	13	20	14	22	5	13	0.8	0	1	36	124	16	0
S 4000S?	0	13	0	30	0	4	0.1	0	1	5	3642	0	180
T 4014M	0	8	4	29	0	5	0.1	0	1	0	3599	0	110
U 4017B?	0	10	0	29	0	3	0.1	1	1	27	4868	0	0

LINE 11272	(FLIGHT	42)											
A 3511B	23	25	43	48	4	9	1.3	13	1	19	77	5	6
B 3529D	68	96	122	187	3	38	1.4	1	1	16	127	1	0
C 3538D	18	21	6	40	3	3	1.1	4	1	44	222	20	0
D 3543D	25	28	45	42	9	15	1.3	0	1	25	81	7	0
E 3547B	19	120	166	240	5	57	0.2	0	1	28	149	11	0
F 3551B	79	120	188	240	14	62	1.4	1	1	16	57	4	0
G 3561B	43	76	67	154	8	25	1.0	4	1	23	80	9	0
H 3565B	33	47	69	78	14	15	1.1	0	1	16	83	1	40
I 3574B?	40	26	68	57	9	13	3.1	17	1	28	168	10	0
J 3576B?	35	26	68	57	7	13	2.5	18	1	31	166	12	0
K 3579M	1	2	1	2	0	4	-	-	-	-	-	-	4

LINE 11273	(FLIGHT	43)											
A 5014S?	0	6	0	17	0	7	0.1	9	1	5	2417	0	440
B 5016M	0	6	0	17	0	7	0.1	9	1	5	2420	0	1610
C 5036S?	0	19	0	35	0	4	0.1	2	1	5	3073	0	0
D 5039M	0	19	0	35	0	2	0.1	3	1	31	5074	0	1070
E 5047M	0	2	0	2	0	2	-	-	-	-	-	-	0
F 5053M	0	1	0	2	0	1	0.1	6	1	75	7187	0	40

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11273	(FLIGHT	43)											
G 5068B?	0	6	0	13	0	2	0.1	0	1	18	5397	0	0
H 5071M	0	2	0	5	0	2	0.1	0	1	34	5649	0	0
I 5093M	0	2	0	2	0	1	0.1	0	1	59	6811	0	0
J 5159B?	5	17	18	29	5	10	0.7	0	1	44	187	20	7
K 5164B?	1	2	1	2	2	1	-	-	-	-	-	-	0
L 5172B?	1	2	1	2	0	4	-	-	-	-	-	-	60
M 5175B?	5	17	13	18	0	7	0.3	7	1	38	481	11	0
N 5283S?	2	13	7	24	0	7	0.2	9	1	0	2175	0	0
O 5300B?	0	15	0	21	0	3	0.1	4	1	7	3013	0	0
P 5308M	0	2	0	2	0	1	-	-	-	-	-	-	190
Q 5322M	2	2	1	10	0	1	0.6	81	1	50	5327	0	0
R 5375S?	0	31	1	55	0	7	0.1	3	1	5	2994	0	0
S 5411B?	1	2	1	2	0	0	-	-	-	-	-	-	18

LINE 11280	(FLIGHT	42)											
A 3312B	54	79	122	144	5	35	1.3	0	1	21	60	7	0
B 3299D	39	34	65	71	6	20	2.1	3	1	26	116	8	0
C 3291D	53	79	114	287	23	44	1.3	4	1	30	96	14	0
D 3289D	92	207	114	287	23	44	1.0	0	1	20	90	6	0
E 3276B	17	19	32	36	12	10	1.2	4	1	28	67	12	140
F 3270B	41	51	75	88	17	24	1.4	0	1	27	56	13	0
G 3266B	51	65	144	114	17	64	1.5	0	1	19	25	8	0
H 3259B	74	43	142	73	21	43	4.3	1	1	28	38	15	0
I 3255B	39	40	142	84	21	43	1.7	1	1	18	172	0	150
J 3244B	110	91	257	204	30	69	3.2	0	1	15	33	4	6
K 3234B	148	61	321	102	32	43	8.6	1	1	13	39	2	0
L 3228M	144	143	314	291	32	92	2.8	2	1	0	1148	0	2330
M 3225B	18	98	55	177	0	92	0.3	0	1	12	327	0	0
N 3221B	12	98	35	177	0	86	0.1	0	1	15	461	0	6
O 3219M	12	98	35	177	0	36	0.1	0	1	0	2202	0	710
P 3216B	0	8	0	177	0	28	0.1	0	1	0	2428	0	430
Q 3213M	44	47	100	92	3	26	1.7	3	1	0	2726	0	1960
R 3209B	44	47	100	92	3	26	1.7	0	1	19	82	4	0
S 3191S?	0	33	20	63	0	9	0.4	3	1	0	1831	0	0
T 3181B?	10	38	20	84	2	13	0.3	7	1	7	1578	0	0
U 3170S?	16	7	40	31	0	17	3.5	35	1	35	244	13	0
V 3164M	16	34	40	49	2	17	0.6	5	1	6	3296	0	1750
W 3142M	0	2	0	2	0	1	-	-	-	-	-	-	30
X 3071B?	1	2	1	2	1	4	-	-	-	-	-	-	0
Y 3066B?	6	17	9	16	4	7	0.3	9	1	58	358	30	0
Z 3060B?	6	15	14	16	2	43	0.3	9	1	32	611	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11280	(FLIGHT		42)										
AA 3051D	63	48	106	77	25	43	2.9	1	1	33	134	14	0
AB 3003S	11	28	27	14	1	11	0.5	0	1	28	317	3	30
AC 2990B	76	80	167	143	1	61	2.1	8	1	32	63	18	0
AD 2983B?	0	43	0	79	0	12	0.1	8	1	0	1937	0	0
AE 2980M	4	43	4	79	0	12	0.1	0	1	9	3004	0	0
AF 2970S	7	15	21	27	0	6	0.4	3	1	28	523	1	0
AG 2938S	1	2	1	2	0	3	-	-	-	-	-	-	4
AH 2923S	1	2	1	2	1	4	-	-	-	-	-	-	20
AI 2898B?	1	2	1	2	2	4	-	-	-	-	-	-	0
AJ 2892D	43	79	83	140	6	27	1.0	0	1	16	214	0	11
AK 2883B?	5	36	47	76	2	12	0.1	0	1	1	2169	0	0
AL 2874B?	6	42	21	63	2	14	0.1	0	1	0	1789	0	80
AM 2858M	0	2	1	2	0	2	-	-	-	-	-	-	320
AN 2821M	0	21	0	37	0	6	0.1	10	1	7	2557	0	0
AO 2799S?	0	11	6	15	0	3	0.3	8	1	3	3550	0	6
AP 2790B?	0	19	7	25	0	4	0.2	0	1	0	2852	0	1030
AQ 2780S?	1	2	1	2	0	4	-	-	-	-	-	-	10
AR 2770M	0	6	0	12	0	2	0.1	2	1	17	4067	0	0
AS 2759M	0	4	0	5	0	1	0.1	1	1	32	5359	0	0
AT 2756M	0	4	0	25	0	1	0.1	0	1	31	5601	0	660
AU 2750M	0	21	0	32	0	3	0.1	1	1	17	4048	0	1890
AV 2746B?	0	21	0	32	0	4	0.1	0	1	0	2876	0	0
AW 2735M	0	17	0	35	0	3	0.1	5	1	24	4314	0	0
AX 2729M	0	2	0	2	0	4	-	-	-	-	-	-	1110
AY 2711B?	0	79	3	120	0	17	0.1	0	1	0	1391	0	0
AZ 2703M	0	6	3	119	0	2	0.1	0	1	25	4795	0	160
BA 2640M	0	2	0	2	0	1	-	-	-	-	-	-	0
BB 2625M	0	2	0	2	0	0	0.1	0	1	149	8388	0	0
BC 2551S?	1	2	0	2	0	3	-	-	-	-	-	-	0
BD 2531B	37	42	76	85	9	25	1.5	2	1	33	88	16	0
BE 2526D	19	33	76	46	9	25	0.7	4	1	36	399	10	0
BF 2523B?	19	24	21	46	9	10	1.0	3	1	26	655	0	50
BG 2519B?	19	5	21	46	6	1	6.9	30	1	30	2120	0	0
BH 2510S	5	14	7	29	0	4	0.2	0	1	24	1309	0	0
BI 2463M	2	11	6	33	0	5	0.1	0	1	8	3151	0	4
BJ 2457M	2	14	6	44	0	6	0.1	0	1	4	2667	0	0
BK 2441M	0	42	7	70	0	10	0.1	0	1	0	1807	0	0
BL 2439S?	0	42	7	70	0	10	0.1	0	1	7	1760	0	4
BM 2419M	0	2	0	2	0	1	-	-	-	-	-	-	130
BN 2389M	0	16	0	24	0	4	0.1	4	1	23	4382	0	190
BO 2383S?	0	21	0	53	0	4	0.1	4	1	11	3439	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11280	(FLIGHT	42)											
BP 2329M	1	4	1	8	0	1	0.1	8	1	38	5791	0	0
BQ 2314S?	0	16	0	23	0	4	0.1	3	1	13	3571	0	130
BR 2299S?	0	31	4	49	0	7	0.1	0	1	3	2237	0	0
LINE 11290	(FLIGHT	42)											
A 426B	23	14	59	90	3	21	2.8	11	1	16	120	0	0
B 434D	1	2	1	2	2	4	-	-	-	-	-	-	0
C 440D	47	63	64	103	6	19	1.4	3	1	19	138	3	0
D 461B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 464B	44	40	81	72	3	32	2.1	1	1	27	37	14	110
F 467B	50	40	92	72	18	36	2.5	3	1	27	38	14	0
G 475B	14	5	29	10	10	16	4.8	18	1	29	107	10	0
H 485B	41	44	81	79	15	26	1.7	0	1	18	89	3	0
I 490B	27	57	72	97	15	25	0.7	0	1	21	67	7	0
J 512M	0	12	0	22	0	4	0.1	5	1	0	2132	0	6
K 516B?	0	7	0	7	0	1	0.1	0	1	0	2587	0	1300
L 520M	0	7	5	3	0	2	1.9	62	1	0	2536	0	0
M 524B	17	21	24	23	0	5	1.0	14	1	0	2240	0	0
N 528D	3	20	8	20	0	4	0.3	10	1	28	507	3	0
O 534B?	1	2	1	2	0	4	-	-	-	-	-	-	0
P 537D	13	22	15	44	0	9	0.6	7	1	23	452	0	5
Q 546B?	3	20	7	48	0	6	0.1	0	1	14	1210	0	0
R 548B?	3	21	7	48	0	6	0.1	0	1	17	908	0	0
S 553D	3	9	13	6	0	1	3.0	33	1	14	1136	0	640
T 557D	1	2	1	2	0	1	-	-	-	-	-	-	0
U 560D	8	14	11	12	0	1	0.6	18	1	12	1298	0	20
V 570M	1	2	1	2	0	4	-	-	-	-	-	-	4
W 574S?	17	8	37	80	0	13	3.4	28	1	20	305	0	30
X 687D	36	2	74	57	16	26	127.0	5	1	22	81	5	0
Y 782D	12	7	15	19	0	5	2.4	17	1	32	500	2	0
Z 792B?	6	9	6	33	0	8	0.6	31	1	11	938	0	0
AA 799B?	4	72	14	135	0	19	0.1	0	1	7	918	0	0
AB 801D	4	72	14	135	0	19	0.1	0	1	0	2554	0	0
AC 804B?	0	6	0	100	0	14	0.1	4	1	6	2921	0	0
AD 813B?	0	18	0	32	0	4	0.1	4	1	0	2340	0	0
AE 818S?	0	23	0	59	0	8	0.1	7	1	0	1829	0	150
AF 821M	0	30	0	59	0	8	0.1	5	1	0	1688	0	550
AG 831B?	0	6	0	16	0	1	0.1	0	1	0	2733	0	0
AH 837B?	5	3	15	35	0	15	0.4	6	1	18	950	0	0
AI 840B?	13	24	36	55	0	16	0.6	17	1	19	415	0	0
AJ 844B?	13	30	36	55	0	16	0.5	11	1	0	1886	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ REAL QUAD REAL QUAD REAL QUAD . COND DEPTH* . COND DEPTH RESIS DEPTH FID/INTERP PPM PPM PPM PPM PPM PPM . SIEMEN M . SIEMEN M OHM-M M NT							

LINE 11290 (FLIGHT 42)							
AK 854B?	6	25	3	16	0	5	0
AL 893S?	0	23	1	53	0	7	0
AM 918D	15	15	16	17	0	4	0
AN 923B?	1	2	1	2	0	4	0
AO 926B?	4	31	7	59	0	6	0
AP 929B?	0	20	2	59	0	6	7
AQ 935D	27	32	33	44	0	6	0
AR 939B	10	21	33	36	1	8	60
AS 944D	10	24	23	10	0	5	0
AT 948M	0	8	11	17	0	3	0
AU 957B?	5	21	5	21	0	5	0
AV 974B?	0	2	0	2	0	2	1430
AW 975M	0	4	0	13	0	2	570
AX 992B?	0	11	8	19	0	3	130
AY 997M	0	2	0	2	0	2	0
AZ 1007M	0	2	0	2	0	1	360
BA 1018M	0	7	0	18	0	5	850
BB 1028M	0	3	0	4	0	1	0
BC 1062M	0	3	0	7	0	1	600
BD 1066M	0	2	0	2	0	1	520
BE 1068B?	0	5	0	10	0	2	0
BF 1072M	0	2	0	2	0	2	5
BG 1082M	0	5	0	12	0	2	0
BH 1087M	0	2	0	3	0	0	0
BI 1098M	0	5	0	9	0	2	1470

LINE 11291 (FLIGHT 42)							
A 2011D	15	14	8	7	5	7	0
B 2016D	7	16	43	23	11	17	0
C 2020B	13	15	43	23	11	17	0
D 2033M	7	41	15	34	0	10	100
E 2036S?	7	41	15	34	0	10	0
F 2049S?	0	2	0	2	0	2	50
G 2060M	0	18	0	38	0	5	0
H 2063B?	4	18	7	38	0	5	0
I 2080S?	4	11	10	24	0	4	0
J 2089S?	2	6	10	13	0	6	14
K 2094B?	3	18	5	13	0	6	0
L 2165M	0	17	1	22	0	7	270
M 2167B?	0	17	1	22	0	7	0

LINE 11301 (FLIGHT 41)							
A 3766D	15	7	9	44	1	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 11301	(FLIGHT	41)											
B 3759B?	32	50	181	94	24	59	1.0	0	1	13	190	0	0
C 3755D	84	18	181	83	24	59	17.7	9	1	18	50	5	0
D 3752B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3743D	63	35	133	93	12	28	4.4	11	1	21	78	7	0
F 3739D	105	146	291	269	14	46	1.7	4	1	19	77	7	0
G 3737D	148	187	291	353	22	73	2.1	0	1	15	50	4	0
H 3730B	28	32	55	55	16	15	1.3	0	1	20	64	5	750
I 3717B	62	76	120	147	16	33	1.6	0	1	15	53	3	0
J 3711B	57	73	125	136	19	42	1.5	0	1	22	43	10	0
K 3706B	67	85	121	153	19	50	1.6	0	1	21	68	7	0
L 3697B?	5	24	27	46	1	12	0.2	0	1	0	2379	0	0
M 3696M	0	24	12	46	0	12	0.3	0	1	0	2412	0	4180
N 3684M	0	6	0	2	0	3	0.1	0	1	5	3290	0	30
O 3677B?	0	5	0	10	0	2	0.1	0	1	0	3342	0	860
P 3674D	3	6	11	10	0	2	1.1	19	1	6	2923	0	0
Q 3665M	3	7	13	12	0	2	1.1	21	1	14	1938	0	220
R 3641S	1	2	1	2	0	2	-	-	-	-	-	-	0
S 3628M	0	2	1	2	0	2	-	-	-	-	-	-	110
T 3613S?	8	43	24	81	0	15	0.2	0	1	21	580	0	0
U 3518S?	5	14	10	27	0	5	0.3	4	1	21	797	0	30
V 3505S?	4	24	7	51	0	7	0.1	0	1	18	693	0	0
W 3497S?	6	21	11	38	0	5	0.2	0	1	14	899	0	0
X 3489B?	8	36	12	52	0	7	0.2	0	1	11	1262	0	0
Y 3482M	0	2	0	2	0	1	-	-	-	-	-	-	70
Z 3469S?	6	24	17	34	0	7	0.2	0	1	10	764	0	0
AA 3451S?	4	44	14	88	0	14	0.2	0	1	2	1992	0	60
AB 3449M	7	44	17	88	0	14	0.2	0	1	0	1650	0	30
AC 3439S?	1	11	0	20	0	3	0.1	0	1	13	3860	0	-280
AD 3417B?	7	16	6	26	1	12	0.4	14	1	27	382	4	0
AE 3414B?	12	39	6	65	1	10	0.4	0	1	21	525	0	0
AF 3393B?	13	51	17	101	0	22	0.3	6	1	20	411	1	0
AG 3391B?	12	51	51	101	3	23	0.3	4	1	17	393	0	8
AH 3387D	15	52	51	100	3	23	0.4	0	1	29	239	9	0
AI 3384M	15	52	51	111	3	17	0.4	5	1	35	841	7	30
AJ 3373D	28	53	45	70	2	15	0.8	0	1	39	434	12	0
AK 3320M	3	16	9	23	0	6	0.3	9	1	0	1910	0	0
AL 3318D	6	16	9	23	0	6	0.4	14	1	11	1397	0	0
AM 3312M	1	14	0	32	0	4	0.1	0	1	6	3268	0	80
AN 3299M	0	2	0	2	0	3	-	-	-	-	-	-	0
AO 3296S?	0	2	0	2	0	4	-	-	-	-	-	-	0
AP 3283M	5	7	3	9	0	1	0.5	35	1	20	4359	0	130

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL	COPLANAR	COPLANAR		VERTICAL		HORIZONTAL	CONDUCTIVE		MAG		
		6368 HZ	7294 HZ	864 HZ		DIKE		SHEET	EARTH		CORR		
ANOMALY/	REAL QUAD	REAL QUAD	REAL QUAD		COND DEPTH*	COND DEPTH	RESIS	DEPTH					
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	.SIEMEN	M	.SIEMEN	M	OHM-M	M	NT

LINE 11301	(FLIGHT	41)											
AQ 3273M	0	1	0	3	0	1	0.1	4	1	33	5247	0	0
AR 3262M	3	5	0	10	0	1	0.3	33	1	12	4175	0	0
AS 3252M	0	25	0	53	0	9	0.1	0	1	0	2733	0	0
AT 3250D	3	25	3	53	0	9	0.1	0	1	0	2428	0	0
AU 3245D	7	25	3	53	0	9	0.2	0	1	28	6129	0	0
AV 3192M	0	1	0	1	0	0	0.1	13	1	86	7326	2	0
AW 3182B?	0	3	0	10	0	0	0.1	0	1	63	6944	0	0
AX 3175M	0	5	0	12	0	3	0.1	0	1	20	5041	0	0
AY 3170B?	2	4	0	7	0	1	0.2	19	1	22	5761	0	5
AZ 3165M	0	1	0	6	0	1	0.1	0	1	34	5771	0	230
BA 3154M	0	1	0	7	0	2	0.1	0	1	36	5675	0	60
BB 3144M	0	1	0	2	0	1	-	-	-	-	-	-	0
BC 3131M	0	4	0	5	0	1	0.1	1	1	26	4899	0	100
BD 3121M	0	7	0	18	0	4	0.1	4	1	11	3313	0	1360
BE 3112M	0	2	0	5	0	1	0.1	1	1	31	5229	0	190
BF 3026B?	0	12	0	35	0	11	0.1	14	1	13	2694	0	0
BG 3008B?	4	19	5	39	0	6	0.1	0	1	3	3063	0	0
BH 2960M	0	2	0	0	0	0	0.1	0	1	43	6060	0	0
BI 2940D	8	7	10	13	0	3	1.1	20	1	37	1234	0	0
BJ 2933D	1	2	1	2	2	4	-	-	-	-	-	-	0
BK 2925D	18	16	38	33	9	10	1.6	17	1	48	275	23	0
BL 2921D	30	31	38	33	9	10	1.5	6	1	45	190	23	0
BM 2917D	26	12	15	14	10	4	4.3	8	1	36	515	6	0
BN 2863M	1	2	1	2	0	3	-	-	-	-	-	-	220
BO 2859B?	5	8	11	19	0	3	0.5	11	1	28	1021	0	4
BP 2850S?	0	11	0	11	0	3	0.1	2	1	0	2460	0	0
BQ 2843M	0	4	0	16	0	1	0.1	6	1	6	2776	0	0
BR 2837S?	0	13	0	41	0	6	0.1	4	1	0	2177	0	0
BS 2817M	0	18	0	32	0	6	0.1	9	1	8	2698	0	200
BT 2809B?	4	26	13	45	0	10	0.3	2	1	5	1901	0	15
BU 2804D	4	27	13	39	0	10	0.3	0	1	27	1432	0	170
BV 2796M	0	2	1	2	0	2	-	-	-	-	-	-	0

LINE 11310	(FLIGHT	41)											
A 1496S	8	38	20	66	1	11	0.2	0	1	22	445	0	0
B 1505S	18	109	33	202	0	27	0.2	0	1	12	408	0	0
C 1511D	72	101	142	198	10	45	1.5	3	1	15	90	2	0
D 1528B	40	40	73	81	7	17	1.7	8	1	17	137	1	0
E 1533M	1	2	1	2	2	4	-	-	-	-	-	-	740
F 1536B	47	35	105	61	18	21	2.7	4	1	20	103	4	40
G 1539B	58	28	105	49	18	21	5.1	0	1	19	51	5	170

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11310	(FLIGHT		41)										
H 1545B	32	55	40	84	5	16	0.9	3	1	28	127	11	0
I 1547B	28	55	40	84	5	16	0.8	0	1	19	180	1	100
J 1555D	38	96	40	149	0	24	0.7	0	1	16	211	0	0
K 1560D	66	83	103	113	15	24	1.6	3	1	15	97	1	0
L 1571B	51	67	100	110	31	30	1.4	1	1	15	44	4	0
M 1580M	0	2	1	2	0	4	-	-	-	-	-	-	0
N 1591M	0	9	0	15	0	3	0.1	0	1	10	3613	0	0
O 1627S?	0	15	2	37	0	5	0.1	2	1	7	2671	0	0
P 1640B?	3	9	6	14	0	2	0.3	4	1	19	1799	0	340
Q 1650S?	0	10	2	22	0	3	0.1	0	1	8	3290	0	0
R 1656M	0	3	4	21	0	2	0.1	0	1	12	4030	0	0
S 1711S?	7	9	19	65	0	13	0.7	32	1	17	557	0	0
T 1728S?	2	29	4	51	0	7	0.1	0	1	0	2218	0	0
U 1746S?	10	30	18	57	0	10	0.4	3	1	27	646	1	0

LINE 11311	(FLIGHT		41)										
A 1822S?	11	35	30	64	0	10	0.4	8	1	0	1524	0	0
B 1825B?	11	35	30	64	0	10	0.4	0	1	26	423	3	6
C 1837S?	1	15	14	33	0	9	0.5	2	1	12	906	0	0
D 1841M	1	14	14	49	0	4	0.3	3	1	3	2454	0	100
E 1850S	1	2	1	2	0	4	-	-	-	-	-	-	5
F 1875S?	6	13	28	30	0	11	0.4	14	1	16	486	0	0
G 1888S?	0	29	0	54	0	7	0.1	5	1	0	2210	0	0
H 1904S	1	2	1	2	1	3	-	-	-	-	-	-	0
I 1954B?	14	42	29	83	1	13	0.4	3	1	27	347	6	0
J 1961B?	1	2	1	2	0	2	-	-	-	-	-	-	0
K 2038B?	0	21	0	32	0	4	0.1	0	1	6	3354	0	10
L 2067M	0	12	0	18	0	2	0.1	0	1	17	5008	0	530
M 2073B?	4	14	4	18	0	3	0.2	0	1	14	4398	0	0
N 2098M	0	5	0	15	0	1	0.1	5	1	39	5580	0	0
O 2127M	0	2	0	5	0	1	0.1	0	1	37	5855	0	0
P 2132M	0	3	0	4	0	0	0.1	0	1	56	6459	0	0
Q 2140M	0	2	0	4	0	0	0.1	0	1	55	6498	0	0
R 2155M	0	4	0	8	0	2	0.1	1	1	43	5877	0	0
S 2182M	0	2	0	4	0	1	0.1	0	1	42	5983	0	0
T 2202M	0	1	0	1	0	1	-	-	-	-	-	-	240
U 2220M	0	6	0	16	0	3	0.1	0	1	12	4393	0	-180
V 2244M	0	1	0	0	0	0	0.1	7	1	71	7518	0	0
W 2292B?	0	2	2	2	2	0	0.5	33	1	129	2141	47	0
X 2311B?	0	1	1	1	1	0	0.2	46	1	140	1503	72	0
Y 2342B	23	15	42	23	10	13	2.6	8	1	40	186	18	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR					
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11311	(FLIGHT	41)											
Z 2352D	10	23	4	26	1	6	0.4	5	1	25	2538	0	0
AA 2363D	3	12	1	10	0	2	0.1	4	1	60	1293	19	15
AB 2386B?	2	2	3	14	1	2	0.1	0	1	25	1780	0	0
AC 2412S	0	2	1	2	1	2	-	-	-	-	-	-	30
AD 2467B?	0	16	0	7	0	4	0.1	5	1	0	2340	0	410
AE 2470M	0	16	0	13	0	4	0.1	10	1	7	2490	0	0
AF 2486D	1	2	1	2	0	2	-	-	-	-	-	-	0
AG 2532M	0	2	0	2	0	1	-	-	-	-	-	-	0
AH 2542B?	0	27	0	40	0	5	0.1	10	1	13	3035	0	6
AI 2552M	0	2	0	9	0	2	0.1	4	1	53	6101	0	70

LINE 11312	(FLIGHT	44)											
A 1903M	0	2	0	2	0	4	-	-	-	-	-	-	0
B 1896M	0	6	0	10	0	3	0.1	9	1	17	3452	0	-6
C 1868M	0	4	0	10	0	3	0.1	0	1	17	4238	0	0
D 1857M	0	8	5	17	0	3	0.2	5	1	6	3564	0	540
E 1847B?	1	2	1	2	0	4	-	-	-	-	-	-	0
F 1842M	0	19	5	44	0	8	0.1	0	1	0	2435	0	0
G 1832S?	0	7	5	12	0	1	0.3	6	1	5	4155	0	0
H 1806M	0	2	0	4	0	1	0.1	0	1	38	6580	0	0
I 1772M	0	3	0	5	0	1	0.1	0	1	51	6332	0	0
J 1758S?	0	2	1	2	1	2	-	-	-	-	-	-	0
K 1744M	0	0	0	0	0	0	-	-	-	-	-	-	410
L 1704M	0	2	1	2	0	1	-	-	-	-	-	-	370
M 1694S?	0	10	1	15	0	2	0.1	0	1	14	4809	0	410
N 1683M	0	5	0	11	0	2	0.1	0	1	21	5781	0	40
O 1660M	0	2	0	4	0	1	0.1	0	1	48	6459	0	0
P 1648M	1	2	0	14	0	0	0.4	62	1	75	7290	0	240
Q 1641B?	10	1	10	30	0	5	22.3	42	1	27	1040	0	70
R 1636D	10	18	11	18	0	2	0.5	9	1	16	4273	0	0
S 1633M	0	8	4	16	0	3	0.1	1	1	27	5321	0	50
T 1619M	1	2	0	2	0	1	-	-	-	-	-	-	1040
U 1590M	0	6	0	2	0	3	0.1	0	1	51	6173	0	0
V 1571S?	0	1	0	3	0	1	0.1	1	1	14	3803	0	0
W 1528M	0	2	0	2	0	1	-	-	-	-	-	-	10
X 1513M	2	4	0	7	0	1	0.3	39	1	49	6250	0	0

LINE 11313	(FLIGHT	44)											
A 1982S?	0	2	0	2	0	2	-	-	-	-	-	-	-4
B 1970B?	0	3	0	14	0	0	0.1	0	1	89	7884	0	150
C 1968M	0	3	0	21	0	0	0.1	0	1	69	7091	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11313	(FLIGHT	44)											
D 1951M	0	3	0	6	0	1	0.1	0	1	16	5090	0	1200

LINE 11320	(FLIGHT	41)											
A 522M	0	2	0	2	0	1	-	-	-	-	-	-	0
B 372D	14	12	13	17	1	5	1.5	0	1	32	437	2	0
C 359D	8	6	5	5	1	1	1.3	13	1	48	1764	2	0
D 334S?	0	2	1	8	0	2	0.1	2	1	20	4270	0	120
E 333M	0	2	1	2	0	2	-	-	-	-	-	-	120
F 328B?	1	2	1	2	0	1	-	-	-	-	-	-	0
G 322B?	1	10	2	15	0	2	0.1	4	1	20	3767	0	0
H 315B?	1	2	1	1	0	1	-	-	-	-	-	-	0
I 265B?	4	11	8	14	0	1	0.4	14	1	25	1382	0	40
J 262M	1	2	1	2	0	1	-	-	-	-	-	-	540
K 259M	0	20	5	29	0	3	0.1	0	1	9	3843	0	0
L 255D	5	20	13	36	0	5	0.4	0	1	19	1327	0	0
M 253D	5	15	13	36	0	5	0.3	11	1	11	1812	0	5
N 249B?	0	16	0	31	0	6	0.1	4	1	3	2705	0	0
O 231M	0	2	1	2	0	2	-	-	-	-	-	-	280
P 228B?	1	2	1	2	0	3	-	-	-	-	-	-	0
Q 224B?	2	19	14	38	0	6	0.4	0	1	27	774	0	0
R 222B?	1	2	1	2	0	4	-	-	-	-	-	-	0
S 203M	0	6	0	12	0	3	0.1	4	1	42	5751	0	0
T 195B?	0	8	0	10	0	1	0.1	0	1	12	4551	0	0
U 189B?	0	11	1	6	0	1	0.1	16	1	10	3938	0	140
V 188M	0	11	0	10	0	1	0.1	1	1	20	4303	0	150
W 184B?	0	7	0	4	0	0	0.1	2	1	28	4914	0	5
X 178B?	0	7	0	6	0	1	0.1	6	1	29	4642	0	0
Y 176M	0	7	0	6	0	1	0.1	8	1	29	4551	0	0

LINE 11321	(FLIGHT	41)											
A 1440B?	1	2	1	2	0	4	-	-	-	-	-	-	0
B 1432B	17	119	97	171	1	6	0.2	0	1	11	173	0	0
C 1429B	17	119	97	171	1	6	0.2	0	1	12	149	0	70
D 1425B	147	81	266	140	92	95	5.8	0	1	19	18	10	0
E 1421B	1	2	1	2	2	4	-	-	-	-	-	-	8
F 1412B	21	11	49	51	2	14	3.3	22	1	18	81	4	0
G 1400B	53	45	85	64	13	23	2.4	0	1	24	43	11	0
H 1398B	53	45	85	64	13	23	2.4	7	1	28	88	12	70
I 1393D	27	88	139	163	5	44	0.5	0	1	27	116	9	100
J 1389D	77	88	139	163	45	44	1.9	2	1	25	47	12	0
K 1385B	116	60	181	105	58	62	5.8	1	1	20	18	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11321	(FLIGHT	41)											
L 1377B	20	70	165	124	10	53	0.4	0	1	21	41	9	70
M 1355S	2	15	8	31	0	5	0.2	0	1	30	763	1	0
N 1350B?	2	12	9	30	0	4	0.3	0	1	37	914	4	0
O 1341M	0	7	5	15	0	2	0.2	8	1	10	3844	0	0
P 1340B?	0	2	0	2	0	2	-	-	-	-	-	-	730
Q 1336M	0	0	4	1	0	1	3.5	72	1	25	5124	0	0
R 1326B?	0	7	2	4	0	2	0.3	37	1	33	1131	0	0
S 1323B?	1	13	7	13	0	2	0.4	11	1	28	1155	0	370
T 1271B?	6	22	12	24	0	6	0.3	2	1	34	731	5	0
U 1257S	3	6	3	14	0	2	0.1	0	1	28	500	0	0
V 1248M	0	2	1	2	0	2	-	-	-	-	-	-	90
W 1237M	0	2	1	2	0	1	-	-	-	-	-	-	30
X 1218S?	6	40	18	80	0	12	0.1	0	1	12	537	0	0
Y 1202S?	1	2	1	2	1	4	-	-	-	-	-	-	13
Z 1192M	18	22	36	39	9	12	1.0	19	1	0	2349	0	0
AA 1189D	18	17	36	35	9	12	1.4	24	1	44	334	19	4
AB 1175M	0	2	1	2	0	4	-	-	-	-	-	-	220
AC 1171S?	0	12	16	23	0	5	0.7	10	1	25	715	0	0
AD 1170M	0	12	16	23	0	5	0.7	15	1	14	1266	0	0
AE 1163M	0	11	14	20	0	3	0.7	16	1	0	2691	0	0
AF 1161S?	0	11	0	20	0	4	0.1	0	1	0	2654	0	0
AG 1155S?	0	10	2	20	0	2	0.1	0	1	6	3557	0	0
AH 1131S?	7	46	18	78	1	11	0.1	0	1	24	638	0	0
AI 1128B?	5	22	11	78	1	6	0.1	0	1	25	659	0	0
AJ 1126B?	5	13	11	40	1	6	0.3	0	1	28	820	0	0
AK 1118B?	2	15	6	31	1	3	0.1	0	1	32	902	3	0
AL 1114B?	7	11	15	27	1	5	0.6	0	1	29	354	1	0
AM 1080S?	0	2	1	2	1	3	-	-	-	-	-	-	0
AN 1064M	0	2	1	2	0	1	-	-	-	-	-	-	140
AO 940S?	2	15	0	13	0	4	0.1	0	1	0	3198	0	0
AP 920M	0	2	0	6	0	2	0.1	7	1	32	4914	0	80
AQ 900M	0	4	0	6	0	1	0.1	0	1	18	5649	0	0
AR 886M	1	2	1	2	0	1	-	-	-	-	-	-	300
AS 883B?	2	6	2	7	0	0	0.1	10	1	41	4146	0	60
AT 877B?	5	10	4	11	1	2	0.4	14	1	29	2813	0	6
AU 860B?	0	2	0	2	0	0	-	-	-	-	-	-	110
AV 856M	0	3	0	4	0	1	0.1	0	1	68	7030	0	0
AW 835M	0	1	0	1	0	1	0.1	0	1	194	8388	0	80
AX 818M	0	2	0	6	0	2	0.1	0	1	157	8388	0	0
AY 778M	0	1	0	1	0	0	0.1	0	1	151	8388	0	0
AZ 766M	0	2	0	3	0	1	0.1	0	1	72	6944	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE	HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR		
ANOMALY/ FID/INTERP		REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11321		(FLIGHT 41)												
BA	755M	0	5	0	15	0	2	0.1	0	1	25	4929	0	320
BB	740M	0	5	0	7	0	1	0.1	0	1	43	6350	0	5

LINE 11330		(FLIGHT 30)												
A	5318S?	12	63	22	119	0	17	0.2	0	1	10	500	0	0
B	5327S?	13	46	18	94	0	12	0.3	2	1	20	446	0	0
C	5352B	60	175	135	354	0	92	0.7	1	1	17	65	6	220
D	5356B	55	175	84	354	17	17	0.7	0	1	22	39	10	70
E	5360B	66	58	120	110	2	30	2.4	0	1	20	27	9	4
F	5365D	46	31	106	218	20	39	3.0	8	1	27	49	14	5
G	5369B	65	107	138	218	16	46	1.2	0	1	18	73	5	170
H	5377B	50	64	101	129	5	30	1.4	0	1	21	93	6	20
I	5391S?	3	19	7	40	0	4	0.1	0	1	21	1238	0	60
J	5398B?	1	2	1	2	0	3	-	-	-	-	-	-	8
K	5400B?	9	12	18	20	0	3	0.8	24	1	30	529	4	0
L	5405B?	10	18	18	39	0	7	0.6	11	1	22	784	0	250
M	5414M	0	2	1	2	0	1	-	-	-	-	-	-	1040
N	5422M	0	2	0	2	0	1	-	-	-	-	-	-	0
O	5437M	0	2	0	2	0	1	-	-	-	-	-	-	0
P	5443S	4	13	5	16	0	3	0.2	0	1	12	2214	0	0
Q	5455M	0	2	0	2	0	1	-	-	-	-	-	-	0
R	5505S?	0	8	0	22	0	3	0.1	0	1	8	3414	0	0
S	5518B?	3	9	4	12	0	3	0.2	0	1	10	2947	0	0
T	5524S?	1	2	1	2	0	3	-	-	-	-	-	-	0
U	5532M	3	4	9	7	0	1	1.4	44	1	9	3078	0	5
V	5539M	2	20	9	43	0	7	0.2	1	1	0	2110	0	13
W	5544S?	1	18	8	43	0	4	0.1	1	1	15	1808	0	0
X	5558S?	0	13	5	29	0	5	0.1	6	1	7	2510	0	0
Y	5566B?	8	18	10	36	0	7	0.4	13	1	22	1202	0	4
Z	5569M	8	18	10	36	0	7	0.4	11	1	21	862	0	15
AA	5574M	7	20	1	34	0	3	0.4	14	1	21	1172	0	10
AB	5585B?	9	15	15	28	0	4	0.6	13	1	13	1116	0	40
AC	5593D	3	44	0	52	0	6	0.1	0	1	0	1978	0	0

LINE 11331		(FLIGHT 30)												
A	5705M	0	2	0	2	0	3	-	-	-	-	-	-	0
B	5715M	0	2	0	2	0	3	-	-	-	-	-	-	0
C	5728S?	0	6	0	15	0	2	0.1	4	1	17	3827	0	150
D	5738S?	0	17	0	33	0	4	0.1	3	1	0	2476	0	110
E	5742S?	0	2	0	2	0	4	-	-	-	-	-	-	0
F	5751M	0	2	0	7	0	1	0.1	0	1	12	4019	0	220

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11331	(FLIGHT	30)											
G 5764B?	6	22	18	48	0	9	0.3	9	1	25	710	1	0
H 5766B?	8	27	18	48	0	9	0.3	7	1	21	703	0	0
I 5775S?	3	18	10	40	0	5	0.2	5	1	15	1382	0	0
J 5780B?	0	13	9	24	0	7	0.3	17	1	1	1920	0	0
K 5785D	2	28	3	46	0	6	0.1	0	1	5	2938	0	0
L 5801M	0	0	0	16	0	2	0.1	50	1	32	4538	0	90
M 5836M	0	1	0	1	0	0	0.1	0	1	68	7518	0	0
N 5879S?	0	3	0	4	0	1	0.1	0	1	11	5657	0	5
O 5887M	0	3	0	5	0	1	0.1	0	1	28	5477	0	0
P 5892M	0	3	0	3	0	1	0.1	0	1	45	6034	0	320
Q 5909M	1	29	0	50	0	6	0.1	0	1	14	3877	0	50
R 5911B?	1	29	0	50	0	6	0.1	4	1	7	2917	0	7
S 5916M	0	3	0	50	0	2	0.1	0	1	33	5580	0	1360
T 5928M	0	1	0	3	0	1	0.1	0	1	72	6972	0	0
U 5960M	0	1	0	2	0	1	-	-	-	-	-	-	0
V 6000M	0	1	0	2	0	1	-	-	-	-	-	-	0
W 6020M	0	1	0	1	0	1	0.1	0	1	83	7478	0	160
X 6043M	0	3	0	7	0	2	0.1	4	1	40	5675	0	300
Y 6054M	0	0	0	0	0	0	-	-	-	-	-	-	6
Z 6078M	0	2	0	4	0	0	0.1	0	1	62	6786	0	270
AA 6088M	0	2	0	4	0	0	0.1	0	1	68	7001	0	210
AB 6120M	0	2	0	4	0	1	0.1	0	1	46	6034	0	0
AC 6128M	0	2	0	4	0	1	0.1	4	1	50	6021	0	190
AD 6202B?	1	2	1	2	2	4	-	-	-	-	-	-	60
AE 6205D	34	20	35	16	6	9	3.2	6	1	41	407	13	0
AF 6208D	17	23	35	16	6	9	0.9	13	1	45	506	16	0
AG 6223B?	0	11	0	18	0	2	0.1	15	1	24	3591	0	11
AH 6233B?	1	9	1	8	1	1	0.1	13	1	32	3806	0	0
AI 6250B?	4	20	8	12	0	3	0.5	28	1	5	2786	0	0

LINE 11335	(FLIGHT	30)											
A 6301B?	2	23	1	22	0	7	0.1	8	1	13	3440	0	0
B 6385S?	2	5	4	10	0	2	0.2	3	1	21	2306	0	40
C 6388M	2	5	4	10	0	2	0.2	11	1	19	4868	0	490
D 6394B?	0	2	1	2	0	4	-	-	-	-	-	-	4
E 6399B?	1	21	8	6	0	5	1.3	43	1	3	2791	0	0
F 6402B?	6	8	8	24	0	4	0.8	37	1	25	1410	0	4
G 6404M	6	8	8	24	0	4	0.8	39	1	0	2430	0	4
H 6413B?	6	9	11	15	0	3	0.6	15	1	24	900	0	0
I 6419B	8	21	13	48	0	7	0.4	0	1	16	734	0	0
J 6471D	0	12	0	21	0	3	0.1	1	1	25	4780	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11335	(FLIGHT	30)											
K 6473D	0	7	0	6	0	4	0.1	1	1	14	3827	0	0
L 6476M	1	2	0	2	0	4	-	-	-	-	-	-	200
M 6479D	2	16	4	4	0	2	0.7	49	1	6	3335	0	0
N 6484B?	5	1	6	10	0	2	0.5	26	1	30	1189	0	30
O 6487S?	6	11	6	16	0	5	0.5	21	1	27	821	0	0

LINE 11340	(FLIGHT	30)											
A 7506B?	20	37	140	288	0	56	0.7	12	1	17	380	0	0
B 7503B	68	141	144	291	2	57	1.0	0	1	13	115	0	7
C 7486B?	1	2	1	2	2	4	-	-	-	-	-	-	580
D 7475B	98	107	184	230	22	55	2.2	5	1	19	40	8	90
E 7464B	239	178	457	308	87	157	4.7	1	1	17	13	10	0
F 7461B	233	178	448	308	87	91	4.5	0	1	17	13	10	5
G 7450D	29	42	34	37	16	4	1.0	1	1	22	98	6	0
H 7445B?	17	51	36	93	5	19	0.4	0	1	21	199	3	0
I 7432B?	2	12	9	29	0	3	0.3	0	1	31	667	3	60
J 7430B?	4	14	9	29	1	3	0.3	0	1	28	518	2	0
K 7420S?	7	22	3	38	0	6	0.3	8	1	23	809	0	0
L 7407S?	3	29	7	64	0	15	0.1	3	1	2	1575	0	4
M 7391S?	0	9	0	10	0	2	0.1	0	1	28	5176	0	0
N 7385B?	0	13	0	30	0	6	0.1	2	1	3	2821	0	0
O 7372M	1	10	2	7	0	1	0.2	15	1	20	4929	0	120
P 7296D	6	7	9	13	0	2	0.7	19	1	20	1196	0	100
Q 7283M	0	2	1	2	0	2	-	-	-	-	-	-	50
R 7275D	15	25	29	36	0	10	0.7	8	1	33	585	5	0
S 7260M	1	15	0	24	0	3	0.1	3	1	15	3787	0	80
T 7257B?	5	15	9	24	0	3	0.3	18	1	9	3040	0	0
U 7240S?	1	2	1	2	1	4	-	-	-	-	-	-	12
V 7234B?	10	13	9	32	1	4	0.8	16	1	24	432	0	0
W 7219S?	0	22	0	47	0	24	0.1	14	1	0	949	0	380
X 7217M	6	10	0	47	0	24	0.5	43	1	0	934	0	390
Y 7188S	1	2	1	2	0	4	-	-	-	-	-	-	0
Z 7183M	2	2	3	25	0	0	0.1	0	1	17	4105	0	240
AA 7177B?	1	2	1	2	1	4	-	-	-	-	-	-	0
AB 7173B?	8	29	9	33	2	7	0.3	3	1	20	847	0	0
AC 7164S?	5	17	9	30	1	5	0.3	7	1	1	2307	0	370
AD 7150S	1	1	2	5	0	6	0.2	41	1	11	1795	0	0
AE 7136B?	1	2	1	2	1	4	-	-	-	-	-	-	7
AF 7134B?	1	20	2	39	0	5	0.1	3	1	3	2241	0	19
AG 7124B?	7	19	7	134	0	21	0.3	11	1	14	1601	0	0
AH 7117S?	1	68	1	134	0	21	0.1	14	1	1	1407	0	110

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND	DEPTH	RESIS	DEPTH		
-----	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	
LINE 11340	(FLIGHT	30)												
AI 7107M	0	2	0	5	0	1	0.1	2	1	65	6580	0	0	
AJ 7086M	0	2	0	2	0	1	-	-	-	-	-	-	0	
AK 7072M	1	6	0	1	0	0	0.1	0	1	56	6422	0	0	
AL 7064M	0	6	0	15	0	2	0.1	9	1	28	4405	0	0	
AM 7062M	0	2	0	2	0	2	-	-	-	-	-	-	0	
AN 7054M	0	2	0	5	0	0	0.1	0	1	52	6350	0	0	
AO 7043S?	0	15	0	31	0	6	0.1	6	1	14	3426	0	0	
AP 7027B?	2	18	1	24	0	5	0.1	0	1	3	3107	0	0	
AQ 7017B?	0	5	0	17	0	0	0.1	10	1	64	6250	4	0	
AR 7010B?	4	24	1	33	0	4	0.1	0	1	4	3307	0	0	
AS 6998M	0	2	0	4	0	1	0.1	1	1	71	6786	0	0	
AT 6982S?	0	1	0	2	0	4	-	-	-	-	-	-	240	
AU 6973M	0	1	0	11	0	0	0.1	0	1	171	8388	0	0	
AV 6960M	0	2	0	2	0	2	-	-	-	-	-	-	0	
AW 6948M	0	0	0	7	0	0	0.1	21	1	205	8388	0	0	
AX 6924S?	0	4	0	10	0	3	0.1	12	1	54	5888	3	160	
AY 6893M	0	2	0	2	0	0	-	-	-	-	-	-	0	
AZ 6843M	0	3	0	18	0	3	0.1	9	1	28	4325	0	140	
BA 6832M	0	14	0	30	0	5	0.1	9	1	8	2729	0	0	
BB 6830S?	0	16	0	30	0	5	0.1	8	1	7	2729	0	0	
BC 6817M	0	22	0	47	0	10	0.1	16	1	9	2169	0	0	
BD 6804M	0	2	0	2	0	2	-	-	-	-	-	-	4	
BE 6797M	0	2	1	2	0	1	-	-	-	-	-	-	60	
BF 6787B?	7	12	6	27	3	4	0.5	5	1	32	694	0	90	
BG 6782D	2	25	6	41	2	8	0.1	3	1	34	941	7	0	
BH 6779D	8	29	4	31	2	7	0.3	11	1	44	1058	14	0	
BI 6765B	84	119	148	188	17	52	1.5	0	1	31	59	17	0	
BJ 6763B	84	119	148	188	17	52	1.5	1	1	25	267	5	0	
BK 6742B?	6	5	7	16	0	2	1.0	42	1	39	1238	4	0	
BL 6682S?	0	7	0	18	0	2	0.1	9	1	27	4270	0	0	
BM 6675M	0	19	0	36	0	5	0.1	8	1	12	3073	0	18	
BN 6672S?	0	19	4	36	0	5	0.1	0	1	4	2539	0	0	
BO 6663S?	2	16	4	27	0	4	0.1	0	1	0	2628	0	5	
BP 6660M	0	16	0	27	0	4	0.1	8	1	22	3956	0	0	
BQ 6657B?	0	15	0	32	0	1	0.1	10	1	10	2743	0	0	
BR 6655M	15	15	19	32	0	4	1.3	33	1	6	2476	0	0	
BS 6653D	15	24	19	25	0	5	0.7	12	1	16	1678	0	0	
BT 6649B?	6	4	19	25	0	2	1.3	41	1	16	1759	0	40	
BU 6640B?	1	8	1	17	0	2	0.1	0	1	0	3945	0	0	
BV 6636M	1	5	1	15	0	3	0.1	0	1	10	3860	0	370	
BW 6626M	0	8	0	8	0	1	0.1	0	1	14	4589	0	290	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11340	(FLIGHT	30)											
BX 6622B?	2	15	6	20	0	4	0.2	1	1	3	3430	0	0
BY 6617B?	4	14	6	21	0	3	0.2	0	1	22	1575	0	0
BZ 6602M	0	4	0	10	0	2	0.1	0	1	43	5900	0	30
CA 6588B?	0	31	0	56	0	9	0.1	10	1	1	2018	0	0
CB 6582B?	4	38	0	71	0	10	0.1	0	1	0	1825	0	0
CC 6576M	0	27	0	60	0	9	0.1	15	1	5	1840	0	0
CD 6571B?	0	16	0	11	0	2	0.1	8	1	3	2281	0	4
CE 6566M	0	11	0	21	0	3	0.1	5	1	0	2309	0	0

LINE 11350	(FLIGHT	31)											
A 362B	1	2	1	2	2	4	-	-	-	-	-	-	0
B 365B	94	124	148	231	16	49	1.8	0	1	14	55	3	0
C 384B	206	197	402	365	72	151	3.3	0	1	17	20	9	0
D 391B	206	123	229	259	72	100	5.9	0	1	16	25	6	0
E 397B	109	63	197	107	37	70	5.0	7	1	25	24	15	420
F 409B	128	99	254	176	43	85	3.6	0	1	21	29	10	0
G 415B	80	51	254	112	43	85	3.9	12	1	27	223	8	270
H 425S?	13	47	46	94	2	11	0.3	8	1	0	1372	0	0
I 430B?	14	31	22	94	0	5	0.5	10	1	21	622	0	0
J 438B?	16	39	23	68	0	12	0.5	16	1	2	1736	0	0
K 442B?	16	26	15	68	0	12	0.7	11	1	18	901	0	570
L 452S?	1	19	0	34	0	5	0.1	4	1	3	2536	0	0
M 460M	0	5	0	25	0	2	0.1	7	1	16	3530	0	0
N 470S?	2	19	15	36	0	6	0.5	1	1	0	2487	0	480
O 478S?	8	26	15	42	0	8	0.3	1	1	0	2352	0	0
P 596M	1	2	0	2	0	1	-	-	-	-	-	-	40
Q 637S	1	2	1	2	0	3	-	-	-	-	-	-	20
R 648S	2	9	7	11	0	4	0.5	13	1	26	1196	0	0
S 660S	8	27	18	42	0	7	0.3	0	1	22	666	0	0
T 664M	8	27	18	54	0	8	0.3	3	1	9	1669	0	60
U 682M	4	8	8	44	0	4	0.2	3	1	11	2913	0	340
V 688M	1	8	13	61	0	6	0.2	0	1	0	2284	0	0
W 692S?	5	33	13	61	0	8	0.2	0	1	11	1031	0	0
X 700M	4	0	10	61	0	1	0.1	0	1	7	2821	0	0
Y 720M	3	24	16	52	0	6	0.4	0	1	6	2807	0	280
Z 726S?	7	24	16	56	0	7	0.3	2	1	20	787	0	0
AA 732M	7	24	16	20	0	7	0.3	11	1	0	2034	0	4
AB 740M	1	22	7	84	0	11	0.1	0	1	0	1913	0	1160
AC 743S	1	22	7	84	0	11	0.1	0	1	5	1783	0	0
AD 762B?	8	16	13	27	0	5	0.4	3	1	24	829	0	0
AE 784S?	3	20	5	40	0	6	0.1	0	1	0	2551	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11350	(FLIGHT	31)											
AF 804B?	3	10	4	5	0	2	0.5	45	1	10	3383	0	15
AG 809B?	0	9	1	32	0	5	0.1	7	1	8	2868	0	0
AH 815S?	4	12	5	25	0	5	0.1	0	1	14	2008	0	9
AI 820M	1	2	1	2	0	4	-	-	-	-	-	-	50
AJ 836M	0	1	0	2	0	1	-	-	-	-	-	-	180
AK 841M	0	2	0	2	0	2	-	-	-	-	-	-	0
AL 848M	0	7	0	9	0	2	0.1	8	1	34	4883	0	4
AM 860M	0	10	0	16	0	2	0.1	7	1	22	4105	0	0
AN 887S?	0	3	0	35	0	6	0.1	20	1	19	2691	4	0
AO 915S?	2	22	0	11	0	1	0.1	6	1	15	3235	0	0
AP 932S?	0	4	0	13	0	3	0.1	8	1	43	5622	0	0
AQ 968M	1	2	0	2	0	1	-	-	-	-	-	-	110
AR 998M	0	3	0	0	0	1	0.1	10	1	63	6601	0	0
AS 1036M	0	2	0	2	0	1	-	-	-	-	-	-	0
AT 1063M	0	2	0	2	0	1	-	-	-	-	-	-	200
AU 1074M	0	2	0	2	0	3	-	-	-	-	-	-	0
AV 1079S?	0	21	0	47	0	7	0.1	10	1	8	2554	0	14
AW 1082M	0	21	0	47	0	7	0.1	6	1	18	3835	0	0
AX 1091M	0	2	0	6	0	1	0.1	0	1	58	6645	0	0
AY 1107S	0	2	0	2	0	2	-	-	-	-	-	-	0
AZ 1130M	0	2	0	2	0	2	-	-	-	-	-	-	0
BA 1137S	1	2	0	2	1	2	-	-	-	-	-	-	0
BB 1151D	17	25	17	37	1	7	0.9	2	1	29	758	0	6
BC 1184B?	1	2	1	2	2	2	-	-	-	-	-	-	0
BD 1200D	1	2	1	2	0	4	-	-	-	-	-	-	0
BE 1206D	8	33	15	53	0	14	0.2	7	1	0	1683	0	0
BF 1213S	9	42	15	75	0	11	0.2	0	1	14	890	0	0
BG 1271S	5	22	10	40	0	0	0.2	0	1	20	1114	0	0
BH 1281S?	2	15	5	19	0	3	0.2	0	1	15	4359	0	0
BI 1300M	12	37	25	59	0	11	0.4	0	1	1	3268	0	200
BJ 1304D	12	37	25	59	0	11	0.4	1	1	30	562	4	5
BK 1307B?	12	30	25	42	0	6	0.4	6	1	0	2593	0	0
BL 1323M	0	2	0	2	0	3	-	-	-	-	-	-	120
BM 1326M	0	9	0	16	0	3	0.1	0	1	60	6645	0	1080
BN 1365M	0	5	0	7	0	1	0.1	4	1	35	5397	0	0
BO 1391S?	8	29	15	44	0	7	0.3	1	1	25	1116	0	0
BP 1418M	0	2	0	2	0	1	-	-	-	-	-	-	60

LINE 11360	(FLIGHT	31)											
A 2665B	184	271	358	515	38	128	2.0	0	1	14	35	5	130
B 2657B	62	94	143	189	13	44	1.3	0	1	15	40	4	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 11360	(FLIGHT	31)												
C 2647D	71	86	140	165	32	64	1.7	7	1	23	38	12	390	
D 2644B	71	86	140	165	32	64	1.7	3	1	27	32	15	0	
E 2630B	84	71	177	121	36	66	2.8	4	1	31	34	19	30	
F 2627D	94	71	171	121	36	66	3.3	7	1	32	41	20	0	
G 2616B?	0	26	5	48	0	8	0.1	0	1	28	1927	0	80	
H 2614M	1	2	1	2	0	4	-	-	-	-	-	-	110	
I 2606D	16	57	28	104	0	16	0.4	0	1	16	625	0	0	
J 2595S	0	18	8	30	0	4	0.2	0	1	35	1391	2	0	
K 2582M	0	2	1	2	1	2	-	-	-	-	-	-	150	
L 2579B?	0	16	7	67	1	5	0.1	0	1	41	1258	4	70	
M 2565S?	0	40	0	67	0	15	0.1	5	1	0	1749	0	1440	
N 2556M	0	10	0	23	0	3	0.1	8	1	10	2884	0	720	
O 2549M	0	29	2	60	0	8	0.1	7	1	6	2344	0	190	
P 2547B?	0	29	2	60	0	8	0.1	2	1	13	3364	0	50	
Q 2540M	0	20	0	55	0	1	0.1	3	1	70	6713	0	70	
R 2411S	1	2	1	2	0	4	-	-	-	-	-	-	0	
S 2403S?	1	24	3	53	0	7	0.1	0	1	6	2592	0	30	
T 2393B?	10	32	15	53	0	8	0.4	0	1	19	754	0	6	
U 2388B?	1	2	1	2	0	4	-	-	-	-	-	-	30	
V 2370S?	6	20	12	33	0	14	0.3	2	1	40	108	22	100	
W 2361B?	18	27	12	10	0	17	0.9	13	1	54	123	34	7	
X 2325S?	0	2	0	2	0	2	-	-	-	-	-	-	5	
Y 2300B?	3	18	2	26	1	4	0.1	0	1	17	2360	0	0	
Z 2289S?	0	18	5	36	1	5	0.1	0	1	9	2146	0	30	
AA 2274S?	0	28	5	59	2	8	0.1	0	1	0	2227	0	30	
AB 2260B?	0	22	4	32	1	4	0.1	0	1	17	2356	0	6	
AC 2251B?	1	2	1	2	1	4	-	-	-	-	-	-	0	
AD 2243S?	1	2	1	2	2	3	-	-	-	-	-	-	19	
AE 2227S	0	7	2	11	1	2	0.1	0	1	34	3600	0	0	
AF 2216M	0	3	0	7	0	1	0.1	0	1	66	6916	0	350	
AG 2202M	0	1	0	4	0	1	0.1	0	1	77	7518	0	30	
AH 2198M	0	2	0	4	0	1	0.1	0	1	94	7834	0	160	
AI 2165S?	0	1	1	2	0	1	-	-	-	-	-	-	0	
AJ 2136B?	6	14	9	19	1	4	0.3	4	1	46	982	10	0	
AK 2064M	0	4	0	10	0	4	0.1	15	1	52	5732	4	160	
AL 2048M	0	1	0	2	0	1	0.1	0	1	95	7834	0	190	
AM 2040M	0	2	0	2	0	1	0.1	0	1	89	7478	2	60	
AN 2030S?	0	2	0	2	0	2	-	-	-	-	-	-	0	
AO 2016M	0	4	0	7	0	2	0.1	0	1	72	6916	0	200	
AP 1936M	0	3	0	4	0	1	0.1	9	1	88	7122	9	0	
AQ 1916M	0	1	0	3	0	1	0.1	6	1	98	7560	9	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR							
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT	

LINE 11360	(FLIGHT	31)												
AR 1901M	0	1	0	1	0	0	0.1	0	1	80	7255	0	0	
AS 1893B?	0	2	0	2	0	1	-	-	-	-	-	-	0	
AT 1884M	0	8	0	5	0	1	0.1	0	1	71	7326	0	0	
AU 1857S?	0	15	0	67	0	17	0.1	19	1	13	2231	1	0	
AV 1852B?	0	15	0	67	0	17	0.1	12	1	46	5559	1	0	
AW 1825M	0	4	0	8	0	2	0.1	3	1	93	7518	5	410	
AX 1797B	14	30	23	45	1	9	0.6	0	1	24	416	0	0	
AY 1781B?	2	12	8	26	0	4	0.2	5	1	26	1755	0	0	
AZ 1772B?	4	23	5	39	0	4	0.1	0	1	9	3113	0	8	
BA 1763D	7	17	11	28	0	5	0.3	16	1	38	1039	8	0	
BB 1759D	9	23	11	28	0	5	0.4	14	1	37	1059	7	7	
BC 1752D	2	30	10	26	0	4	0.4	22	1	21	2745	0	0	
BD 1732B	1	2	1	2	0	4	-	-	-	-	-	-	0	
BE 1695S?	0	2	1	2	0	2	-	-	-	-	-	-	0	
BF 1674M	0	2	0	2	0	2	-	-	-	-	-	-	0	
BG 1642S?	0	33	1	68	0	9	0.1	11	1	3	2039	0	0	
BH 1591B?	0	7	6	36	0	5	0.1	11	1	17	2769	1	0	
BI 1575B?	7	44	19	77	0	11	0.2	1	1	21	757	0	0	
BJ 1568B?	15	44	20	77	0	11	0.4	6	1	2	2974	0	30	
BK 1564D	15	15	20	11	0	1	1.2	27	1	12	1746	0	0	
BL 1559B?	0	18	0	8	0	3	0.1	6	1	0	2300	0	0	
BM 1556M	0	2	1	2	0	3	-	-	-	-	-	-	60	
BN 1546M	0	2	0	5	0	1	0.1	0	1	40	6203	0	240	
BO 1536M	0	1	1	2	0	1	-	-	-	-	-	-	0	
BP 1527B?	2	13	6	21	0	3	0.2	0	1	24	1763	0	0	
BQ 1518M	0	2	1	2	0	3	-	-	-	-	-	-	0	

LINE 11370	(FLIGHT	31)												
A 2756B	1	57	61	126	15	13	0.8	0	1	16	135	1	0	
B 2760B	34	55	70	212	12	33	1.0	11	1	14	100	1	0	
C 2774B	36	59	61	113	9	19	1.0	0	1	19	74	5	5	
D 2780B	19	19	8	89	7	6	1.4	5	1	29	76	12	290	
E 2787B	50	42	175	306	13	86	2.4	7	1	29	49	16	5	
F 2792B	75	8	91	306	19	24	46.8	24	1	22	39	12	5	
G 2799B	41	93	67	254	39	28	0.8	5	1	22	35	12	4	
H 2804B	96	18	140	41	42	75	23.5	6	1	17	12	9	0	
I 2811B	30	65	193	114	17	62	0.7	0	1	21	38	9	0	
J 2817B	91	38	183	57	45	56	7.1	3	1	24	30	13	0	
K 2824B?	4	33	53	58	6	10	1.5	11	1	18	724	0	30	
L 2834D	5	30	16	30	3	10	0.6	8	1	28	352	5	80	
M 2837D	8	18	16	30	3	10	0.4	7	1	30	269	7	4	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE	HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR		
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	M	COND DEPTH SIEMEN	M	OHM-M	DEPTH M	NT

LINE 11370	(FLIGHT	31)											
N 2850S?	1	2	1	2	0	2	-	-	-	-	-	-	4
O 2858D?	2	14	3	17	0	3	0.1	6	1	15	3369	0	10
P 2867M	0	1	0	2	0	2	-	-	-	-	-	-	0
Q 2874B?	0	6	0	9	0	0	0.1	3	1	21	4259	0	0
R 2888M	0	2	0	8	0	0	0.1	0	1	25	5194	0	0
S 2895S?	0	9	0	22	0	3	0.1	0	1	0	3613	0	0
T 2910M	0	5	0	7	0	1	0.1	0	1	21	5666	0	0
U 3008M	0	2	1	6	1	1	0.1	11	1	51	6173	0	250
V 3032S?	3	17	7	32	0	5	0.2	0	1	14	2144	0	60
W 3048B	37	26	75	113	0	31	2.7	23	1	22	209	5	6
X 3050M	37	26	75	113	0	31	2.7	28	1	0	1094	0	50
Y 3067M	1	2	1	2	0	4	-	-	-	-	-	-	0
Z 3072S?	10	25	37	30	0	13	0.4	15	1	26	385	5	0
AA 3090M	0	2	0	2	0	4	-	-	-	-	-	-	130
AB 3100S?	0	4	0	10	0	0	0.1	0	1	28	5771	0	7
AC 3137B?	1	2	1	2	0	4	-	-	-	-	-	-	11
AD 3140B?	7	22	10	40	0	6	0.3	4	1	1	2978	0	0
AE 3156S?	0	34	1	71	0	10	0.1	5	1	0	1986	0	80
AF 3160B?	1	2	1	2	0	4	-	-	-	-	-	-	50
AG 3165S?	2	29	2	55	0	7	0.1	5	1	4	2225	0	6
AH 3190B?	1	11	1	7	0	2	0.1	0	1	28	5631	0	0

LINE 11375	(FLIGHT	31)											
A 3368B?	0	7	0	14	0	1	0.1	0	1	60	6690	0	80
B 3378M	0	1	0	1	0	1	0.1	0	1	124	8388	0	16
C 3395D	31	57	19	23	0	0	0.9	2	1	14	3992	0	150
D 3496B?	0	4	0	11	0	2	0.1	0	1	50	6188	0	1470
E 3510M	0	2	0	4	0	1	0.1	0	1	131	8388	0	440
F 3746M	0	1	0	2	0	0	-	-	-	-	-	-	8
G 3755M	0	1	0	2	0	0	-	-	-	-	-	-	8
H 3774M	0	1	0	4	0	1	0.1	0	1	85	7646	0	250
I 3786M	0	1	0	2	0	0	-	-	-	-	-	-	8
J 3810D	3	29	18	16	1	8	1.4	24	1	41	739	11	0
K 3817D	18	22	28	21	2	8	1.0	18	1	41	435	15	8
L 3845B?	1	2	1	2	1	3	-	-	-	-	-	-	7
M 3850D	14	8	12	4	2	4	2.4	6	1	42	499	10	0
N 3857S?	5	18	10	27	1	4	0.2	13	1	31	2016	0	10
O 3864S?	1	2	1	2	0	2	-	-	-	-	-	-	0
P 3916M	0	30	0	58	0	8	0.1	7	1	1	2279	0	0
Q 3918B?	0	30	0	58	0	8	0.1	4	1	11	3301	0	6
R 3929M	0	2	0	2	0	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11375	(FLIGHT	31)											
S 3999B?	3	15	5	20	0	3	0.2	0	1	34	1192	0	0
T 4009B?	1	2	1	2	0	4	-	-	-	-	-	-	4
U 4022M	5	13	15	22	0	4	0.3	24	1	2	2302	0	570
V 4025D	5	25	3	26	0	5	0.2	5	1	5	2688	0	4
W 4035B?	0	9	1	24	0	4	0.1	4	1	14	3613	0	0
X 4041B?	0	2	0	2	0	2	-	-	-	-	-	-	40
Y 4059S	0	2	1	2	0	2	-	-	-	-	-	-	4

LINE 11380	(FLIGHT	31)											
A 4703M	0	3	0	2	0	1	0.1	9	1	58	6115	2	70
B 4674M	0	2	0	4	0	1	0.1	4	1	95	7560	6	190
C 4663M	0	9	0	14	0	5	0.1	12	1	46	5631	0	0
D 4652M	0	2	0	4	0	1	0.1	2	1	96	7646	5	0
E 4640M	0	1	0	4	0	1	0.1	1	1	94	7603	4	230
F 4631M	0	1	0	3	0	1	0.1	2	1	131	8388	0	190
G 4543M	0	2	0	3	0	1	0.1	1	1	123	8388	0	0
H 4508S?	0	3	0	7	0	4	0.1	10	1	54	5935	2	7
I 4505M	0	4	0	7	0	4	0.1	11	1	43	5477	0	60
J 4490M	0	1	0	2	0	1	0.1	0	1	196	8388	0	40
K 4462M	0	4	0	9	0	0	0.1	1	1	114	8344	8	0
L 4459M	0	3	0	7	0	1	0.1	1	1	79	7091	0	0
M 4438M	0	9	0	29	0	7	0.1	13	1	16	3040	0	90
N 4423M	0	2	0	15	0	0	0.1	5	1	98	7603	8	0
O 4375D	1	0	1	2	1	4	-	-	-	-	-	-	40
P 4366B?	4	15	9	9	1	3	0.9	18	1	47	497	16	0
Q 4345S?	1	2	1	2	0	2	-	-	-	-	-	-	0
R 4307B?	1	2	1	2	0	2	-	-	-	-	-	-	7
S 4300S?	3	18	4	29	0	4	0.1	0	1	20	1841	0	13
T 4272S?	1	2	1	2	0	2	-	-	-	-	-	-	0
U 4241B?	1	2	1	2	0	2	-	-	-	-	-	-	40
V 4228M	0	0	0	2	0	1	0.1	16	1	39	6087	0	120
W 4216S	0	2	0	2	0	2	-	-	-	-	-	-	0
X 4169B?	7	16	20	45	0	8	0.4	12	1	14	998	0	6
Y 4167B?	11	28	20	45	0	7	0.4	1	1	22	600	0	6
Z 4158B?	1	9	0	9	0	1	0.1	0	1	0	2420	0	620
AA 4146D	19	103	20	165	0	21	0.3	0	1	0	1388	0	4
AB 4140B?	0	20	0	39	0	5	0.1	8	1	0	1416	0	0
AC 4129B?	0	23	3	47	0	13	0.1	2	1	0	1511	0	20

LINE 11385	(FLIGHT	31)											
A 5474B	30	155	267	329	30	87	0.3	0	1	14	40	4	5

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11385	(FLIGHT 31)												
B 5456B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 5453B	1	2	1	2	2	4	-	-	-	-	-	-	4
D 5449B	135	162	297	361	25	129	2.2	4	1	19	21	10	4
E 5442B	147	218	379	335	50	126	1.8	0	1	15	17	7	0
F 5436B	4	43	210	69	12	78	11.5	2	1	29	18	19	0
G 5429B	44	27	78	52	8	28	3.4	9	1	30	30	18	0
H 5424B	35	11	54	18	14	33	7.7	13	1	33	75	17	0
I 5417B	10	24	5	36	0	4	0.4	8	1	23	473	0	0
J 5407D	25	56	42	95	0	20	0.7	0	1	17	284	0	190
K 5330M	0	4	0	7	0	1	0.1	0	1	80	7785	0	0
L 5315M	0	3	0	7	0	2	0.1	1	1	90	7478	3	0
M 5298M	0	5	0	15	0	5	0.1	8	1	49	5855	0	0
N 5272B?	3	24	4	40	0	5	0.1	0	1	14	2754	0	0
O 5267M	0	2	0	2	0	2	-	-	-	-	-	-	0
P 5256M	0	1	0	4	0	1	0.1	0	1	46	6047	0	330
Q 5220B?	1	1	1	2	0	0	0.7	86	1	144	8388	0	0
R 5210M	0	1	0	0	0	0	-	-	-	-	-	-	130
S 5183M	0	2	0	2	0	1	-	-	-	-	-	-	100
T 5144M	0	1	0	2	0	0	-	-	-	-	-	-	0
U 5118S	1	2	1	2	0	3	-	-	-	-	-	-	0
V 5102B?	5	27	8	97	0	13	0.2	4	1	0	2288	0	11
W 5082S	1	1	1	2	0	4	-	-	-	-	-	-	5
X 5059M	23	23	58	22	0	23	1.5	29	1	0	1196	0	190
Y 5055S?	23	23	58	22	0	23	1.5	26	1	24	269	6	0
Z 5018B?	0	10	0	9	0	2	0.1	0	1	2	3671	0	6
AA 5003M	0	2	0	2	0	1	-	-	-	-	-	-	0
AB 4995M	1	2	1	2	0	4	-	-	-	-	-	-	6
AC 4989B?	5	4	40	10	0	11	1.2	41	1	19	293	0	7
AD 4971M	0	2	0	2	0	1	-	-	-	-	-	-	60
AE 4959S?	0	14	0	25	0	3	0.1	3	1	4	2798	0	30
AF 4936M	0	2	0	2	0	2	-	-	-	-	-	-	190
AG 4921M	0	2	1	2	0	1	-	-	-	-	-	-	4
AH 4912M	0	3	0	9	0	1	0.1	0	1	89	7518	1	240
AI 4884S?	0	4	0	11	0	2	0.1	0	1	24	5284	0	0
AJ 4851M	0	2	0	1	0	0	-	-	-	-	-	-	8

LINE 11390	(FLIGHT 31)												
A 5532B	41	69	75	69	12	10	1.0	0	1	25	107	8	0
B 5536B	14	41	15	71	0	10	0.4	2	1	19	146	3	0
C 5542B	1	2	1	2	2	4	-	-	-	-	-	-	0
D 5551B	185	206	400	393	44	121	2.6	0	1	16	22	7	6

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11390	(FLIGHT	31)											
E 5559B	79	81	229	131	36	70	2.2	3	1	25	13	16	6
F 5562B	51	81	229	131	36	70	1.2	0	1	28	23	18	6
G 5569B	31	49	44	115	25	12	1.0	2	1	30	39	17	0
H 5574B	52	68	169	116	17	56	1.4	4	1	25	48	12	6
I 5580D	19	13	126	72	1	37	2.2	19	1	23	268	2	90
J 5584B	8	28	13	43	0	6	0.3	3	1	25	450	1	0
K 5595B?	16	16	15	30	0	7	1.3	8	1	27	335	3	90
L 5602B?	4	7	6	17	0	2	0.3	11	1	28	1352	0	0
M 5630M	0	1	0	2	0	1	-	-	-	-	-	-	0
N 5732M	0	3	0	4	0	1	0.1	0	1	44	6385	0	0
O 5740B?	0	2	1	2	0	0	-	-	-	-	-	-	1120
P 5751S?	0	9	2	19	0	3	0.1	0	1	15	4067	0	70
Q 5758B?	1	2	1	1	0	0	-	-	-	-	-	-	0

LINE 11395	(FLIGHT	31)											
A 5884M	0	2	0	2	0	1	-	-	-	-	-	-	180
B 5902B	6	18	6	15	0	7	0.3	7	1	10	1916	0	0
C 5905B?	3	18	6	15	0	7	0.3	20	1	0	2735	0	0
D 5912B	0	2	0	2	0	2	-	-	-	-	-	-	5
E 5923B	8	46	13	91	1	12	0.2	0	1	6	1009	0	0
F 5927B?	13	37	4	61	1	8	0.4	0	1	5	959	0	0
G 5934B	24	16	34	112	1	7	2.6	6	1	28	317	3	6
H 5940B?	0	65	33	129	0	20	0.4	0	1	0	1213	0	50
I 5945B	10	6	20	12	0	10	2.0	47	1	10	779	0	0
J 5958B	7	10	10	17	0	10	0.7	31	1	19	648	0	50
K 5964B	11	30	23	58	0	10	0.4	12	1	14	632	0	250
L 5986B?	1	2	0	2	0	0	-	-	-	-	-	-	90
M 5994B?	1	2	0	2	0	1	-	-	-	-	-	-	0
N 6006B?	0	4	0	9	0	1	0.1	0	1	13	4048	0	0
O 6016M	0	2	0	2	0	0	-	-	-	-	-	-	420
P 6024S?	5	19	8	33	0	5	0.2	0	1	0	2791	0	0
Q 6044S?	0	13	1	23	0	4	0.1	0	1	5	3251	0	0
R 6059S?	3	16	1	27	0	4	0.1	5	1	3	3017	0	0
S 6068B?	3	9	0	9	0	2	0.2	22	1	9	2995	0	4
T 6076B?	6	17	18	17	0	5	0.3	2	1	25	635	0	0
U 6078B?	13	17	18	17	0	5	0.9	12	1	31	664	2	0
V 6083M	1	2	0	2	0	4	-	-	-	-	-	-	0
W 6096M	1	2	0	2	0	0	-	-	-	-	-	-	60
X 6108M	0	2	0	2	0	1	-	-	-	-	-	-	0
Y 6115B?	1	2	1	2	1	2	-	-	-	-	-	-	0
Z 6118B?	4	1	5	2	1	2	2.1	56	1	68	1259	25	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11395	(FLIGHT	31)											
AA 6324M	0	2	0	1	0	0	-	-	-	-	-	-	370
AB 6344M	0	2	0	2	0	1	-	-	-	-	-	-	7
AC 6375M	0	1	0	2	0	0	0.1	0	1	87	8218	0	130
AD 6388M	0	1	0	1	0	1	0.1	0	1	98	8388	0	50
AE 6422M	0	1	0	2	0	1	-	-	-	-	-	-	330
AF 6463D	6	9	15	26	0	6	0.5	1	1	31	1454	0	11
AG 6467B	9	27	15	26	1	6	0.4	0	1	32	543	2	0
AH 6474D	10	18	13	24	1	5	0.6	0	1	49	587	16	0
AI 6517B?	2	10	5	17	1	3	0.2	1	1	29	1067	0	0
AJ 6577S?	0	2	1	2	0	3	-	-	-	-	-	-	30
AK 6589M	0	7	0	11	0	2	0.1	15	1	31	4096	2	20
AL 6592B?	0	9	0	11	0	1	0.1	8	1	30	4655	0	0
AM 6610M	0	2	1	2	0	1	-	-	-	-	-	-	60
AN 6612B?	0	2	1	2	0	1	-	-	-	-	-	-	0
AO 6643B?	1	2	1	2	0	3	-	-	-	-	-	-	7
AP 6657S?	0	6	0	21	0	4	0.1	6	1	17	3664	0	690
AQ 6672B?	1	11	4	17	0	2	0.1	0	1	20	2923	0	7
AR 6683S?	5	24	13	43	0	7	0.3	0	1	21	917	0	0

LINE 11400	(FLIGHT	31)											
A 7663B	1	2	1	2	2	4	-	-	-	-	-	-	6
B 7654B	65	95	123	184	38	54	1.4	2	1	20	43	8	160
C 7649B	51	82	104	145	14	30	1.2	2	1	20	39	9	0
D 7646B	56	60	81	134	14	23	1.9	7	1	21	42	9	0
E 7643B	60	70	137	142	21	45	1.7	7	1	22	36	11	0
F 7633B	115	62	220	103	46	71	5.4	6	1	24	21	14	6
G 7626D	39	74	11	116	14	4	0.9	1	1	20	171	3	0
H 7623D	33	47	64	116	2	4	1.1	4	1	21	183	3	100
I 7610B?	11	14	20	23	0	4	0.8	18	1	27	378	3	0
J 7607D	8	26	20	47	0	11	0.3	0	1	17	740	0	0
K 7603B?	8	26	15	45	1	11	0.3	0	1	35	492	7	0
L 7595S	1	2	1	2	0	2	-	-	-	-	-	-	0
M 7579S	1	2	1	2	0	2	-	-	-	-	-	-	70
N 7569M	0	1	1	2	0	1	-	-	-	-	-	-	14
O 7553M	0	1	0	2	0	1	0.1	9	1	100	7518	11	30
P 7524M	0	8	0	34	0	3	0.1	8	1	23	4029	0	0
Q 7517B?	1	2	1	2	0	2	-	-	-	-	-	-	6
R 7514B?	4	32	6	48	0	7	0.1	0	1	27	1816	0	0
S 7510B?	3	31	6	48	0	7	0.1	3	1	4	1972	0	0
T 7508B?	1	2	1	2	0	4	-	-	-	-	-	-	0
U 7497S?	1	2	1	2	0	3	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL	HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE	SHEET		EARTH		CORR	
ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*	COND DEPTH	RESIS	DEPTH			
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11400	(FLIGHT	31)											
V 7478M	0	1	1	2	0	1	-	-	-	-	-	-	80
W 7439M	0	2	0	2	0	1	-	-	-	-	-	-	40
X 7405B?	1	54	25	96	0	20	0.3	4	1	0	999	0	0
Y 7397B	37	100	81	194	0	27	0.6	4	1	15	252	0	40
Z 7390B	42	64	90	120	2	26	1.1	0	1	18	84	3	0
AA 7381S?	21	27	40	57	2	13	1.1	10	1	29	169	10	0
AB 7370B?	10	39	27	82	0	8	0.3	6	1	13	823	0	0
AC 7369B?	6	43	27	84	0	7	0.1	0	1	12	904	0	150
AD 7364M	16	24	40	43	0	5	0.8	24	1	0	1267	0	30
AE 7356S?	4	63	23	120	0	20	0.3	0	1	13	410	0	0
AF 7328M	0	4	0	7	0	1	0.1	0	1	56	6601	0	130
AG 7315B?	0	6	0	19	0	3	0.1	4	1	14	3671	0	0
AH 7306B?	649	71	115	187	156	31	96.7	13	1	2	985	0	0
AI 7301D	0	23	0	187	0	31	0.1	15	1	6	1929	0	130
AJ 7294S?	0	32	0	53	0	7	0.1	7	1	0	1893	0	9
AK 7282S?	0	29	0	57	0	8	0.1	11	1	1	1854	0	250
AL 7274D	0	14	0	25	0	4	0.1	6	1	3	2560	0	0
AM 7267D	7	11	13	22	0	1	0.5	28	1	26	1204	0	0
AN 7258S?	8	6	25	29	0	15	1.5	48	1	20	593	0	50
AO 7246M	1	1	1	2	0	1	-	-	-	-	-	-	0
AP 7229B	7	21	16	53	0	11	0.3	10	1	17	761	0	0
AQ 7224B	13	11	16	46	0	17	1.5	37	1	20	478	0	5
AR 7220D	12	33	31	14	0	6	0.4	9	1	1	2302	0	0
AS 7203D	1	17	3	18	0	2	0.1	5	1	8	3073	0	4
AT 7199B?	0	4	3	1	0	0	1.7	83	1	12	3664	0	0
AU 7194B?	6	19	6	34	0	2	0.3	12	1	6	2772	0	0
AV 7187B	1	2	1	2	2	4	-	-	-	-	-	-	0
AW 7184B	23	14	43	23	21	15	2.8	0	1	62	32	47	0
AX 7064M	0	4	0	6	0	1	0.1	0	1	86	7400	1	4
AY 7055M	0	4	0	5	0	1	0.1	7	1	81	6916	6	0
AZ 7050M	0	1	0	3	0	1	0.1	1	1	126	8388	0	300
BA 7029B?	0	5	0	14	0	6	0.1	15	1	50	5649	4	200
BB 7018M	0	1	0	2	0	2	0.1	6	1	106	7884	10	0
BC 7009M	0	3	0	4	0	2	0.1	10	1	83	6916	8	240
BD 7003M	0	2	0	2	0	4	-	-	-	-	-	-	0
BE 6984B?	0	2	0	2	0	4	-	-	-	-	-	-	0
BF 6977S?	0	96	0	233	0	31	0.1	16	1	0	978	0	0
BG 6967D	2	8	0	1	0	0	0.1	20	1	95	7518	6	4
BH 6954D	14	6	8	30	6	10	3.7	48	1	51	764	21	4
BI 6951D	19	19	16	6	9	13	1.3	7	1	44	130	24	0
BJ 6947D	20	26	16	22	9	12	1.1	17	1	57	304	31	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11400	(FLIGHT 31)												
BK 6937D	4	12	1	4	1	1	0.2	14	1	63	1284	23	4
BL 6933D	1	2	0	2	0	1	-	-	-	-	-	-	0
BM 6929B?	1	2	1	2	0	1	-	-	-	-	-	-	0
BN 6925D	1	2	1	2	1	2	-	-	-	-	-	-	18
BO 6921D	14	12	10	11	1	3	1.4	14	1	46	717	12	0
BP 6898D	5	11	6	20	0	2	0.2	14	1	17	3582	0	15
BQ 6896M	5	10	2	26	0	3	0.3	29	1	12	3144	0	6
BR 6882S	0	2	1	2	0	4	-	-	-	-	-	-	0
BS 6832B?	1	10	2	10	0	1	0.1	10	1	31	5170	0	0
BT 6805B?	4	15	11	35	0	4	0.3	9	1	7	2625	0	200
BU 6792B?	6	4	8	9	0	0	1.4	50	1	45	1094	10	0
BV 6770B?	4	18	7	34	0	4	0.2	0	1	16	1562	0	0
BW 6763B?	4	80	7	119	0	17	0.1	0	1	0	1438	0	0
BX 6745B?	9	41	14	83	0	12	0.2	0	1	15	676	0	8

LINE 11410	(FLIGHT 40)												
A 2382B	24	100	38	171	35	21	0.4	0	1	19	83	6	0
B 2385B	23	98	47	195	36	33	0.3	0	1	18	85	5	0
C 2397B	73	97	125	181	41	45	1.6	0	1	17	25	7	4
D 2402B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 2407B	96	90	188	177	37	77	2.6	4	1	23	23	13	0
F 2409B	94	68	176	129	37	77	3.5	4	1	22	24	12	0
G 2418B	90	62	217	84	20	69	3.7	4	1	24	36	12	4
H 2420B	107	96	217	196	20	69	2.8	4	1	24	33	13	0
I 2422B	77	96	217	196	20	69	1.8	3	1	19	62	7	80
J 2429D	24	39	25	125	4	12	0.9	12	1	23	296	3	6
K 2433D	14	67	8	125	1	20	0.3	0	1	12	471	0	30
L 2445S?	14	29	31	48	0	10	0.6	4	1	21	414	0	0
M 2451M	0	0	26	43	0	5	0.7	1	1	0	3040	0	0
N 2454B?	3	6	6	10	0	5	0.5	23	1	29	1496	0	0
O 2551S?	0	2	0	2	0	2	-	-	-	-	-	-	0
P 2571M	0	7	12	51	0	12	0.2	2	1	11	3073	0	230
Q 2575D	11	53	12	82	1	12	0.2	0	1	0	1923	0	17
R 2594M	0	1	0	3	0	0	0.1	0	1	66	6811	0	0
S 2605M	0	2	0	2	0	0	-	-	-	-	-	-	0
T 2633S?	4	17	15	80	0	12	0.2	0	1	12	882	0	0
U 2642S?	19	36	40	77	0	14	0.7	9	1	21	275	1	40
V 2648B?	15	17	25	31	2	6	1.1	2	1	21	160	1	0
W 2652B?	1	2	1	2	2	4	-	-	-	-	-	-	4
X 2665S?	1	2	1	2	0	4	-	-	-	-	-	-	0
Y 2674B?	1	2	1	2	0	4	-	-	-	-	-	-	70

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11410	(FLIGHT	40)											
Z 2681S?	9	24	15	38	0	8	0.4	7	1	21	336	0	0
AA 2690S?	11	43	27	87	0	17	0.3	5	1	11	579	0	0
AB 2739B?	0	2	0	2	0	1	-	-	-	-	-	-	0
AC 2742M	0	7	0	6	0	1	0.1	0	1	23	4780	0	270
AD 2749D	0	8	0	10	0	1	0.1	0	1	13	4839	0	0
AE 2754B?	2	4	0	10	0	1	0.3	0	1	0	5833	0	0
AF 2768M	0	23	0	17	0	6	0.1	6	1	10	3092	0	260
AG 2770D	0	23	0	33	0	6	0.1	7	1	5	2569	0	0
AH 2775B?	0	19	0	33	0	5	0.1	8	1	0	2091	0	30
AI 2787S?	5	14	12	28	0	5	0.3	10	1	18	976	0	50
AJ 2802S	6	16	13	35	0	6	0.3	0	1	21	685	0	0
AK 2814B?	4	7	13	24	1	4	0.5	3	1	34	1015	1	40
AL 2819B?	1	2	1	2	1	3	-	-	-	-	-	-	0
AM 2823B?	5	6	10	16	1	3	0.5	0	1	39	1989	0	0
AN 2837B?	1	2	1	2	0	1	-	-	-	-	-	-	0
AO 2851D	51	19	32	21	3	11	7.1	3	1	48	160	26	0
AP 2856D	65	20	69	25	44	22	9.7	7	1	57	30	43	0
AQ 2862D	5	8	39	5	2	13	25.2	9	1	69	6427	0	0
AR 2872M	0	1	0	0	0	0	0.1	0	1	114	8388	0	80
AS 2880M	0	1	0	2	0	0	0.1	13	1	104	8218	1	260
AT 2885M	0	2	0	2	0	1	0.1	3	1	99	7737	6	0
AU 2920M	0	2	0	1	0	0	-	-	-	-	-	-	140
AV 2932M	0	2	0	3	0	1	0.1	0	1	86	7691	0	90
AW 2940M	0	0	0	2	0	1	0.1	0	1	117	8388	0	210
AX 2954M	0	4	0	5	0	2	0.1	7	1	62	6299	1	120
AY 2967B?	0	2	0	2	0	4	-	-	-	-	-	-	0
AZ 2980M	0	2	0	2	0	1	-	-	-	-	-	-	0
BA 2986M	0	3	0	3	0	1	0.1	2	1	87	7326	3	0
BB 3000M	0	11	0	18	0	2	0.1	0	1	33	5722	0	0
BC 3010B?	0	25	27	43	3	7	0.8	14	1	4	2396	0	50
BD 3015B	108	50	181	57	66	64	6.7	5	1	29	172	10	16
BE 3019B	108	87	181	95	66	64	3.2	1	1	28	64	14	0
BF 3024D	9	24	55	40	15	4	0.4	17	1	6	2551	0	0
BG 3028D	38	20	21	40	1	5	3.7	28	1	25	1269	0	20
BH 3030D	38	12	28	23	3	5	7.4	24	1	26	650	1	20
BI 3036B	24	43	16	64	2	8	0.8	6	1	25	377	3	8
BJ 3043D	29	24	13	29	3	4	2.1	9	1	42	321	16	14
BK 3044D	29	22	13	29	4	4	2.3	7	1	36	297	11	0
BL 3053B?	2	5	5	29	0	1	0.1	0	1	31	1683	0	0
BM 3056D	15	20	14	39	0	6	1.0	12	1	17	1401	0	15
BN 3069S?	0	11	0	22	0	4	0.1	10	1	14	3063	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11410	(FLIGHT	40)											
BO 3077B?	0	13	0	20	0	4	0.1	2	1	15	3903	0	0
BP 3080M	0	13	0	20	0	4	0.1	7	1	21	3992	0	260
BQ 3106S	1	2	1	2	0	2	-	-	-	-	-	-	0
BR 3117S?	1	2	1	2	0	2	-	-	-	-	-	-	11
BS 3147B?	1	9	5	16	0	3	0.2	0	1	28	1521	0	60
BT 3158S?	3	10	3	19	0	2	0.2	9	1	16	2044	0	0
BU 3168S?	3	10	7	17	0	3	0.4	11	1	0	2909	0	0

LINE 11420	(FLIGHT	40)											
A 2307B	28	28	47	49	19	28	1.6	5	1	26	25	15	0
B 2300B	62	58	113	121	14	31	2.3	0	1	18	35	7	0
C 2297B	49	55	87	100	14	31	1.7	0	1	19	36	7	60
D 2290B	79	121	162	221	14	55	1.4	0	1	15	33	4	0
E 2280B	70	38	121	58	29	41	4.6	2	1	19	16	10	0
F 2276B	1	2	1	2	2	4	-	-	-	-	-	-	0
G 2271D	92	79	123	174	29	52	2.8	1	1	20	39	8	130
H 2268B	32	0	118	134	6	50	999.0	22	1	28	52	14	0
I 2262B	22	40	34	82	4	21	0.7	3	1	22	212	3	0
J 2254B	19	25	34	38	2	11	1.0	4	1	24	217	3	0
K 2186B?	0	2	0	2	0	1	-	-	-	-	-	-	0
L 2168B?	1	2	1	2	0	2	-	-	-	-	-	-	0
M 2156S?	6	12	11	26	1	4	0.4	17	1	14	1184	0	0
N 2141D	6	36	18	64	0	10	0.2	0	1	19	713	0	0
O 2138D	14	41	18	28	0	10	0.4	1	1	20	863	0	0
P 2085B	15	35	27	34	3	7	0.5	0	1	25	256	4	0
Q 2081B	14	20	17	34	3	3	0.8	0	1	24	158	4	0
R 2071S?	7	39	9	80	0	11	0.2	0	1	22	495	1	0
S 2059M	0	7	16	19	2	2	0.9	23	1	25	705	1	0
T 2039S	1	2	1	2	0	4	-	-	-	-	-	-	7
U 1993M	0	2	1	2	0	1	-	-	-	-	-	-	0
V 1987M	0	2	0	2	0	1	-	-	-	-	-	-	40
W 1979M	0	6	3	13	0	2	0.1	6	1	18	4314	0	90
X 1977B?	0	6	5	6	0	2	0.7	40	1	12	4029	0	0
Y 1955B?	0	10	6	15	0	3	0.3	19	1	2	2487	0	6
Z 1948B?	7	5	13	10	0	1	1.4	45	1	33	820	4	13
AA 1939M	1	2	1	2	0	2	-	-	-	-	-	-	0
AB 1909S?	0	2	1	2	1	2	-	-	-	-	-	-	0
AC 1885D	1	2	1	2	2	4	-	-	-	-	-	-	0
AD 1880D	25	10	24	3	6	8	5.2	16	1	74	259	45	0
AE 1877B?	25	20	17	35	5	7	2.0	21	1	34	1546	1	1150
AF 1850M	0	2	0	2	1	1	-	-	-	-	-	-	80

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH	
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11420	(FLIGHT	40)												
AG 1827M	0	2	0	1	0	0		~	-	~	-	-	-	180
AH 1805M	0	1	0	2	0	1		0.1	1	1	93	7603	3	0
AI 1798M	0	4	0	5	0	1		0.1	3	1	81	7060	2	0
AJ 1788M	0	4	0	5	0	1		0.1	0	1	83	7362	0	0
AK 1780M	0	1	0	2	0	0		0.1	0	1	107	8344	2	120
AL 1776M	0	2	0	3	0	1		0.1	0	1	101	8100	1	320
AM 1674M	0	2	0	2	0	4		-	-	-	-	-	-	80
AN 1666B	66	56	116	94	16	40		2.6	6	1	39	52	24	0
AO 1661D	14	31	49	33	11	22		0.5	6	1	14	1304	0	0
AP 1652D	56	15	40	28	4	15		11.1	13	1	37	251	14	18
AQ 1647D	13	12	16	40	0	5		1.3	29	1	26	692	0	0
AR 1645D	34	12	22	40	0	7		6.5	24	1	28	384	5	0
AS 1643D	34	44	39	47	1	12		1.3	10	1	29	300	7	20
AT 1640D	23	24	39	10	2	12		1.4	20	1	32	248	11	0
AU 1635D	66	44	15	78	2	23		3.5	12	1	29	164	11	4
AV 1631D	17	28	15	78	2	23		0.8	8	1	33	477	7	0
AW 1622D	11	17	10	13	0	4		0.7	6	1	34	1317	0	0
AX 1610S?	1	2	1	2	0	2		-	-	-	-	-	-	0
AY 1602S?	1	12	3	21	0	3		0.1	0	1	14	3671	0	260
AZ 1591M	0	8	0	11	0	2		0.1	8	1	31	4669	0	5
BA 1585M	0	5	0	9	0	2		0.1	0	1	25	4945	0	20
BB 1551S?	1	2	1	2	0	2		-	-	-	-	-	-	0
BC 1520D	7	17	7	18	0	2		0.4	12	1	33	971	2	70

LINE 11430	(FLIGHT	40)												
A 386B	52	44	106	82	16	23		2.4	0	1	15	26	4	0
B 394B	41	79	91	151	5	22		0.9	0	1	15	42	4	0
C 401B	152	120	304	232	64	105		3.7	0	1	21	19	12	0
D 404B	150	120	304	232	64	105		3.7	4	1	23	24	13	0
E 407B	150	120	304	232	31	105		3.7	0	1	21	36	9	5
F 418B	17	42	29	76	5	1		0.5	0	1	25	147	7	0
G 428B	3	72	38	135	2	27		0.4	0	1	21	388	0	0
H 444S?	0	16	2	30	0	4		0.1	0	1	13	3776	0	0
I 495S?	0	2	0	2	0	1		-	-	-	-	-	-	0
J 514S?	0	13	1	23	0	3		0.1	0	1	9	3803	0	50
K 522B?	1	11	2	12	1	2		0.1	0	1	10	4413	0	0
L 546S?	3	17	5	28	0	4		0.1	0	1	13	2109	0	0
M 552M	1	2	1	2	0	4		-	-	-	-	-	-	0
N 557S?	20	118	59	248	0	34		0.3	0	1	9	390	0	0
O 576B	46	69	80	128	2	24		1.2	0	1	16	156	0	0
P 592S?	1	2	1	2	2	4		-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL QUAD		REAL QUAD		REAL QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE	11430	(FLIGHT		40)										
Q	608B?	16	39	24	71	4	18	0.5	8	1	31	312	10	17
R	629S?	4	12	7	24	2	6	0.2	0	1	29	655	1	0
S	647S?	1	2	1	2	0	4	-	-	-	-	-	-	15
T	681M	1	2	1	2	0	4	-	-	-	-	-	-	0
U	683B?	6	23	6	49	0	7	0.2	0	1	0	2083	0	0
V	688M	6	12	6	49	0	2	0.4	14	1	33	5791	0	340
W	708S?	6	18	6	16	0	4	0.3	13	1	8	3082	0	0
X	721B?	9	10	6	11	0	2	0.8	20	1	19	1852	0	0
Y	734B	4	32	4	60	0	8	0.1	1	1	0	1937	0	0
Z	746S?	4	16	2	33	0	4	0.2	11	1	2	2519	0	0
AA	750B?	1	2	1	2	0	4	-	-	-	-	-	-	16
AB	758S?	1	2	1	2	0	4	-	-	-	-	-	-	60
AC	772B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AD	787S?	4	10	0	21	0	3	0.3	19	1	12	3771	0	0
AE	799M	5	5	0	13	0	1	0.7	45	1	24	4766	0	70
AF	812B	15	10	9	8	3	4	1.9	0	1	49	576	11	0
AG	896M	0	2	0	8	0	3	0.1	14	1	82	6737	11	0
AH	1138M	2	0	0	1	0	1	7.4	81	1	111	8388	0	70
AI	1144M	4	2	0	2	0	0	2.4	68	1	114	8388	0	5
AJ	1237B?	1	2	1	2	2	2	-	-	-	-	-	-	14
AK	1245D	5	15	9	23	1	4	0.3	0	1	57	1350	16	0
AL	1254D	12	19	13	26	1	5	0.7	7	1	43	590	12	18
AM	1258D	7	17	13	26	1	5	0.4	4	1	39	725	8	0
AN	1280D	17	31	25	48	0	9	0.7	7	1	37	482	10	5
AO	1288D	20	28	36	35	2	11	1.0	7	1	39	274	15	0
AP	1290D	22	28	36	35	2	11	1.1	1	1	36	323	10	0
AQ	1301B?	5	20	5	38	0	7	0.2	7	1	2	2722	0	30
AR	1304D	5	20	5	38	0	7	0.2	0	1	22	2134	0	0
AS	1320S?	0	18	3	30	0	4	0.1	0	1	7	3666	0	0
AT	1339M	0	2	0	2	0	1	-	-	-	-	-	-	170
AU	1346S?	0	2	1	2	0	2	-	-	-	-	-	-	0
AV	1370B?	5	16	7	16	0	2	0.4	1	1	18	1494	0	0
AW	1386B	13	48	30	79	0	12	0.3	0	1	21	567	0	0
AX	1393B?	3	43	22	66	0	11	0.4	0	1	0	1917	0	0

LINE	11447	(FLIGHT		46)										
A	753B	81	66	164	124	44	66	2.9	0	1	22	23	11	0
B	755B	92	70	164	130	44	66	3.3	0	1	23	23	12	0
C	763B	43	27	73	180	38	70	3.3	11	1	20	35	8	0
D	774B	66	147	141	275	10	50	0.9	0	1	15	45	4	0
E	777B	66	125	141	257	41	50	1.1	0	1	17	54	5	210

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
	ANOMALY/	REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT

LINE 11447	(FLIGHT	46)												
F	786B	95	68	190	130	40	76	3.5	6	1	25	35	13	0
G	801B	1	2	1	2	2	4	-	-	-	-	-	-	0
H	805D	1	2	1	2	2	4	-	-	-	-	-	-	0
I	807D	11	28	37	57	6	7	0.4	8	1	17	1296	0	160
J	875M	0	1	0	15	0	2	0.1	13	1	37	4780	0	0
K	917S?	2	8	1	15	1	3	0.2	16	1	23	4853	0	0
L	926S?	2	13	1	29	1	4	0.1	11	1	19	3517	0	0
M	939S?	0	2	0	2	0	4	-	-	-	-	-	-	0
N	958M	0	10	0	21	0	2	0.1	5	1	40	5649	0	320
O	964M	0	9	0	21	0	3	0.1	10	1	24	3956	0	0
P	974S?	1	52	0	109	0	14	0.1	8	1	0	1797	0	0
Q	977M	1	52	56	109	1	14	0.8	10	1	8	2165	0	210
R	987S?	36	78	70	154	2	24	0.8	2	1	16	238	0	5
S	990M	1	2	1	2	1	4	-	-	-	-	-	-	40
T	1000S?	2	34	6	65	2	14	0.1	0	1	40	269	19	0
U	1016S?	14	56	7	122	0	13	0.3	8	1	0	1349	0	5
V	1025B?	11	36	16	69	0	9	0.4	7	1	5	1286	0	5
W	1036M	11	11	18	26	0	7	1.1	39	1	0	1837	0	18
X	1065B?	0	29	0	50	0	5	0.1	1	1	0	2244	0	40
Y	1097B?	5	37	34	56	5	8	0.8	3	1	0	3473	0	0
Z	1102B?	3	37	34	41	5	12	1.2	8	1	40	462	13	0
AA	1120B?	3	52	0	107	0	15	0.1	3	1	0	1542	0	0
AB	1146D	0	13	0	20	0	3	0.1	5	1	28	4629	0	4
AC	1160B?	0	39	0	90	0	11	0.1	10	1	0	1846	0	11
AD	1179S?	3	19	1	28	1	4	0.1	2	1	9	3125	0	4
AE	1195S?	1	2	1	2	0	3	-	-	-	-	-	-	0
AF	1220S	1	2	0	2	1	2	-	-	-	-	-	-	5
AG	1239D	17	9	13	13	7	6	3.1	22	1	57	981	19	0
AH	1246D	16	19	4	10	1	3	1.0	20	1	61	2585	16	4
AI	1279M	1	2	0	2	0	0	-	-	-	-	-	-	7
AJ	1764D	1	2	1	2	2	2	-	-	-	-	-	-	0
AK	1773D	14	33	65	48	4	12	0.5	0	1	36	531	8	6
AL	1779D	44	42	65	74	8	22	1.9	5	1	31	152	12	0
AM	1783B	44	31	65	43	8	22	2.8	11	1	34	468	8	8
AN	1794B?	0	7	10	6	1	0	1.9	42	1	45	1803	7	5
AO	1799D	4	16	32	18	0	2	2.9	21	1	33	1971	0	17
AP	1806D	18	25	34	58	4	12	1.0	10	1	33	474	7	0
AQ	1811B?	22	40	39	51	5	10	0.8	4	1	33	305	10	10
AR	1815D	29	26	42	33	4	10	1.8	4	1	33	219	11	0
AS	1818D	27	26	42	22	4	10	1.6	6	1	42	238	18	5
AT	1828M	1	28	10	33	0	9	0.3	0	1	15	1305	0	60

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11447	(FLIGHT	46)											
AU 1830M	1	28	10	33	0	9	0.3	2	1	9	2046	0	60
AV 1861S?	1	6	3	26	0	4	0.1	0	1	17	2818	0	0
AW 1883M	0	5	0	8	0	1	0.1	10	1	42	5437	0	0
AX 1904M	0	8	0	11	0	2	0.1	2	1	28	4945	0	160
AY 1912S?	1	2	1	2	0	4	-	-	-	-	-	-	0
AZ 1918S?	10	38	18	72	1	10	0.3	0	1	14	824	0	0
BA 1929B?	3	48	9	90	0	26	0.1	0	1	25	1515	0	0
BB 1936B?	13	90	40	160	0	26	0.2	0	1	10	757	0	0

LINE 11456	(FLIGHT	39)											
A 1410B	8	61	67	105	23	32	0.1	0	1	24	39	12	0
B 1412B	8	61	67	105	22	32	0.1	0	1	25	40	12	4
C 1421B	166	133	330	236	92	118	3.8	0	1	15	11	8	50
D 1427B	7	11	81	18	79	38	0.5	21	1	16	12	8	0
E 1448B	51	90	108	173	10	40	1.0	0	1	16	52	4	0
F 1453B	120	97	106	124	57	34	3.4	2	1	24	25	14	0
G 1454B	120	118	106	224	57	34	2.7	3	1	23	36	12	4
H 1457B	101	118	216	224	21	70	2.1	1	1	18	44	6	0
I 1464B	7	14	13	27	7	7	0.5	16	1	26	192	6	0
J 1490S?	0	9	0	17	0	2	0.1	0	1	14	3983	0	0
K 1494M	0	9	0	17	0	2	0.1	0	1	24	4839	0	190
L 1496B?	0	2	0	2	0	1	-	-	-	-	-	-	190
M 1516S?	0	2	0	2	0	2	-	-	-	-	-	-	0
N 1538B?	1	2	1	2	0	4	-	-	-	-	-	-	4
O 1543M	8	19	5	30	0	5	0.4	2	1	0	2888	0	190
P 1545D	8	19	5	30	0	5	0.4	0	1	11	1908	0	0
Q 1604M	0	2	0	2	0	1	-	-	-	-	-	-	190
R 1616S?	0	9	0	16	0	2	0.1	3	1	26	4669	0	90
S 1625M	0	12	10	23	0	7	0.4	21	1	6	2354	0	140
T 1626B?	0	2	1	2	0	4	-	-	-	-	-	-	0
U 1636M	1	2	1	2	0	2	-	-	-	-	-	-	14
V 1642B?	14	15	30	38	0	12	1.1	27	1	29	340	7	0
W 1646M	1	2	1	2	2	4	-	-	-	-	-	-	30
X 1650B?	18	36	33	74	6	11	0.6	0	1	24	227	3	20
Y 1655S?	14	14	30	26	6	8	1.2	22	1	38	333	14	60
Z 1666S?	7	15	23	68	0	16	0.5	33	1	0	1363	0	0
AA 1682S?	0	25	0	52	0	8	0.1	10	1	0	1488	0	40
AB 1690S?	4	9	15	46	0	12	0.3	9	1	0	1504	0	16
AC 1703S?	0	2	0	2	0	4	-	-	-	-	-	-	0
AD 1737S?	0	13	2	22	0	3	0.1	0	1	3	3557	0	0
AE 1813B?	0	2	1	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11456	(FLIGHT	39)											
AF 1852S	1	2	1	2	0	3	-	-	-	-	-	-	0
AG 1899B	80	39	101	54	31	39	5.4	0	1	35	39	21	0
AH 1906D	29	40	19	45	11	8	1.1	0	1	28	641	0	4
AI 1921S	1	2	1	2	0	2	-	-	-	-	-	-	4

LINE 11457	(FLIGHT	39)											
A 2394D	6	17	25	14	4	8	0.3	10	1	33	654	6	0
B 2400D	10	22	11	23	0	4	0.4	6	1	31	502	5	0
C 2403D	13	22	11	23	1	4	0.7	11	1	28	562	2	0
D 2412S?	5	14	11	35	0	9	0.3	14	1	15	725	0	0
E 2421D	1	2	1	2	0	4	-	-	-	-	-	-	0
F 2440S	0	11	2	22	0	3	0.1	3	1	13	3257	0	0
G 2480M	0	10	0	13	0	2	0.1	4	1	29	4883	0	290
H 2483S?	1	10	2	13	0	2	0.1	4	1	20	4135	0	0
I 2501B?	20	26	66	80	5	20	1.1	0	1	22	115	4	7

LINE 11458	(FLIGHT	46)											
A 3047B	6	41	11	58	0	13	0.1	0	1	8	1191	0	16
B 3055B	19	85	20	140	1	18	0.3	0	1	11	625	0	0
C 3073D	48	45	54	68	6	17	2.0	6	1	31	204	11	0
D 3079B?	1	2	1	2	2	4	-	-	-	-	-	-	0
E 3094B?	12	35	13	57	1	7	0.4	5	1	23	820	0	6
F 3100D	19	42	27	66	3	11	0.6	0	1	26	344	3	0
G 3103D	17	42	27	66	2	11	0.5	0	1	37	289	11	0

LINE 11466	(FLIGHT	39)											
A 1334B	12	6	117	107	20	44	3.2	21	1	21	17	10	0
B 1323B	43	18	131	42	77	46	5.4	14	1	17	14	8	40
C 1319B	99	7	190	77	58	70	95.8	6	1	19	11	10	0
D 1310B	1	2	1	2	2	4	-	-	-	-	-	-	0
E 1307B	33	47	62	76	8	18	1.1	2	1	20	34	8	0
F 1300B	109	89	78	149	42	21	3.2	1	1	21	36	9	730
G 1296B	111	72	202	131	50	78	4.3	5	1	25	32	13	4
H 1289B	1	2	1	2	2	4	-	-	-	-	-	-	5
I 1288B	15	11	25	17	5	20	1.9	26	1	28	175	8	0
J 1265S?	0	2	1	2	0	1	-	-	-	-	-	-	20
K 1260S?	0	27	0	37	0	7	0.1	8	1	17	3557	0	0
L 1256S?	0	27	1	37	0	7	0.1	9	1	5	2462	0	5
M 1190S	0	2	0	2	0	1	-	-	-	-	-	-	20
N 1163S?	1	2	1	2	0	4	-	-	-	-	-	-	0
O 1140D	27	54	66	159	0	26	0.7	3	1	14	354	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11466	(FLIGHT	39)											
P 1117S?	10	12	18	20	3	4	0.9	26	1	30	701	3	140
Q 1111B?	12	18	19	28	3	7	0.7	2	1	25	282	2	0
R 1080B?	18	23	34	48	0	12	1.0	12	1	31	275	8	0
S 1073D	6	10	3	10	0	3	0.5	15	1	33	939	0	5
T 1058S?	1	2	0	2	0	2	-	-	-	-	-	-	0
U 1049S?	1	2	1	2	0	4	-	-	-	-	-	-	0
V 1023M	0	2	0	2	0	1	-	-	-	-	-	-	280
W 989B?	6	17	7	19	1	2	0.3	3	1	27	1471	0	0
X 973S?	4	13	3	22	1	3	0.2	10	1	36	1353	2	0
Y 955B?	1	2	1	2	1	4	-	-	-	-	-	-	19
Z 951B?	5	27	5	61	0	9	0.1	0	1	9	2043	0	0
AA 934B?	2	5	1	5	0	1	0.2	25	1	14	3963	0	5
AB 931M	2	4	6	7	0	2	0.7	33	1	7	3787	0	5
AC 924D	24	6	17	9	10	9	8.5	19	1	53	318	25	0
AD 921D	1	2	1	2	2	4	-	-	-	-	-	-	0
AE 918D	16	3	14	1	5	8	13.1	18	1	59	224	32	0
AF 864M	0	5	0	13	0	1	0.1	0	1	43	6234	0	170

LINE 11467	(FLIGHT	46)											
A 2362M	0	2	0	1	0	0	-	-	-	-	-	-	0
B 2284M	0	2	0	2	0	0	-	-	-	-	-	-	0
C 2250M	0	2	0	2	0	2	-	-	-	-	-	-	0
D 2245M	0	3	0	6	0	1	0.1	5	1	78	6916	3	20
E 2215D	2	8	0	6	0	1	0.1	0	1	60	7060	0	20
F 2169D	1	2	1	2	0	0	-	-	-	-	-	-	20
G 2160D	8	12	9	16	0	3	0.6	20	1	41	817	9	0
H 2154B?	1	2	1	2	1	2	-	-	-	-	-	-	0
I 2146D	5	17	3	29	0	4	0.3	7	1	21	1370	0	9
J 2139B	4	22	4	40	0	5	0.1	1	1	16	2059	0	10
K 2136D	1	2	1	2	0	4	-	-	-	-	-	-	5
L 2134D	4	24	4	47	0	6	0.1	0	1	33	1427	4	0
M 2124D	3	22	17	27	0	7	0.7	21	1	33	853	7	0
N 2120D	31	32	36	51	2	17	1.6	15	1	26	370	4	0
O 2116D	27	56	29	90	2	14	0.7	9	1	23	460	2	19
P 2108D	14	69	13	88	1	12	0.2	0	1	25	1128	0	0
Q 2104D	17	69	13	93	0	14	0.3	3	1	2	2146	0	4
R 2101D	5	36	13	93	0	14	0.1	5	1	0	1505	0	20
S 2098B?	10	4	9	93	0	14	3.9	57	1	9	2213	0	16
T 2092B?	9	65	13	153	0	22	0.1	0	1	10	1029	0	0
U 2079S?	0	11	0	25	0	3	0.1	8	1	18	3642	0	0
V 2043B?	2	21	30	28	2	10	1.6	0	1	28	246	3	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11476	(FLIGHT	38)											
A 494B	45	33	98	72	21	40	2.8	0	1	19	35	7	0
B 504B	32	15	54	31	19	15	4.3	11	1	20	20	9	0
C 509B	20	14	23	30	12	18	2.3	16	1	21	21	10	0
D 523B	106	82	74	143	33	50	3.4	1	1	18	47	6	370
E 527B	76	76	74	143	33	50	2.2	7	1	24	76	10	5
F 538B?	29	9	54	78	4	21	7.6	23	1	31	141	13	0
G 541B?	29	31	55	73	4	22	1.5	19	1	31	250	11	0
H 558S?	0	10	1	18	0	2	0.1	9	1	13	3082	0	0
I 578S?	1	16	3	15	0	4	0.1	4	1	4	3366	0	5
J 588M	0	8	0	8	0	1	0.1	11	1	29	4303	0	260
K 590B?	0	8	0	8	0	2	0.1	8	1	26	4314	0	0
L 610M	0	3	0	5	0	1	0.1	0	1	61	6667	0	0
M 708D	0	12	1	19	0	3	0.1	1	1	22	4347	0	40
N 735B?	22	39	41	82	0	3	0.8	6	1	18	252	0	0
O 741S?	2	32	20	67	0	13	0.4	1	1	13	722	0	13
P 748S?	7	23	14	47	0	8	0.3	14	1	3	2127	0	0
Q 767S?	4	23	41	39	2	14	1.7	4	1	39	125	20	0
R 783S?	2	26	9	53	0	14	0.2	1	1	13	560	0	0
S 791B?	11	17	22	28	0	5	0.7	18	1	26	417	3	0
T 793B?	11	16	22	28	0	5	0.8	19	1	20	705	0	0
U 800D	6	24	9	32	0	4	0.2	6	1	23	796	0	0
V 809B?	1	2	1	2	0	3	-	-	-	-	-	-	11
W 812B?	4	11	6	22	0	3	0.2	1	1	21	788	0	0
X 825S?	1	2	1	2	0	3	-	-	-	-	-	-	0
Y 834B	13	13	19	19	0	6	1.2	0	1	35	535	4	0
Z 848M	0	2	0	2	0	1	-	-	-	-	-	-	4
AA 902D	6	12	5	9	0	1	0.4	16	1	26	1271	0	0
AB 915D	5	16	6	29	0	4	0.3	11	1	16	1192	0	0
AC 923D	25	16	30	19	14	7	2.8	11	1	31	194	9	70
AD 926D	8	21	37	14	15	22	0.3	0	1	41	104	23	0
AE 929D	28	42	9	14	4	11	1.0	0	1	33	68	17	0
AF 931D	65	46	9	14	4	11	3.2	2	1	44	81	27	0
AG 968M	0	1	1	2	0	1	-	-	-	-	-	-	0
AH 976M	0	3	0	4	0	1	0.1	0	1	68	6761	0	0
AI 1036M	0	1	1	0	0	0	-	-	-	-	-	-	0
AJ 1054M	0	2	1	1	0	0	-	-	-	-	-	-	50
AK 1066M	0	2	3	4	0	1	0.4	37	1	84	7603	0	180

LINE 11477	(FLIGHT	46)											
A 3374M	0	4	0	5	0	1	0.1	4	1	50	6008	0	20
B 3389S?	0	2	0	2	0	2	-	-	-	-	-	-	5

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ REAL QUAD REAL QUAD REAL QUAD . COND DEPTH* . COND DEPTH RESIS DEPTH	FID/INTERP PPM PPM PPM PPM PPM PPM . SIEMEN M . SIEMEN M OHM-M M	NT					

LINE 11477 (FLIGHT 46)							
C 3408B?	6 9 4 10 1 2 .	0.6 32 .	1 52 780 19 0				
D 3414D	1 2 1 2 0 0 .	- - .	- - - - 0				
E 3419D	20 40 20 63 1 9 .	0.7 2 .	1 32 553 5 0				
F 3422D	21 41 20 63 1 9 .	0.7 3 .	1 28 592 2 0				
G 3433S?	4 11 5 17 1 3 .	0.2 0 .	1 34 1366 0 0				
H 3452D	7 15 10 31 0 5 .	0.4 15 .	1 32 1293 1 0				
I 3462B	22 50 23 88 2 16 .	0.6 5 .	1 25 290 5 0				
J 3466B	15 21 27 51 2 9 .	0.8 17 .	1 19 458 0 9				
K 3472B?	2 12 25 18 2 2 .	2.0 27 .	1 7 2278 0 30				
L 3475B	19 153 9 308 0 44 .	0.2 0 .	1 15 1220 0 17				
M 3479B	1 2 1 2 0 4 .	- - .	- - - - 11				
N 3479B	25 153 39 308 0 44 .	0.3 0 .	1 5 566 0 11				
O 3494M	4 9 10 33 0 2 .	0.3 5 .	1 23 4336 0 80				
P 3496D	4 9 3 10 0 2 .	0.4 28 .	1 34 3603 0 0				
Q 3500B?	0 2 1 2 0 1 .	- - .	- - - - 0				
R 3515M	3 8 1 64 0 9 .	0.2 32 .	1 23 3795 0 80				
S 3519B?	2 39 0 66 0 9 .	0.1 9 .	1 4 1983 0 0				
T 3522M	0 8 0 66 0 9 .	0.1 9 .	1 7 2554 0 0				
U 3527B?	1 2 1 2 0 4 .	- - .	- - - - 0				
V 3536B?	1 2 1 2 0 4 .	- - .	- - - - 0				

LINE 11480 (FLIGHT 27)							
A 3649B	16 84 32 112 0 21 .	0.3 0 .	1 12 402 0 20				
B 3644B?	37 72 70 222 0 36 .	0.9 12 .	1 12 188 0 0				
C 3626B?	0 2 1 2 1 1 .	- - .	- - - - 7				
D 3608B?	0 19 7 33 0 4 .	0.2 0 .	1 14 2525 0 0				
E 3600B?	0 2 1 2 0 4 .	- - .	- - - - 0				
F 3585M	0 1 0 5 0 1 .	0.1 7 .	1 59 6188 0 0				
G 3579B?	0 9 0 11 0 3 .	0.1 8 .	1 36 5124 0 50				

LINE 11481 (FLIGHT 27)							
A 4446B	81 19 257 404 32 103 .	15.4 19 .	1 16 13 8 6				
B 4442B	24 19 257 350 32 103 .	1.9 25 .	1 15 22 7 80				
C 4439B	105 76 300 269 4 106 .	3.6 6 .	1 24 40 12 7				
D 4429B	20 24 46 56 5 10 .	1.1 12 .	1 26 130 9 0				
E 4415B?	5 12 6 34 0 5 .	0.1 0 .	1 18 982 0 30				
F 4401S	1 2 1 2 0 2 .	- - .	- - - - 30				
G 4381S?	0 16 0 31 0 4 .	0.1 6 .	1 7 2783 0 70				
H 4366S?	0 19 1 30 0 4 .	0.1 3 .	1 10 3049 0 0				
I 4356M	0 2 0 5 0 0 .	0.1 0 .	1 42 5959 0 150				
J 4342B?	0 7 3 5 0 2 .	0.3 40 .	1 31 5107 0 0				

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11481	(FLIGHT		27)										
K 4272B?	4	12	9	28	0	4	0.3	0	1	32	2580	0	0
L 4268B?	1	2	1	2	0	4	-	-	-	-	-	-	0
M 4250B?	4	9	22	25	0	6	1.1	7	1	46	2382	3	0
N 4240B	7	14	4	27	0	4	0.5	20	1	44	585	15	0
O 4236B	5	13	4	27	0	4	0.3	11	1	29	1373	0	0
P 4206S?	5	18	18	60	0	10	0.4	3	1	19	858	0	20
Q 4200B?	15	39	13	69	0	12	0.5	4	1	26	286	5	0
R 4195B?	1	2	1	2	0	4	-	-	-	-	-	-	0
S 4182S	5	8	10	42	0	7	0.2	0	1	25	411	2	7
T 4164S?	29	45	65	86	0	20	1.0	8	1	29	151	11	0
U 4143S?	8	13	11	23	0	4	0.6	17	1	29	414	4	0
V 4127S?	0	37	15	77	0	10	0.2	0	1	6	1513	0	0
W 4122B?	6	19	14	32	0	5	0.3	12	1	23	981	0	0
X 4110B?	5	4	18	48	0	7	0.4	5	1	27	610	3	30
Y 4108B?	5	4	18	48	0	7	0.4	2	1	27	451	4	0
Z 4102D	35	20	25	80	7	5	3.5	18	1	28	143	10	0
AA 4098B?	6	18	39	31	7	21	0.3	1	1	36	270	12	4
AB 4088M	0	5	4	13	0	2	0.2	14	1	10	3484	0	240
AC 4065E	0	36	0	72	0	10	0.1	11	1	0	1793	0	0
AD 4063M	0	17	10	33	0	4	0.3	12	1	1	1819	0	0
AE 4057S?	0	16	11	31	0	5	0.3	6	1	19	1233	0	0
AF 4049M	0	19	8	40	0	6	0.2	0	1	2	2498	0	0
AG 4030B?	1	2	1	2	2	0	-	-	-	-	-	-	0
AH 4005D	10	12	40	25	7	13	0.9	23	1	52	147	30	0
AI 4004D	10	18	40	25	7	13	0.6	15	1	63	156	40	20
AJ 3890S?	0	2	0	3	0	0	0.1	0	1	83	7326	0	0
AK 3879B?	0	1	0	3	0	0	0.1	0	1	76	7362	0	0
AL 3817D	10	8	8	12	6	8	1.4	24	1	57	1273	16	0
AM 3788B?	4	10	14	18	0	5	0.8	13	1	53	1237	15	0
AN 3771D	16	10	14	14	2	4	2.4	9	1	34	313	7	0
AO 3759D	22	21	21	87	0	11	1.6	19	1	31	398	7	0
AP 3753D	25	26	10	37	0	4	1.4	18	1	28	404	6	6
AQ 3749B?	9	14	8	9	1	3	0.6	24	1	32	369	9	19
AR 3743D	41	69	48	81	3	15	1.0	8	1	26	244	7	0

LINE 11490	(FLIGHT		27)										
A 2616B	23	10	25	48	4	14	4.2	21	1	19	41	7	0
B 2624B	1	2	1	2	2	4	-	-	-	-	-	-	0
C 2635B	107	283	223	507	0	92	1.0	0	1	15	90	3	0
D 2640B	107	52	211	91	0	13	6.1	16	1	17	79	5	60
E 2643B	89	32	207	83	0	7	8.6	19	1	19	84	6	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11490	(FLIGHT	27)											
F 2668S	1	2	1	2	0	4	-	-	-	-	-	-	0
G 2688S	1	2	1	2	0	2	-	-	-	-	-	-	0
H 2789B?	2	17	0	10	0	1	0.1	0	1	15	4325	0	0
I 2808B?	0	2	0	2	0	1	-	-	-	-	-	-	0
J 2823B?	1	2	1	2	0	0	-	-	-	-	-	-	0
K 2834B?	1	2	1	2	0	1	-	-	-	-	-	-	0
L 2863B?	7	7	14	11	1	4	1.0	14	1	50	351	20	6
M 2879S?	4	10	6	47	0	5	0.1	0	1	28	621	2	80
N 2896S	4	8	7	61	0	7	0.1	0	1	15	524	0	0
O 2905B	22	46	59	36	0	1	0.7	9	1	12	549	0	0
P 2911B	1	2	1	2	0	4	-	-	-	-	-	-	0
Q 2915B	32	73	82	145	0	29	0.7	0	1	18	171	2	0
R 2930B?	20	93	49	171	0	33	0.3	0	1	23	222	6	0
S 2934M	20	93	49	171	0	33	0.3	4	1	22	427	4	20
T 2946B?	7	12	3	73	0	18	0.5	32	1	40	126	22	0
U 2951M	17	12	7	73	0	21	2.1	37	1	21	853	0	0
V 2962M	1	2	1	2	0	2	-	-	-	-	-	-	300
W 2975M	13	13	27	12	0	5	1.2	31	1	3	2457	0	15
X 2982S?	11	23	34	35	0	9	0.5	17	1	33	431	9	0
Y 3006B?	1	2	1	2	0	1	-	-	-	-	-	-	11
Z 3017B?	0	9	0	20	0	7	0.1	8	1	3	2361	0	50
AA 3024S?	0	24	0	42	0	5	0.1	11	1	2	2018	0	0
AB 3028M	0	12	0	24	0	4	0.1	10	1	10	2688	0	140
AC 3034B?	3	24	3	7	0	3	0.2	33	1	8	2926	0	140
AD 3053B	25	111	64	253	0	37	0.4	0	1	17	328	0	0
AE 3059B	9	67	17	253	0	37	0.1	0	1	31	728	6	0
AF 3074B?	6	10	11	38	0	6	0.5	35	1	10	2751	0	0
AG 3092M	0	3	0	9	0	2	0.1	7	1	33	4929	0	0
AH 3106M	3	6	2	9	0	2	0.4	43	1	43	5751	0	100
AI 3152M	1	1	0	4	0	1	0.6	103	1	73	6944	0	0
AJ 3171S?	0	5	0	21	0	5	0.1	3	1	40	5703	0	400
AK 3237S?	0	19	0	33	0	4	0.1	14	1	18	3107	0	0
AL 3260S	0	2	0	2	0	1	-	-	-	-	-	-	14
AM 3314D	7	17	4	21	1	4	0.4	11	1	42	587	13	0
AN 3318D	1	2	1	2	2	4	-	-	-	-	-	-	0
AO 3322D	10	15	12	4	2	2	0.7	22	1	43	612	14	17
AP 3326D	26	26	19	15	2	6	1.5	12	1	37	338	13	0
AQ 3330D	9	39	19	47	2	7	0.3	6	1	40	463	15	0
AR 3334D	15	39	12	47	0	7	0.5	0	1	36	459	10	0
AS 3342D	24	75	43	142	3	22	0.5	0	1	24	261	4	0
AT 3346B?	24	75	43	142	3	22	0.5	1	1	22	288	3	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11490	(FLIGHT	27)											
AU 3355B?	1	0	1	2	0	3	-	-	-	-	-	-	0
AV 3359B?	12	69	31	64	0	21	0.2	0	1	16	335	0	0
AW 3363B?	13	69	40	64	0	21	0.2	0	1	15	323	0	0
AX 3382B?	3	18	5	17	0	2	0.2	11	1	27	1580	0	0
AY 3393B?	1	2	1	2	0	2	-	-	-	-	-	-	0
AZ 3412S?	2	7	8	28	0	4	0.3	0	1	16	1234	0	11
BA 3422M	0	2	0	2	0	3	-	-	-	-	-	-	0
BB 3432M	0	1	0	4	0	1	0.1	0	1	86	7400	0	60
BC 3445M	0	3	0	8	0	1	0.1	0	1	79	7154	0	16

LINE 11500	(FLIGHT	27)											
A 2277S?	0	9	2	53	0	11	0.1	10	1	3	1813	0	0
B 2264M	0	5	0	10	0	2	0.1	0	1	17	4752	0	110
C 2254D	3	9	12	10	2	6	1.2	20	1	23	5631	0	60
D 2239D	13	40	6	24	0	6	0.4	0	1	8	2010	0	0
E 2223D	1	2	1	2	0	2	-	-	-	-	-	-	0
F 2161M	0	2	0	2	0	1	-	-	-	-	-	-	0
G 2153B?	0	10	0	11	0	1	0.1	0	1	14	4382	0	0
H 2127D	2	15	3	21	0	4	0.1	0	1	27	5302	0	0
I 2116S?	1	2	1	2	0	4	-	-	-	-	-	-	50
J 2108M	1	2	1	2	0	2	-	-	-	-	-	-	70
K 2097S?	18	42	41	86	0	21	0.5	14	1	0	1492	0	0
L 2088S?	0	55	19	110	0	11	0.2	0	1	3	1129	0	16
M 2082S	9	17	19	129	0	19	0.6	23	1	14	499	0	7
N 2067B?	24	46	53	84	2	18	0.7	0	1	24	164	6	0
O 2040S?	0	24	12	53	0	9	0.2	2	1	2	2266	0	0
P 2027S?	0	12	6	24	0	3	0.2	8	1	12	3136	0	0
Q 2010S	17	33	48	60	0	12	0.6	0	1	21	162	2	0
R 2005B?	1	2	1	2	0	4	-	-	-	-	-	-	70
S 2001B?	0	2	1	2	0	2	-	-	-	-	-	-	70
T 1999B?	0	7	6	13	0	4	0.3	13	1	3	3462	0	70
U 1995B?	0	11	5	13	0	2	0.3	1	1	30	1698	0	9
V 1959B?	1	2	1	2	0	4	-	-	-	-	-	-	9
W 1956B?	4	16	28	26	3	9	1.5	6	1	50	108	30	13
X 1874S?	0	11	0	127	0	18	0.1	12	1	10	2584	0	0
Y 1829M	0	2	0	2	0	2	-	-	-	-	-	-	480
Z 1822M	0	4	0	6	0	1	0.1	0	1	64	6645	0	70
AA 1730B?	4	9	3	9	0	1	0.3	0	1	40	2938	0	0
AB 1677B?	1	2	1	2	0	1	-	-	-	-	-	-	8
AC 1664D	6	17	7	7	0	2	0.4	1	1	47	2320	3	17
AD 1659D	2	8	6	6	0	2	0.8	43	1	48	1633	10	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11500	(FLIGHT	27)											
AE 1654D	1	2	1	2	0	1	-	-	-	-	-	-	0
AF 1641B?	1	2	1	2	0	3	-	-	-	-	-	-	0
AG 1636D	6	16	10	24	1	4	0.3	1	1	35	741	4	0
AH 1561B?	8	16	10	15	1	3	0.5	20	1	40	707	11	0
AI 1550D	12	12	9	12	1	2	1.2	20	1	36	463	8	0
AJ 1539B?	13	14	26	57	1	20	1.2	33	1	19	351	1	7
AK 1505B?	5	9	11	14	1	4	0.8	0	1	40	404	8	9

LINE 11501	(FLIGHT	27)											
A 2473B	29	80	89	160	6	33	0.6	0	1	15	38	4	0
B 2459B	79	51	152	77	29	43	3.8	0	1	20	30	8	0
C 2444B	16	11	90	30	13	28	2.0	18	1	23	70	8	0
D 2432S?	5	10	9	22	0	4	0.4	18	1	27	535	0	0

LINE 11510	(FLIGHT	27)											
A 475B	32	27	62	51	13	22	2.0	0	1	21	39	7	0
B 481B	32	17	67	30	17	25	3.8	0	1	23	20	12	0
C 492B	13	12	39	24	16	15	1.3	2	1	25	34	12	0
D 502B	35	79	82	155	11	26	0.7	0	1	17	70	3	0
E 523S?	4	13	6	23	0	5	0.2	0	1	21	589	0	0
F 544S?	2	19	1	32	0	4	0.1	0	1	10	2404	0	5
G 547S?	0	25	5	44	0	6	0.1	0	1	0	2335	0	0
H 559M	0	2	0	2	0	2	-	-	-	-	-	-	0
I 561S?	1	2	0	2	0	2	-	-	-	-	-	-	40
J 590M	0	2	0	2	0	2	-	-	-	-	-	-	0
K 594S?	0	4	0	11	0	1	0.1	9	1	56	6047	1	60
L 602B?	11	41	0	65	0	10	0.3	10	1	26	3886	0	0
M 606B?	5	29	16	65	0	10	0.2	7	1	8	2615	0	40
N 617D	7	13	9	18	0	3	0.5	17	1	54	501	23	0
O 673D	21	44	55	73	3	19	0.7	0	1	40	382	14	7
P 675D	35	44	55	73	3	19	1.3	5	1	35	193	14	0
Q 710D	7	14	28	24	2	10	0.4	4	1	68	346	37	0
R 712D	11	14	28	24	2	10	0.9	9	1	48	331	21	0
S 726S?	4	12	12	57	0	9	0.2	0	1	1	2206	0	50
T 744S?	5	17	13	56	0	6	0.3	6	1	17	687	0	0
U 765B?	32	55	66	104	0	22	0.9	4	1	30	172	11	0
V 770M	8	55	60	104	0	22	0.1	0	1	0	1759	0	0
W 785S?	13	7	13	26	0	4	2.6	37	1	28	468	3	0
X 815M	4	8	7	14	0	2	0.4	18	1	11	3795	0	70
Y 821S?	1	2	0	2	0	2	-	-	-	-	-	-	18
Z 853B?	1	3	0	9	0	1	0.1	15	1	21	5302	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR	
ANOMALY/ FID/INTERP	REAL QUAD PPM	REAL QUAD PPM	REAL QUAD PPM	COND DEPTH* .SIEMEN	COND DEPTH M	RESIS DEPTH OHM-M	DEPTH M	NT

LINE 11510	(FLIGHT 27)							
AA 859S?	0 3	0 14	0 3	0.1 6	1 27	4589	0	120
AB 862M	0 4	0 14	0 3	0.1 6	1 18	3747	0	80
AC 875M	0 2	0 3	0 1	0.1 0	1 23	5302	0	60
AD 891S	3 14	21 26	0 5	0.9 5	1 23	956	0	50
AE 914S?	3 7	5 15	0 3	0.2 11	1 4	3144	0	16
AF 927M	0 2	1 2	0 1	- -	- -	-	-	0
AG 949M	0 3	0 5	0 2	0.1 2	1 21	4393	0	150
AH 969S?	0 2	0 2	0 1	- -	- -	-	-	0
AI 985B?	0 2	0 2	0 4	- -	- -	-	-	120
AJ 1002M	0 4	0 8	0 1	0.1 2	1 58	6350	0	0
AK 1044M	0 4	0 7	0 1	0.1 1	1 50	6129	0	50
AL 1064B	6 177	265 276	58 93	0.1 0	1 34	32	22	0
AM 1068B	167 177	265 276	58 93	2.7 6	1 24	104	10	30
AN 1195S?	0 9	4 27	1 4	0.1 0	1 37	977	6	30
AO 1198B?	1 2	1 2	1 3	- -	- -	-	-	0
AP 1210D	5 16	3 7	1 4	0.3 14	1 39	620	11	0
AQ 1228D	4 19	2 19	1 1	0.2 7	1 29	1436	0	0
AR 1250D	6 14	6 10	1 1	0.4 0	1 51	500	19	0
AS 1254D	7 11	6 10	1 1	0.6 2	1 57	373	26	0
AT 1267B?	8 31	7 110	1 18	0.2 1	1 21	412	0	0
AU 1271M	6 31	7 110	1 17	0.2 3	1 24	455	2	0
AV 1278S?	4 37	32 78	0 11	0.6 0	1 18	705	0	0
AW 1281M	4 37	25 78	0 11	0.4 3	1 4	2332	0	110
AX 1301B	5 17	22 34	0 6	0.2 0	1 33	647	2	0
AY 1304B	4 17	22 34	0 6	0.7 0	1 35	369	6	0

LINE 11520	(FLIGHT 26)							
A 6743B	49 32	101 106	20 35	3.2 3	1 20	24	9	0
B 6734B	53 57	224 99	32 87	1.8 1	1 19	30	8	0
C 6730B	148 60	224 155	32 87	8.7 2	1 19	20	9	140
D 6720B	27 25	57 44	12 18	1.7 2	1 30	97	12	15
E 6712D	5 10	13 19	0 2	0.4 16	1 46	676	14	0
F 6704S?	7 18	12 34	0 5	0.4 0	1 25	441	0	0
G 6693S?	1 2	1 2	1 2	- -	- -	-	-	0
H 6685S	0 10	1 15	0 2	0.1 0	1 29	1993	0	0
I 6662D	6 10	12 13	1 4	0.5 20	1 84	608	46	0
J 6618M	0 2	1 2	0 1	- -	- -	-	-	0
K 6614S?	0 6	3 13	0 2	0.1 14	1 45	4804	0	0
L 6600M	0 1	0 7	0 1	0.1 0	1 60	6559	0	140
M 6564S?	1 21	12 38	0 5	0.3 9	1 9	2765	0	0
N 6542H	6 3	21 3	0 10	3.1 54	1 26	338	3	50

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11520	(FLIGHT	26)											
O 6510B	1	1	1	2	2	1	-	-	-	-	-	-	70
P 6491B?	15	30	29	56	4	15	0.6	3	1	34	150	15	6
Q 6481B	8	4	22	27	1	6	2.0	35	1	46	213	22	0
R 6452S	0	7	6	16	0	0	0.3	0	1	44	1540	4	6
S 6442M	0	3	0	1	0	3	0.1	13	1	31	4682	0	80
T 6438B?	0	5	0	4	0	1	0.1	5	1	27	4642	0	4
U 6435M	0	1	0	6	0	1	0.1	5	1	23	4227	0	5
V 6432B?	0	12	0	9	0	2	0.1	3	1	16	3877	0	5
W 6430M	0	2	0	2	0	2	-	-	-	-	-	-	140
X 6418B?	14	26	48	42	0	12	0.6	15	1	31	242	11	0
Y 6404S?	0	2	1	2	0	2	-	-	-	-	-	-	290
Z 6397S?	0	14	9	35	1	5	0.2	1	1	2	2758	0	240
AA 6388M	0	3	8	4	0	1	2.3	49	1	30	5397	0	70
AB 6371B?	0	25	3	45	0	7	0.1	0	1	6	2635	0	70
AC 6361S?	0	14	0	47	0	8	0.1	8	1	8	2802	0	0
AD 6344M	0	1	1	2	1	1	-	-	-	-	-	-	0
AE 6273S	0	2	1	2	1	1	-	-	-	-	-	-	6
AF 6188B	1	2	1	2	2	2	-	-	-	-	-	-	0
AG 6177B	14	56	4	57	2	10	0.3	0	1	41	407	15	0
AH 6159B	58	59	67	81	5	23	2.0	2	1	44	189	22	0
AI 6091S?	0	2	1	2	0	0	-	-	-	-	-	-	8
AJ 6020B?	1	2	1	2	0	4	-	-	-	-	-	-	0
AK 6013B?	0	2	1	2	0	4	-	-	-	-	-	-	0
AL 5996B	12	17	14	17	1	4	0.8	4	1	36	401	9	0
AM 5990D	1	2	1	2	1	0	-	-	-	-	-	-	0
AN 5982B	6	38	12	98	1	11	0.1	0	1	26	695	2	0
AO 5961D	6	11	11	19	1	3	0.5	19	1	45	311	20	0
AP 5953D	4	8	13	26	0	5	0.5	8	1	45	302	20	11
AQ 5948D	1	2	1	2	1	4	-	-	-	-	-	-	0
AR 5925B?	12	28	16	35	1	9	0.5	0	1	29	588	0	0
AS 5919B	11	30	9	50	0	7	0.4	10	1	27	492	4	17
AT 5918B	13	24	9	50	0	7	0.6	16	1	33	362	10	0
AU 5913S?	14	24	25	44	0	6	0.7	11	1	24	488	0	6
AV 5908M	1	1	22	13	0	4	2.6	34	1	7	2635	0	70
AW 5887B?	4	9	4	9	0	2	0.4	20	1	58	1934	15	4
AX 5880M	0	1	0	2	0	1	-	-	-	-	-	-	260

LINE 11530	(FLIGHT	26)											
A 4877B?	34	19	53	12	11	12	3.5	5	1	23	76	7	360
B 4880D	42	31	17	33	15	12	2.6	4	1	22	108	6	6
C 4887B	27	38	48	29	3	2	1.1	5	1	19	334	0	6

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11530	(FLIGHT		26)										
D 4891B?	14	73	13	133	0	24	0.2	0	1	0	1548	0	0
E 4911S?	3	20	3	33	0	5	0.1	5	1	17	1170	0	0
F 4928S?	1	12	2	24	0	3	0.1	0	1	2	3670	0	0
G 4947D	10	11	6	7	0	2	0.9	22	1	40	5005	0	0
H 5005M	0	2	0	7	0	2	0.1	0	1	39	5802	0	270
I 5043S?	0	12	1	22	0	3	0.1	0	1	11	4062	0	6
J 5063S?	9	61	22	123	0	17	0.1	0	1	10	672	0	20
K 5071S?	5	13	12	22	0	3	0.3	27	1	10	2581	0	20
L 5109B?	35	83	104	163	5	35	0.7	0	1	20	75	7	60
M 5121B?	4	25	20	47	1	8	0.5	0	1	32	163	12	0
N 5166S?	1	22	7	38	0	5	0.2	0	1	8	2252	0	0
O 5199S?	1	2	1	2	1	2	-	-	-	-	-	-	5
P 5212B?	28	24	44	65	0	17	1.9	14	1	32	162	12	90
Q 5224M	2	12	15	29	0	5	0.5	8	1	0	2901	0	90
R 5227B?	2	7	4	25	0	5	0.1	0	1	25	2054	0	4
S 5238S?	5	8	10	13	0	2	0.7	7	1	20	1005	0	0
T 5265M	0	6	0	10	0	3	0.1	4	1	7	2960	0	0
U 5270B?	0	11	0	36	0	5	0.1	6	1	6	2740	0	0
V 5273B?	0	2	0	2	0	4	-	-	-	-	-	-	240
W 5347M	0	2	1	2	1	1	-	-	-	-	-	-	180
X 5422B	17	19	37	63	6	15	1.2	14	1	34	239	12	0
Y 5438B	52	49	124	77	19	47	2.1	5	1	38	33	26	0
Z 5459B?	0	16	2	22	1	3	0.1	0	1	27	2552	0	0
AA 5550D	1	13	7	15	1	2	0.4	11	1	34	1580	0	0
AB 5558D	4	20	7	20	1	2	0.3	0	1	28	869	0	0
AC 5614B?	1	2	1	2	1	2	-	-	-	-	-	-	11
AD 5623B	8	12	13	8	1	5	0.7	0	1	36	283	10	0
AE 5632D	10	25	10	29	1	5	0.4	0	1	38	543	9	0
AF 5696B?	33	54	42	42	2	8	1.0	13	1	14	336	0	7
AG 5702B	31	39	58	72	0	6	1.2	17	1	13	469	0	0
AH 5704B	31	39	58	72	0	5	1.2	15	1	17	329	0	7
AI 5706B	27	32	58	67	0	5	1.3	18	1	22	331	2	18
AJ 5712B	0	14	14	36	0	26	0.4	14	1	6	1365	0	10
AK 5727M	0	1	0	2	0	0	-	-	-	-	-	-	10
AL 5733B?	0	2	0	2	0	1	-	-	-	-	-	-	0
AM 5739M	0	2	0	2	0	1	-	-	-	-	-	-	150

LINE 11540	(FLIGHT		26)										
A 4758B	28	32	141	44	30	54	1.4	1	1	23	21	12	6
B 4751B	24	20	25	34	10	5	1.8	10	1	27	205	6	6
C 4739B	101	247	235	405	9	82	1.0	0	1	15	77	3	6

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11540	(FLIGHT	26)											
D 4717S?	0	30	0	41	0	9	0.1	10	1	3	2155	0	0
E 4699S?	0	2	1	2	0	4	-	-	-	-	-	-	730
F 4688B?	0	2	1	2	0	1	-	-	-	-	-	-	7
G 4679D	2	7	5	3	0	1	1.7	47	1	74	2639	19	7
H 4627B?	1	2	1	2	0	1	-	-	-	-	-	-	0
I 4585S?	3	12	14	20	0	8	0.7	23	1	3	2449	0	0
J 4576S?	9	29	26	61	0	11	0.3	14	1	15	1285	0	0
K 4569S?	6	37	23	77	0	21	0.2	0	1	11	567	0	70
L 4545S?	1	2	1	2	0	3	-	-	-	-	-	-	17
M 4533S	1	2	1	2	0	2	-	-	-	-	-	-	19
N 4523S	9	16	6	24	0	5	0.5	7	1	36	354	10	80
O 4507B?	3	51	18	19	2	16	1.1	15	1	31	132	12	0
P 4493B?	10	17	23	30	6	12	0.6	0	1	24	80	7	0
Q 4484S?	2	29	17	56	0	9	0.4	0	1	23	571	0	50
R 4458S?	1	39	12	77	0	10	0.2	0	1	10	1179	0	0
S 4454B?	1	21	3	21	0	6	0.1	1	1	27	858	0	50
T 4441B?	15	38	39	57	1	9	0.5	3	1	24	387	2	0
U 4436B	21	68	62	125	3	19	0.5	0	1	19	142	2	18
V 4430S?	1	2	1	2	2	4	-	-	-	-	-	-	4
W 4420M	5	27	15	79	0	11	0.2	0	1	19	1296	0	30
X 4417S?	0	27	12	79	0	11	0.1	0	1	20	783	0	4
Y 4406M	0	3	7	10	0	1	0.6	21	1	11	4359	0	190
Z 4388M	0	8	0	20	0	3	0.1	12	1	23	3664	0	80
AA 4386M	0	8	0	20	0	3	0.1	13	1	43	5284	1	100
AB 4339B?	1	10	7	14	0	2	0.4	20	1	26	3002	0	0
AC 4261S?	0	2	1	2	0	2	-	-	-	-	-	-	7
AD 4248S	0	2	1	2	0	1	-	-	-	-	-	-	9
AE 4184B	151	43	117	307	32	43	14.3	0	1	36	28	23	16
AF 4180B	148	115	450	309	106	203	3.8	8	2	26	9	19	6
AG 4112B?	2	16	6	27	0	5	0.2	1	1	51	1029	16	50
AH 4110B?	4	13	6	27	0	5	0.2	0	1	36	1192	4	40
AI 4095D	3	9	1	7	0	1	0.2	1	1	60	1221	18	0
AJ 4084D	1	2	1	2	0	0	-	-	-	-	-	-	0
AK 4067B?	5	24	9	52	0	7	0.2	2	1	21	903	0	0
AL 4065B?	4	24	9	52	0	7	0.2	0	1	31	896	2	0
AM 4039B	26	267	157	558	6	81	0.2	0	1	11	142	0	50
AN 4000S?	1	2	1	2	1	4	-	-	-	-	-	-	0
AO 3989B?	1	2	1	2	1	1	-	-	-	-	-	-	0
AP 3978D	33	42	66	63	4	21	1.3	10	1	32	193	12	0
AQ 3974D	28	52	51	93	4	17	0.8	7	1	28	177	10	0
AR 3967B	14	25	24	39	1	6	0.7	13	1	32	384	9	30

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11540	(FLIGHT	26)											
AS 3956D	1	2	1	2	1	2	-	-	-	-	-	-	0
AT 3950B	19	4	15	71	0	9	10.0	29	1	33	266	10	0
AU 3946M	5	18	15	71	0	12	0.2	8	1	17	896	0	13
AV 3922M	0	1	0	3	0	0	0.1	0	1	161	8388	0	7
AW 3910M	0	1	0	2	0	1	-	-	-	-	-	-	190
AX 3891M	0	1	0	2	0	0	0.1	0	1	203	8388	0	0

LINE 11550	(FLIGHT	26)											
A 2893B	62	46	130	78	25	40	3.0	0	1	19	27	8	0
B 2906B	47	53	8	88	8	28	1.6	1	1	24	87	8	0
C 2922B?	8	16	16	25	0	5	0.5	9	1	25	409	1	40
D 2926B?	9	22	16	34	0	5	0.4	9	1	21	735	0	11
E 2935B?	5	18	5	37	0	5	0.1	0	1	16	1903	0	0
F 2962B?	16	12	25	20	0	8	1.7	14	1	54	305	26	8
G 2965B?	14	12	25	20	0	8	1.5	14	1	68	148	44	30
H 3020S?	0	2	0	2	0	1	-	-	-	-	-	-	0
I 3032B?	1	2	1	2	0	1	-	-	-	-	-	-	0
J 3070S?	3	94	32	186	0	26	0.3	0	1	9	515	0	13
K 3079S?	2	12	8	24	0	3	0.3	12	1	11	3078	0	0
L 3087S?	8	34	16	72	0	11	0.2	4	1	18	861	0	0
M 3110S?	0	2	0	2	0	3	-	-	-	-	-	-	30
N 3132S?	23	62	84	121	0	30	0.5	1	1	21	146	5	0
O 3144B?	3	26	6	50	0	6	0.1	0	1	25	1176	0	50
P 3159S	12	19	26	36	1	9	0.7	5	1	28	127	9	0
Q 3170S?	8	34	19	68	2	9	0.2	0	1	23	223	3	0
R 3217B?	17	33	25	62	1	10	0.7	0	1	17	400	0	50
S 3224S?	8	15	15	40	1	5	0.5	24	1	29	630	4	7
T 3239B?	74	78	142	139	10	40	2.1	0	1	22	71	8	0
U 3241B?	74	44	142	139	10	40	4.1	11	1	28	80	13	7
V 3249B?	4	26	12	75	0	6	0.2	0	1	19	851	0	5
W 3252S?	4	34	12	75	0	10	0.2	0	1	2	1785	0	0
X 3263S?	3	16	21	33	0	9	0.7	12	1	23	533	0	20
Y 3529D	8	22	8	9	1	3	0.3	1	1	46	974	11	0
Z 3539B?	10	52	17	97	1	14	0.2	0	1	19	564	0	7
AA 3547D	1	2	1	2	1	3	-	-	-	-	-	-	19
AB 3559B?	5	26	9	55	1	7	0.1	0	1	18	1385	0	7
AC 3574D	1	2	1	2	1	3	-	-	-	-	-	-	0
AD 3581D	12	27	19	32	2	7	0.5	0	1	32	558	4	10
AE 3590D	5	8	7	35	2	8	0.5	23	1	49	643	16	0
AF 3596D	16	40	8	56	0	9	0.5	7	1	29	992	2	11
AG 3621D	13	10	17	8	2	7	1.5	6	1	39	339	11	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11550	(FLIGHT	26)											
AH 3627D	28	17	25	28	1	10	2.9	21	1	34	314	11	0
AI 3628D	28	35	25	28	1	10	1.2	6	1	30	237	9	0
AJ 3632B?	2	5	25	60	1	10	0.5	0	1	30	376	5	8
AK 3636D	1	2	1	2	0	4	-	-	-	-	-	-	0
AL 3639D	10	21	14	25	3	6	0.5	13	1	32	284	10	13
AM 3645D	38	58	43	80	3	20	1.1	9	1	25	308	5	0
AN 3680M	0	0	0	2	0	0	0.1	37	1	157	8388	0	0

LINE 11560	(FLIGHT	26)											
A 2806B?	3	16	3	13	0	3	0.2	12	1	19	1839	0	0
B 2799S?	10	13	15	30	0	4	0.8	12	1	23	614	0	0
C 2788M	1	2	1	2	0	1	-	-	-	-	-	-	370
D 2781S	1	12	5	22	0	3	0.1	0	1	14	2082	0	130
E 2774B?	5	3	10	8	0	3	1.3	0	1	62	658	23	0
F 2770B?	6	6	10	8	0	3	0.9	5	1	66	613	27	5
G 2737M	0	1	0	2	0	1	0.1	0	1	89	7691	0	60
H 2712M	1	13	21	30	0	35	0.8	9	1	4	3313	0	750
I 2705S?	0	156	21	328	0	45	0.1	0	1	0	726	0	0
J 2693S?	4	42	22	84	0	11	0.3	0	1	10	1005	0	0
K 2684B?	1	2	1	2	0	4	-	-	-	-	-	-	0
L 2643S?	2	23	22	41	0	12	0.6	5	1	36	132	18	0
M 2620B?	25	8	43	23	2	14	6.5	30	1	34	108	17	0
N 2613B?	1	2	1	2	1	4	-	-	-	-	-	-	0
O 2589B	13	89	34	193	1	26	0.2	0	1	13	474	0	0
P 2580D	21	24	31	24	4	8	1.3	9	1	41	271	16	0
Q 2569B?	3	39	10	73	0	10	0.1	0	1	22	517	0	20
R 2565B?	28	12	46	71	7	11	4.6	9	1	24	120	6	30
S 2555S	4	8	9	29	3	6	0.3	2	1	39	671	9	0
T 2543S	1	2	1	2	1	2	-	-	-	-	-	-	8
U 2511D	12	16	11	51	4	14	0.8	12	1	36	131	17	0
V 2499D	1	2	1	2	2	4	-	-	-	-	-	-	0
W 2495D	18	57	32	76	4	12	0.4	1	1	33	123	16	0
X 2490D	18	14	19	7	5	6	1.9	32	1	57	103	38	0
Y 2485D	26	26	73	34	14	23	1.5	12	1	39	52	24	0
Z 2479D	13	26	21	2	4	8	0.6	7	1	43	378	17	0
AA 2444M	0	4	0	12	0	2	0.1	5	1	33	5074	0	330
AB 2339B?	10	20	8	27	1	4	0.5	13	1	44	862	12	0
AC 2249D	5	14	4	1	0	2	0.3	4	1	53	969	15	0
AD 2242B?	1	18	5	29	1	4	0.1	5	1	38	978	9	0
AE 2241D	2	21	8	29	1	4	0.3	8	1	40	947	10	13
AF 2236D	8	13	8	24	1	3	0.6	22	1	39	1035	7	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	REAL QUAD	COND DEPTH*	COND DEPTH	COND DEPTH	COND DEPTH	RESIS	DEPTH		
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	.SIEMEN	M	.SIEMEN	M	OHM-M	M	NT	

LINE 11560	(FLIGHT 26)													
AG 2231D	2	19	4	25	0	3	0.1	6	1	35	1945	3	0	
AH 2213B?	2	18	2	21	0	3	0.1	0	1	31	1355	0	0	
AI 2185B?	3	13	4	3	0	2	0.9	66	1	35	844	7	0	
AJ 2180B?	1	14	1	16	1	2	0.1	1	1	35	824	6	0	
AK 2167B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
AL 2156D	9	8	10	26	2	4	1.3	31	1	38	276	14	0	
AM 2152M	1	2	1	2	2	3	-	-	-	-	-	-	9	
AN 2144D	1	2	1	2	0	4	-	-	-	-	-	-	7	
AO 2140D	15	35	23	40	2	15	0.5	11	1	19	351	0	0	
AP 2137D	20	35	42	3	2	3	0.7	15	1	21	291	2	0	
AQ 2133D	19	61	42	131	2	21	0.4	3	1	16	390	0	0	

LINE 11570	(FLIGHT 26)													
A 264B?	2	9	8	8	0	2	0.9	23	1	15	2799	0	4	
B 273B	30	26	36	34	0	12	1.9	12	1	46	223	23	0	
C 284B?	1	2	1	2	0	3	-	-	-	-	-	-	0	
D 303M	0	2	0	2	0	1	-	-	-	-	-	-	210	
E 330M	0	22	18	50	0	13	0.4	1	1	0	2619	0	610	
F 334S?	10	22	18	50	0	13	0.5	8	1	11	765	0	4	
G 345B?	0	47	9	94	0	18	0.1	2	1	0	1148	0	60	
H 355S?	15	48	28	92	0	12	0.4	0	1	14	644	0	6	
I 360M	0	0	21	76	0	10	0.3	0	1	8	3779	0	580	
J 365B?	8	10	3	9	0	1	0.7	22	1	16	2865	0	0	
K 383S?	0	2	0	2	0	2	-	-	-	-	-	-	17	
L 441S?	23	23	52	44	0	16	1.5	16	1	31	133	13	0	
M 455B?	2	25	62	56	1	16	2.0	6	1	35	134	16	18	
N 472B?	4	10	5	14	0	2	0.2	3	1	22	1603	0	40	
O 489S?	3	16	9	38	0	5	0.2	0	1	20	1116	0	40	
P 513B?	6	17	10	4	0	3	0.3	8	1	26	2205	0	50	
Q 519B?	5	12	10	19	0	3	0.5	16	1	35	1383	3	0	
R 533B?	34	31	134	194	7	41	1.9	9	1	17	85	2	0	
S 554S?	1	2	1	2	0	3	-	-	-	-	-	-	0	
T 588B	17	3	30	7	5	11	17.3	13	1	44	85	25	12	
U 596B	52	27	88	31	39	31	4.4	1	1	40	25	27	0	
V 598B	52	27	88	31	39	31	4.4	2	1	37	18	26	8	
W 604D	50	44	39	32	18	12	2.2	6	1	54	205	31	10	
X 618M	3	7	0	16	0	3	0.3	40	1	37	4724	1	40	
Y 621B?	3	8	0	16	0	2	0.3	23	1	38	5761	0	6	
Z 823B?	1	2	1	2	1	2	-	-	-	-	-	-	0	
AA 848B?	1	2	1	2	1	2	-	-	-	-	-	-	6	
AB 855D	12	29	18	36	1	7	0.5	1	1	29	538	2	100	

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11570	(FLIGHT	26)											
AC 861B?	1	15	2	17	1	2	0.1	3	1	31	1004	3	0
AD 870B?	3	11	5	18	0	3	0.2	18	1	40	736	13	6
AE 884S?	0	39	12	87	1	13	0.1	3	1	14	1551	0	0
AF 917B?	1	16	13	20	2	5	0.6	12	1	41	440	14	0
AG 921B?	5	9	8	16	2	5	0.5	25	1	29	674	1	0
AH 923B?	2	23	8	16	1	5	0.4	14	1	28	761	0	0
AI 936D	15	21	19	30	2	7	0.9	1	1	35	281	10	6
AJ 939D	5	8	19	9	2	7	3.1	24	1	35	378	10	0
AK 943D	1	2	1	2	2	3	-	-	-	-	-	-	16
AL 952B	31	44	82	164	1	31	1.1	16	1	18	228	2	0
AM 955B	23	44	82	164	0	31	0.7	17	1	15	500	0	15
AN 961B	3	26	7	30	0	7	0.2	11	1	0	1228	0	0
AO 1018M	0	1	0	1	0	0	-	-	-	-	-	-	0

LINE 11580	(FLIGHT	26)											
A 1604B	8	17	30	7	7	13	0.5	0	1	59	51	41	0
B 1597B	29	24	29	7	7	12	2.0	0	1	66	99	45	0
C 1584B	2	9	9	6	3	2	1.5	27	1	60	590	25	0
D 1576D	0	2	1	2	1	2	-	-	-	-	-	-	13
E 1518M	0	1	0	3	0	0	0.1	2	1	87	7326	3	40
F 1393B?	0	2	0	2	0	4	-	-	-	-	-	-	230
G 1366S?	0	2	0	12	0	1	0.1	10	1	32	4551	0	0
H 1334B?	7	10	8	9	1	2	0.7	26	1	62	605	29	0
I 1331B?	5	10	8	9	0	2	0.4	24	1	66	887	28	0
J 1308M	0	2	1	2	0	3	-	-	-	-	-	-	0
K 1292B?	1	2	1	2	0	4	-	-	-	-	-	-	6
L 1280B?	1	2	1	2	0	3	-	-	-	-	-	-	0
M 1271B?	1	2	1	2	1	0	-	-	-	-	-	-	10
N 1260B?	1	8	2	9	1	2	0.1	6	1	47	1352	9	0
O 1227B?	1	2	1	2	0	4	-	-	-	-	-	-	11
P 1220B	4	6	18	74	1	10	0.3	0	1	24	440	1	0
Q 1216B	7	31	18	74	1	10	0.2	0	1	25	524	1	0
R 1203B	5	21	2	10	1	3	0.2	8	1	39	752	10	6
S 1197D	13	19	15	10	3	13	0.8	13	1	35	337	11	20
T 1192D	18	45	17	88	2	13	0.5	1	1	21	301	1	17
U 1182B	18	55	31	105	0	18	0.4	2	1	19	303	1	0
V 1178B	24	13	43	108	0	26	3.1	34	1	21	407	1	0
W 1175B	23	13	43	108	0	26	2.9	29	1	31	358	8	6
X 1166M	1	2	1	2	0	3	-	-	-	-	-	-	110
Y 1156M	0	2	1	2	1	1	-	-	-	-	-	-	60

LINE 11590	(FLIGHT	26)											
A 1753B?	1	2	1	2	1	3	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 11590	(FLIGHT	26)											
B 1758B?	1	2	1	2	1	3	-	-	-	-	-	-	0
C 1773B?	7	28	12	77	3	12	0.2	11	1	44	514	18	0
D 1792S?	2	11	9	23	1	5	0.4	8	1	37	448	11	10
E 1803B?	1	22	12	37	0	11	0.3	0	1	24	323	1	20
F 1807B?	10	26	10	36	1	9	0.4	0	1	28	448	0	0
G 1820D	13	23	22	57	1	12	0.6	0	1	42	379	13	6
H 1823D	6	23	26	57	2	12	0.2	0	1	32	331	7	0
I 1827D	17	19	19	47	1	10	1.2	15	1	38	277	14	10
J 1830D	14	26	19	47	2	9	0.6	5	1	27	211	6	19
K 1834D	13	11	14	17	3	0	1.5	23	1	35	262	12	9
L 1837D	12	17	17	17	3	13	0.8	16	1	33	275	10	0
M 1841D	13	14	17	17	3	13	1.1	25	1	34	428	9	18
N 1852M	0	2	0	4	0	1	0.1	7	1	32	4824	0	0
O 1860S?	2	21	4	42	0	6	0.1	0	1	10	2912	0	0

LINE 19010	(FLIGHT	36)											
A 1069B?	17	33	38	77	1	13	0.7	0	1	12	453	0	0
B 1067B?	17	34	38	77	1	13	0.6	0	1	13	268	0	0
C 1058M	5	4	11	8	2	1	1.3	50	1	52	2615	7	15
D 1053M	5	4	7	9	0	2	1.2	49	1	31	5657	0	50
E 1041M	1	4	0	18	0	1	0.1	26	1	50	6350	0	8
F 1033B?	4	14	7	33	0	4	0.2	0	1	6	2776	0	0
G 1031M	4	17	7	33	0	5	0.2	0	1	1	3208	0	0
H 1029B?	0	17	0	33	0	5	0.1	0	1	8	4259	0	-5
I 1004M	1	2	1	2	0	1	-	-	-	-	-	-	1090
J 982B?	1	2	1	2	0	1	-	-	-	-	-	-	0
K 955B?	9	12	15	22	0	5	0.8	12	1	46	741	11	1100
L 952B?	7	12	15	22	0	5	0.5	10	1	56	516	24	0
M 881S	1	2	1	2	0	2	-	-	-	-	-	-	0
N 803S	1	2	1	2	1	2	-	-	-	-	-	-	0
O 776B?	8	4	9	4	3	3	2.7	13	1	56	277	26	0
P 766S?	4	7	8	13	2	3	0.5	0	1	43	582	9	0
Q 740M	0	6	0	9	0	2	0.1	0	1	18	5559	0	40
R 721M	0	12	0	25	0	4	0.1	0	1	21	5266	0	0
S 717S?	1	2	1	2	0	4	-	-	-	-	-	-	0
T 705M	0	1	1	2	0	1	-	-	-	-	-	-	0
U 703D	0	5	0	5	0	1	0.1	0	1	25	5983	0	0
V 696M	0	2	0	2	0	1	-	-	-	-	-	-	0
W 684M	0	2	0	2	0	1	-	-	-	-	-	-	0
X 682B?	0	9	0	12	0	2	0.1	0	1	23	5457	0	0
Y 664B?	2	9	10	15	0	2	0.6	0	1	16	1743	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT	
LINE 19010	(FLIGHT		36)												
Z 657B?	4	10	7	16	0	2	0.3	0	1	16	1487	0	0		
AA 648S	1	2	1	2	1	2	-	-	-	-	-	-	0		
AB 636S	1	2	1	2	0	2	-	-	-	-	-	-	0		
AC 617B?	7	9	12	28	0	5	0.7	16	1	29	1315	0	0		
AD 614B?	7	14	12	28	0	5	0.5	0	1	20	789	0	0		
AE 592B?	3	7	8	11	0	2	0.6	5	1	28	1120	0	0		
AF 590B?	1	2	1	2	0	2	-	-	-	-	-	-	0		
AG 587B?	1	2	1	2	0	2	-	-	-	-	-	-	0		
AH 564D	14	7	22	12	2	6	3.3	2	1	33	281	6	1280		
AI 559B	7	5	17	12	3	5	1.4	6	1	32	134	10	0		
AJ 545M	0	2	0	1	0	0	0.1	0	1	14	5823	0	0		
AK 536M	0	11	0	4	0	3	0.1	0	1	2	3947	0	0		
AL 536B?	0	11	0	4	0	3	0.1	0	1	2	3920	0	0		
AM 532B?	0	13	0	10	0	4	0.1	0	1	0	3779	0	0		
AN 512M	0	3	0	6	0	1	0.1	0	1	30	5946	0	0		
AO 506M	0	5	0	13	0	2	0.1	0	1	30	5823	0	1170		
AP 500B?	0	7	0	4	0	3	0.1	0	1	0	3835	0	-4		
AQ 495B?	6	6	4	18	0	3	0.8	21	1	17	1080	0	50		
AR 492B?	4	11	4	18	0	3	0.3	0	1	21	936	0	-4		
AS 478B	29	29	54	49	5	17	1.6	0	1	19	124	0	14		
AT 472B	7	19	14	33	0	6	0.3	0	1	14	821	0	0		
AU 467B	1	13	0	23	0	4	0.1	0	1	0	3503	0	0		
AV 462D	0	8	0	35	0	3	0.1	0	1	5	4115	0	0		
AW 457D	0	25	0	35	0	5	0.1	0	1	0	2729	0	-4		
AX 445M	3	1	6	1	0	1	8.1	46	1	50	6944	0	0		
AY 434B?	0	10	6	20	0	3	0.2	0	1	6	4227	0	0		
AZ 429B?	1	2	1	0	0	2	-	-	-	-	-	-	8		
BA 418B?	5	10	15	19	0	4	0.5	7	1	31	346	4	0		
BB 407D	13	18	8	5	2	4	0.9	1	1	23	418	0	60		
BC 403D	18	26	17	10	5	8	0.9	1	1	27	191	6	0		
BD 381B	96	20	12	36	21	22	19.9	3	1	25	28	13	4		
BE 378B	96	150	160	116	24	59	1.5	0	1	24	28	13	0		
BF 364B	38	80	40	30	16	17	0.8	0	1	30	50	14	0		
BG 357B	10	22	6	68	16	13	0.5	9	1	28	184	9	0		
BH 329B	1	10	12	25	1	6	0.5	0	1	32	338	6	0		
BI 312S?	3	12	9	25	1	6	0.3	0	1	35	568	6	0		
LINE 19020	(FLIGHT		36)												
A 1345B	10	8	20	13	4	4	1.4	8	1	53	207	26	0		
B 1359B	23	24	32	49	1	11	1.4	0	1	20	252	0	0		
C 1431B?	0	2	0	2	0	3	-	-	-	-	-	-	-7		

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19020	(FLIGHT	36)											
D 1439B?	11	20	11	45	0	8	0.6	6	1	16	1132	0	-5
E 1447M	0	20	11	45	0	8	0.3	0	1	19	4370	0	20
F 1465B?	1	9	0	13	0	2	0.1	0	1	4	3724	0	-5
G 1483M	1	2	1	2	0	4	-	-	-	-	-	-	-9
H 1497B?	6	61	0	113	0	16	0.1	0	1	0	1460	0	-4
I 1501B?	6	57	0	113	0	16	0.1	0	1	0	1523	0	-5
J 1503M	0	57	0	113	0	16	0.1	8	1	0	2039	0	16
K 1515D	10	13	27	18	0	11	0.8	10	1	25	1159	0	0
L 1519D	18	22	27	23	0	11	1.1	1	1	30	480	2	-9
M 1524D	15	31	11	44	0	11	0.6	4	1	19	1079	0	-9
N 1528D	15	8	11	44	0	10	2.8	36	1	0	2399	0	1090
O 1529D	0	27	0	19	0	10	0.1	1	1	3	2942	0	50
P 1536D	16	14	19	24	0	5	1.5	1	1	22	534	0	-8
Q 1542M	16	3	19	8	0	5	10.8	40	1	25	4824	0	40
R 1551B	0	11	0	12	0	4	0.1	0	1	3	4001	0	8
S 1556B	12	14	14	20	0	7	1.1	0	1	26	692	0	-6
T 1561B	0	12	0	12	0	3	0.1	0	1	4	4752	0	0
U 1566M	0	4	0	12	0	1	0.1	0	1	37	5923	0	-4
V 1574M	0	2	0	1	0	1	0.1	0	1	48	6332	0	-5
W 1582B?	0	2	0	2	0	1	-	-	-	-	-	-	-4
X 1587B?	0	7	0	6	0	1	0.1	0	1	25	5844	0	0
Y 1599B?	0	2	1	2	0	3	-	-	-	-	-	-	-6
Z 1610M	1	2	1	2	1	1	-	-	-	-	-	-	90
AA 1617B?	1	9	4	10	0	1	0.2	0	1	15	2887	0	0
AB 1635B	7	3	13	9	2	4	2.5	21	1	59	224	30	0
AC 1653B	1	2	1	2	1	4	-	-	-	-	-	-	0
AD 1658B	19	16	36	5	2	9	1.7	11	1	43	166	21	0
AE 1667D	0	11	2	17	0	2	0.1	2	1	4	2568	0	0
AF 1671D	0	17	0	17	0	2	0.1	9	1	12	3045	0	0
AG 1681B	25	18	50	30	4	11	2.3	3	1	33	113	14	-7
AH 1691B	15	24	19	38	0	8	0.8	17	1	39	441	13	-7
AI 1697D	25	36	25	53	0	8	1.0	6	1	29	424	4	-6
AJ 1700D	25	28	25	53	0	8	1.4	17	1	33	589	7	-5
AK 1743B?	4	19	7	39	0	6	0.1	0	1	19	1551	0	0
AL 1779S	1	2	1	2	0	2	-	-	-	-	-	-	0
AM 1834S?	1	2	1	2	0	2	-	-	-	-	-	-	0
AN 1854B?	1	2	0	2	0	1	-	-	-	-	-	-	0
AO 1876D	3	11	3	17	0	2	0.2	12	1	25	3061	0	0
AP 1888D	15	7	21	15	2	6	3.4	14	1	33	353	6	0
AQ 1898D	14	9	24	17	2	7	2.2	9	1	31	349	4	0
AR 1928D	4	10	3	13	0	2	0.3	2	1	13	4193	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19020	(FLIGHT	36)											
AS 1943S?	1	2	0	2	0	2	-	-	-	-	-	-	0
AT 1966B?	1	2	1	2	0	2	-	-	-	-	-	-	5
AU 1971B	1	2	1	2	0	2	-	-	-	-	-	-	-130
AV 1975B	11	24	18	38	0	7	0.5	0	1	14	617	0	4
AW 1993S?	6	35	16	73	0	10	0.2	0	1	1	2096	0	-5
AX 2024M	0	9	0	6	0	2	0.1	9	1	26	4196	0	40
AY 2037B?	0	8	0	13	0	1	0.1	2	1	17	4057	0	1120
AZ 2048M	0	8	0	10	0	2	0.1	10	1	36	4899	0	0
BA 2050B?	0	2	0	2	0	2	-	-	-	-	-	-	0
BB 2055B?	0	10	0	10	0	1	0.1	4	1	22	4314	0	50
BC 2060M	0	4	0	12	0	2	0.1	4	1	20	4048	0	60
BD 2068B?	0	10	0	25	0	2	0.1	3	1	15	3763	0	-4
BE 2071B?	0	17	0	25	0	4	0.1	4	1	6	2876	0	0
BF 2080D	29	10	51	28	7	16	5.9	3	1	26	194	3	0
BG 2084D	33	21	51	52	7	16	2.8	0	1	26	136	6	1110
BH 2088D	33	36	44	52	7	13	1.5	12	1	24	626	0	0
BI 2091D	13	24	9	52	0	13	0.6	5	1	24	765	0	0
BJ 2097D	14	8	21	14	0	0	2.4	17	1	30	484	2	0
BK 2106D	8	27	9	43	0	7	0.3	0	1	0	2550	0	0
BL 2111M	8	27	9	43	0	3	0.3	5	1	15	3860	0	110
BM 2125M	0	1	0	7	0	0	0.1	1	1	31	5284	0	0
BN 2133B?	0	8	0	16	0	2	0.1	2	1	20	4217	0	-4
BO 2137B?	0	6	0	16	0	2	0.1	0	1	18	4766	0	-4
BP 2144M	2	5	0	8	0	1	0.3	44	1	27	4795	0	30
BQ 2170S?	4	12	9	19	0	3	0.4	0	1	18	1187	0	0
BR 2177B?	1	2	1	2	0	2	-	-	-	-	-	-	0
BS 2180M	5	4	6	7	0	2	0.6	30	1	11	4291	0	0
BT 2195B?	1	2	1	2	1	1	-	-	-	-	-	-	0
BU 2205B	15	15	31	25	3	10	1.3	0	1	31	115	10	0
BV 2218B	1	2	1	2	1	4	-	-	-	-	-	-	4
BW 2222B	12	15	25	28	1	7	0.9	0	1	29	304	2	0
BX 2239B	5	19	7	29	0	4	0.2	0	1	19	1245	0	6
BY 2343B	4	5	7	8	1	2	0.7	1	1	55	439	21	0
BZ 2363D	10	28	13	38	0	7	0.4	0	1	19	1183	0	30
CA 2369B	11	32	19	57	0	9	0.4	0	1	19	658	0	0
CB 2384M	1	0	1	2	0	2	-	-	-	-	-	-	0
CC 2394M	2	4	3	6	0	1	0.2	16	1	39	6173	0	1120
CD 2414S	9	32	24	64	0	11	0.3	0	1	10	481	0	0
CE 2437S?	6	16	12	30	0	4	0.3	2	1	6	2146	0	0
CF 2451D	1	2	1	2	2	4	-	-	-	-	-	-	0
CG 2453D	37	47	43	78	3	16	1.3	0	1	19	234	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND DEPTH*		COND DEPTH		RESIS	DEPTH	
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	.SIEMEN	M	.SIEMEN	M	OHM-M	M	NT

LINE 19020	(FLIGHT	36)												
CH 2459B		22	43	36	95	4	12	0.7	0	1	14	357	0	60
CI 2479B		35	41	75	85	4	19	1.4	3	1	32	101	15	0
CJ 2487D		26	23	27	34	4	4	1.8	13	1	29	403	5	1820
CK 2495D		69	42	133	71	7	42	4.0	3	1	23	259	2	180
CL 2499B		69	95	133	194	7	42	1.5	0	1	18	87	4	0
CM 2503B		73	101	131	180	7	40	1.5	0	1	15	92	1	1070
CN 2522B		12	9	19	9	2	5	1.6	18	1	22	134	3	0
CO 2553B		34	55	80	94	11	35	1.0	0	1	22	35	10	4
CP 2557B		57	55	101	94	11	35	2.1	0	1	19	34	7	0
CQ 2563B		13	2	101	13	9	35	14.0	29	1	27	43	13	0
CR 2567B		35	22	64	41	7	27	3.0	1	1	30	54	14	0
CS 2571B		1	2	1	2	2	4	-	-	-	-	-	-	0
CT 2589B		74	42	146	73	37	59	4.5	0	1	28	17	18	0

LINE 19030	(FLIGHT	36)												
A 4501B		6	9	14	22	1	5	0.6	10	1	50	700	14	0
B 4461S?		0	9	1	15	0	3	0.1	0	1	25	4741	0	-4
C 4436S?		2	24	8	41	0	6	0.2	0	1	7	2981	0	-8
D 4422B?		8	22	17	35	1	6	0.4	14	1	32	898	4	-4
E 4412B?		15	33	24	58	0	11	0.6	0	1	22	399	0	-6
F 4394B?		12	24	18	61	2	9	0.5	2	1	29	472	3	0
G 4383B?		7	59	21	109	2	13	0.1	0	1	11	702	0	0
H 4375B?		5	23	6	43	2	9	0.2	0	1	31	386	3	0
I 4372B?		10	23	6	39	1	8	0.4	0	1	32	613	3	15
J 4354B?		7	22	7	30	0	5	0.3	2	1	28	1353	0	-7
K 4351B?		5	21	9	36	0	6	0.2	2	1	33	1378	3	0
L 4349B?		1	2	1	2	0	4	-	-	-	-	-	-	-5
M 4344B		5	22	6	31	0	4	0.2	1	1	7	3201	0	-4
N 4340B?		1	2	1	2	0	3	-	-	-	-	-	-	0
O 4331B?		4	13	6	23	0	3	0.2	3	1	8	3452	0	-6
P 4326B?		4	7	6	23	0	3	0.2	0	1	21	4976	0	0
Q 4315B		11	13	14	30	0	5	1.0	12	1	21	793	0	0
R 4301B		1	2	0	2	0	2	-	-	-	-	-	-	0
S 4297B		4	3	0	9	0	1	1.2	52	1	36	5877	0	0
T 4283B		2	15	0	20	0	3	0.1	0	1	19	4227	0	0
U 4278B		0	2	0	2	0	3	-	-	-	-	-	-	0
V 4268B?		1	2	0	2	0	1	-	-	-	-	-	-	0
W 4253S?		4	14	7	27	0	3	0.2	0	1	3	2299	0	0
X 4237B		11	6	22	12	6	7	2.3	32	1	68	175	43	0
Y 4228B		18	10	31	17	7	11	2.9	20	1	58	97	37	0
Z 4214B		13	27	23	58	0	11	0.5	8	1	27	648	1	20

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

		COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
		6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
ANOMALY/		REAL	QUAD	REAL	QUAD	REAL	QUAD	COND	DEPTH*	COND	DEPTH	RESIS	DEPTH		
FID/INTERP		PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE	19030	(FLIGHT		36)											
AA	4210B	9	38	23	68	0	11	0.3	0	1	14	499	0	0	
AB	4190B?	1	2	1	2	0	1	-	-	-	-	-	-	-4	
AC	4170M	0	16	0	30	0	4	0.1	0	1	25	4914	0	0	
AD	4161M	3	4	4	7	0	3	0.3	34	1	24	4696	0	0	
AE	4153M	3	57	4	110	0	16	0.1	0	1	0	2056	0	190	
AF	4151S?	0	57	0	110	0	16	0.1	5	1	0	1516	0	0	
AG	4143B	0	16	0	47	0	7	0.1	0	1	0	2631	0	0	
AH	4140B	0	26	0	47	0	7	0.1	5	1	0	2127	0	30	
AI	4137B	0	26	0	47	0	7	0.1	3	1	3	2747	0	-5	
AJ	4128D	8	17	2	47	0	10	0.5	7	1	8	4006	0	0	
AK	4121B?	12	18	9	47	0	10	0.7	25	1	1	2157	0	-6	
AL	4100S?	0	2	0	2	0	1	-	-	-	-	-	-	0	
AM	4090M	0	8	0	20	0	3	0.1	0	1	22	4914	0	70	
AN	4087B?	0	15	0	20	0	2	0.1	0	1	0	3497	0	-6	
AO	4084M	0	5	0	20	0	3	0.1	0	1	6	5141	0	0	
AP	4080B?	0	13	0	15	0	2	0.1	0	1	11	3869	0	0	
AQ	4075B?	0	11	0	10	0	2	0.1	0	1	19	5074	0	60	
AR	4068S?	3	38	2	69	0	9	0.1	0	1	0	2071	0	30	
AS	4062B?	2	13	0	69	0	3	0.1	0	1	5	3886	0	-5	
AT	4052B?	5	10	1	20	0	3	0.4	7	1	4	4476	0	0	
AU	4041B?	0	2	0	2	0	4	-	-	-	-	-	-	0	
AV	4038M	0	17	0	31	0	6	0.1	13	1	16	2981	0	0	
AW	4020B?	0	12	0	18	0	2	0.1	0	1	10	4105	0	6	
AX	4004M	0	8	0	8	0	3	0.1	6	1	35	5159	0	90	
AY	4001B?	0	2	0	2	0	3	-	-	-	-	-	-	0	
AZ	3992S?	0	2	0	1	0	0	-	-	-	-	-	-	0	
BA	3977S?	1	2	1	2	0	3	-	-	-	-	-	-	0	
BB	3960S?	29	51	48	84	0	15	0.9	3	1	0	2452	0	20	
BC	3955B?	29	38	48	62	0	12	1.2	0	1	27	174	6	20	
BD	3945B?	10	16	36	24	0	5	0.6	5	1	24	1809	0	-4	
BE	3935D	0	2	1	2	0	2	-	-	-	-	-	-	40	
BF	3929D	0	14	0	21	0	3	0.1	0	1	0	3992	0	40	
BG	3920S?	0	2	0	2	0	2	-	-	-	-	-	-	0	
BH	3910B?	0	2	0	2	0	2	-	-	-	-	-	-	19	
BI	3898B?	4	12	12	25	0	4	0.5	9	1	8	3530	0	0	
BJ	3889B?	10	19	16	35	0	8	0.6	0	1	21	715	0	100	
BK	3887B?	11	21	16	35	0	8	0.6	0	1	14	914	0	0	
BL	3884B?	11	19	16	31	0	8	0.6	1	1	0	3956	0	0	
BM	3873S?	1	2	1	2	0	3	-	-	-	-	-	-	0	
BN	3864D	9	18	11	26	0	4	0.5	0	1	18	987	0	0	
BO	3855D	0	26	0	11	0	4	0.1	0	1	0	2802	0	0	

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19030	(FLIGHT	36)											
BP 3847B?	7	31	10	53	0	7	0.2	4	1	0	2102	0	-4
BQ 3841B?	7	22	20	22	0	7	0.3	10	1	9	1982	0	0
BR 3835B	12	28	20	40	0	6	0.5	0	1	22	603	0	20
BS 3831B	1	2	1	2	0	4	-	-	-	-	-	-	50
BT 3828B	6	15	20	15	0	2	0.4	4	1	2	3803	0	0
BU 3821D	14	38	14	52	0	7	0.4	0	1	12	908	0	20
BV 3817D	11	33	14	52	0	7	0.4	0	1	19	1464	0	0
BW 3809B	9	32	6	21	0	6	0.3	0	1	7	2010	0	1120
BX 3801D	13	47	24	76	0	12	0.3	0	1	10	745	0	0
BY 3783S	5	19	10	34	0	6	0.3	0	1	17	869	0	40
BZ 3769S	1	2	1	2	0	3	-	-	-	-	-	-	0
CA 3764B?	3	15	7	35	0	6	0.2	0	1	20	1588	0	0
CB 3761B?	0	22	0	35	0	6	0.1	0	1	0	3126	0	1090
CC 3757B?	0	2	0	2	0	2	-	-	-	-	-	-	1140
CD 3754B?	6	15	5	14	0	2	0.3	3	1	3	2540	0	0
CE 3750M	0	2	1	2	0	2	-	-	-	-	-	-	70
CF 3742M	0	2	0	2	0	4	-	-	-	-	-	-	20
CG 3734D	5	22	25	29	0	12	0.2	0	1	9	1611	0	0
CH 3728D	17	23	25	9	0	4	0.9	0	1	22	526	0	60
CI 3719S	8	19	17	37	0	7	0.4	0	1	21	650	0	0
CJ 3664B?	3	9	0	11	0	3	0.2	0	1	11	5107	0	0
CK 3603S	1	2	0	2	0	1	-	-	-	-	-	-	0
CL 3556S	1	2	1	2	0	4	-	-	-	-	-	-	0
CM 3527S?	0	15	0	26	0	4	0.1	0	1	5	3869	0	0
CN 3512S?	0	5	0	8	0	1	0.1	0	1	27	5437	0	30
CO 3479S	2	17	4	35	0	5	0.1	0	1	3	2795	0	0
CP 3423B	56	48	91	210	6	12	2.4	5	1	13	151	0	4
CQ 3409B?	21	7	20	60	3	14	5.5	10	1	15	236	0	0
CR 3390D	4	9	4	11	1	2	0.3	0	1	4	3070	0	5
CS 3362B?	8	15	10	24	1	4	0.5	0	1	12	1017	0	0
CT 3355B?	5	15	11	31	0	7	0.3	0	1	9	1200	0	0
CU 3343B?	7	56	14	144	0	16	0.1	0	1	0	989	0	0
CV 3334B	15	47	37	93	0	15	0.4	0	1	15	373	0	0
CW 3322S?	0	17	2	33	0	4	0.1	1	1	6	2688	0	0
CX 3313S	0	15	1	31	0	3	0.1	9	1	10	2776	0	0
CY 3297S?	3	18	45	38	2	7	2.0	15	1	16	1520	0	0
CZ 3290D	28	33	45	43	7	14	1.3	1	1	30	217	8	0
DA 3283D	1	2	1	2	2	4	-	-	-	-	-	-	16
DB 3269B	13	23	18	38	6	6	0.6	0	1	24	325	0	0
DC 3260S?	5	12	10	39	0	4	0.2	0	1	10	751	0	0
DD 3245S?	26	71	38	137	2	21	0.6	0	1	17	232	0	5

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT

LINE 19030	(FLIGHT		36)											
DE 3240S?	2	51	36	103	16	17	0.5	0	1	18	208	0		6
DF 3232B	37	18	65	83	16	14	4.2	0	1	23	52	7		0
DG 3223S?	0	30	65	83	16	16	1.4	0	1	0	1687	0		0
DH 3211M	0	3	0	3	0	1	0.1	0	1	11	4526	0		90
DI 3203M	0	6	5	10	1	2	0.3	19	1	10	3903	0		0
DJ 3186S	4	12	8	24	1	5	0.3	0	1	26	675	0		0
DK 3176S?	2	22	21	40	0	7	0.6	3	1	28	558	2		0
DL 3128B?	6	9	10	14	1	3	0.7	14	1	10	1334	0		5

LINE 19040	(FLIGHT		37)											
A 6788B	1	2	1	2	2	4	-	-	-	-	-	-		0
B 6780B	5	21	12	47	2	8	0.2	0	1	31	91	13		0
C 6767B	1	2	1	2	2	4	-	-	-	-	-	-		0
D 6764B	57	62	54	106	20	16	1.8	0	1	20	34	8		90
E 6760B	37	45	57	74	3	15	1.4	0	1	17	30	5		0
F 6757B	39	45	57	74	3	15	1.5	0	1	16	47	3	1140	
G 6754B	20	13	64	32	14	21	2.5	14	1	18	33	6		0
H 6745B	143	395	369	829	35	152	1.0	0	1	9	47	0		40
I 6739B	59	128	140	247	37	40	0.9	0	1	14	29	4		12
J 6715B	31	88	71	175	0	26	0.6	0	1	10	238	0		20
K 6709M	4	16	9	15	1	6	0.6	30	1	22	1717	0		0
L 6694S?	1	39	9	87	0	11	0.1	0	1	0	3079	0		0
M 6673D	0	15	2	18	0	3	0.1	0	1	26	1661	0		0
N 6649S	0	13	6	20	0	3	0.2	0	1	20	1147	0		0
O 6574B?	0	2	1	2	0	4	-	-	-	-	-	-		0
P 6569B?	0	35	25	58	6	8	0.5	0	1	0	2047	0		610
Q 6557B	3	16	80	176	18	18	0.9	0	1	31	39	18		5
R 6522B	26	55	53	92	6	18	0.7	0	1	20	87	4		0
S 6518B	20	55	31	92	6	18	0.5	0	1	20	81	4	180	
T 6508B	17	14	30	4	4	9	1.7	17	1	27	81	11		0
U 6498B	17	8	21	13	8	10	3.6	22	1	22	65	7	200	
V 6484B	13	28	17	46	3	8	0.6	0	1	25	261	2		5
W 6477B	1	2	1	2	1	2	-	-	-	-	-	-		0
X 6470B	8	2	28	35	5	9	7.3	45	1	26	167	6		5
Y 6446B	113	129	206	198	18	75	2.2	0	1	12	36	1		0
Z 6438D	22	106	154	225	4	40	0.3	0	1	15	139	0		13
AA 6434D	51	106	154	225	4	41	0.9	0	1	10	109	0		0
AB 6428D	1	69	49	117	0	16	0.7	4	1	8	1434	0		50
AC 6411S?	0	7	0	20	0	3	0.1	3	1	33	5302	0		15
AD 6393B?	8	12	14	19	1	4	0.6	13	1	51	297	24		0
AE 6320S?	0	2	0	12	0	1	0.1	12	1	38	4992	0		0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG	
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR	
	ANOMALY/		REAL QUAD		REAL QUAD		COND DEPTH*		COND DEPTH		RESIS DEPTH			
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	SIEMEN	M	SIEMEN	M	OHM-M	M	NT	

LINE 19040	{FLIGHT		37)											
AF 6256S	3	14	2	31	0	4	0.1	17	1	33	1524	5	0	
AG 6238S?	0	43	11	84	0	11	0.1	0	1	7	2043	0	0	
AH 6224M	0	2	1	2	0	1	-	-	-	-	-	-	0	
AI 6210D	1	2	1	2	0	1	-	-	-	-	-	-	0	
AJ 6197B	2	8	2	36	0	1	0.1	8	1	54	3904	1	0	
AK 6188B	13	11	22	59	1	8	1.5	22	1	21	594	0	14	
AL 6157B	4	6	10	3	0	3	5.3	42	1	74	260	45	0	
AM 6149B	3	17	7	28	0	4	0.2	0	1	30	2018	0	0	
AN 6101S?	7	32	26	92	0	14	0.2	0	1	20	432	0	0	
AO 6092S?	4	25	6	47	0	7	0.1	0	1	23	977	0	0	
AP 6006B	20	35	55	68	2	15	0.7	0	1	17	178	0	0	
AQ 6002B	15	18	55	68	2	15	1.0	0	1	26	157	5	0	
AR 5985B	15	35	39	71	1	13	0.5	0	1	19	276	0	15	
AS 5961B	7	10	15	21	6	8	0.6	25	1	42	520	13	0	
AT 5922S?	5	8	10	49	0	6	0.2	0	1	25	464	1	0	
AU 5911S	6	38	18	84	0	16	0.2	0	1	9	680	0	10	

LINE 19045	{FLIGHT		37)											
A 7239D	0	10	0	8	0	1	0.1	0	1	62	6889	0	0	
B 7124B?	0	8	3	13	0	2	0.2	0	1	15	5340	0	100	
C 7111D	4	9	6	9	1	2	0.6	4	1	47	564	13	0	
D 7040S?	3	15	3	34	2	5	0.1	0	1	35	921	5	0	
E 7003S?	1	10	2	13	0	2	0.1	0	1	59	931	22	0	
F 6855B?	1	2	1	2	0	3	-	-	-	-	-	-	0	
G 6831B	6	7	17	13	1	4	0.9	0	1	24	254	0	5	
H 6817B	117	74	242	190	14	83	4.5	0	1	16	24	5	11	
I 6814B	35	13	64	20	14	27	6.5	11	1	17	22	6	0	
J 6809B	28	39	95	66	29	36	1.1	0	1	22	25	11	0	

LINE 19046	{FLIGHT		37)											
A 7628B	7	7	17	13	1	5	0.8	0	1	45	141	20	0	
B 7541D	2	17	4	24	1	3	0.1	0	1	29	2728	0	0	
C 7536D	4	14	4	32	1	7	0.2	17	1	39	1519	6	10	
D 7528B	1	13	7	23	1	2	0.2	0	1	57	1019	18	0	
E 7515B	0	14	0	19	0	2	0.1	0	1	17	4186	0	0	
F 7503M	0	9	1	13	0	2	0.1	0	1	16	4696	0	10	
G 7494B?	0	11	0	14	0	2	0.1	7	1	45	5761	0	-7	
H 7465B?	1	2	1	2	0	1	-	-	-	-	-	-	0	
I 7448M	0	3	0	9	0	2	0.1	0	1	36	5761	0	0	
J 7426M	0	2	0	5	0	1	0.1	0	1	43	6144	0	-4	
K 7418S?	0	8	0	15	0	3	0.1	4	1	17	3894	0		

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/ REAL QUAD REAL QUAD REAL QUAD . COND DEPTH* . COND DEPTH RESIS DEPTH	FID/INTERP PPM PPM PPM PPM PPM PPM . SIEMEN M . SIEMEN M OHM-M M	NT					

LINE 19046 (FLIGHT 37)							
L 7411M 0 2 0 2 0 2 . - - . - - - - 80							
M 7388S? 4 21 14 37 0 6 . 0.4 10 . 1 19 1063 0 0							
N 7374M 2 15 20 32 0 5 . 0.7 16 . 1 4 2533 0 0							
O 7361S? 5 39 10 77 1 11 . 0.1 0 . 1 0 1925 0 40							
P 7345S 1 2 1 2 0 2 . - - . - - - - 0							
Q 7324S 7 6 8 14 2 3 . 1.3 16 . 1 45 441 14 -5							

LINE 19050 (FLIGHT 37)							
A 7890B 14 14 29 25 4 10 . 1.3 14 . 1 37 192 15 0							
B 7948S? 0 2 0 2 0 2 . - - . - - - - 0							
C 7971S? 0 2 1 2 0 1 . - - . - - - - 0							
D 8072S? 0 2 1 2 0 2 . - - . - - - - 0							
E 8092D 8 39 2 42 1 7 . 0.2 0 . 1 20 1219 0 0							
F 8108M 0 7 0 11 0 2 . 0.1 0 . 1 25 5176 0 60							
G 8122B? 7 17 12 16 0 5 . 0.4 2 . 1 26 917 0 0							
H 8130B? 7 11 7 14 2 3 . 0.5 13 . 1 28 1032 0 0							
I 8142M 0 2 0 2 0 2 . - - . - - - - 110							
J 8159M 0 2 0 4 0 1 . 0.1 0 . 1 46 6203 0 0							
K 8197S? 0 18 0 32 0 5 . 0.1 3 . 1 3 2795 0 5							
L 8208M 0 2 0 2 0 2 . - - . - - - - 40							
M 8217S 0 2 0 2 0 3 . - - . - - - - 0							
N 8238S? 0 10 1 11 0 7 . 0.1 0 . 1 0 2342 0 0							
O 8249M 0 3 0 3 0 0 . 0.1 2 . 1 39 5713 0 20							
P 8257B? 0 10 0 11 0 2 . 0.1 0 . 1 21 5378 0 0							
Q 8262M 0 2 0 8 0 1 . 0.1 0 . 1 55 6667 0 0							
R 8289M 0 2 0 2 0 1 . - - . - - - - 80							
S 8332S? 18 37 13 27 0 5 . 0.6 0 . 1 25 338 1 0							
T 8350B? 7 53 15 76 0 14 . 0.1 0 . 1 14 542 0 0							
U 8354B? 22 32 47 145 0 23 . 1.0 17 . 1 21 347 2 0							
V 8366M 0 9 0 21 0 4 . 0.1 15 . 1 10 2399 0 16							
W 8378M 0 2 0 2 0 4 . - - . - - - - 0							
X 8399M 2 5 0 7 0 1 . 0.2 26 . 1 37 5866 0 0							
Y 8416S? 0 26 0 32 0 5 . 0.1 9 . 1 5 2417 0 0							
Z 8435S? 0 14 0 27 0 4 . 0.1 9 . 1 10 2852 0 190							
AA 8467B 364 1142 1004 2545 86 495 . 1.3 0 . 1 16 20 9 70							
AB 8478B 23 31 31 62 17 12 . 1.1 0 . 1 29 32 16 0							
AC 8480B 23 31 31 58 17 12 . 1.1 4 . 1 28 41 15 0							
AD 8491B 56 45 36 106 4 8 . 2.6 2 . 1 31 48 17 40							
AE 8494B 46 34 44 47 4 8 . 2.8 3 . 1 29 78 13 0							
AF 8498B 18 40 41 63 7 10 . 0.6 3 . 1 21 532 0 0							
AG 8509S? 1 10 0 22 0 3 . 0.1 6 . 1 3 2631 0 0							

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19050	(FLIGHT	37)											
AH 8510M	3	10	0	22	0	3	0.2	19	1	4	2787	0	0
AI 8524M	0	6	0	32	0	3	0.1	4	1	2	2563	0	16
AJ 8544M	0	14	2	35	0	5	0.1	6	1	2	1914	0	10
AK 8572S?	3	14	4	6	0	4	0.4	41	1	21	1638	0	0
AL 8604B?	14	20	30	51	0	9	0.8	24	1	20	463	0	0
AM 8607B?	14	30	28	19	0	9	0.6	12	1	19	505	0	0
AN 8609B?	6	30	28	19	0	9	0.2	0	1	19	584	0	0
AO 8612M	1	2	1	2	0	4	-	-	-	-	-	-	170
AP 8642B	123	265	290	505	11	114	1.2	0	1	11	36	2	0
AQ 8660B	70	21	137	329	31	57	10.0	18	1	18	53	7	0
AR 8665B	44	176	103	363	22	1	0.5	0	1	12	147	0	50

LINE 19051	(FLIGHT	37)											
A 8909B	160	186	318	368	43	117	2.4	0	1	14	18	5	0
B 8914B	235	297	471	516	44	152	2.5	0	1	10	32	0	60
C 8923B	80	112	178	208	14	51	1.6	0	1	27	53	13	0
D 8926B	80	112	178	208	14	51	1.6	0	1	14	62	1	110
E 8938B	73	65	149	120	23	55	2.5	0	1	21	29	9	60
F 8949B	53	60	108	110	32	44	1.7	0	1	23	23	12	30
G 8956B	122	60	189	138	5	19	6.3	0	1	20	35	9	0
H 8959B	122	60	189	138	5	19	6.3	5	1	16	60	4	0
I 8962B	103	139	179	328	38	58	1.8	3	1	20	72	7	0
J 8965B	31	136	179	328	21	58	0.4	0	1	9	327	0	0
K 8972B	30	19	18	57	0	18	2.8	22	1	24	194	6	20
L 8976B	16	6	18	57	0	18	4.7	39	1	22	135	6	0
M 8978B	13	4	18	57	1	18	4.9	42	1	24	121	7	0
N 8980B	13	4	18	57	1	18	4.9	42	1	28	113	11	0
O 8989M	1	0	1	2	2	4	-	-	-	-	-	-	0
P 9006B?	11	9	18	14	4	11	1.5	27	1	53	61	36	4
Q 9021S?	11	11	15	24	10	7	1.1	29	1	56	142	34	0
R 9043S?	1	2	1	2	2	4	-	-	-	-	-	-	0
S 9076B	1	2	1	2	2	4	-	-	-	-	-	-	0
T 9081B	21	39	50	76	9	16	0.7	0	1	19	59	5	9
U 9090B	29	29	76	86	8	26	1.6	0	1	19	51	5	0
V 9100B	11	11	13	16	8	13	1.2	1	1	32	49	16	0
W 9124B	1	2	1	2	2	4	-	-	-	-	-	-	30
X 9128B	27	27	33	50	9	12	1.6	0	1	29	59	13	0
Y 9134B	39	51	69	120	8	26	1.3	2	1	25	61	11	0
Z 9147B	1	2	1	2	2	4	-	-	-	-	-	-	0
AA 9152B	25	17	47	79	22	10	2.4	15	1	27	18	16	5
AB 9160B	27	61	47	184	13	17	0.7	0	1	14	67	1	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19051	(FLIGHT	37)											
AC 9167B	46	19	86	62	21	16	5.9	14	1	20	42	8	40
AD 9189B	25	21	46	29	4	4	1.8	14	1	21	114	5	0
AE 9193B	33	31	57	71	8	6	1.8	6	1	18	104	2	0
AF 9199B	56	44	101	104	12	26	2.7	2	1	22	47	9	0
AG 9221B	24	10	40	13	8	15	4.7	13	1	42	29	28	60
AH 9230B?	22	27	19	46	12	7	1.1	10	1	34	139	15	50
AI 9251M	29	0	56	5	5	7	766.5	39	1	17	3693	0	50
AJ 9258B?	47	26	99	88	6	21	3.8	8	1	26	97	10	30
AK 9266B?	4	21	6	28	0	4	0.2	3	1	0	1994	0	4
AL 9269M	0	21	0	28	0	4	0.1	6	1	3	2487	0	70
AM 9298S?	10	34	22	63	0	10	0.3	0	1	16	626	0	0
AN 9313B?	12	14	18	31	0	6	1.0	24	1	17	1766	0	0
AO 9332M	1	2	1	2	0	2	-	-	-	-	-	-	0
AP 9336B?	2	13	0	14	0	3	0.1	7	1	14	3389	0	5
AQ 9342M	8	1	8	15	0	2	15.6	60	1	17	4105	0	40
AR 9364S	1	10	4	21	0	3	0.1	0	1	32	772	4	0
AS 9381S	6	9	8	17	0	2	0.5	28	1	23	1814	0	0
AT 9388M	4	25	4	51	0	7	0.1	2	1	0	2272	0	80
AU 9422B	5	64	19	133	0	17	0.1	0	1	0	1318	0	0
AV 9426B	8	8	12	120	0	15	1.1	44	1	13	938	0	0
AW 9434M	0	73	1	144	0	20	0.1	13	1	0	989	0	11
AX 9444M	0	13	0	32	0	4	0.1	11	1	0	1774	0	5
AY 9457M	0	30	0	81	0	12	0.1	18	1	1	1193	0	7
AZ 9463S?	0	12	0	81	0	12	0.1	12	1	0	1268	0	15
BA 9485S?	0	2	0	2	0	4	-	-	-	-	-	-	10
BB 9490M	0	5	0	22	0	1	0.1	0	1	35	5741	0	30
BC 9503D	16	10	31	16	17	8	2.3	6	1	62	173	36	0
BD 9524S	1	10	0	21	0	3	0.1	1	1	24	3186	0	0
BE 9542B?	22	46	51	92	1	18	0.7	0	1	26	269	4	0
BF 9543B?	22	46	51	92	2	18	0.7	0	1	27	181	7	9
BG 9563B	17	105	45	92	0	28	0.2	0	1	15	420	0	0
BH 9588S	1	2	0	2	0	2	-	-	-	-	-	-	7
BI 9606S?	0	12	1	31	0	4	0.1	10	1	12	2909	0	7
BJ 9622M	1	2	1	21	0	0	0.2	51	1	42	4481	0	0

LINE 19060	(FLIGHT	47)											
A 6149B	27	48	59	95	7	20	0.8	0	1	25	92	9	0
B 6145B	39	38	64	79	6	22	1.8	0	1	23	107	6	10
C 6122B?	0	13	4	19	0	1	0.1	0	1	11	3763	0	0
D 6114B	0	11	0	17	0	3	0.1	1	1	11	3571	0	0
E 6103B	0	23	0	42	0	7	0.1	10	1	0	1820	0	0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 . OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 . LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR	
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M		NT

LINE 19060	(FLIGHT	47)												
F 6100B	0	16	0	42	0	5	0.1	13	1	8	2266	0		0
G 6064B?	6	27	6	41	1	7	0.2	0	1	32	657	4		19
H 6052B?	1	2	1	2	2	2	-	-	-	-	-	-		20
I 6040B	27	14	44	28	3	10	3.5	23	1	30	322	8		0
J 6037B	27	27	38	27	0	9	1.6	17	1	20	1048	0		0
K 6027B	5	13	7	25	0	3	0.2	0	1	20	1760	0		0
L 6025B	2	14	7	25	0	3	0.2	1	1	11	2093	0		40
M 6010B	49	89	110	188	5	38	1.0	1	1	21	123	5		0
N 6002S?	9	22	45	46	1	7	0.4	20	1	0	1663	0		0
O 5997B?	23	10	45	9	1	8	4.2	23	1	33	225	12		0
P 5989B?	14	29	29	52	0	15	0.6	0	1	46	383	18		0
Q 5950M	0	12	0	44	0	6	0.1	8	1	11	2995	0		16
R 5947S?	0	21	5	44	0	6	0.1	0	1	3	2414	0		0
S 5937S?	0	28	6	56	0	8	0.1	0	1	5	1931	0		180
T 5905M	0	2	0	2	0	2	-	-	-	-	-	-		8
U 5894M	0	2	0	4	0	1	0.1	6	1	32	4960	0		0
V 5887D	0	2	1	2	2	4	-	-	-	-	-	-		0
W 5882B	18	46	55	98	4	18	0.5	0	1	21	224	1		0
X 5862S?	9	24	31	50	0	12	0.4	6	1	7	1682	0		6
Y 5853B	1	2	1	2	0	4	-	-	-	-	-	-		210
Z 5850B	60	94	127	206	0	44	1.2	1	1	22	114	6		12
AA 5838B	24	38	41	18	2	28	0.9	3	1	36	209	15		650
AB 5836M	46	97	48	112	2	40	0.9	1	1	26	396	5		590
AC 5833B	46	97	48	112	0	40	0.9	2	1	23	148	6		0
AD 5830B	41	97	48	112	0	40	0.7	0	1	33	205	13		0
AE 5810S?	0	17	0	23	0	5	0.1	8	1	7	2698	0		0
AF 5804M	0	10	0	19	0	4	0.1	6	1	23	4186	0		80
AG 5793M	0	8	0	16	0	4	0.1	8	1	26	4292	0		740
AH 5765B?	0	14	10	20	0	5	0.4	5	1	5	2837	0		40
AI 5600M	1	3	0	3	0	1	0.3	54	1	158	8388	0		100
AJ 5537M	0	2	0	1	0	0	0.1	8	1	156	8388	0		7
AK 5534M	0	3	0	4	0	0	0.1	8	1	148	8388	0		0
AL 5532M	0	2	0	4	0	1	0.1	2	1	105	7989	7		40
AM 5459S?	0	7	0	10	0	1	0.1	1	1	33	5417	0		0

LINE 19061	(FLIGHT	47)												
A 7307B	15	8	31	3	6	15	2.7	17	1	42	138	21		0
B 7302B	18	9	9	28	6	15	3.3	21	1	54	140	32		0
C 7224M	0	2	1	2	0	1	-	-	-	-	-	-		0
D 7193B	0	13	0	47	0	11	0.1	8	1	3	2332	0		430
E 7188B	0	29	0	51	0	11	0.1	12	1	11	2736	0		480

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19061	(FLIGHT	47)											
F 7178B?	0	2	0	2	0	2	-	-	-	-	-	-	-80
G 7162M	0	5	0	8	0	1	0.1	0	1	44	6087	0	0
H 7130M	2	4	0	4	0	1	0.3	44	1	86	7400	0	0
I 7120M	0	2	0	2	0	2	-	-	-	-	-	-	820
J 7110B?	0	34	0	70	0	9	0.1	10	1	3	2127	0	0
K 7108B?	0	39	0	70	0	9	0.1	9	1	2	2127	0	0
L 7089M	0	2	0	3	0	1	0.1	2	1	57	6315	0	20
M 7067M	3	1	0	2	0	1	2.7	79	1	138	8388	0	220
N 7053M	0	4	0	4	0	1	0.1	0	1	116	8388	0	0
O 7005S?	0	17	10	43	0	7	0.2	12	1	9	2088	0	180
P 6984B?	12	33	19	57	1	7	0.4	12	1	39	666	12	0
Q 6971B?	17	34	31	64	8	15	0.6	7	1	25	156	7	0
R 6958B?	21	34	46	62	1	12	0.9	5	1	25	134	7	0
S 6953B?	16	31	26	34	1	9	0.6	6	1	32	303	9	0
T 6942B?	6	10	14	28	1	5	0.5	22	1	34	263	11	0
U 6915B	1	17	62	4	14	22	5.8	0	2	30	41	3	0
V 6905B	26	17	11	29	3	9	2.6	0	1	28	128	8	0
W 6881B?	1	2	1	2	2	2	-	-	-	-	-	-	0
X 6797M	0	2	0	2	0	2	-	-	-	-	-	-	0
Y 6771M	0	7	0	13	0	1	0.1	0	1	31	6087	0	0
Z 6753M	0	5	0	19	0	3	0.1	6	1	17	3771	0	270
AA 6733S?	0	11	0	15	0	2	0.1	0	1	0	3136	0	0
AB 6721S?	3	12	0	20	0	2	0.1	0	1	5	3938	0	0
AC 6705S?	0	13	0	23	0	3	0.1	3	1	14	3716	0	80
AD 6646B?	5	15	13	34	0	5	0.4	0	1	12	1480	0	0
AE 6631B?	5	21	3	29	0	4	0.2	6	1	7	2964	0	0
AF 6621B?	7	10	11	17	0	3	0.7	0	1	15	1011	0	0
AG 6614M	0	4	0	7	0	1	0.1	0	1	35	5823	0	390
AH 6593M	1	6	0	5	0	2	0.1	2	1	5	3656	0	0
AI 6577S?	0	2	0	2	0	4	-	-	-	-	-	-	1070
AJ 6568M	0	2	0	2	0	2	-	-	-	-	-	-	190
AK 6544S?	0	16	0	25	0	3	0.1	1	1	0	2648	0	130
AL 6534S?	0	11	0	18	0	3	0.1	0	1	2	2884	0	0
AM 6518S?	0	61	0	123	0	17	0.1	10	1	0	1399	0	0
AN 6512M	3	4	3	44	0	1	0.5	50	1	17	3852	0	120
AO 6492S?	1	10	1	24	0	4	0.1	0	1	3	2785	0	13
AP 6472B	16	64	149	200	5	31	0.3	0	1	8	703	0	0
AQ 6469B	85	96	149	200	5	31	2.0	0	1	7	115	0	0
AR 6458B	87	64	174	134	21	54	3.4	0	1	15	53	2	40
AS 6452B	41	29	62	32	12	20	2.7	0	1	22	31	10	0
AT 6444D	16	49	28	93	6	12	0.4	0	1	25	193	7	40

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL		COPLANAR		COPLANAR		VERTICAL		HORIZONTAL		CONDUCTIVE		MAG
	6368 HZ		7294 HZ		864 HZ		DIKE		SHEET		EARTH		CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19061	(FLIGHT		47)										
AU 6440D	11	45	27	55	6	4	0.3	0	1	21	268	1	70
AV 6428B	100	92	173	155	16	60	2.7	0	1	14	30	4	0
AW 6415B	1	2	1	2	2	4	-	-	-	-	-	-	0
AX 6405B	10	68	13	128	8	12	0.2	0	1	8	686	0	0
AY 6397B	26	71	37	146	6	16	0.6	0	1	11	266	0	0
AZ 6392D	14	26	39	54	4	13	0.6	1	1	25	187	5	70
BA 6389D	21	29	39	54	6	13	1.0	2	1	29	115	11	9
BB 6386D	18	37	39	51	12	13	0.6	0	1	29	96	12	0
BC 6378B	38	94	51	177	11	28	0.7	0	1	16	151	0	0
BD 6370B	28	66	27	143	5	25	0.7	0	1	16	195	0	0
BE 6360B	5	22	1	24	3	3	0.2	0	1	30	582	3	120
BF 6353D	10	32	15	61	2	9	0.3	0	1	26	366	2	0
BG 6344B	14	27	19	41	2	9	0.6	0	1	29	239	6	0
BH 6338B	11	22	7	31	2	4	0.5	0	1	35	340	9	70

LINE 19070	(FLIGHT		46)										
A 5973S?	7	19	11	41	0	6	0.3	10	1	16	1182	0	20
B 5961M	1	14	9	31	0	5	0.2	9	1	4	2396	0	0
C 5956S?	5	14	9	26	0	3	0.3	3	1	6	1749	0	60
D 5933S	1	2	1	2	0	2	-	-	-	-	-	-	0
E 5914S?	2	34	11	43	0	9	0.2	8	1	3	1970	0	90
F 5908S?	0	11	11	50	0	9	0.2	2	1	3	2240	0	0
G 5876S	2	16	5	31	0	5	0.1	0	1	31	836	0	0
H 5864S?	1	17	7	30	0	5	0.2	1	1	27	1078	0	0
I 5753B?	5	16	3	20	0	3	0.3	3	1	45	1424	7	17
J 5734S	1	2	1	2	0	2	-	-	-	-	-	-	0
K 5718S?	2	10	8	20	1	3	0.4	0	1	46	467	16	18
L 5700B	1	2	1	2	1	3	-	-	-	-	-	-	0
M 5683D	6	9	5	6	1	2	0.6	26	1	41	603	11	40
N 5664B	19	23	44	27	10	16	1.1	0	1	39	96	20	0
O 5650M	0	1	1	2	0	1	-	-	-	-	-	-	240
P 5525M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 5465M	0	2	0	2	0	0	-	-	-	-	-	-	16
R 5402S?	5	39	11	121	0	15	0.1	0	1	12	1000	0	0
S 5374B?	1	2	1	2	0	4	-	-	-	-	-	-	0
T 5356B?	1	2	1	2	0	0	-	-	-	-	-	-	0
U 5347S?	4	9	3	16	0	2	0.4	15	1	41	632	10	0
V 5301S	1	2	1	2	0	3	-	-	-	-	-	-	14
W 5267S	1	2	1	2	0	3	-	-	-	-	-	-	0
X 5254S	4	8	2	12	0	2	0.3	15	1	38	1304	1	0
Y 5239S	1	2	1	2	0	3	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

		COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR			
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT
LINE 19070	(FLIGHT 46)										
Z 5226S	1	2	1	2	1	3	-	-	-	-	0
LINE 19071	(FLIGHT 48)										
A 2283S?	0	7	0	16	0	2	0.1	0	1	9 5229	0 0
B 2327S?	0	2	0	2	0	1	-	-	-	-	0
C 2372B?	0	11	0	9	0	1	0.1	0	1	46 6667	0 0
D 2379M	0	3	0	4	0	1	0.1	0	1	88 7989	0 0
E 2396M	0	3	0	7	0	1	0.1	0	1	80 7400	0 220
F 2470M	1	3	1	5	0	1	0.2	24	1	78 7737	0 20
G 2523B?	1	2	1	2	0	2	-	-	-	-	0
H 2555D	1	2	1	2	1	0	-	-	-	-	0
I 2602S	1	2	1	2	0	2	-	-	-	-	0
J 2713B?	0	2	0	2	0	1	-	-	-	-	0
K 2724B?	0	5	0	9	0	1	0.1	3	1	17 3983	0 0
L 2805S?	0	2	1	2	0	3	-	-	-	-	0
M 2817S?	0	20	8	39	0	5	0.2	0	1	2 2705	0 50
N 2831S?	0	11	0	31	0	4	0.1	0	1	0 3008	0 0
O 2847S?	9	23	24	35	1	7	0.4	5	1	28 578	2 0
P 2849M	1	2	1	2	0	4	-	-	-	-	0
Q 2880M	0	2	1	2	0	2	-	-	-	-	0
R 2898B?	2	27	8	17	0	5	0.4	17	1	0 2235	0 0
S 2919B?	0	13	3	40	0	6	0.1	0	1	17 3089	0 0
T 2949S?	0	10	3	26	0	3	0.1	0	1	16 2788	0 0
U 2958S?	0	2	1	2	0	3	-	-	-	-	190
V 3019S	0	2	1	2	0	1	-	-	-	-	0
W 3034S	0	2	1	2	0	2	-	-	-	-	0
X 3090B?	2	71	16	175	0	25	0.1	0	1	0 1138	0 0
Y 3118S	1	2	0	2	0	1	-	-	-	-	0
Z 3140M	0	2	0	2	0	1	-	-	-	-	90
AA 3151S?	3	15	4	25	0	3	0.1	0	1	21 2552	0 0
AB 3183S?	5	1	9	46	0	6	0.2	0	1	7 2503	0 0
AC 3201S?	2	19	2	31	0	4	0.1	2	1	11 3363	0 9
AD 3228S?	5	11	5	17	0	2	0.2	12	1	20 2583	0 14
AE 3242S	3	9	7	14	0	5	0.4	20	1	20 2119	0 9
LINE 19080	(FLIGHT 46)										
A 4545S?	2	18	12	19	0	3	0.6	10	1	25 735	0 0
B 4533S?	5	42	9	79	0	11	0.1	0	1	0 1860	0 0
C 4518M	1	2	0	2	0	1	-	-	-	-	120
D 4498S?	0	19	0	19	0	5	0.1	4	1	2 2575	0 0
E 4475M	1	4	0	5	0	2	0.1	23	1	16 4440	0 0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 19080	(FLIGHT	46)											
F 4452S?	5	10	0	22	0	3	0.4	25	1	12	3523	0	40
G 4444M	1	1	1	2	0	1	-	-	-	-	-	-	0
H 4436S?	8	26	20	49	0	10	0.3	1	1	34	562	7	0
I 4428S?	2	14	2	27	0	4	0.1	0	1	19	1339	0	0
J 4413H	9	13	16	23	0	5	0.7	5	1	29	406	2	0
K 4361S?	1	2	1	2	0	2	-	-	-	-	-	-	0
L 4317S?	0	13	0	44	0	3	0.1	2	1	7	3177	0	0
M 4308B?	3	16	1	18	0	2	0.1	1	1	6	3251	0	0
N 4305M	1	2	1	2	0	2	-	-	-	-	-	-	0
O 4300M	0	2	0	2	0	0	-	-	-	-	-	-	160
P 4294S?	0	15	0	21	0	3	0.1	1	1	0	2705	0	0
Q 4287S?	0	21	0	45	0	6	0.1	0	1	0	2806	0	110
R 4176B	29	66	37	117	0	18	0.7	0	1	14	387	0	0
S 4168S?	0	9	0	27	0	7	0.1	10	1	0	1845	0	0
T 4150B?	4	9	6	12	0	2	0.4	7	1	27	1169	0	0
U 4088S?	0	2	0	2	0	1	-	-	-	-	-	-	5
V 4027B?	10	29	19	64	2	12	0.3	0	1	26	489	1	17

LINE 10170	(FLIGHT	7)											
A 489B?	1	2	1	2	0	4	-	-	-	-	-	-	0
B 509B?	1	2	0	2	0	2	-	-	-	-	-	-	40
C 526M	0	3	0	3	0	1	0.1	1	1	45	5911	0	60
D 540M	0	2	0	3	0	1	0.1	0	1	65	6667	0	0
E 584M	0	10	0	17	0	4	0.1	17	1	28	3678	3	0
F 610M	1	1	0	2	0	0	0.3	87	1	33	4853	0	-8
G 695M	1	2	0	2	0	2	-	-	-	-	-	-	50
H 712M	0	4	0	6	0	1	0.1	1	1	30	5211	0	180
I 722M	0	2	0	3	0	2	0.1	0	1	20	5359	0	130
J 743M	0	6	0	13	0	2	0.1	0	1	10	4629	0	430
K 755M	0	4	0	7	0	2	0.1	0	1	10	4196	0	110
L 774B?	92	58	205	102	22	72	4.2	0	1	14	18	4	0
M 787B?	120	40	245	11	25	89	10.6	0	1	16	14	6	0
N 788B?	120	40	245	11	25	89	10.6	0	1	15	23	5	-7
O 790B?	72	39	245	88	25	89	4.6	0	1	14	40	3	-7
P 804D	1	2	1	2	0	3	-	-	-	-	-	-	0
Q 822M	0	2	0	8	0	2	0.1	4	1	26	4629	0	-7
R 833M	0	1	0	5	0	1	0.1	0	1	35	5694	0	0
S 838M	0	4	0	4	0	1	0.1	0	1	33	5703	0	90
T 850M	0	13	7	67	0	12	0.1	0	1	0	3557	0	520
U 855B?	10	12	9	69	0	12	0.9	18	1	0	1423	0	0
V 863M	0	2	0	2	0	1	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
 OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
 LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ		COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE		HORIZONTAL SHEET		CONDUCTIVE EARTH		MAG CORR
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND SIEMEN	DEPTH* M	COND SIEMEN	DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10170	(FLIGHT	7)											
W 889D	0	28	0	34	0	4	0.1	10	1	11	2872	0	0
X 905M	0	14	0	32	0	5	0.1	16	1	21	3126	1	-6
Y 939B?	4	27	30	56	1	8	0.7	0	1	11	759	0	0
Z 964M	1	2	1	2	0	2	-	-	-	-	-	-	0
AA 971D?	0	2	1	2	0	2	-	-	-	-	-	-	0
AB 1020S?	4	16	4	31	0	4	0.1	0	1	21	1957	0	0
AC 1048B	11	20	20	36	2	6	0.6	0	1	26	371	0	0

LINE 10225	(FLIGHT	34)											
A 2810M	0	2	0	2	0	4	-	-	-	-	-	-	0
B 2780M	0	2	0	6	0	1	0.1	0	1	52	6440	0	0
C 2681M	0	3	0	1	0	0	0.1	0	1	111	8388	0	0
D 2631M	0	2	0	2	0	0	-	-	-	-	-	-	0
E 2612M	0	4	0	10	0	2	0.1	0	1	22	5844	0	0

LINE 10230	(FLIGHT	7)											
A 1808S	2	3	1	4	0	2	0.4	54	1	48	1029	12	0
B 1821M	4	1	5	3	0	2	2.0	42	1	39	1190	1	0
C 1856M	1	1	0	0	0	1	-	-	-	-	-	-	0
D 1879M	0	1	0	5	0	1	0.1	1	1	74	6889	0	0
E 1888M	1	2	0	10	0	1	0.3	64	1	77	6944	1	0
F 1893B?	1	9	0	8	0	2	0.1	1	1	28	5559	0	0
G 1901D	1	2	0	2	0	1	-	-	-	-	-	-	0
H 1916S?	2	14	0	19	0	3	0.1	0	1	0	3008	0	0
I 1932M	0	3	0	9	0	2	0.1	0	1	34	5781	0	0
J 1941M	0	2	0	4	0	1	0.1	6	1	69	6580	2	0
K 1951M	0	3	0	5	0	1	0.1	0	1	55	6350	0	0
L 1960M	0	1	0	5	0	1	0.1	4	1	47	5935	0	0
M 1969M	0	3	0	3	0	1	0.1	1	1	39	5781	0	0
N 1992M	0	2	0	4	0	0	0.1	0	1	55	6518	0	0
O 2010B?	0	6	0	17	0	3	0.1	0	1	1	4096	0	0
P 2032M	0	2	0	2	0	1	-	-	-	-	-	-	0
Q 2040B?	4	10	12	21	0	5	0.5	0	1	29	861	0	0
R 2055B?	1	2	0	2	0	3	-	-	-	-	-	-	0
S 2217M	0	2	1	2	0	3	-	-	-	-	-	-	0
T 2238B?	0	2	0	16	0	1	0.1	0	1	9	3811	0	0
U 2261M	0	2	0	2	0	2	-	-	-	-	-	-	0
V 2287S?	0	21	9	47	0	7	0.2	0	1	6	1426	0	0
W 2328B?	0	17	8	26	0	4	0.3	0	1	19	1472	0	0
X 2339S?	0	2	1	2	0	3	-	-	-	-	-	-	0
Y 2359M	0	11	6	3	0	3	1.6	42	1	0	3827	0	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10230	(FLIGHT	7)											
Z 2387S	13	5	27	14	0	11	3.7	38	1	15	360	0	0

LINE 10235	(FLIGHT	34)											
A 3605M	0	4	2	11	0	2	0.1	0	1	21	5657	0	0
B 3596M	0	3	0	8	0	1	0.1	0	1	42	5900	0	0
C 3583B?	0	13	2	17	0	3	0.1	0	1	11	4551	0	0
D 3577M	0	4	0	10	0	1	0.1	0	1	30	5631	0	0
E 3560B?	1	13	9	31	0	1	0.3	5	1	23	4405	0	0
F 3551B?	1	11	9	50	0	7	0.2	4	1	4	2095	0	0
G 3545B?	0	31	4	16	0	8	0.2	22	1	9	2088	0	0
H 3534M	0	16	5	34	0	4	0.1	9	1	10	2140	0	0
I 3530M	0	16	5	11	0	6	0.3	37	1	17	2270	0	0
J 3511B?	0	20	4	38	0	5	0.1	0	1	2	2841	0	0
K 3504M	0	8	4	13	0	2	0.2	6	1	21	4853	0	0
L 3450M	0	1	0	2	0	1	-	-	-	-	-	-	0
M 3424S?	0	2	0	2	0	4	-	-	-	-	-	-	0
N 3403B?	0	2	0	24	0	3	0.1	1	1	4	2973	0	0
O 3396B?	0	14	0	36	0	17	0.1	7	1	0	1801	0	0
P 3386B?	0	47	0	15	0	16	0.1	12	1	0	1522	0	0
Q 3371B?	0	6	0	1	0	2	0.1	10	1	12	4048	0	0
R 3365B?	0	9	0	11	0	2	0.1	0	1	6	4724	0	0
S 3354M	0	8	0	14	0	3	0.1	1	1	30	5211	0	0
T 3300M	0	3	0	11	0	1	0.1	0	1	43	7091	0	0
U 3289M	0	4	0	14	0	2	0.1	0	1	19	4526	0	0
V 3272M	0	5	0	14	0	2	0.1	0	1	10	3912	0	0
W 3267B?	0	15	0	20	0	2	0.1	0	1	16	4259	0	0
X 3244M	0	1	0	6	0	2	0.1	14	1	41	5666	0	0
Y 3239B?	0	2	0	6	0	1	0.1	0	1	41	6266	0	0
Z 3156M	0	2	0	4	0	1	0.1	0	1	75	7290	0	0
AA 3102M	0	2	0	2	0	1	-	-	-	-	-	-	0
AB 3095M	0	2	0	2	0	1	0.1	0	1	64	7154	0	0
AC 3082M	0	2	0	2	0	1	-	-	-	-	-	-	0

LINE 10250	(FLIGHT	7)											
A 3606D	1	2	1	2	1	3	-	-	-	-	-	-	0
B 3697B?	1	2	1	2	0	2	-	-	-	-	-	-	0
C 3706B?	0	2	1	2	0	1	-	-	-	-	-	-	0
D 3738S?	1	12	0	32	0	5	0.1	0	1	0	3746	0	0
E 3793B?	0	2	0	2	0	1	-	-	-	-	-	-	0
F 3796M	0	2	0	2	0	2	-	-	-	-	-	-	0
G 3814S	0	2	0	2	0	2	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ		COPLANAR 864 HZ		VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR				
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10250	(FLIGHT	7)											
H 3850M	0	3	0	4	0	1	0.1	0	1	39	6144	0	0
I 3856M	0	1	0	0	0	1	-	-	-	-	-	-	0
J 3895M	0	2	1	2	0	3	-	-	-	-	-	-	0
K 3906M	1	4	1	14	0	1	0.1	0	1	3	4135	0	0
L 3931B?	0	2	0	2	0	3	-	-	-	-	-	-	0
M 3934M	0	2	0	2	0	2	-	-	-	-	-	-	0
N 3990B?	1	2	1	2	0	1	-	-	-	-	-	-	0
O 3998B?	1	7	6	14	0	2	0.3	4	1	7	4325	0	0
P 4018B?	1	2	0	2	0	2	-	-	-	-	-	-	0
Q 4020M	1	2	0	2	0	2	-	-	-	-	-	-	0
R 4031M	6	20	5	36	0	6	0.2	2	1	0	2612	0	0
S 4042M	1	12	0	23	0	4	0.1	0	1	4	3627	0	0
T 4087S?	2	2	0	36	0	5	0.8	67	1	0	3284	0	0
U 4102S?	1	2	1	2	0	4	-	-	-	-	-	-	0
V 4126S?	1	2	1	2	0	4	-	-	-	-	-	-	0
W 4153S?	3	15	1	33	0	4	0.1	0	1	0	2910	0	0

LINE 10255	(FLIGHT	34)											
A 4992M	1	1	1	2	0	1	-	-	-	-	-	-	0
B 4989B?	1	11	4	29	0	6	0.1	0	1	35	2401	0	0
C 4984D	4	23	10	29	1	6	0.3	3	1	1	2872	0	0
D 4963M	0	8	2	19	0	3	0.1	0	1	42	4776	0	0
E 4956M	0	3	0	10	0	3	0.1	0	1	0	3642	0	0
F 4950B?	0	2	0	2	0	2	-	-	-	-	-	-	0
G 4936B?	1	115	8	220	0	33	0.1	2	1	0	912	0	0
H 4926B?	2	36	10	72	0	11	0.1	3	1	33	1258	7	0
I 4923B?	6	36	12	72	2	11	0.1	7	1	6	2009	0	0
J 4908M	0	3	4	5	0	1	0.6	44	1	40	5923	0	0
K 4902M	0	1	0	2	0	1	0.1	0	1	49	6315	0	0
L 4889M	0	3	0	2	0	0	0.1	0	1	48	6690	0	0
M 4868M	0	2	0	2	0	1	-	-	-	-	-	-	0
N 4854M	0	10	0	17	0	4	0.1	1	1	54	6266	0	0
O 4851B?	0	10	0	17	0	4	0.1	3	1	27	4795	0	0
P 4837M	0	2	0	2	0	3	-	-	-	-	-	-	0
Q 4825B?	0	15	0	19	0	5	0.1	7	1	9	2938	0	0
R 4802B?	0	23	0	65	0	10	0.1	2	1	0	1768	0	0
S 4793B?	0	11	6	26	0	7	0.2	0	1	0	2800	0	0
T 4790M	0	11	6	17	0	5	0.3	13	1	8	3224	0	0
U 4779M	0	3	0	8	0	3	0.1	5	1	21	4067	0	0
V 4776B?	0	4	0	23	0	1	0.1	0	1	20	4809	0	0
W 4773B?	0	2	0	2	0	4	-	-	-	-	-	-	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR						
ANOMALY/ FID/INTERP	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	REAL PPM	QUAD PPM	COND DEPTH* SIEMEN	COND DEPTH M	COND DEPTH SIEMEN	COND DEPTH M	RESIS OHM-M	DEPTH M	NT

LINE 10255	(FLIGHT	34)											
X 4751D	0	10	0	17	0	4	0.1	0	1	25	5057	0	0
Y 4732M	0	4	0	6	0	0	0.1	0	1	75	7478	0	0
Z 4717M	0	1	0	3	0	1	0.1	0	1	64	6811	0	0
AA 4702M	0	5	0	7	0	1	0.1	0	1	33	5781	0	0
AB 4690M	0	3	0	8	0	1	0.1	0	1	20	4696	0	0
AC 4674B?	0	15	0	21	0	5	0.1	0	1	4	3246	0	0
AD 4671B?	0	14	0	21	0	5	0.1	0	1	1	3240	0	0
AE 4663B?	0	5	0	10	0	0	0.1	0	1	31	6144	0	0
AF 4655M	0	3	0	2	0	1	0.1	0	1	55	6403	0	0
AG 4639M	0	6	0	39	0	8	0.1	13	1	14	2913	0	0
AH 4632B?	0	6	0	39	0	8	0.1	1	1	66	6623	0	0
AI 4616M	0	20	0	41	0	8	0.1	8	1	10	2960	0	0
AJ 4609B?	0	16	0	32	0	6	0.1	3	1	8	3246	0	0
AK 4598M	0	2	0	5	0	1	0.1	0	1	62	6559	0	0
AL 4594M	0	2	0	2	0	0	-	-	-	-	-	-	0
AM 4586M	0	2	0	2	0	1	-	-	-	-	-	-	0
AN 4542B?	0	4	0	7	0	1	0.1	0	1	54	6836	0	0
AO 4534B?	0	2	0	2	0	0	-	-	-	-	-	-	0
AP 4526B?	0	3	0	4	0	0	0.1	0	1	61	7478	0	0
AQ 4513B?	0	2	0	2	0	0	-	-	-	-	-	-	0
AR 4490B?	0	3	0	9	0	3	0.1	7	1	27	4452	0	0
AS 4479D	0	14	0	22	0	3	0.1	6	1	17	3627	0	0
AT 4465M	0	4	0	9	0	2	0.1	2	1	36	5640	0	0
AU 4460M	0	5	0	14	0	2	0.1	4	1	26	4629	0	0
AV 4454M	0	3	0	7	0	1	0.1	1	1	28	5041	0	0
AW 4450M	0	3	0	6	0	1	0.1	5	1	34	5194	0	0
AX 4444M	0	4	0	9	0	2	0.1	0	1	23	4655	0	0
AY 4439M	0	6	0	9	0	2	0.1	3	1	44	5833	0	0

LINE 11278	(FLIGHT	46)											
A 508B	10	38	71	3	25	1	0.3	0	1	25	54	11	0
B 502B	30	40	55	44	8	18	1.2	12	1	32	48	19	0
C 495B	24	43	43	69	16	15	0.8	5	1	25	54	12	0
D 491B	30	10	43	48	18	16	6.4	20	1	24	41	12	0
E 486B	68	10	116	21	19	21	28.4	9	1	27	45	14	0
F 452B?	26	7	10	50	1	20	9.4	27	1	28	237	7	0
G 447B?	6	36	49	50	0	21	0.1	0	1	13	656	0	0
H 446M	0	36	49	50	0	21	1.6	8	1	10	1055	0	0
I 410M	0	2	1	2	0	0	0.2	63	1	83	7518	0	0
J 246D	16	27	16	23	0	7	0.7	8	1	26	879	0	0
K 238B?	22	18	16	29	14	19	1.9	14	1	35	157	15	0

* ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART
OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT
LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS.

	COAXIAL 6368 HZ	COPLANAR 7294 HZ	COPLANAR 864 HZ	VERTICAL DIKE	HORIZONTAL SHEET	CONDUCTIVE EARTH	MAG CORR
ANOMALY/	REAL QUAD	REAL QUAD	REAL QUAD	COND DEPTH*	COND DEPTH	RESIS DEPTH	
FID/INTERP	PPM	PPM	PPM	PPM	PPM	PPM	PPM

LINE 11278	(FLIGHT	46)					
L 234D	14	22	16	29	14	19	0.7 0 1 38 48 22 0

. * ESTIMATED DEPTH MAY BE UNRELIABLE BECAUSE THE STRONGER PART .
. OF THE CONDUCTOR MAY BE DEEPER OR TO ONE SIDE OF THE FLIGHT .
. LINE, OR BECAUSE OF A SHALLOW DIP OR OVERBURDEN EFFECTS. .