

Alaska Division of Geological & Geophysical Surveys

RAW-DATA FILE 2014-20

LIDAR DATA FOR THE COMMUNITY OF GOLOVIN, ALASKA

by

Lauren E. Southerland and Nicole E.M. Kinsman



NOVEMBER 2014

Oblique aerial photograph of Golovin in Norton Sound, Alaska, looking south across the peninsula and spit (photo by Nicole Kinsman, 2012)

Released by:

STATE OF ALASKA

DEPARTMENT OF NATURAL RESOURCES

Division of Geological & Geophysical Surveys

3354 College Road, Fairbanks, Alaska 99709-3707

Email: dggspubs@alaska.gov

Website: www.dggs.alaska.gov



CONTENTS

Introduction	1
Data Acquisition.....	2
Files	2
Acknowledgments	2

FIGURE

Figure 1. Location of lidar data collection area.....	1
---	---

APPENDIX

Appendix A. Golovin, Alaska, lidar: Technical Data Report (Quantum Spatial, Sept. 19, 2014)	3
---	---

Note: This report, including all digital lidar data, explanations, and tables, is available in digital format from the DGGs website (www.dggs.alaska.gov) for free download.

LIDAR DATA FOR FOR THE COMMUNITY OF GOLOVIN, ALASKA

by

Lauren E. Southerland and Nicole E.M. Kinsman

Introduction

This report is a summary of lidar data collected over the community of Golovin, on the southern coast of the Seward Peninsula in western Alaska (fig. 1). The original data were collected on November 5, 2013, by Quantum Spatial. The complete, classified lidar dataset was purchased by the State of Alaska Division of Geological & Geophysical Surveys in 2014 in support of coastal vulnerability mapping efforts. For the purposes of open access to lidar datasets in coastal regions of Alaska, this collection is being released as a Raw Data File with an open end-user license.

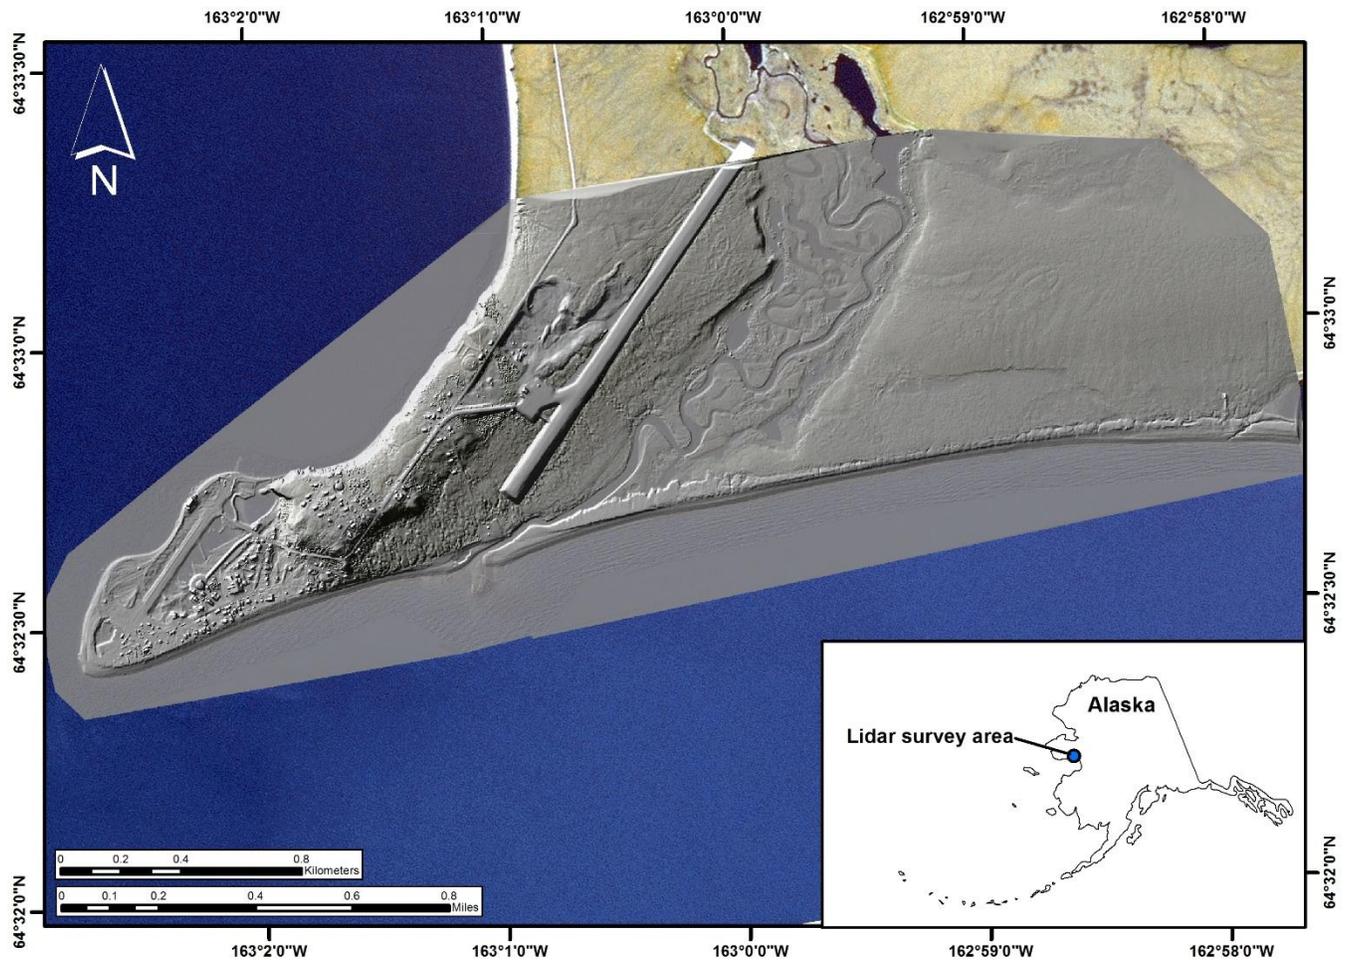


FIGURE 1. Location map of 2013 lidar data collection area over the coastal community of Golovin, Alaska, displayed as a hillshaded raster overlain on 2005 SPOT-5 satellite imagery.

Data acquisition

Lidar data, initially collected on November 5, 2013, and fully post-processed in 2013 by Quantum Spatial, comprises a 1.64 mi² coverage over the coastal community of Golovin (64.5447°N, 163.0275°W, Solomon C-3 and C-2 U.S. Geological Survey quadrangles, scale 1:63,360).

The lidar dataset for this area was obtained with an average laser pulse rate of 70 kHz under operational conditions designed to achieve a nominal point spacing of 0.50 m. The data were delivered to DGGs with a reported vertical accuracy of 0.107 m at the 95 percent confidence interval. This confidence value is based on 15 check points provided by DGGs and evaluated by Quantum Spatial; a full summary of this vertical accuracy assessment is available in the 2014 delivery report, which can be found on the DGGs website (doi:[10.14509/29127](https://doi.org/10.14509/29127)).

The vertical accuracy of the lidar dataset was independently evaluated by DGGs using control points (n=10) that were collected by DGGs during the course of 2012 fieldwork. The standard deviation of the differences between these independent control points and the lidar point-cloud data confirmed the vertical accuracy reported by Quantum Spatial in the 2014 delivery report.

The 2014 delivery report also contains an explanation of the point-cloud classification scheme that was applied by Quantum Spatial.

Files

The project files available for download comprise tiled and classified lidar point-clouds (LAS 1.2 format), polygons for the tile index, and a polygon that outlines the full lidar survey area. These data are projected in UTM Zone 3 (meters) using the NAD83 horizontal and NAVD88 (Geoid12A) vertical datums, as outlined in the accompanying metadata.

Acknowledgments

This publication is funded with qualified outer continental shelf oil and gas revenues through the Coastal Impact Assistance Program, U.S. Fish and Wildlife Service, U.S. Department of the Interior.

The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the opinions or policies of the U.S. Government. Mention of trade names or commercial products does not constitute their endorsement by the U.S. Government.

September 19, 2014



Golovin, Alaska Lidar

Technical Data Report



Nicole Kinsman, Coastal Hazards Geologist
Alaska Department of Natural Resources,
Division of Geological & Geophysical Surveys
3354 College Road
Fairbanks, Alaska 99709-3707
PH: 907-451-5026



QSI Anchorage Office
2014 Merrill Field Drive
Anchorage, AK 99501
PH: 907-272-4495
AMI Reference #6140809


TABLE OF CONTENTS

- INTRODUCTION 1
 - Deliverable Products 2
- ACQUISITION 4
 - Planning..... 4
 - Ground Control..... 5
 - Airborne Lidar Survey..... 5
- PROCESSING 7
 - Lidar Data 7
- RESULTS & DISCUSSION..... 9
 - Lidar Density..... 9
 - Lidar Accuracy Assessments..... 12
 - Lidar Absolute Accuracy 12
 - Lidar Vertical Relative Accuracy 13
- SELECTED IMAGES..... 15
- GLOSSARY 16
- APPENDIX A - ACCURACY CONTROLS 17

Cover Photo: A view looking northeast over Golovin, Alaska. The image was created from the gridded lidar surface colored by elevation and overlaid with the above ground lidar point cloud.

INTRODUCTION

This image shows a view looking northeast over an airstrip in Golovin, Alaska. The image was created from the gridded lidar surface colored by elevation and overlaid with the lidar point cloud.

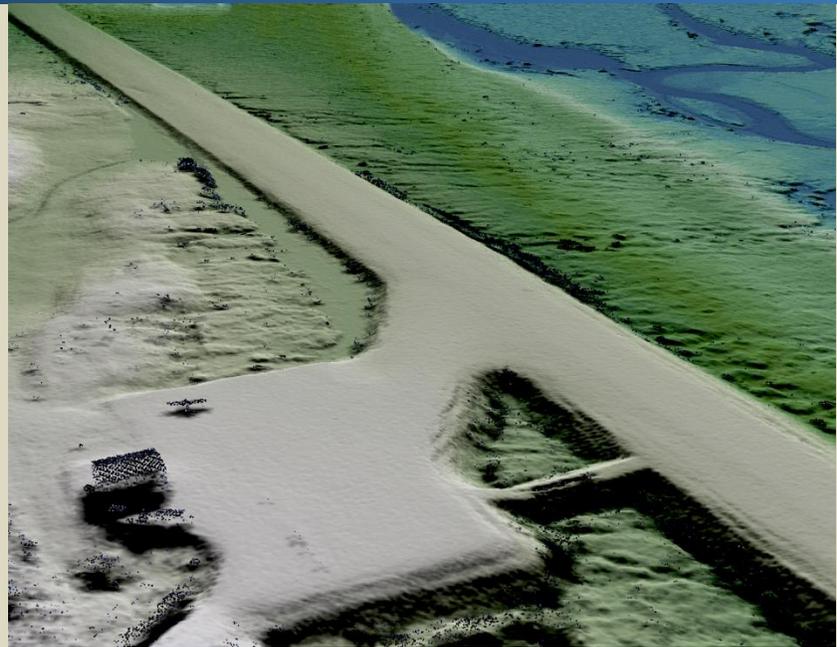

In August 2014, Quantum Spatial (QSI, previously Aerometric), was contracted by the Alaska Department of Natural Resources, Division of Geological and Geophysical Surveys (AKDGGG) to process Light Detection and Ranging (lidar) data previously collected in the fall of 2013 for the town of Golovin, Alaska. AKDGGG's area of interest (AOI) was larger in extent than the previous AOI for which the data was acquired. This resulted in small but unavoidable data gaps along the northern boundary and lower point densities in the eastern section of the AOI not specifically targeted during the acquisition. All discernible laser returns from the fall 2013 acquisition were processed to aid AKDGGG in assessing the topographic and geophysical properties of the study area to support storm monitoring.

This report accompanies the delivered Golovin lidar data and documents contract specifications, data acquisition procedures, processing methods, and analysis of the final dataset including lidar accuracy and density. Acquisition dates and acreage are shown in Table 1, a complete list of contracted deliverables provided to AKDGGG is shown in Table 2, and the project extent is shown in Figure 1.

Table 1: Acquisition dates, acreage, and data types collected on the Golovin site

Project Site	Total Acres	Acquisition Dates	Data Type
Golovin	1,050	09/05/2013	Lidar

Deliverable Products

Table 2: Products delivered to AKDGGs for the Golovin site

Golivin Lidar Products Projection: UTM Zone 3 North Horizontal Datum: NAD83 (CORS96) Vertical Datum: NAVD88 (GEOID09) Units: Meters	
Points	LAS v 1.2 <ul style="list-style-type: none"> • All Returns (by Tile and by AOI) Comma Delimited ASCII Files (*.asc) <ul style="list-style-type: none"> • All Returns (By Tile and by AOI) • Ground Returns (By Tile and by AOI)
Vectors	Shapefiles (*.shp) <ul style="list-style-type: none"> • Site Boundary • Site Lidar Tile Index

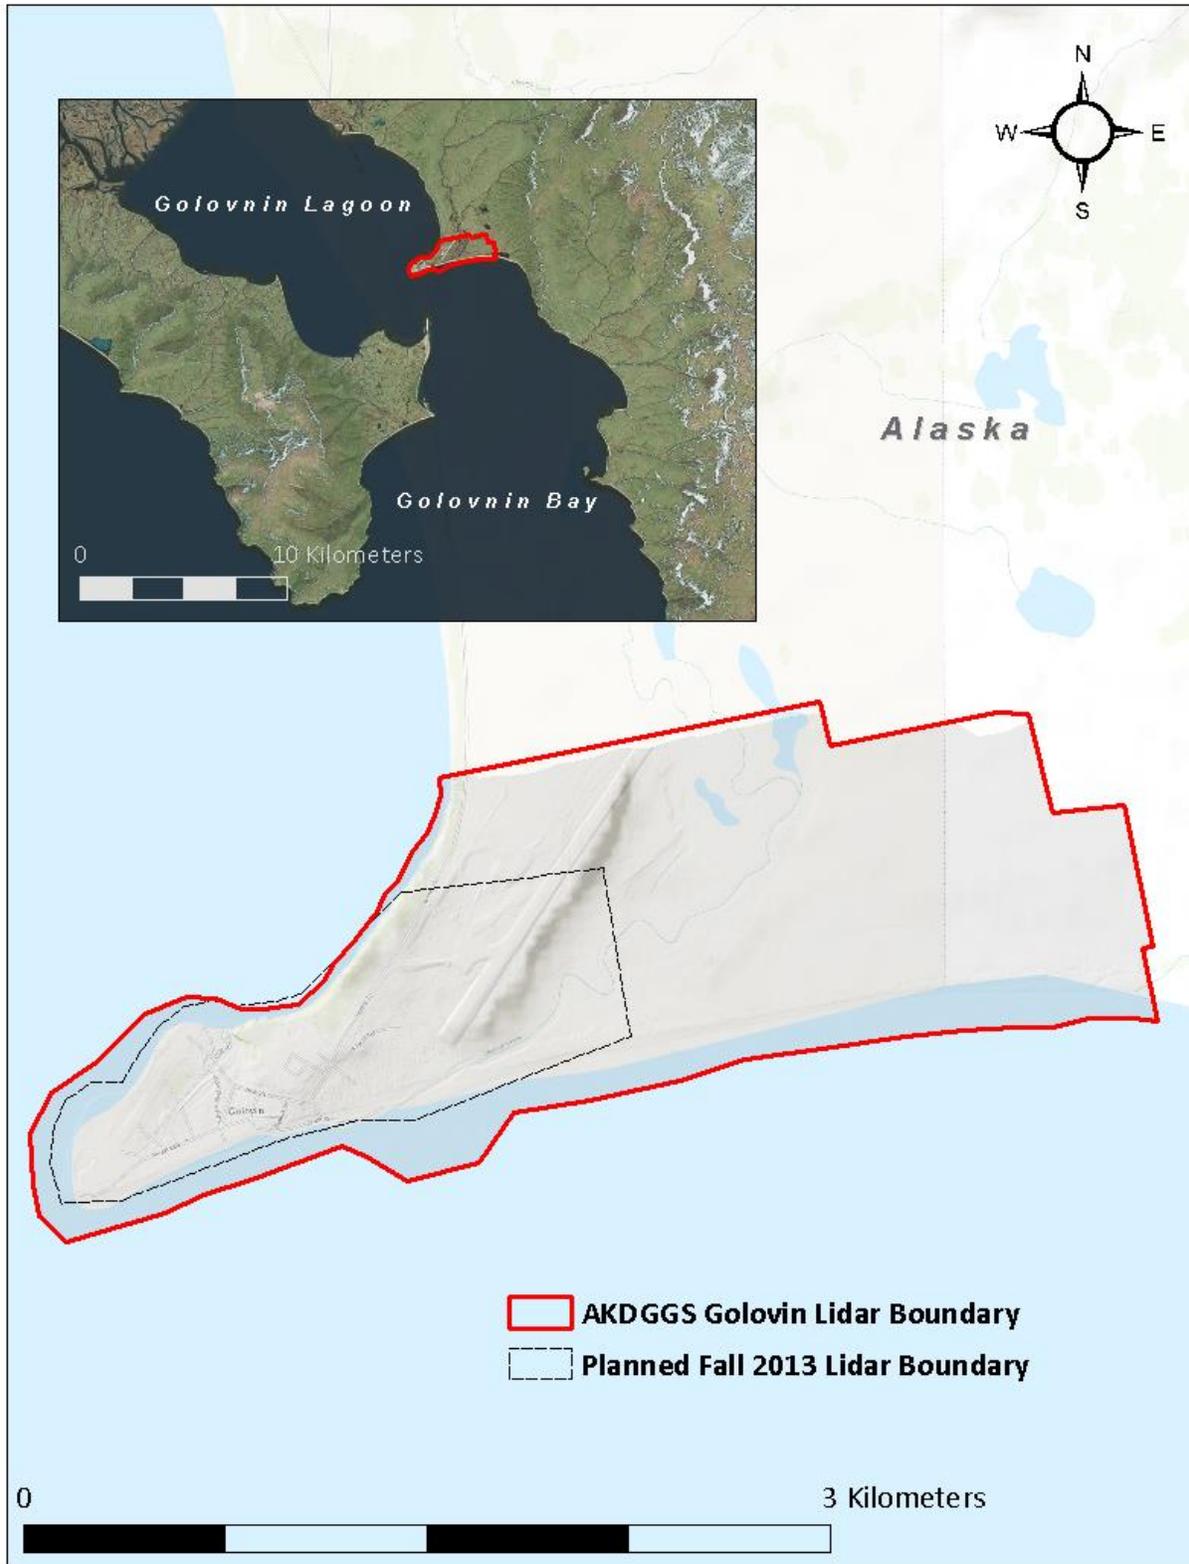


Figure 1: Location map of the Golovin site in Alaska

QSI's Piper Navajo that was used in lidar acquisition of the Golovin, Alaska project.



Planning

In preparation for data collection, the project area was reviewed and a specialized flight plan was developed to ensure complete coverage of the Golovin lidar study area at the target point density of ≥ 4.0 points/m² (0.37 points/ft²). Acquisition parameters including orientation relative to terrain, flight altitude, pulse rate, scan angle, and ground speed were adapted to optimize flight paths and flight times while meeting all contract specifications.

Factors such as satellite constellation availability and weather windows must be considered during the planning stage. Any weather hazards or conditions affecting the flight were continuously monitored due to their potential impact on the daily success of airborne and ground operations. In addition, logistical considerations including private property access and potential air space restrictions were reviewed.

Ground Control

Ground control points were provided to QSI by the Alaska Division of Geological and Geophysical Surveys (AKDGGs) and were used to geospatially correct the aircraft positional coordinate data and to perform quality assurance checks on final Lidar data. In total, 17 ground control points were provided, however, 2 outlier points were excluded from the final control dataset.

Airborne Lidar Survey

The Lidar survey was accomplished using an Optech Gemini system mounted in Piper Navajo. Table 3 summarizes the settings used to yield an average pulse density of ≥ 4 pulses/m² over the Golovin project area. The Optech laser system records up to four range measurements (returns) per pulse. It is not uncommon for some types of surfaces (e.g., dense vegetation or water) to return fewer pulses to the Lidar sensor than the laser originally emitted. The discrepancy between first return and overall delivered density will vary depending on terrain, land cover, and the prevalence of water bodies. All discernible laser returns were processed for the output dataset.

Table 3: Lidar specifications and survey settings

Lidar Survey Settings & Specifications	
Acquisition Dates	November 5, 2013
Aircraft Used	Piper Navajo
Sensor	Optech Gemini
Survey Altitude (AGL)	800 m
Target Pulse Rate	70 kHz
Pulse Mode	Single Pulse in Air (SPiA)
Laser Pulse Diameter	26 cm
Field of View	40°
GPS Baselines	≤ 13 nm
GPS PDOP	≤ 3.0
GPS Satellite Constellation	≥ 6
Maximum Returns	4
Intensity	12-bit
Resolution/Density	Average 4 pulses/m ²
Vertical Accuracy	RMSE _z ≤ 35 cm
Horizontal Accuracy	1/5500 x altitude

Optech Gemini Sensor



All areas were surveyed with an opposing flight line side-lap of $\geq 50\%$ ($\geq 100\%$ overlap) in order to reduce laser shadowing and increase surface laser painting. To accurately solve for laser point position (geographic coordinates x, y and z), the positional coordinates of the airborne sensor and the attitude of the aircraft were recorded continuously throughout the Lidar data collection mission. Position of the aircraft was measured twice per second (2 Hz) by an onboard differential GPS unit, and aircraft attitude was measured 200 times per second (200 Hz) as pitch, roll and yaw (heading) from an onboard inertial measurement unit (IMU). To allow for post-processing correction and calibration, aircraft and sensor position and attitude data are indexed by GPS time.

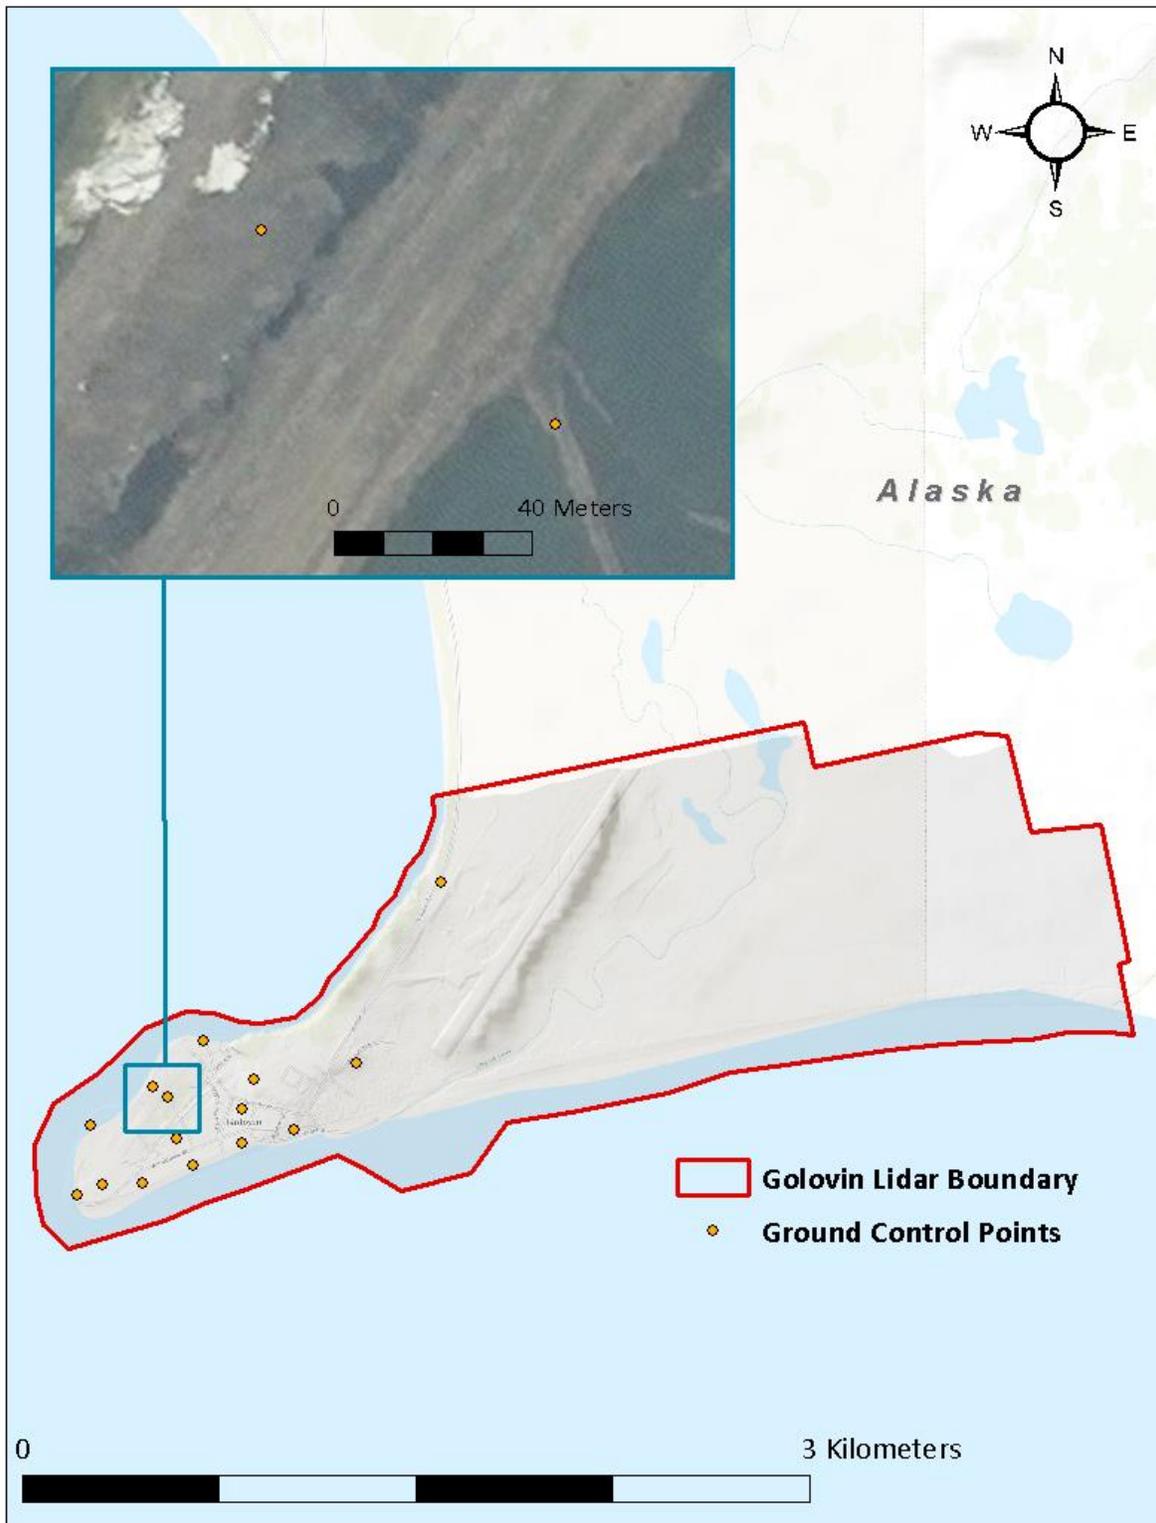


Figure 2: Ground Control location map

Default ■
Ground ■



View of a building and vehicle in Golovin, Alaska. The image was created from a 3 meter cross section and the lidar points are colored by class.

Lidar Data


QSI processing staff initiated a suite of automated and manual techniques to process the data into the requested deliverables. Processing tasks included GPS control computations, smoothed best estimate trajectory (SBET) calculations, kinematic corrections, calculation of laser point position, sensor and data calibration for optimal relative and absolute accuracy, and LiDAR point classification (Table 4). Processing methodologies were tailored for the landscape. Brief descriptions of these tasks are shown in Table 4.

Table 4: ASPRS LAS classification standards applied to the Golovin dataset

Classification Number	Classification Name	Classification Description
1	Default/ Unclassified	Laser returns that are not included in the ground class, composed of vegetation and man-made structures
2	Ground	Laser returns that are determined to be ground using automated and manual cleaning algorithms

Table 5: Lidar processing workflow

Lidar Processing Step	Software Used
Resolve kinematic corrections for aircraft position data using kinematic aircraft GPS and static ground GPS data.	Waypoint GPS v.8.3 Global Mapper v.13.0
Develop a smoothed best estimate of trajectory (SBET) file that blends post-processed aircraft position with attitude data. Sensor head position and attitude are calculated throughout the survey. A satellite-only solution using precise point positioning (PPP) techniques refined onboard measurements of the aircraft position. The SBET data are used extensively for laser point processing.	IPAS Pro 2.01.02 TerraPos 2.2.1
Calculate laser point position by associating SBET position to each laser point return time, scan angle, intensity, etc. Create raw laser point cloud data for the entire survey in *.las (ASPRS v. 1.2) format. Data are converted to orthometric elevations (NAVD88) by applying a Geoid12 correction.	Optech LMS 2.0
Import raw laser points into manageable blocks (less than 500 MB) to perform manual relative accuracy calibration and filter erroneous points. Ground points are then classified for individual flight lines (to be used for relative accuracy testing and calibration).	TerraScan v.13.008
Using ground classified points per each flight line, the relative accuracy is tested. Automated line-to-line calibrations are then performed for system attitude parameters (pitch, roll, heading), mirror flex (scale) and GPS/IMU drift. Calibrations are calculated on ground classified points from paired flight lines and results are applied to all points in a flight line. Every flight line is used for relative accuracy calibration.	TerraMatch v.13.002
Classify resulting data to ground and other client designated ASPRS classifications (Table 4). Assess statistical absolute accuracy via direct comparisons of ground classified points to ground control data.	TerraScan v.13.008 TerraModeler v.13.002

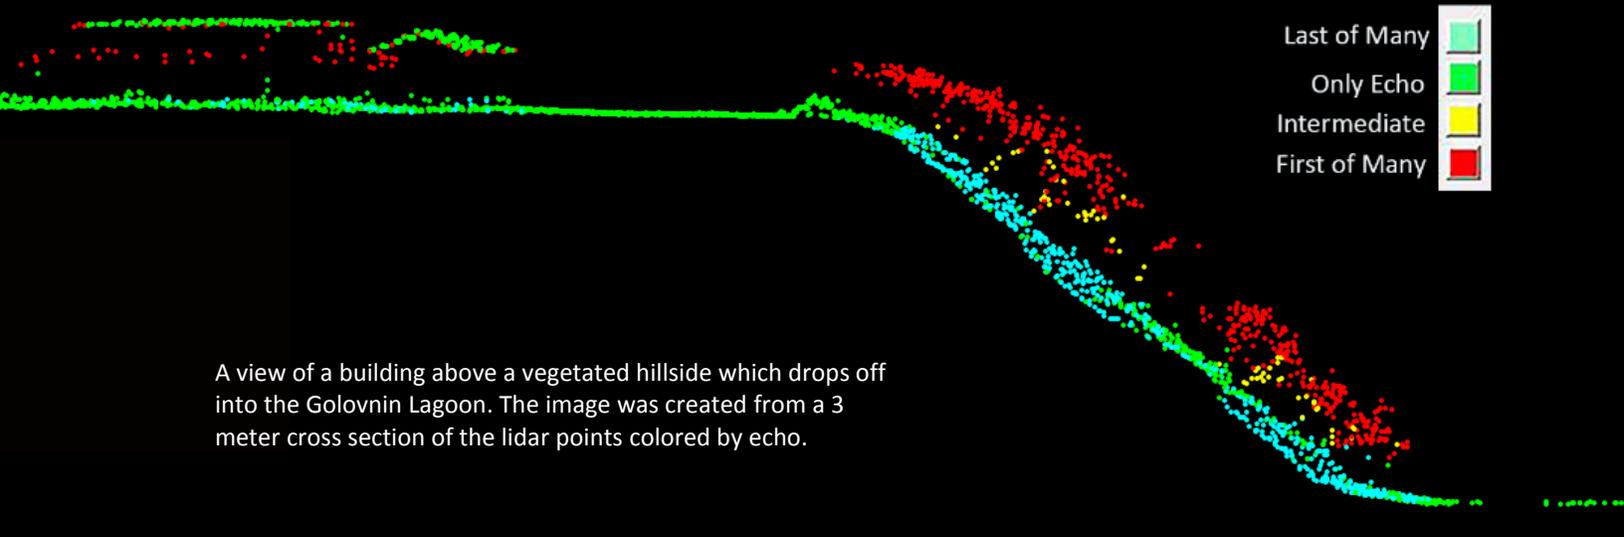

Lidar Density

The acquisition parameters were designed to acquire an average first-return density of 4 points/m² (0.37 points/ft²). First return density describes the density of pulses emitted from the laser that return at least one echo to the system. Multiple returns from a single pulse were not considered in first return density analysis. Some types of surfaces (e.g., breaks in terrain, water and steep slopes) may have returned fewer pulses than originally emitted by the laser. First returns typically reflect off the highest feature on the landscape within the footprint of the pulse. In forested or urban areas the highest feature could be a tree, building or power line, while in areas of unobstructed ground, the first return will be the only echo and represents the bare earth surface.

The density of ground-classified lidar returns was also analyzed for this project. Terrain character, land cover, and ground surface reflectivity all influenced the density of ground surface returns. In vegetated areas, fewer pulses may penetrate the canopy, resulting in lower ground density.

The average first-return density of lidar data for the Golovin project was 3.61 points/m² while the average ground classified density was 1.77 points/m² (Table 6). Because the fall 2013 dataset was flown with an alternative area of interest (AOI) that is smaller than the current contracted AOI for the Golovin lidar dataset, the resulting first return density is low in some areas, and single flightline coverage can be found (Figure 5). The statistical and spatial distributions of first return densities and classified ground return densities per 100 m x 100 m cell are portrayed in Figure 3 through Figure 5.

Table 6: Average Lidar point densities

Classification	Point Density
First-Return	3.61 points/m ²
Ground Classified	1.77 points/m ²

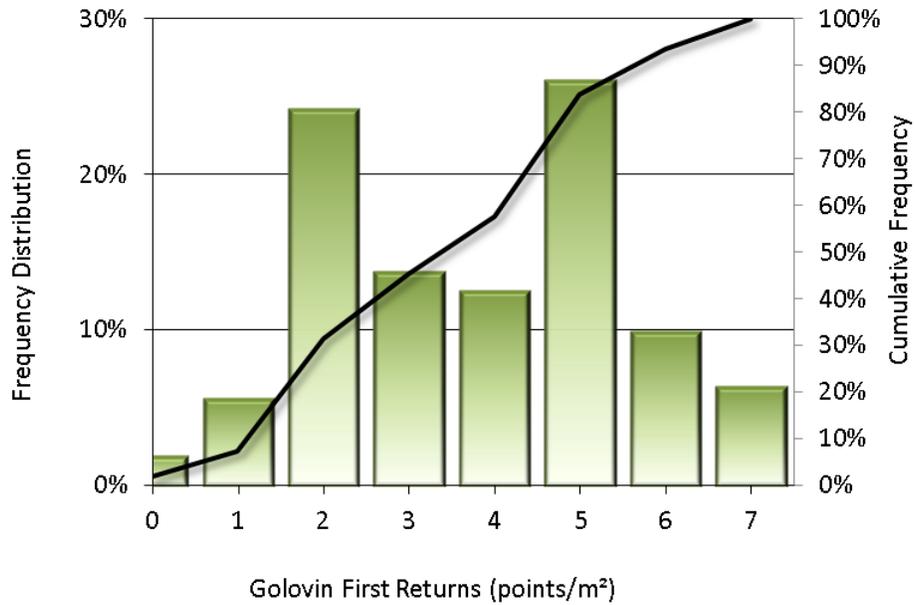


Figure 3: Frequency distribution of first return densities per 100 x 100 m cell

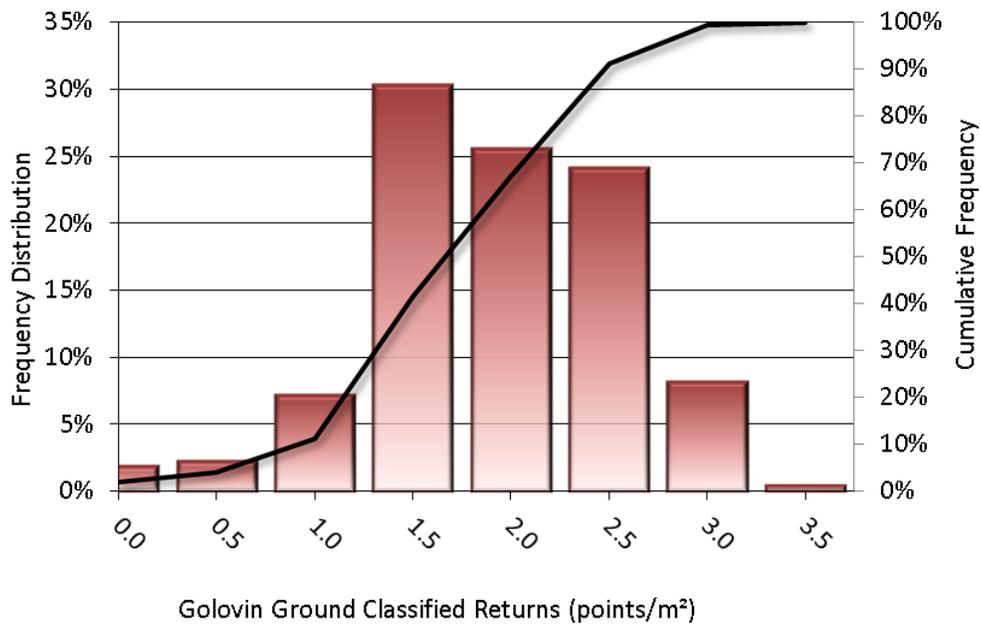


Figure 4: Frequency distribution of ground return densities per 100 x 100 m cell

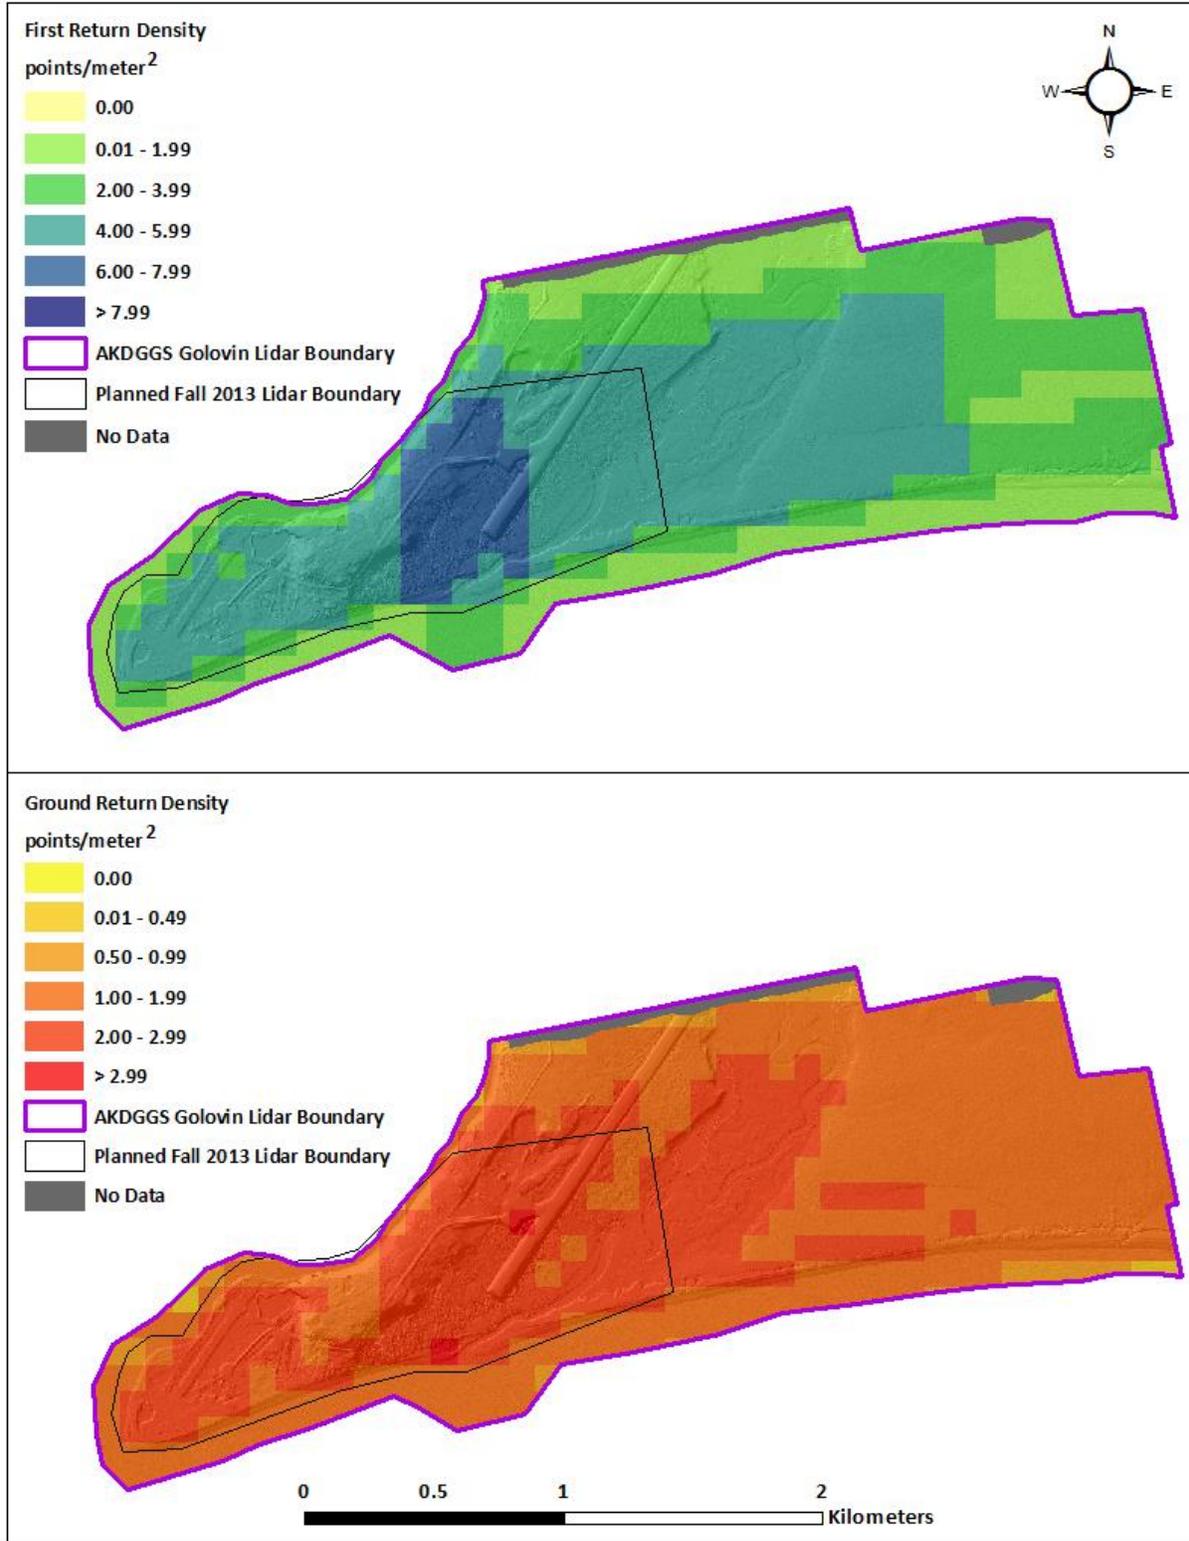


Figure 5: First return and ground density map for the Golovin site (100 m x 100 m cells)

Lidar Accuracy Assessments

The accuracy of the Lidar data collection can be described in terms of absolute accuracy (the consistency of the data with external data sources) and relative accuracy (the consistency of the dataset with itself). See Appendix A for further information on sources of error and operational measures used to improve relative accuracy.

Lidar Absolute Accuracy

The Optech Gemini system has a stated horizontal accuracy of 1/5500 x altitude. The Golovin lidar data was flown at 800m AGL resulting in a horizontal accuracy of 15cm.

Vertical accuracy was assessed using ground control data provided by the AKDGGS. These control points collected on open, bare earth surfaces with level slope (<20°) are compared to the triangulated surface generated by the lidar points. Absolute accuracy is a measure of the accuracy of lidar point data in open areas where the lidar system has a high probability of measuring the ground surface and is evaluated at the 95% confidence interval (1.96 * RMSE), as shown in Table 7.

The mean and standard deviation (σ) of divergence of the ground surface model from ground survey point coordinates are also considered during accuracy assessment. These statistics assume the error for x, y and z is normally distributed, and therefore the skew and kurtosis of distributions are also considered when evaluating error statistics. For the Golovin survey, 15 ground survey points were collected in total resulting in an average accuracy of -0.003 meters (Figure 6).

Table 7: Vertical Accuracy

Absolute Accuracy	
Sample	15 points
1.96*RMSE	0.210 m
Average	-0.003 m
Median	-0.044 m
RMSE	0.107 m
Standard Deviation (1 σ)	0.111 m

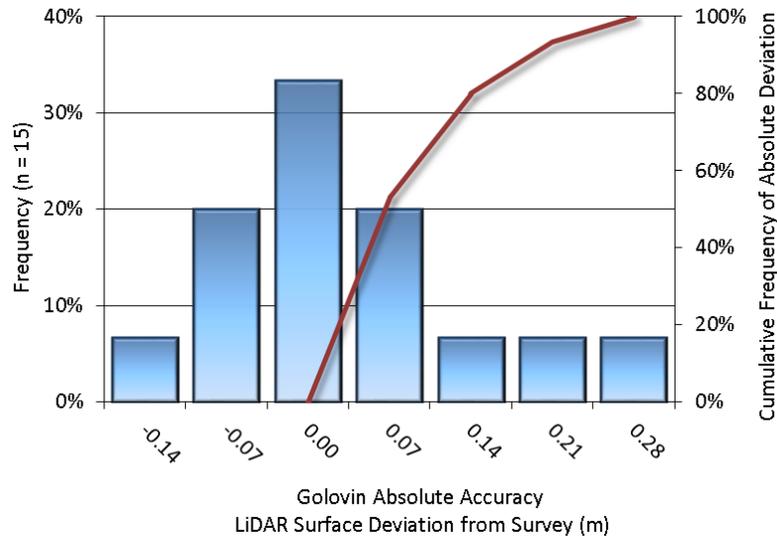


Figure 6: Frequency histogram for lidar surface deviation from client provided ground survey point values

Lidar Relative Vertical Accuracy

Relative vertical accuracy refers to the internal consistency of the data set as a whole: the ability to place an object in the same location given multiple flight lines, GPS conditions, and aircraft attitudes. When the Lidar system is well calibrated, the swath-to-swath vertical divergence is low (<0.10 meters). The relative vertical accuracy was computed by comparing the ground surface model of each individual flight line with its neighbors in overlapping regions. The average (mean) line to line relative vertical accuracy for the Golovin lidar project was 0.035 meters (Table 8, Figure 7).

Table 8: Relative accuracy

Relative Accuracy	
Sample	8 surfaces
Average	0.035 m
Median	0.035 m
RMSE	0.035 m
Standard Deviation (1σ)	0.002 m
1.96σ	0.003 m

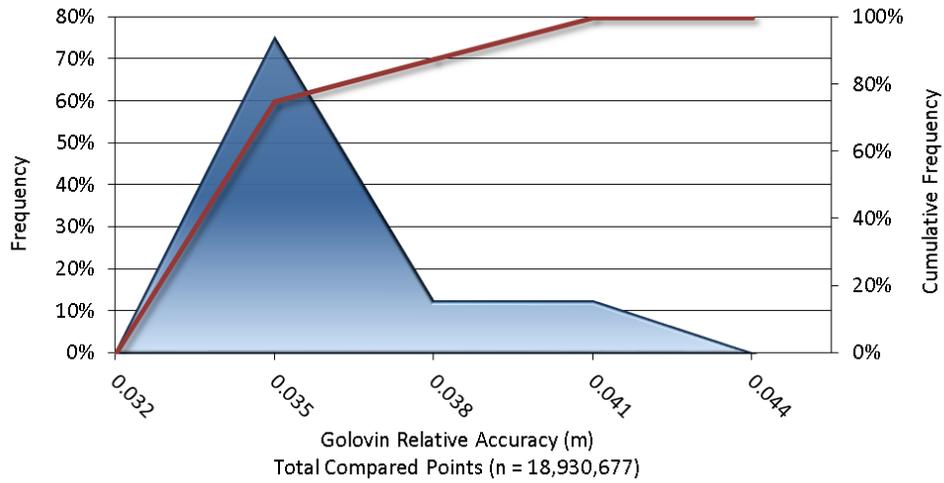


Figure 7: Frequency plot for relative vertical accuracy between flight lines

SELECTED IMAGES

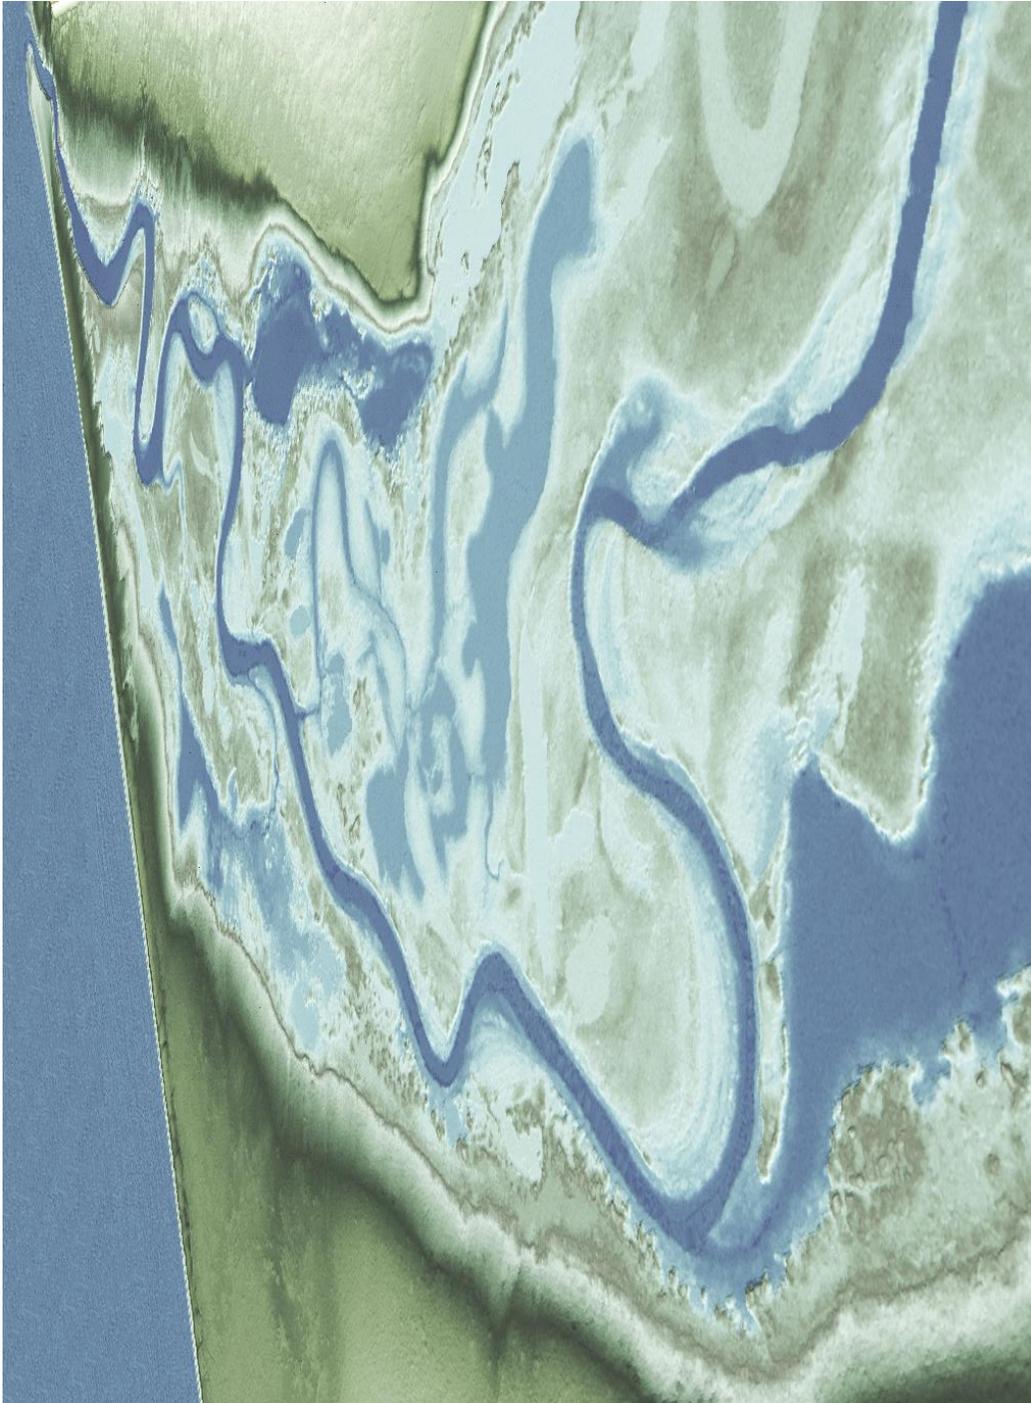


Figure 8: A view of Cheenik Creek looking South toward Golovin Bay. The image was created from gridded lidar surface colored by elevation.

1-sigma (σ) Absolute Deviation: Value for which the data are within one standard deviation (approximately 68th percentile) of a normally distributed data set.

1.96 * RMSE Absolute Deviation: Value for which the data are within two standard deviations (approximately 95th percentile) of a normally distributed data set, based on the FGDC standards for Fundamental Vertical Accuracy (FVA) reporting.

Accuracy: The statistical comparison between known (surveyed) points and laser points. Typically measured as the standard deviation (σ) and root mean square error (RMSE).

Absolute Accuracy: The vertical accuracy of LiDAR data is described as the mean and standard deviation (σ) of divergence of lidar point coordinates from ground survey point coordinates. To provide a sense of the model predictive power of the dataset, the root mean square error (RMSE) for vertical accuracy is also provided. These statistics assume the error distributions for x, y and z are normally distributed, and thus we also consider the skew and kurtosis of distributions when evaluating error statistics.

Relative Accuracy: Relative accuracy refers to the internal consistency of the data set; i.e., the ability to place a laser point in the same location over multiple flight lines, GPS conditions and aircraft attitudes. Affected by system attitude offsets, scale and GPS/IMU drift, internal consistency is measured as the divergence between points from different flight lines within an overlapping area. Divergence is most apparent when flight lines are opposing. When the lidar system is well calibrated, the line-to-line divergence is low (<10 cm).

Root Mean Square Error (RMSE): A statistic used to approximate the difference between real-world points and the lidar points. It is calculated by squaring all the values, then taking the average of the squares and taking the square root of the average.

Data Density: A common measure of lidar resolution, measured as points per square meter.

Digital Elevation Model (DEM): File or database made from surveyed points, containing elevation points over a contiguous area. Digital terrain models (DTM) and digital surface models (DSM) are types of DEMs. DTMs consist solely of the bare earth surface (ground points), while DSMs include information about all surfaces, including vegetation and man-made structures.

Intensity Values: The peak power ratio of the laser return to the emitted laser, calculated as a function of surface reflectivity.

Nadir: A single point or locus of points on the surface of the earth directly below a sensor as it progresses along its flight line.

Overlap: The area shared between flight lines, typically measured in percent. 100% overlap is essential to ensure complete coverage and reduce laser shadows.

Pulse Rate (PR): The rate at which laser pulses are emitted from the sensor; typically measured in thousands of pulses per second (kHz).

Pulse Returns: For every laser pulse emitted, the number of wave forms (i.e., echos) reflected back to the sensor. Portions of the wave form that return first are the highest element in multi-tiered surfaces such as vegetation. Portions of the wave form that return last are the lowest element in multi-tiered surfaces.

Real-Time Kinematic (RTK) Survey: A type of surveying conducted with a GPS base station deployed over a known monument with a radio connection to a GPS rover. Both the base station and rover receive differential GPS data and the baseline correction is solved between the two. This type of ground survey is accurate to 1.5 cm or less.

Post-Processed Kinematic (PPK) Survey: GPS surveying is conducted with a GPS rover collecting concurrently with a GPS base station set up over a known monument. Differential corrections and precisions for the GNSS baselines are computed and applied after the fact during processing. This type of ground survey is accurate to 1.5 cm or less.

Scan Angle: The angle from nadir to the edge of the scan, measured in degrees. Laser point accuracy typically decreases as scan angles increase.

Native Lidar Density: The number of pulses emitted by the lidar system, commonly expressed as pulses per square meter.

APPENDIX A - ACCURACY CONTROLS

Relative Accuracy Calibration Methodology:

Manual System Calibration: Calibration procedures for each mission require solving geometric relationships that relate measured swath-to-swath deviations to misalignments of system attitude parameters. Corrected scale, pitch, roll and heading offsets were calculated and applied to resolve misalignments. The raw divergence between lines was computed after the manual calibration was completed and reported for each survey area.

Automated Attitude Calibration: All data were tested and calibrated using TerraMatch automated sampling routines. Ground points were classified for each individual flight line and used for line-to-line testing. System misalignment offsets (pitch, roll and heading) and scale were solved for each individual mission and applied to respective mission datasets. The data from each mission were then blended when imported together to form the entire area of interest.

Automated Z Calibration: Ground points per line were used to calculate the vertical divergence between lines caused by vertical GPS drift. Automated Z calibration was the final step employed for relative accuracy calibration.

LiDAR accuracy error sources and solutions:

Type of Error	Source	Post Processing Solution
GPS (Static/Kinematic)	Long Base Lines	None
	Poor Satellite Constellation	None
	Poor Antenna Visibility	Reduce Visibility Mask
Relative Accuracy	Poor System Calibration	Recalibrate IMU and sensor offsets/settings
	Inaccurate System	None
Laser Noise	Poor Laser Timing	None
	Poor Laser Reception	None
	Poor Laser Power	None
	Irregular Laser Shape	None

Operational measures taken to improve relative accuracy:

Low Flight Altitude: Terrain following was employed to maintain a constant above ground level (AGL). Laser horizontal errors are a function of flight altitude above ground (about 1/3000th AGL flight altitude).

Focus Laser Power at narrow beam footprint: A laser return must be received by the system above a power threshold to accurately record a measurement. The strength of the laser return (i.e., intensity) is a function of laser emission power, laser footprint, flight altitude and the reflectivity of the target. While surface reflectivity cannot be controlled, laser power can be increased and low flight altitudes can be maintained.

Reduced Scan Angle: Edge-of-scan data can become inaccurate. The scan angle was reduced to a maximum of $\pm 20^\circ$ from nadir, creating a narrow swath width and greatly reducing laser shadows from trees and buildings.

Quality GPS: Flights took place during optimal GPS conditions (e.g., 6 or more satellites and PDOP [Position Dilution of Precision] less than 3.0). Before each flight, the PDOP was determined for the survey day. During all flight times, a dual frequency DGPS base station recording at 1 second epochs was utilized and a maximum baseline length between the aircraft and the control points was less than 13 nm at all times.

Ground Survey: Ground survey point accuracy (<1.5 cm RMSE) occurs during optimal PDOP ranges and targets a minimal baseline distance of 4 miles between GPS rover and base. Robust statistics are, in part, a function of sample size (n) and distribution. Ground survey points are distributed to the extent possible throughout multiple flight lines and across the survey area.

50% Side-Lap (100% Overlap): Overlapping areas are optimized for relative accuracy testing. Laser shadowing is minimized to help increase target acquisition from multiple scan angles. Ideally, with a 50% side-lap, the nadir portion of one flight line coincides with the swath edge portion of overlapping flight lines. A minimum of 50% side-lap with terrain-followed acquisition prevents data gaps.

Opposing Flight Lines: All overlapping flight lines have opposing directions. Pitch, roll and heading errors are amplified by a factor of two relative to the adjacent flight line(s), making misalignments easier to detect and resolve.