

Division of Geological & Geophysical Surveys

PUBLIC-DATA FILE 99-6

**PORTFOLIO OF AEROMAGNETIC AND RESISTIVITY
MAPS OF PART OF THE FORTYMILE MINING DISTRICT, ALASKA**

SOUTHERN EAGLE & NORTHERN TANACROSS QUADRANGLES

by

Laurel E. Burns

and

Shirley A. Liss

January 1999

THIS REPORT HAS NOT BEEN REVIEWED FOR
TECHNICAL CONTENT (EXCEPT AS NOTED IN TEXT) OR FOR
CONFORMITY TO THE EDITORIAL STANDARDS OF DGGS.

Released by

STATE OF ALASKA
DEPARTMENT OF NATURAL RESOURCES
Division of Geological & Geophysical Surveys
794 University Avenue, Suite 200
Fairbanks, Alaska 99709-3645

PORTFOLIO OF AEROMAGNETIC AND RESISTIVITY MAPS OF PART OF THE FORTY MILE MINING DISTRICT, ALASKA SOUTHERN EAGLE AND NORTHERN TANACROSS QUADRANGLES

In the fall of 1998, the Alaska Division of Geologic and Geophysical Surveys acquired airborne geophysical data over about 1035 square miles in the southern Eagle and northern Tanacross Quadrangles (figure 1). The data acquired were aeromagnetic and resistivity data at several frequencies. The data were released in January 1999. This Public-Data File (PDF) contains generalized information on data acquisition, data interpretation, and publications and data formats available for the survey area. Another report, PDF 99-7, gives a more detailed interpretation of the data and a more complete description of the processing.

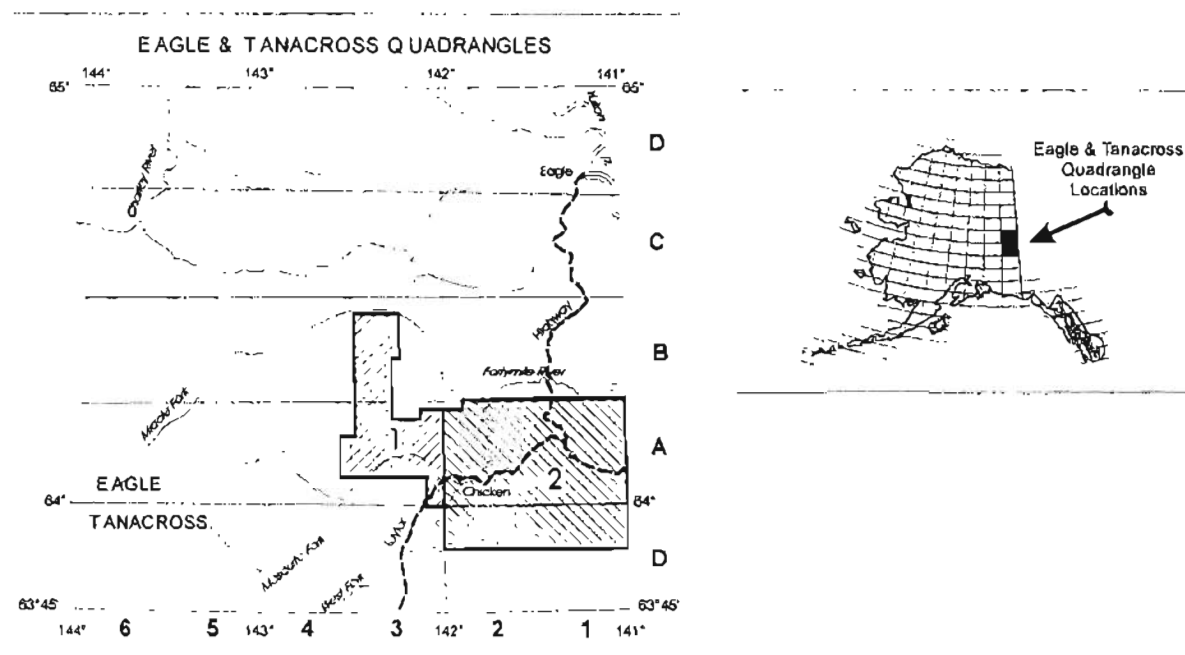


Figure 1. Index map for aeromagnetic and resistivity maps that are available at 1:63,360 scale.

This report also shows some of the data as page-size color maps and black-and-white shadow maps, and includes an acetate overlay of the topography. The acetate topography included as figure 8 in this portfolio should be used only for generalized locations. For accurate locations, the large-scale geophysical maps or the computer files should be used. Clients can request any color map from this portfolio at scale of 1:63,360 (1 inch = 1 mile) from the Alaska Division of Geological & Geophysical Surveys, 794 University Avenue, Suite 200, Fairbanks, Alaska, 99709-3645. Phone: (907) 451-5020. Fax: (907) 451-5050. Other maps showing variations of the data can be made at any scale at the DGGs office for a reasonable fee.

The area surveyed includes parts of the Eagle A-1, A-2, A-3, A-4. and B-3 quadrangles and parts

of the Tanacross D-2 and D-2 quadrangles. Figures 1 and 2 show the map layout for 1:63,360 and 1:31,680.

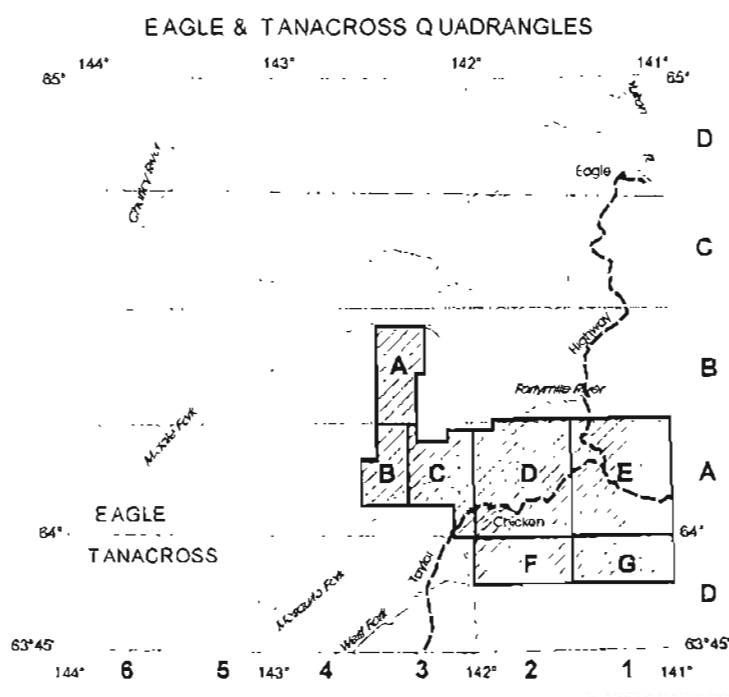


Figure 2. Index map for aeromagnetic maps available at 1:31,680 scale. Only aeromagnetic maps are available at this scale. These contain photographic topography, magnetic contours, and detailed EM anomalies. The detailed EM anomalies are shown as a symbol that denotes signal strength and an interpretation as to the source of the EM anomaly.

Survey history, instrumentation, and data processing

The following indented section describing the instrumentation and processing is from the maps produced by Stevens Exploration Management Corporation and Geotrex-Dighem, the contractor and subcontractor, in conjunction with DGGs.

The airborne geophysical data were compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys, and Stevens Exploration Management Corporation. Airborne geophysical data for the area were acquired in 1998 by Geotrex-Dighem, a division of CGG Canada Ltd.

Geophysical data were acquired with a DIGHEM^V Electromagnetic (EM) system and a Scintrex cesium magnetometer. Both were flown at a height of 100 feet. A Herz VLF system was flown at a height of 130 feet. In addition, the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors, and a video camera. Flights were performed with a AS350B-2 Squirrel helicopter at a mean

terrain clearance of 200 feet along survey flight lines with a spacing of a quarter of a mile. Tie lines were flown perpendicular to the flight lines at intervals of approximately three miles.

An Ashtech/Racal Real-Time Differential Global Positioning System (RT-DGPS) was used for both navigation and flight path recovery. The helicopter position was derived every 0.5 seconds using both real-time differential positioning to a relative accuracy of better than 10 m. Flight path positions were projected onto the Clark 1866 (UTM zone 7) spheroid, 1927 North American datum using a central meridian (CM) of 141 degrees, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

Total Field Magnetism:

The total field magnetic data were acquired with a sampling interval of 0.1 seconds, and were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) leveled to the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF gradient, 1995 updated to September, 1998) was removed from the leveled magnetic data.

Resistivity:

The Dighem[®] EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 900 and 5500 Hz while three horizontal coplanar coil-pairs operated at 900, 7200, and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The power line monitor and the flight track video were examined to locate cultural sources.

Akima, H., 1970. A new method of interpolation and smooth curve fitting based on local procedures: *Journal of the Association of Computing Machinery*, v. 17, no. 4, p. 589-602.

Magnetic data

The magnetometer is a passive instrument that measures the earth's magnetic field in nanoteslas (nT). Rocks with high magnetic susceptibilities (measured in SI units) locally attenuate or dampen these magnetic signals producing the relative highs and lows. Iron-rich magnetic minerals such as magnetite, ilmenite, and pyrrhotite have the highest magnetic susceptibility. These minerals commonly occur in mafic volcanic rocks (such as basalt), mafic and ultramafic plutonic rocks (such as serpentinite, clinopyroxenite, and gabbro), some skarns, and in some other geologic units. Rocks with low to no iron tend to produce little variation in the magnetic signal. These include silicic volcanic rocks (rhyolites), silicic plutonic rocks (granites), and most sedimentary rocks (for example, limestone, sandstone, and shale). Some iron-rich minerals—such as pyrite—are not magnetic and do not produce a magnetic signal.

Different types of ore deposits have different magnetic signatures. A bedrock gold deposit associated with the top of a granitic pluton would likely be an aeromagnetic low whereas a magnetite-bearing gold skarn would be an aeromagnetic high. A gold deposit hosted by a low-angle (thrust) fault has a different signature than one hosted by a high-angle fault.

Figure 3 shows the aeromagnetic data for the survey area. The high values (in nanoteslas) are purple and orange and indicate appreciably magnetic rocks. The low values are the blues and greens. A gradual change in color indicates a gradual change in the magnetic field strength. This can be caused by either a gradual change in magnetic susceptibility of rocks near the surface, the gradual burial of a rock unit of relatively constant magnetic susceptibility, or the introduction of a new unit at depth. Conversely, an abrupt change in color indicates an abrupt change in the magnetic susceptibility. This is caused by juxtaposing two rock units with very different magnetic susceptibilities such as is the case with faults, volcanic dikes, or some mineralized zones. Faults can be inferred on aeromagnetic maps from linear or curvilinear features composed of discontinuous aeromagnetic highs or lows.

Figures 4 and 5 show the aeromagnetic data presented as “shadow” maps. These three-dimensional maps simulate a light source shining on the data. The higher values appear bright like the mountain tops struck by sunlight. The light source can be rotated in a complete circle with 0° (north) clockwise to 180° (south) and back to 360° (north). Shadow maps can enhance structures, such as faults, intrusions, and the trend of stratigraphic layers. Figures 4, 5, and 6 have azimuths that were chosen to show particular features for the survey area.

Resistivity data

The electromagnetic (EM) system is an active instrument that measures the resistivity of the rocks below it by sending out electromagnetic signals at different frequencies and recording the signals that are returned from the earth. The high values (measured in ohm-m) are indicative of resistive (low conductivity) rocks, such as quartzite. Low resistivity (high conductivity) values are present for bedrock conductors (water-saturated clays, graphite, concentrations of certain sulfides, some alteration halos), conductive overburden (water-saturated zones), and cultural sources (e.g. powerlines). The main conductive minerals are graphite, most sulfides, (but not sphalerite), and water-saturated clays. Rocks hydrothermally altered to clay minerals also are conductive. Some faults will show up very well on the resistivity maps, because they either offer a conduit for ground water or they separate rocks with markedly different resistivities.

The EM instrument (bird) contains 5 or more transmitting coils in front and 5 matching (paired) receiver coils in the rear. Three of these pairs are coplanar—the axes of the coils are perpendicular to the long axis of the bird. Two of these pairs are coaxial—the axes of the coils are parallel to the long axis of the bird. These two major geometric configurations, coplanar and coaxial, record different information about the conductivity of the rocks below. Coplanar coils emphasize horizontal and flat lying conductive units. Coaxial coils emphasize vertical to near vertical conductive units.

The EM coplanar coil pairs are processed to produce resistivity maps, shown in figures 7, 8, and 9. For these Hz resistivity maps, the resistivity is generated from the inphase and quadrature component of the coplanar 900, 7200, and 56,000 Hz using the pseudo-layer half space model. Since ground penetration correlates inversely with frequency, the 56,000 Hz reflects near surface rocks and the 900 Hz adds the influence of deeper rocks in general. However, the depth of penetration is variable depending on the resistivity of the rocks the signal is passing through. Although the color bars in these figures differ, each figure has the most conductive rocks shown as purple and orange.

The information derived from the coaxial electromagnetic pairs emphasizes vertically- or near-vertically-dipping "discrete" bedrock conductors. These anomalies are shown generally as circular symbols along flight lines with some of the aeromagnetic maps. The 1 inch = 1 mile scale maps show anomaly symbols denoting strength of the signal, those caused by a concentration of magnetite, and those interpreted to have formed from cultural sources. More detailed interpretations for the electromagnetic anomalies are shown on the aeromagnetic maps produced at the 1:31,680 scale. This information is also available on the CD-ROM. The project report prepared by the Geotrex-Digheem, PDF 99-7, gives a more detailed discussion of these EM anomalies.

Description of selected products

Three maps are in full color, the aeromagnetic data, the 900 Hz coplanar resistivity data, and the 7200 Hz coplanar resistivity data. All three have scanned topography at a scale of 1:63,360 (inch to a mile). The data contours, electromagnetic anomaly symbols, and flight lines are not included in any of these maps. They are all DGGs Reports of Investigation (RI's) and the actual numbers for this survey area are listed at end of this portfolio.

The blue line format for the aeromagnetic data, the 900 Hz coplanar resistivity data, and the 7200 Hz coplanar resistivity data contain data contours and section lines, but do not show topography. An addition, the aeromagnetic maps show simplified electromagnetic anomaly symbols (discussed above) along the flight lines. This aeromagnetic map is also available on diazo.

The flight line maps contain photographically-produced topography, which is clearer than the scanned topography. These other maps are all DGGs Public-Data File reports (PDF's) and are also listed at the end of this portfolio.

The CD-ROM contains profile data, gridded data, and location information. The CD-ROM is useful for someone who would like to view the original processed data or take out different mathematical trends. The zip-disk contains gridded files in Geosoft format. A computer program capable of viewing these files in Geosoft format or converting files to another format is necessary to view the files. If you need assistance, please contact our office. These computer products are also DGGs PDF's and listed at end of this portfolio.

DGGS PUBLICATIONS PRODUCED FOR THE FORTY MILE MINING DISTRICT SURVEY

AEROMAGNETIC MAPS

RI 99-1. Total field magnetics of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Topography included. Full color plot from electronic file, 400 dpi. Made on request.

PDF 99-2. Total field magnetics and electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Blueline. Magnetic contours and section lines included.

PDF 99-3. Total field magnetics and electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Clear diazo film. Magnetic contours and section lines included. Made on request.

PDF 99-10a. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (western part of B-3 Eagle Quadrangle). Blueline.

PDF 99-10b. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (northwestern A-3 and small part of A-4 Eagle Quadrangle). Blueline.

PDF 99-10c. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (most of the eastern A-3 Quadrangle). Blueline.

PDF 99-10d. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (A-2 Eagle Quadrangle). Blueline.

PDF 99-10e. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (A-1 Eagle Quadrangle). Blueline.

PDF 99-10f. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (northern part of D-2 Tanacross Quadrangle). Blueline.

PDF 99-10g. Total field magnetics and detailed electromagnetic anomalies of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 1 sheet, scale 1:31,680 (northern part of D-1 Tanacross Quadrangle). Blueline.

RESISTIVITY MAPS

RI 99-2. 900 Hz coplanar resistivity of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Topography included. Full color plot from electronic file, 400 dpi. Made on request.

RI 99-3. 7200 Hz coplanar resistivity of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Topography included. Full color plot from electronic file, 400 dpi. Made on request.

PDF 99-4. 900 Hz coplanar resistivity of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Blueline. Resistivity contours and section lines included.

PDF 99-5. 7200 Hz coplanar resistivity of part of the Fortymile mining district, Alaska, southern Eagle and northern Tanacross quadrangles, 2 sheets, scale 1:63,360. Blueline. Resistivity contours and section lines included.

DIGITAL FILES, PROJECT REPORTS, PORTFOLIO, FLIGHT LINES AND OTHER

PDF 99-1. Flight lines of part of the Fortymile mining district. Alaska. southern Eagle and northern Tanacross quadrangles, 2 sheets. scale 1:63,360. Blueline. Topography included.

PDF 99-6. Portfolio of aeromagnetic and resistivity maps of part of the Fortymile mining district. Alaska. southern Eagle and northern Tanacross quadrangles. Includes color and shadow maps. Maps fit 8½" x 11" sheet.

PDF 99-7. Project report of the 1997 geophysical survey data for of part of the Fortymile mining district. Alaska. southern Eagle and northern Tanacross quadrangles.

PDF 99-8. Zip disk containing gridded files and section lines of 1997 geophysical survey data for part of the Fortymile and Livengood mining districts. Alaska. southern Eagle. northern Tanacross. and central Livengood quadrangles. 1 zip disk.

PDF 99-9. CD-ROM containing profile and gridded data and section lines of 1997 geophysical survey data for part of the Fortymile mining district. Alaska. southern Eagle and northern Tanacross quadrangles. 2 CD-ROMs.

SOME AVAILABLE REFERENCES FOR THE FORTYMILE MINING DISTRICT

Asher, R.R., 1970, Geochemistry and geology, boundary area, Fortymile district, Eagle A-1 Quadrangle, Alaska: Alaska Division of Mines and Geology, Geochemical Report 23, 32 p., scale 1:63,360. 2 sheets.

Averitt, W., and Barker, J. C., 1981, Report of analyses from Mineral resource investigations in central and eastern Alaska: U. S. Bureau of Mines Inventory Report, 148 p.

Bacon, C.R., Foster, H.L., and Smith, J.G., 1990, Rhyolitic calderas of the Yukon-Tanana terrane, east central Alaska: Volcanic remnants of a mid-Cretaceous magmatic arc: *Journal of Geophysical Research*, v. 95, no. B13, p. 21,451-21,461.

Barker, Fred. 1994, Some accreted volcanic rocks of Alaska and their elemental abundances: in Plafker, George, and Berg, Henry C., eds., *The Geology of Alaska: Boulder, Colorado, Geological Society of America, The Geology of North America*, vol. G-1, p. 555-588.

Barker, J. C., 1978, Mineral deposits of the Tanana-Yukon uplands: a summary report: U. S. Bureau of Mines Open-File Report 88-78, 33 p., 7 sheets.

Bundtzen, T.K., 1975, Antimony in Alaska: Alaska Division of Geological & Geophysical Surveys, Miscellaneous Papers 10, v. 24, no. 6, p. 9-10.

Bundtzen, T.K., Eakins, G.R., and Dillon, J.T., 1980, Strategic and selected critical minerals in Alaska, summarized: AK Division of Geological & Geophysical Surveys, Miscellaneous Papers 16, *Mines & Geology Bulletin*, v. 29, no. 1, p. 1-8.

Burand, W.M., 1966, Geochemical investigations of selected areas in the Yukon-Tanana region of Alaska. 1965 and 1966: Alaska Division of Mines and Minerals, Geochemical Report 13, 51 p.

Burleigh, R. E., and Lear, K. G., 1994, Compilation of data for phase I of the Mineral resource evaluation of the Bureau of Land Management Black River and Fortymile River subunits: U. S. Bureau of Mines Open-File Report 48-94, 116 p.

Burns, L.E., Newberry, R.J., and Solie, D.N., 1991, Quartz normative plutonic rocks of interior Alaska and their

- favorability for association with gold: Alaska Division of Geological & Geophysical Surveys. Report of Investigations 91-3. 71 p., scale 1:412,500, 2 sheets.
- Burns, L.E., Solie, D.N., and Newberry, R.J., 1993, Digital files of geochemical analyses of plutonic rocks in east-central interior Alaska: Alaska Division of Geological & Geophysical Surveys, Public-data File 93-44, 1 5 1/4 disk.
- Dover, J.H., 1990, Geology of east-central Alaska: U.S. Geological Survey Open-file Report 90-0289, 91 p., 5 pl., scale 1:250,000.
- Dover, James H., 1994. Geology of part of east-central Alaska: in Plafker, George, and Berg, Henry C., eds., *The Geology of Alaska*: Boulder, Colorado, Geological Society of America, *The Geology of North America*, vol. G-1, p. 153-204, pl. 3, scale 1:2,500,000.
- Eakins, G.R., 1969, Uranium in Alaska: Alaska Division of Mines and Geology, Geologic Report 38, 49 p., scale 1:3,800,000, 1 sheet.
- Eakins, G.R., and Forbes, R.B., 1976, Investigation of Alaska's uranium potential: Alaska Division of Geological & Geophysical Surveys, Special Report 12, 372 p., scale 1:1,000,000, 5 sheets.
- Eakins, G.R., Jones, B.K., and Forbes, R.B., 1977, Investigation of Alaska's uranium potential: Alaska Division of Geological and Geophysical Surveys, Alaska Open-File Report 109, 213 p., scale 1:40,000, 10 sheets.
- Foley, J. Y., and Barker, J. C., 1981, Tungsten investigations near VABM Bend, eastern Alaska: U. S. Bureau of Mines Open-File Report 29-81, 24 p.
- Foley, J.Y., Burns, L.E., Schneider, C.L., and Forbes, R.B., 1989, Preliminary report of platinum group element occurrences in Alaska: Alaska Division of Geological & Geophysical Surveys, Public-data File 89-20, 33 p., scale 1:2,500,000, 1 sheet.
- Foster, H. L., 1969, Reconnaissance geology of the Eagle A-1 and A-2 quadrangles, Alaska: U. S. Geological Survey Bulletin 1271-G, p. 1-30, scale 1:63,360.
- Foster, H.L., 1970, Reconnaissance geologic map of the Tanacross quadrangle, Alaska: U. S. Geological Survey. Miscellaneous Geological Investigations Map I-593. 1 pl., scale 1:250,000.
- Foster, H. L., 1976, Geologic map of the Eagle quadrangle, Alaska: U. S. Geological Survey Miscellaneous Investigations Series Map I-922. 1 sheet, scale 1:250,000.
- Foster, H.L., 1992, Geologic map of the eastern Yukon-Tanana region, Alaska: U.S. Geological Survey Open-file Report 92-313, 27 p., 1 pl., scale 1:500,000.
- Foster, H.L., Brabb, E.E., Weber, F.R., and Forbes, R.B., 1970, Regional geology of Yukon-Tanana Upland, Alaska [abs.]: *American Association of Petroleum Geologists Bulletin*, v. 54, no. 12, p. 2481.
- Foster, H.L., Keith, T.E.C., and Menzie, W.D., 1987, Geology of East-Central Alaska: U. S. Geological Survey Open-file Report 87-188, 59 p.
- Foster, H.L., Weber, F.R., Forbes, R.B., and Brabb, E.E., 1973, Regional geology of Yukon-Tanana Upland, Alaska, in *Arctic Geology*: American Association of Petroleum Geologists, Memoir no. 19, p. 388-395.
- Foster, Helen L., Keith, Terry E.C., and Menzie, W. David, 1994, Geology of the Yukon-Tanana area of east-central Alaska: in Plafker, George, and Berg, Henry C., eds., *The Geology of Alaska*: Boulder, Colorado, Geological Society of America, *The Geology of North America*, vol. G-1, p. 205-240.

- Foster, Helen L., Keith, Terry E.C., and Menzie, W. David, 1987. Geology of East-Central Alaska: U. S. Geological Survey. Open-file Report 87-188, 59 p.
- Glover, A.E., 1950. Placer gold fineness: AK Territorial Dept. of Mines, Miscellaneous Reports 195-1, 38 p.
- Liss, S.A., and Wiltse, M.A., 1993. United States Geological Survey: Alaska Mineral Resource Appraisal Program (AMRAP) geochemical data for Tanacross Quadrangle. Alaska: Alaska Division of Geological & Geophysical Surveys. Public-data File 93-39aa, 7 p.
- Luedke, Robert G., and Smith, Robert L., 1986. Map showing distribution, composition, and age of late cenozoic volcanic centers in Alaska: U.S. Geological Survey. Miscellaneous investigations series Map I-1091-F, 3 pl., scale 1:1,000,000.
- Mertie, J. B., Jr., 1931, A geologic reconnaissance of the Dennison Fork district, Alaska: U. S. Geological Survey Bulletin 827, 44 p., 1 sheet, scale 1:250,000.
- Miller, Thomas P., 1994. Pre-Cenozoic plutonic rocks in mainland Alaska: in Plafker, George, and Berg, Henry C., eds., The Geology of Alaska: Boulder, Colorado, Geological Society of America, The Geology of North America, vol. G-1, p. 535-554.
- Newberry, R.J., 1995, An update on skarn deposits of Alaska: Alaska Division of Geological & Geophysical Surveys Public-Data File 95-20, 72 p., 1 disk. Hard copy \$7.20. Disk \$8.
- Newberry, R.J., Burns, L.E., and Solie, D.N., 1990, Gold favorability in the Eagle Quadrangle, Alaska, as predicted by discriminant analysis for non-porphyry granitic rocks: Alaska Division of Geological & Geophysical Surveys, Public-data File 90-16, 18 p., scale 1:63,360, 2 sheets.
- Newberry, R.J., and Solie, D.N. 1995. Data for plutonic rocks and associated gold deposits in Interior Alaska: Alaska Division of Geological & Geophysical Surveys Public-Data File 95-25, 62 p.
- Nye, C.J., 1995, Volcanoes of Alaska: Alaska Division of Geological & Geophysical Surveys Information Circular 38, 1 sheet, scale 1:5,000,000.
- Patton, William W. Jr., Box, Stephen E., and Grybeck, Donald G., 1994. Ophiolites and other mafic-ultramafic complexes in Alaska: in Plafker, George, and Berg, Henry C., eds., The Geology of Alaska: Boulder, Colorado, Geological Society of America, The Geology of North America, vol. G-1, p. 671-686.
- Powers, J.B., 1935, Synopsis and history of early day mining and prospecting on the Fortymile River and its bars and low benches: AK Territorial Dept. of Mines, Miscellaneous Report 60-2, 19 p.
- Robinson, M.S., and Bundtzen, T.K., 1979, Historic gold production in Alaska - a minisummary in Mines and Geology Bulletin, v. 28, no. 3, p 1-4: Alaska Division of Geological & Geophysical Surveys, MP 28, 4 p.
- Robinson, Mark S., 1993. Trace element and major oxide analyses of samples from the Eagle and Tanacross Quadrangles, east central Alaska: Alaska Division of Geological & Geophysical Surveys, Public-data File 93-4, 31 p., 1 sheet, scale 1:250,000.
- Roehm, J.C., 1939, Summary report of miscellaneous investigations in the Fairbanks, Fortymile, Knik and Kenai precincts: AK Territorial Dept. of Mines, Itinerary Reports 195-27, 28 p.
- Roehm, J.C., 1949, Report of investigations and itinerary of J.C. Roehm in the Fortymile Precinct: AK Territorial Dept. of Mines, Itinerary Report 60-1, 9 p.
- Saunders, R.H., 1953, Mining operations in the Fortymile District - 1953: AK Territorial Dept. of Mines, Miscellaneous Report 60-4, 10 p.

- Saunders, R.H., 1955, Notes on the occurrence of cinnabar at Canyon Creek: AK Territorial Dept. of Mines, Mineral Investigations 60-2, 5 p.
- Saunders, R.H., 1955, Report on the Flume Creek lode gold prospect (Alaska Nickel Co.): AK Territorial Dept. of Mines, Properties Examined 60-4, 10 p.
- Saunders, R.H., 1957, Mining operations in the Fortymile District - 1957: AK Territorial Dept. of Mines, Miscellaneous Reports 60-5, 5 p.
- Saunders, R.H., 1957, Report on the scheelite-bearing veins at the Weston Placer Mine, Eagle Quadrangle (Fortymile River): AK Territorial Dept. of Mines, Properties Examined 60-5, 7 p.
- Saunders, R.H., 1957, Report on the La Flamme Copper Prospect (Southfork Lodge and Chicken Creeks): AK Territorial Dept. of Mines, Properties Examined 60-6, 7 p.
- Saunders, R.H., 1958, Report on the examination of a vermiculite prospect in the Fortymile District: AK Territorial Dept. of Mines, Properties Examined 60-7, 12 p.
- Saunders, R.H., 1959, Report on a magnetite occurrence near Boundary (Turk Creek): AK Territorial Dept. of Mines, Properties Examined 60-8, 3 p.
- Saunders, R.H., 1966, A geochemical investigation along the Taylor Highway, eastcentral, Alaska: Alaska Division of Mines and Minerals, Geochemical Report 9, 32 p. Out of print.
- Saunders, R.H., 1967, Mineral occurrences in the Yukon-Tanana Region, Alaska: Alaska Division of Mines and Minerals, Special Report 2, 60 p., scale 1:1,000,000 and 1:100,000, 2 sheets. Out of print.
- Smith, W.H., 1968, Geochemical investigation of a portion of the Fortymile district, Alaska: Alaska Division of Mines and Minerals, Geochemical Report 16, 17 p., scale 1:63,360, 1 sheet.
- Staff, B.O.M. 1995, Final report of the Mineral resource evaluation of the Bureau of Land Management Black River and Fortymile River subunits: U. S. Bureau of Mines Open-File Report 79-95, 30 p.
- Staff, DGGs, 1973, Aeromagnetic map, Tanacross Quadrangle: Alaska Division of Geological & Geophysical Surveys, Alaska Open-File Report 11, 5 p., scale 1:250,000, 1 sheet.
- Staff, DGGs, 1973, Aeromagnetic map, Eagle Quadrangle: Alaska Division of Geological & Geophysical Surveys, Alaska Open-File Report 18, 5 p., scale 1:250,000, 1 sheet.
- Swainbank, R.C., Robinson, M.S., and Clement, R.F., 1992, Map of selected mines, reserves, and resources in Alaska: Alaska Division of Geological & Geophysical Surveys, Public-data File 92-16, 1 plate, scale 1:2,500,000.
- Turner, D.L., Grybeck, D.G., and Wilson, F.H., 1975, Radiometric dates from Alaska: A 1975 compilation: Alaska Division of Geological and Geophysical Surveys, Special Report 10, 64 p.
- Tysdal, A. K., 1980, Uranium/thorium determinations on samples collected from seven quadrangles in eastern Alaska: U. S. Bureau of Mines Inventory Report, 32 p., 7 sheets.
- Williams, J.A., 1950, Mining operations in the Fortymile District: AK Territorial Dept. of Mines, Miscellaneous Reports 60-3, 5 p.
- Williams, J.A., 1951, Active mining operations in the Fortymile District of the Fairbanks Precinct in 1951: AK Territorial Dept. of Mines, Miscellaneous Report 60-3A, 3 p.

- Wiltse, M.A.. 1991. National uranium resource evaluation (NURE) geochemical data for stream and lake sediment samples, Alaska: Alaska Division of Geological & Geophysical Surveys, Public-data File 91-22m, 33 p. of data along with one 5-1/4" diskette.
- Wood, John E.. 1992. Preliminary results of heavy minerals concentrate analysis from selected interior and western Alaska placer mines: Alaska Division of Geological & Geophysical Surveys, Public-data File 92-2, 8 p.
- Yeend, W. E.. 1996, Gold placers of the historical Fortymile River region, Alaska: U. S. Geological Survey Bulletin 2125, 75 p., 1 sheet, scale 1:63,360.

Quadrangles
Eagle
Tanacross

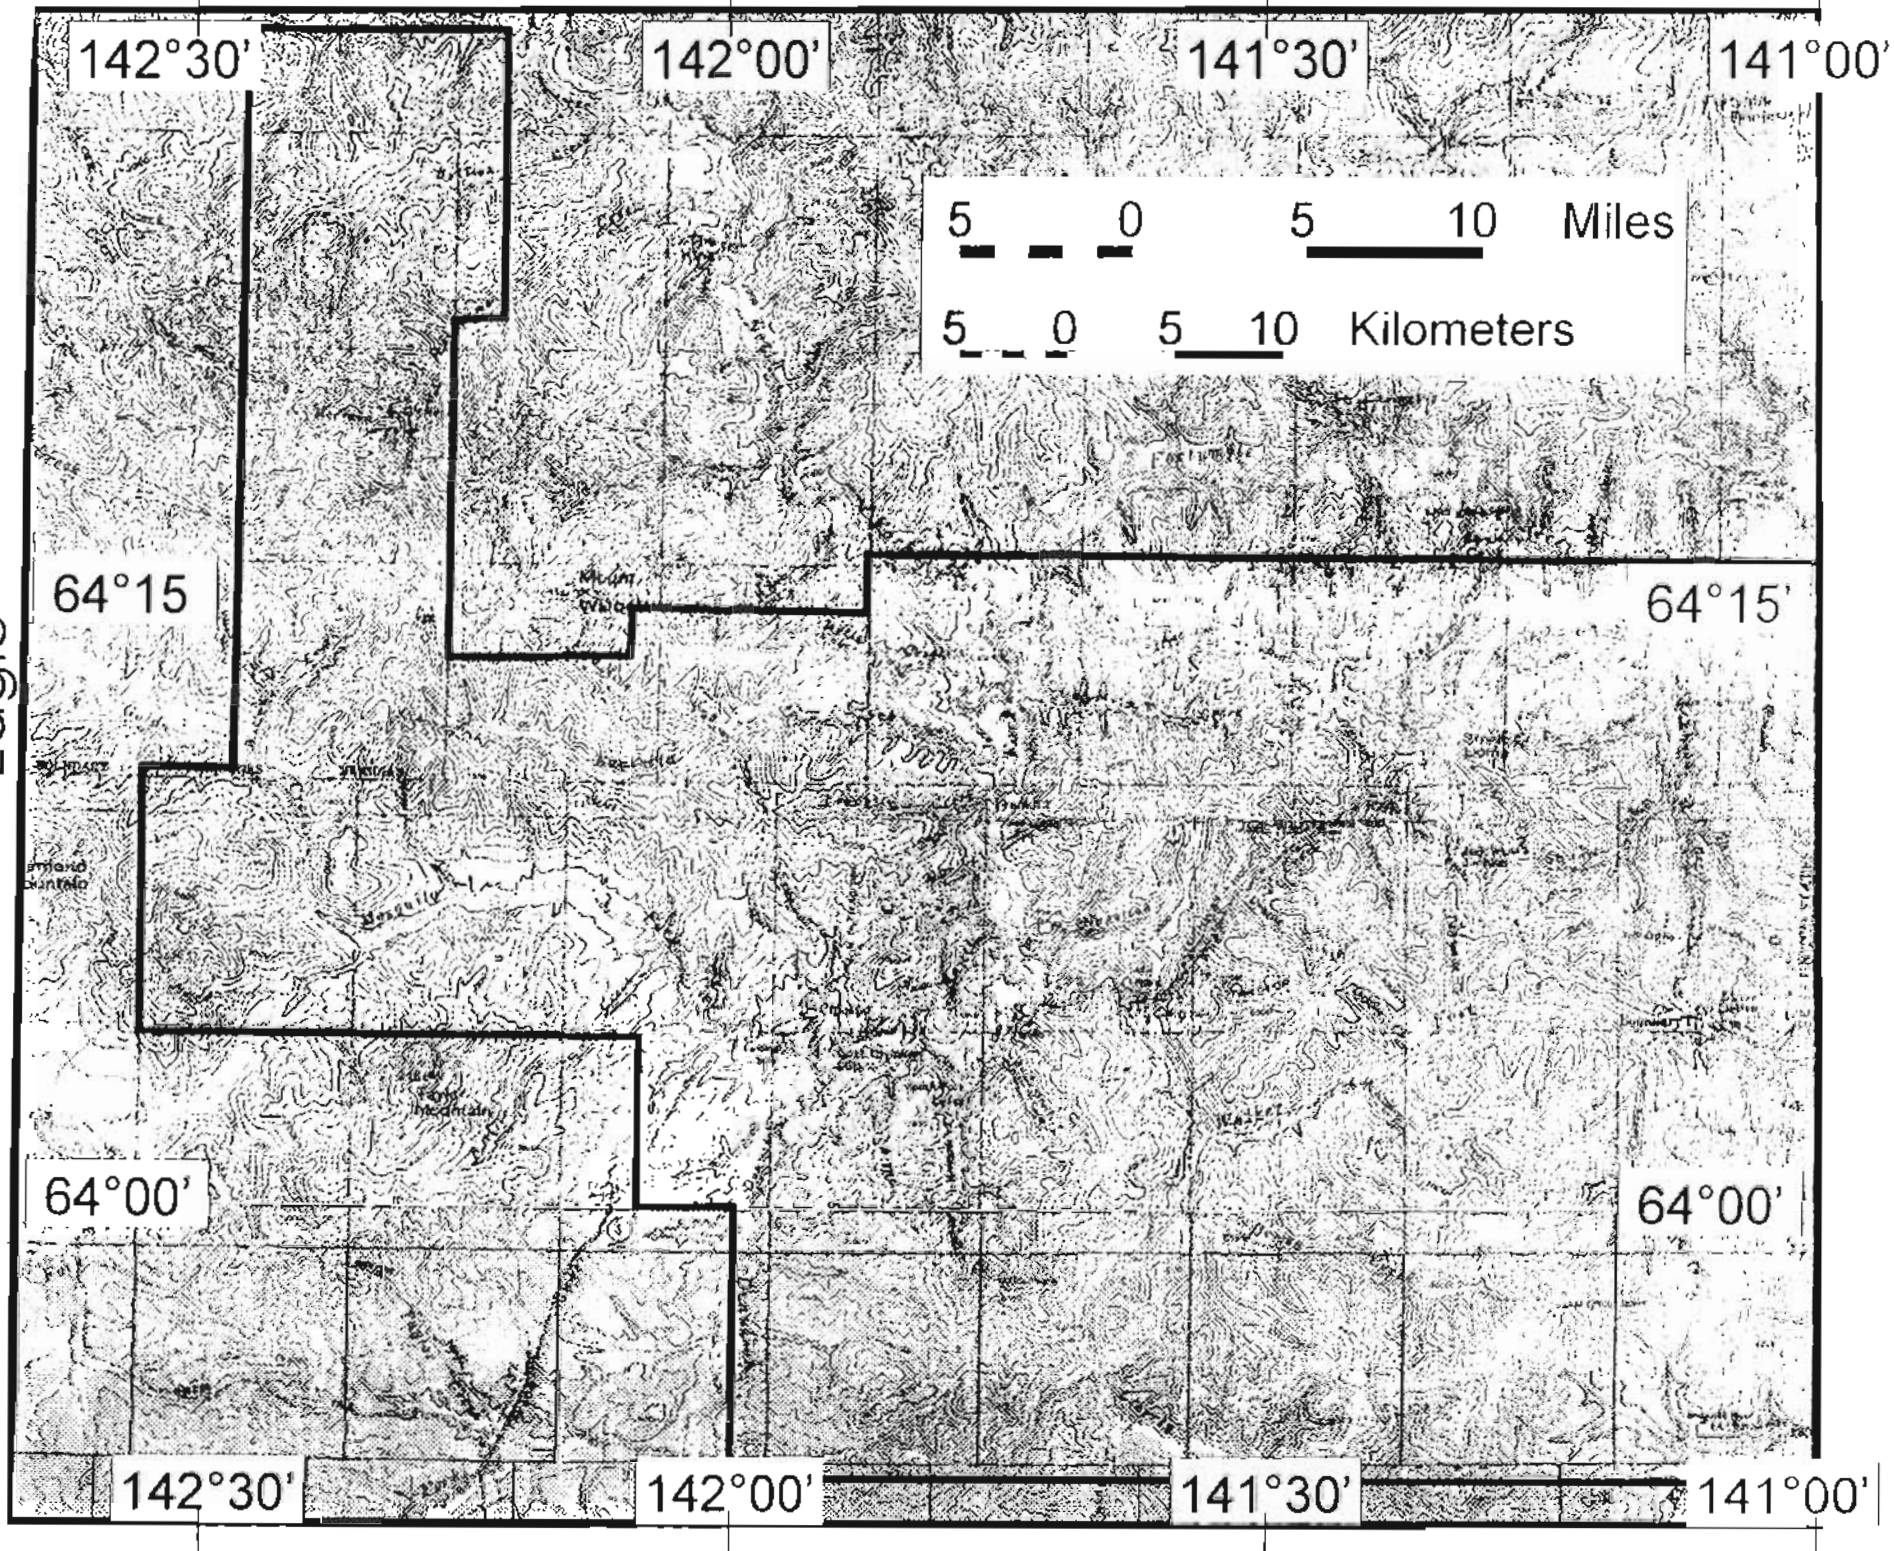




Figure 3: Total field magnetics of the Fortymile area. Magnetic units are in nT.



Figure 4: Shadow map of the aeromagnetic data from the Fortymile area, Alaska. Illumination source is at N 12 E. High magnetic values appear like the tops of mountains that are hit by sunlight.

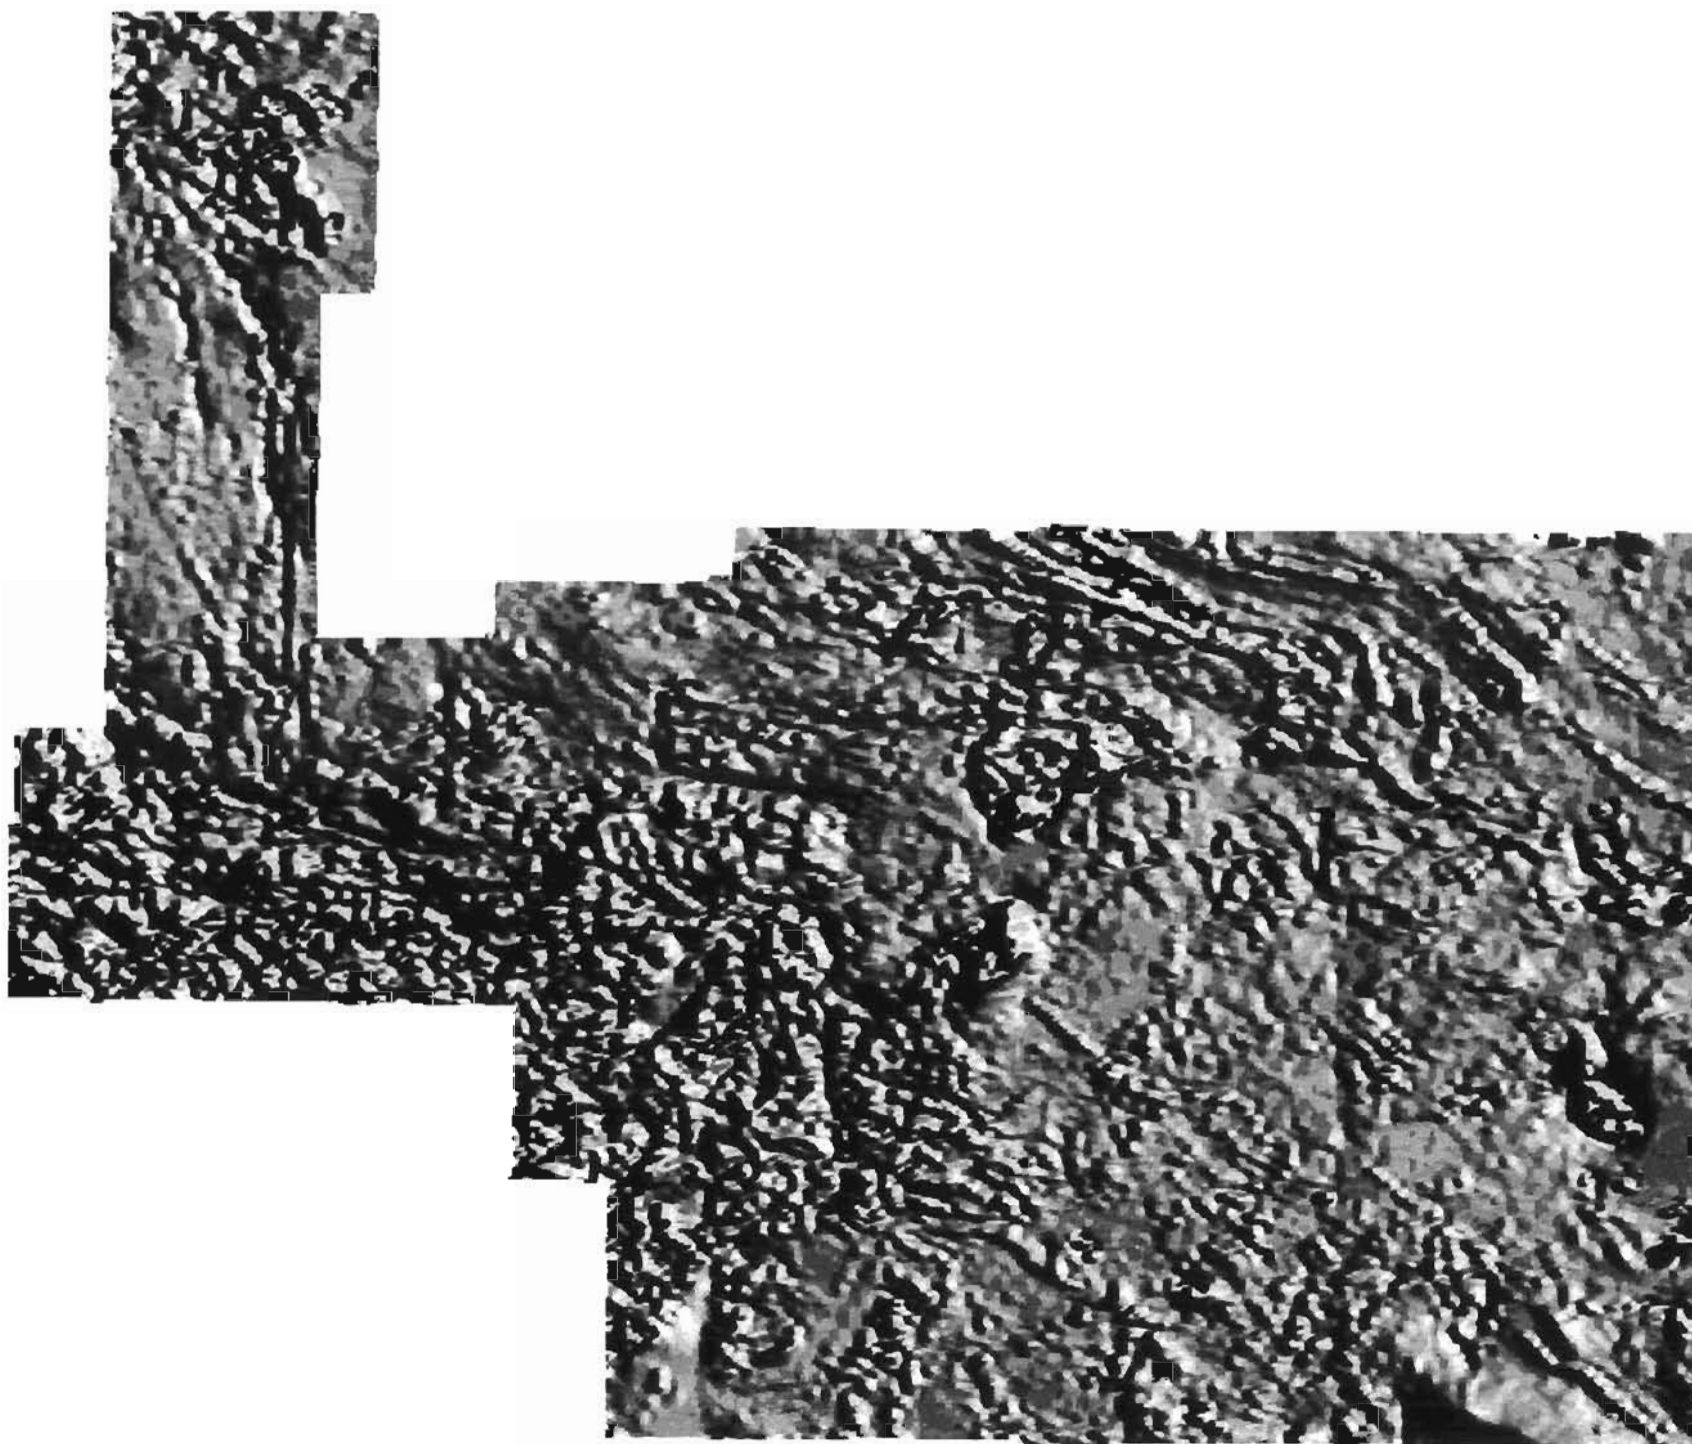


Figure 5: Shadow map of the aeromagnetic data from the Fortymile area, Alaska. Illumination source is at N 69 E. High magnetic values appear like the tops of mountains that are hit by sunlight.



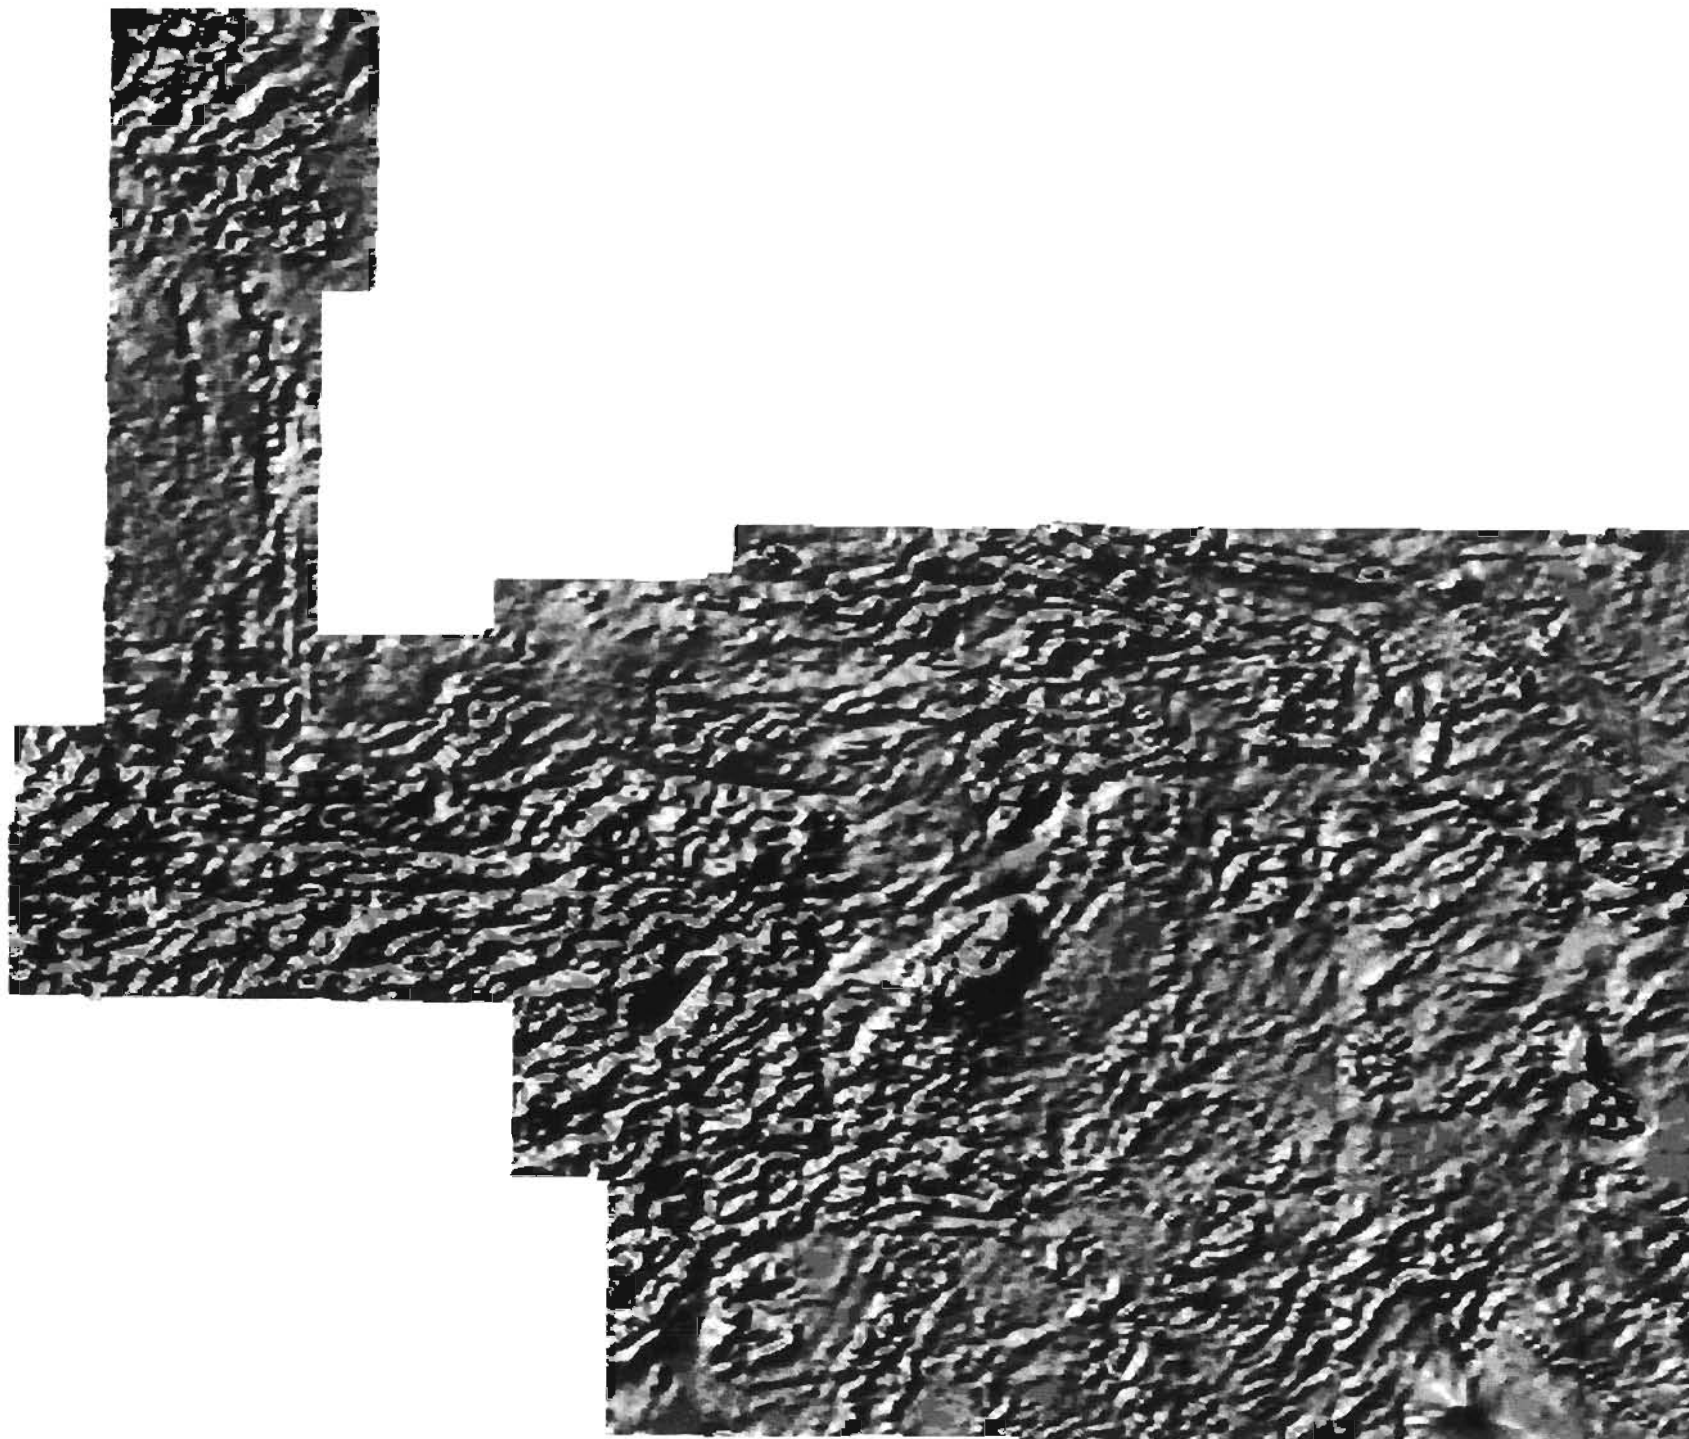


Figure 6: Shadow map of the aeromagnetic data from the Fortymile area, Alaska. Illumination source is at N 48 W. High magnetic values appear like the tops of mountains that are hit by sunlight.

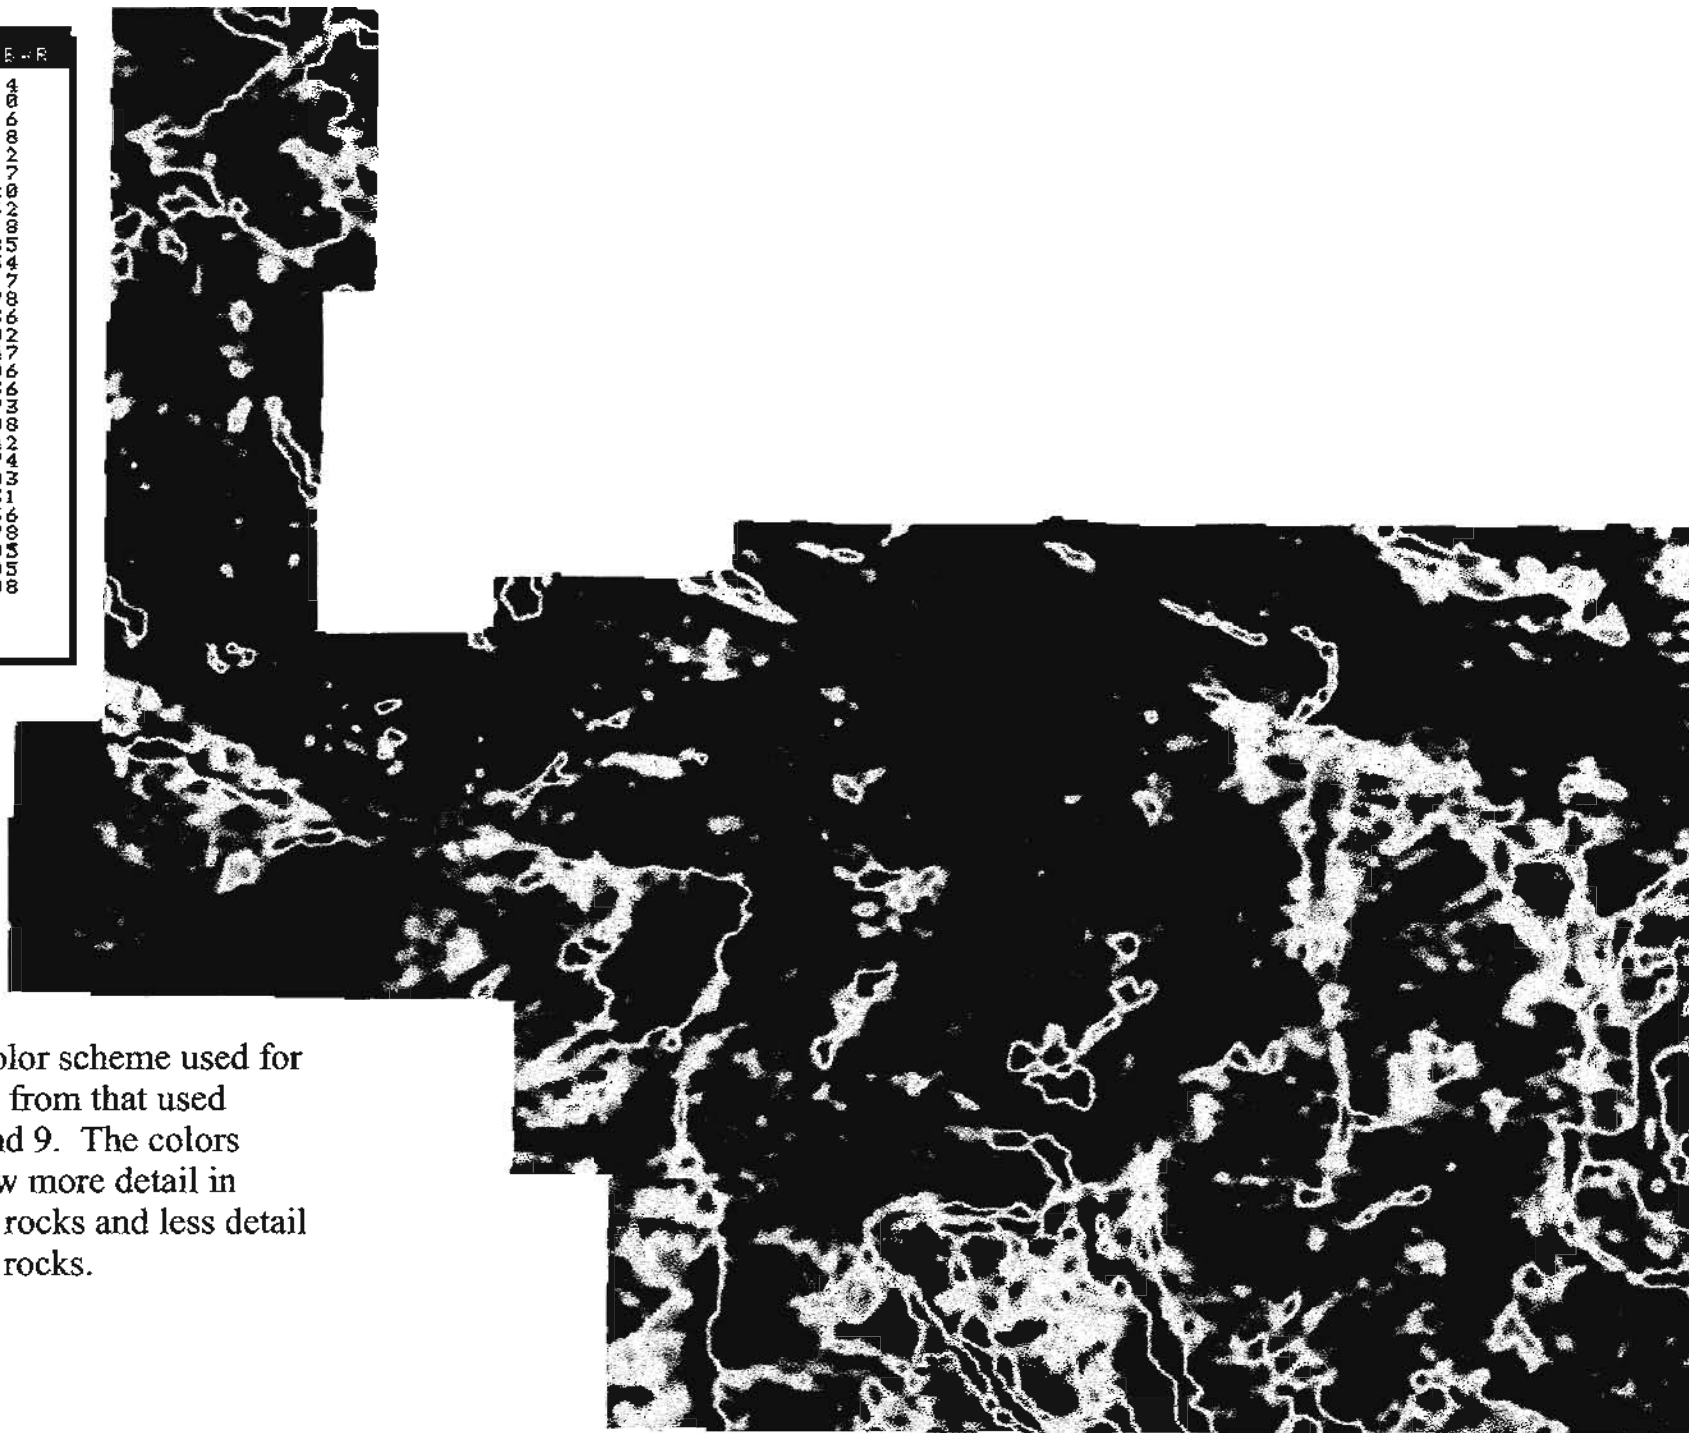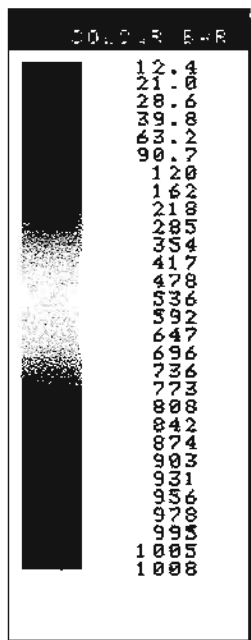

NOTE: The color scheme used for figure 7 differs from that used for figures 8 and 9. The colors on figure 7 show more detail in the conductive rocks and less detail in the resistive rocks.

Figure 7: 900 Hz resistivity map of the Fortymile area. Resistivity values in ohm-m.
Conductive units have low numbers and are shown in purple and orange on this map.

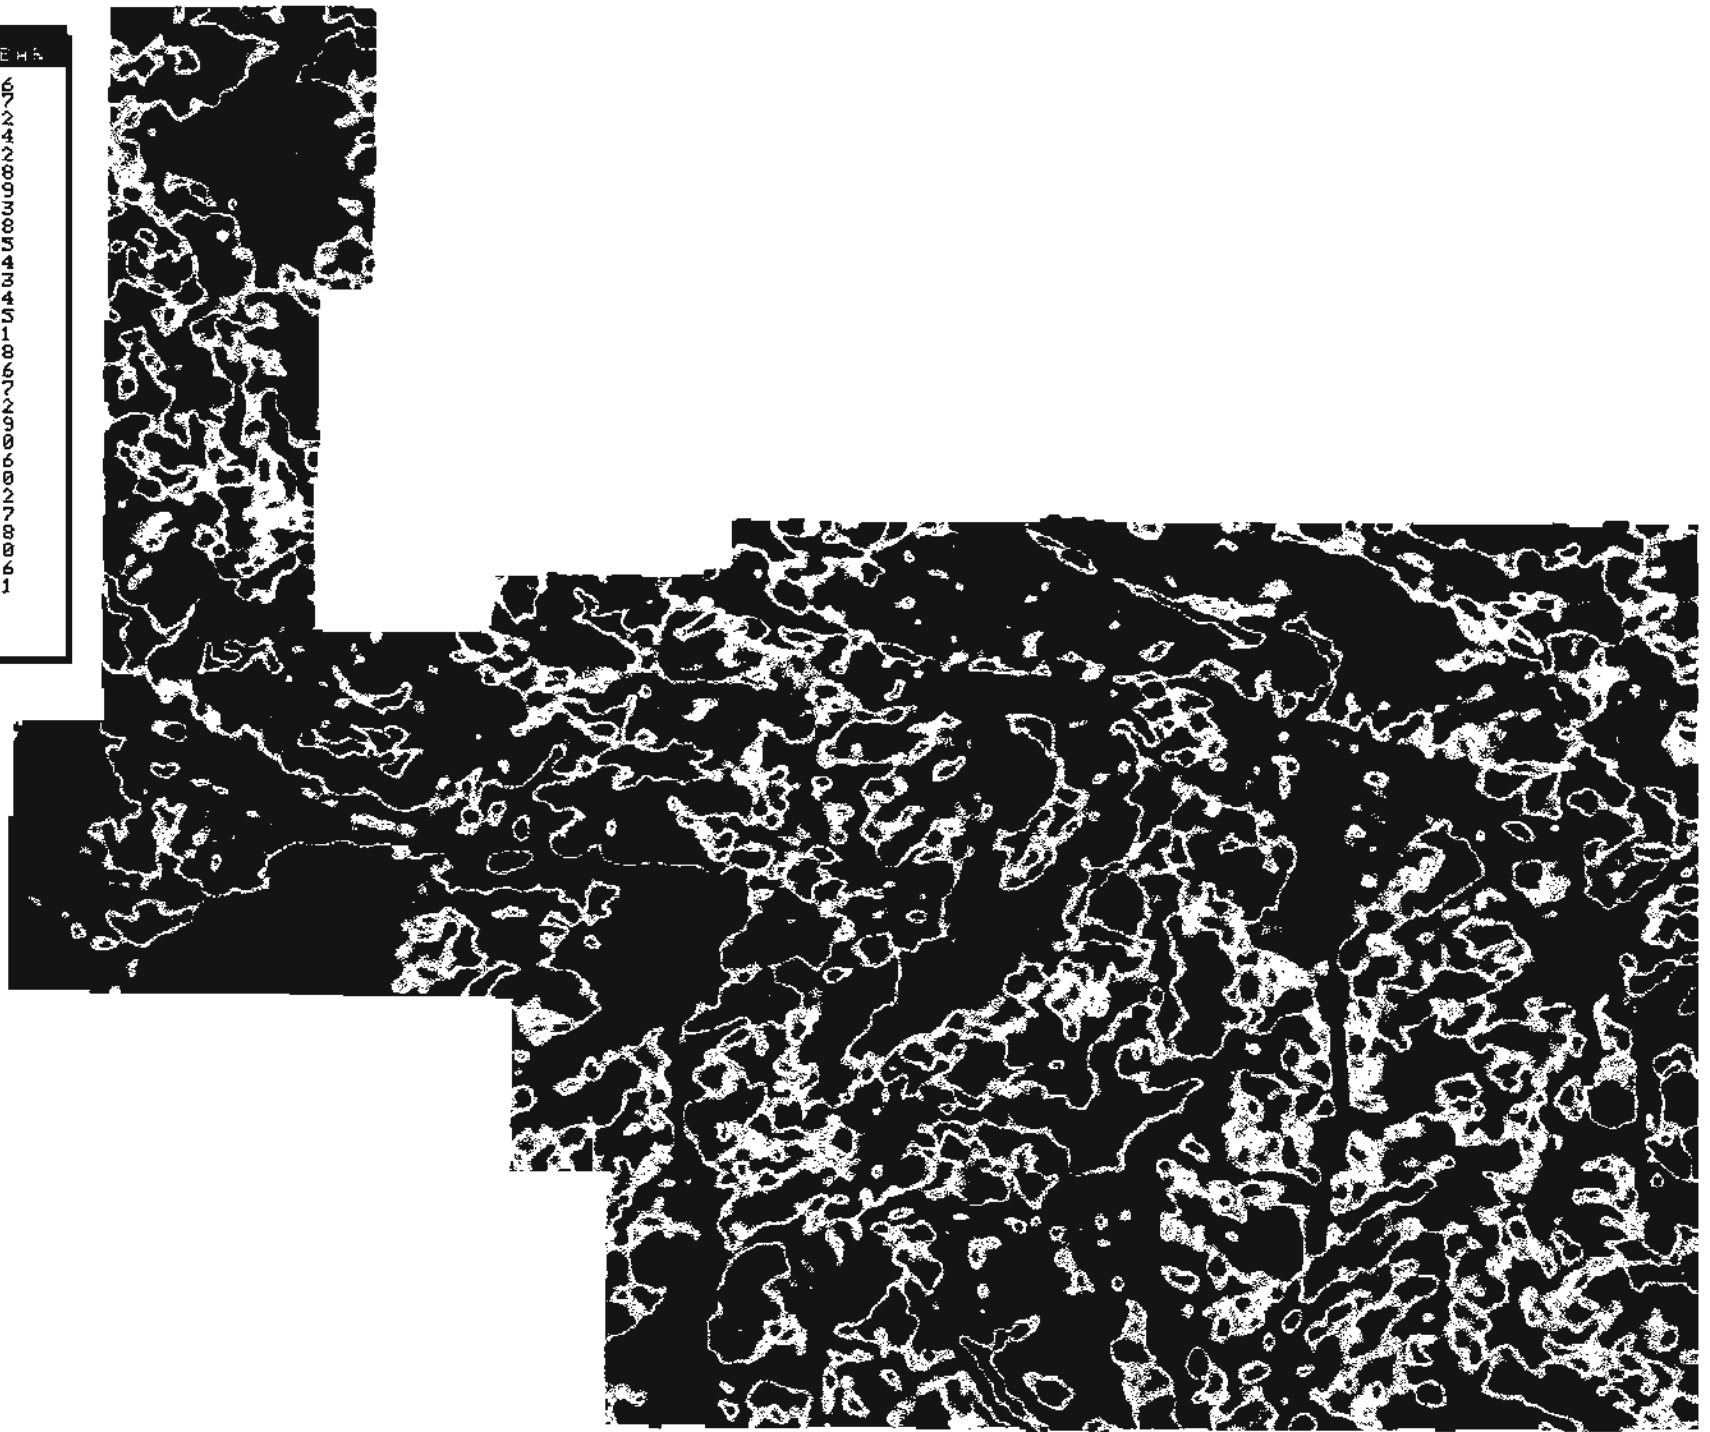
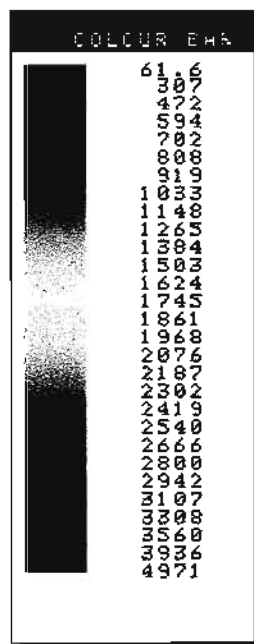


Figure 8: 7200 Hz resistivity map of the Ruby area. Resistivity values in ohm-m. Conductive units have low numbers and are shown in purple and orange on this map.