

U.S. DEPARTMENT OF THE INTERIOR  
U.S. GEOLOGICAL SURVEY

DATA REPORT FOR THE 1990 SEISMIC REFLECTION/REFRACTION EXPERIMENT  
IN THE BROOKS RANGE, ARCTIC ALASKA,  
BY

Janice M. Murphy<sup>1</sup>, Gary S. Fuis<sup>1</sup>, Alan R. Levander<sup>2</sup>, William J. Lutter<sup>1</sup>,  
Edward E. Criley<sup>1</sup>, Stuart A. Henrys<sup>2</sup>, Isa Asudeh<sup>3</sup>, and James C. Fowler<sup>4</sup>

OPEN-FILE REPORT 93-265

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards or with the North American Stratigraphic Code. Any use of trade, product or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government


1993

<sup>1</sup> U.S. Geological Survey, Menlo Park, CA

<sup>2</sup> Rice University, Houston, TX

<sup>3</sup> Geological Survey of Canada, Ottawa, CANADA

<sup>4</sup> IRIS/PASSCAL, Arlington, VA

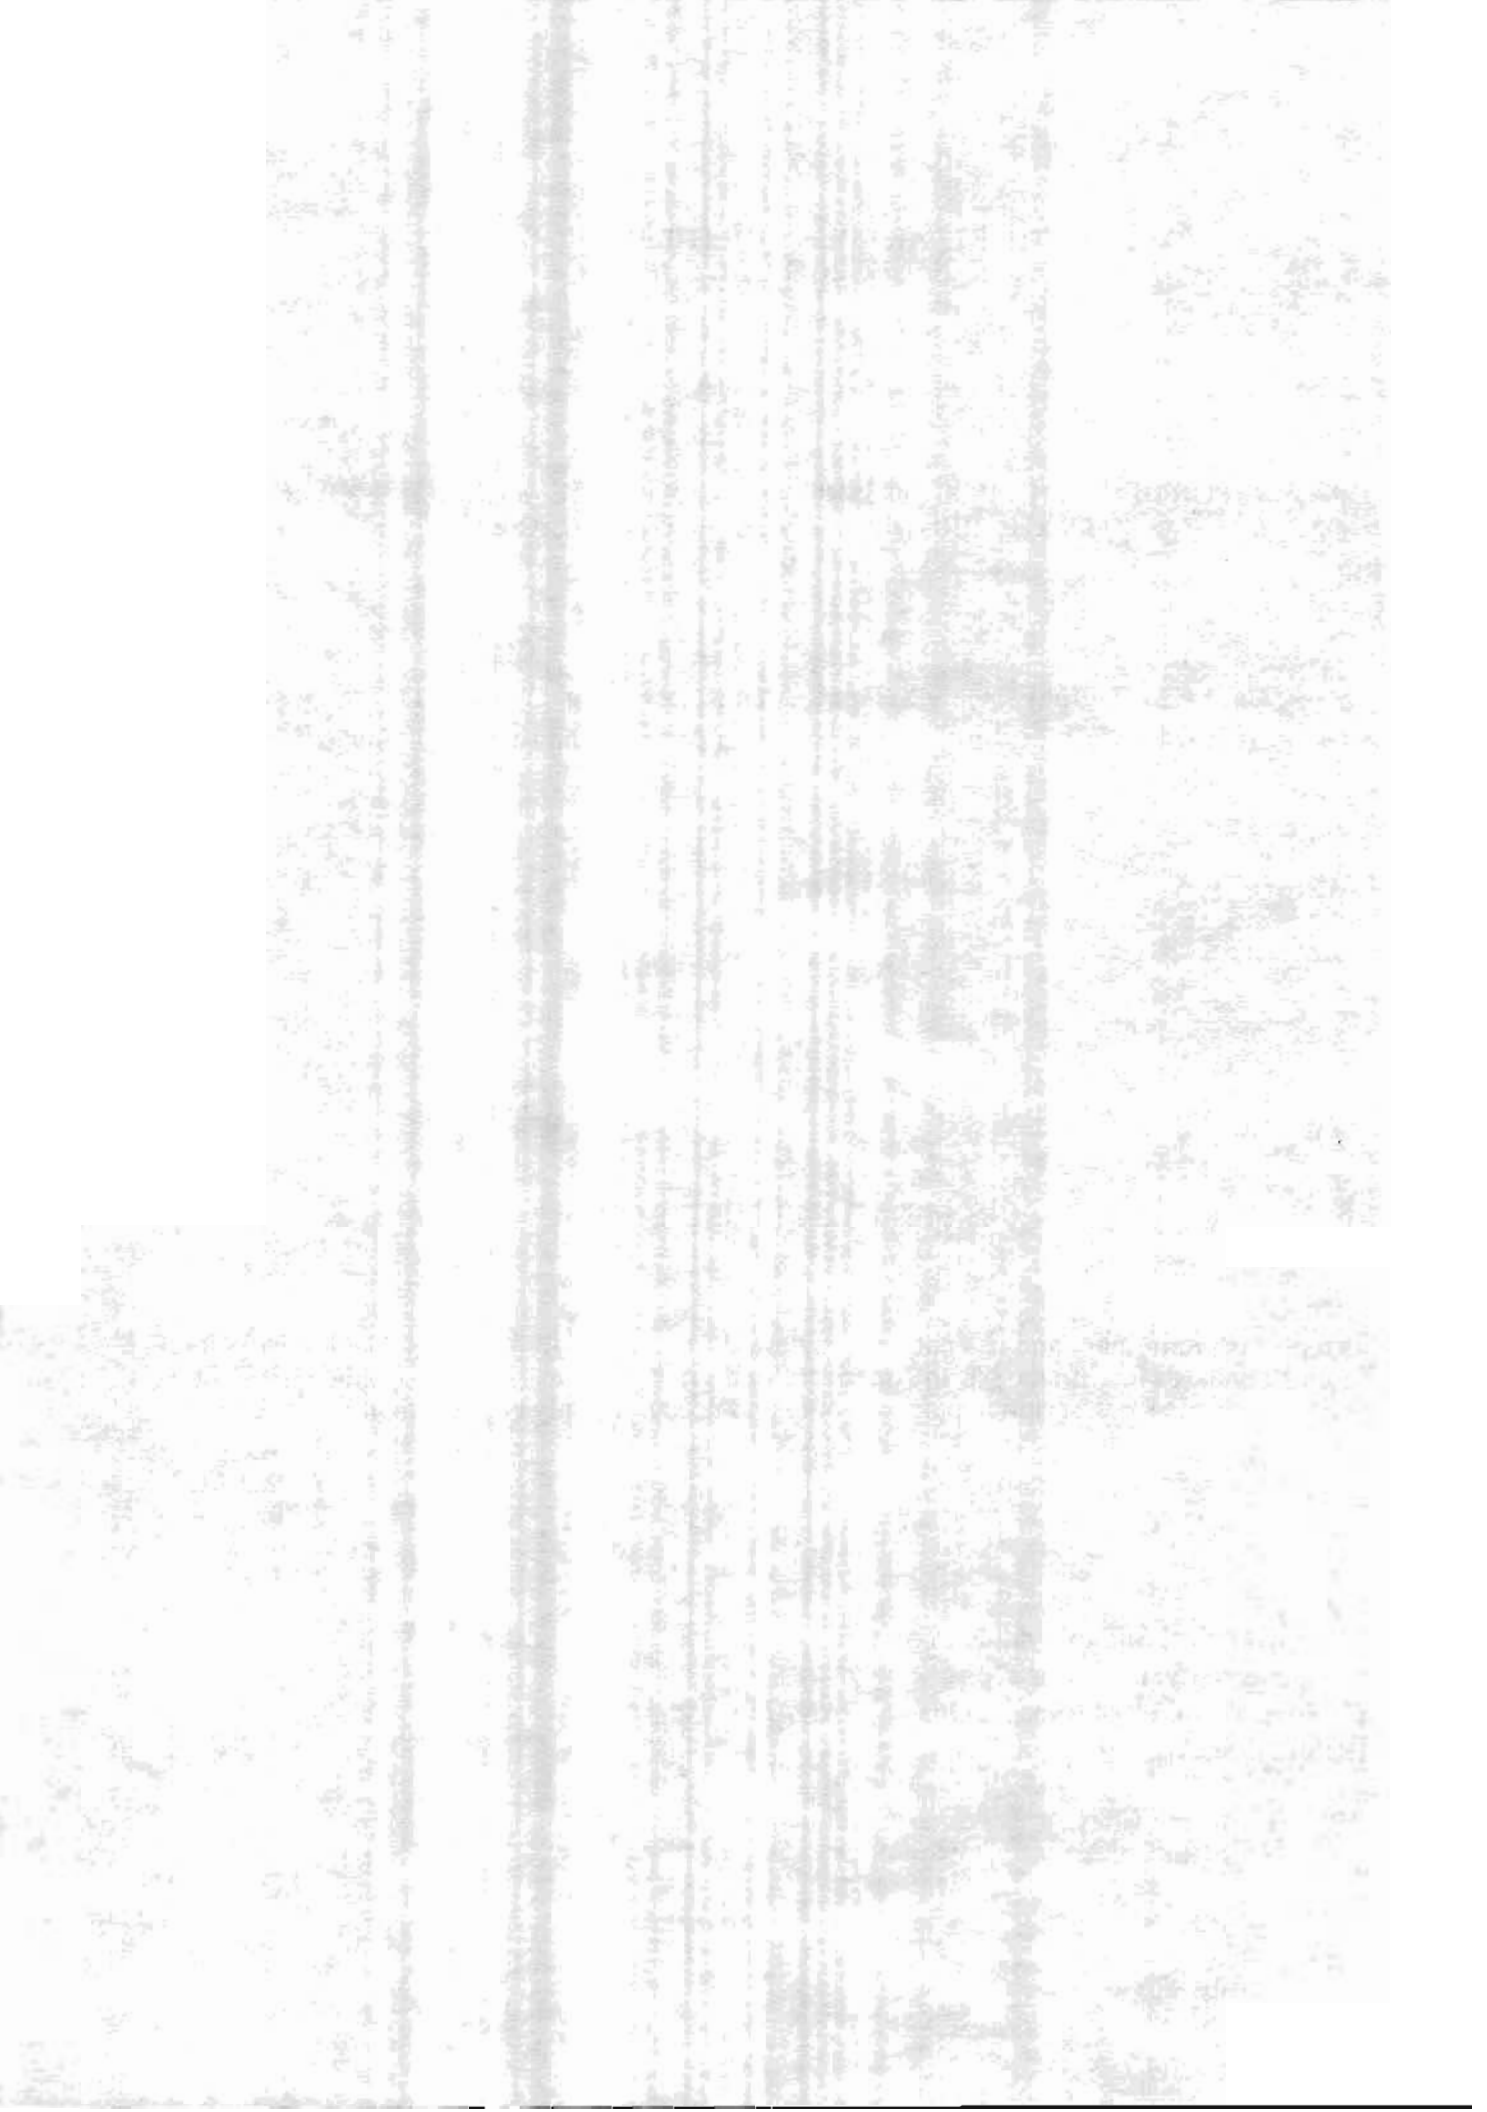

## TABLE OF CONTENTS

Introduction.....	1
Geologic setting.....	9
Planning and design.....	10
Seismic recorders.....	20
Data processing.....	31
Acknowledgments.....	40
References.....	41
Appendix A -- Record sections .....	44
Appendix B -- Actual length of data for each shot.....	128

## TABLES

Table 1--TACT seismic data reports.....	4
Table 2--Shot list.....	5
Table 3--Seismic Cassette Recorder (SCR) component values.....	22
Table 4--Collocation sites.....	33
Table 5--Instrument scaling factors.....	33
Table 6--Archive tape format.....	37

## FIGURES

1. Experiment location map, showing geography.....	2
2. Experiment location map, showing terranes .....	3
3. Experiment diagram, showing shotpoints and recorder deployments.....	8
4. Cross sections of the Brooks Range--testable models.....	11
5. Maps showing shotpoint and recorder locations by deployment.....	15
6. Schematic diagram of the Seismic Cassette Recorders (SCR) system.....	21
7a. System response curve for the Seismic Cassette Recorder (SCR) system.....	23
7b. Phase characteristics of the Seismic Cassette Recorder (SCR).....	24
8a. Phase characteristics of the PRS1.....	26

## TABLE OF CONTENTS (continued)

### FIGURES (continued)

8b. Response curve for the PRS1.....	27
9a. Phase characteristics of the Seismic Group Recorder (SGR III).....	28
9b. Response curve for the Seismic Group Recorder (SGR III).....	29
10. Response curve for the Ref Tek 72A-02.....	30
11. Schematic diagram of processing procedures.....	32
12. Archive tape reel header information list.....	36
13-95 Record sections.....	45



## INTRODUCTION

In the summer of 1990, the U.S. Geological Survey, Rice University, the Geological Survey of Canada, and IRIS/PASSCAL jointly conducted a seismic experiment across the Brooks Range, Arctic Alaska. The goal of the experiment was to produce a high-resolution image of the crust and upper mantle of the Brooks Range and flanking geologic provinces (Koyukuk basin and North Slope; Figures 1 and 2) by combining refraction and reflection techniques. The U.S. Geological Survey and Rice University jointly led the planning of the experiment, which began in 1985, and also the field execution of the experiment, which occurred in June and July 1990. Persons from the Geological Survey of Canada, IRIS/PASSCAL, University of Alaska, University of Wyoming, Purdue University, and the Air Force Geophysics Laboratory participated in the field. This experiment completes the seismic investigations of the U.S. Geological Survey's Trans-Alaska Crustal Transect (TACT) program, a multidisciplinary investigation of the crust and upper mantle of Alaska from the Pacific to Arctic Oceans along the oil-pipeline corridor (see summary in Nokleberg and Fisher, 1989). Other seismic data reports from TACT are summarized in Table 1. The 1990 Brooks Range experiment represents the first instance in which refraction and reflection techniques are merged in TACT investigations. This experiment also adds an important geophysical dimension to ongoing geologic studies of the Brooks Range at Rice University (see, for example, Oldow and others, 1987).

We used a 700-channel seismograph system (consisting of four different types of instruments) to record 63 shots (Table 2) at 44 separate shotpoint locations (Figures 3). The instruments included 35 PASSCAL Ref Tek 72A-02's, each recording 6 channels, 190 Stanford University Seismic Group Recorders (SGR's), 120 USGS Seismic Cassette Recorders (SCR's), and 180 Geological Survey of Canada Portable Refraction Seismographs (PRS1's). (See below for a detailed description of these seismic recorders.) All seismographs recorded only vertical-component motion. The instruments were deployed five times in abutting and overlapping arrays, producing a 315-km-long profile (Figures 1, 2, 3). Instrument spacing was nominally 100 m. Both small shots (100-600 lbs) and large shots (1500-4000 lbs) were fired to produce a vertical-incidence to wide-angle refraction-reflection data set with continuous offset coverage from 0 km to more than 200 km. Data recovery was about 95 percent, and signal-to-noise ratios were excellent from most shots. The data have been archived at the National Geophysical Data Center in Boulder, Colorado and at the IRIS Data Center in

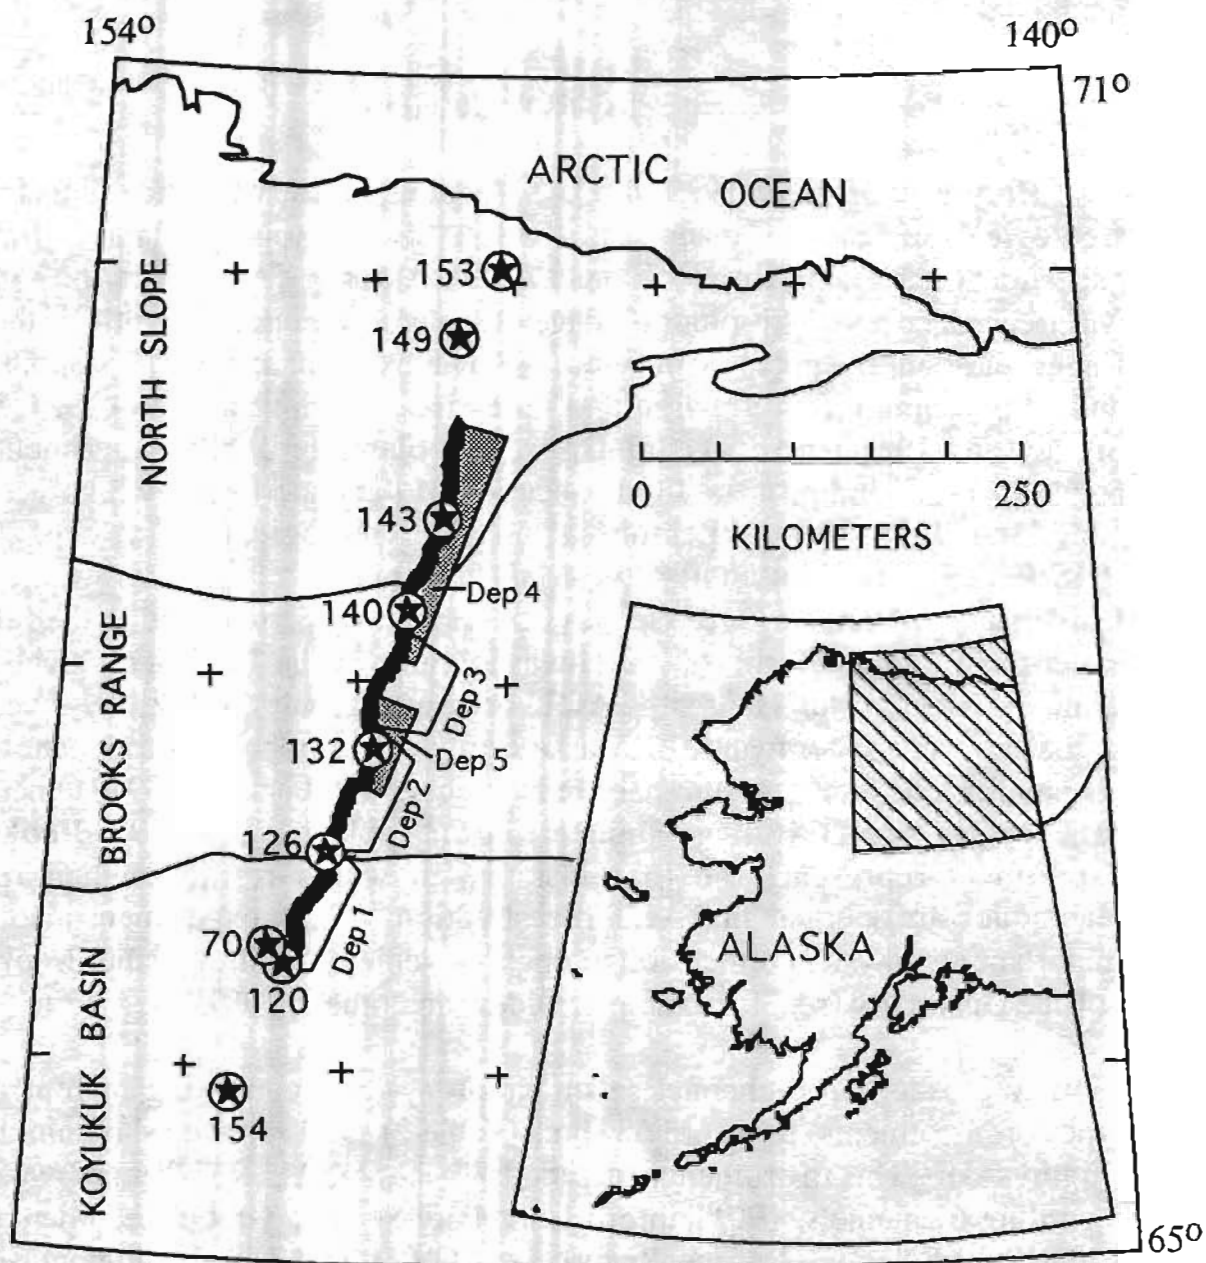


Figure 1. Experiment map showing all instrument locations (triangles) and selected shotpoint locations (circled stars with shotpoint location number). Brackets delineate extent of the deployments.

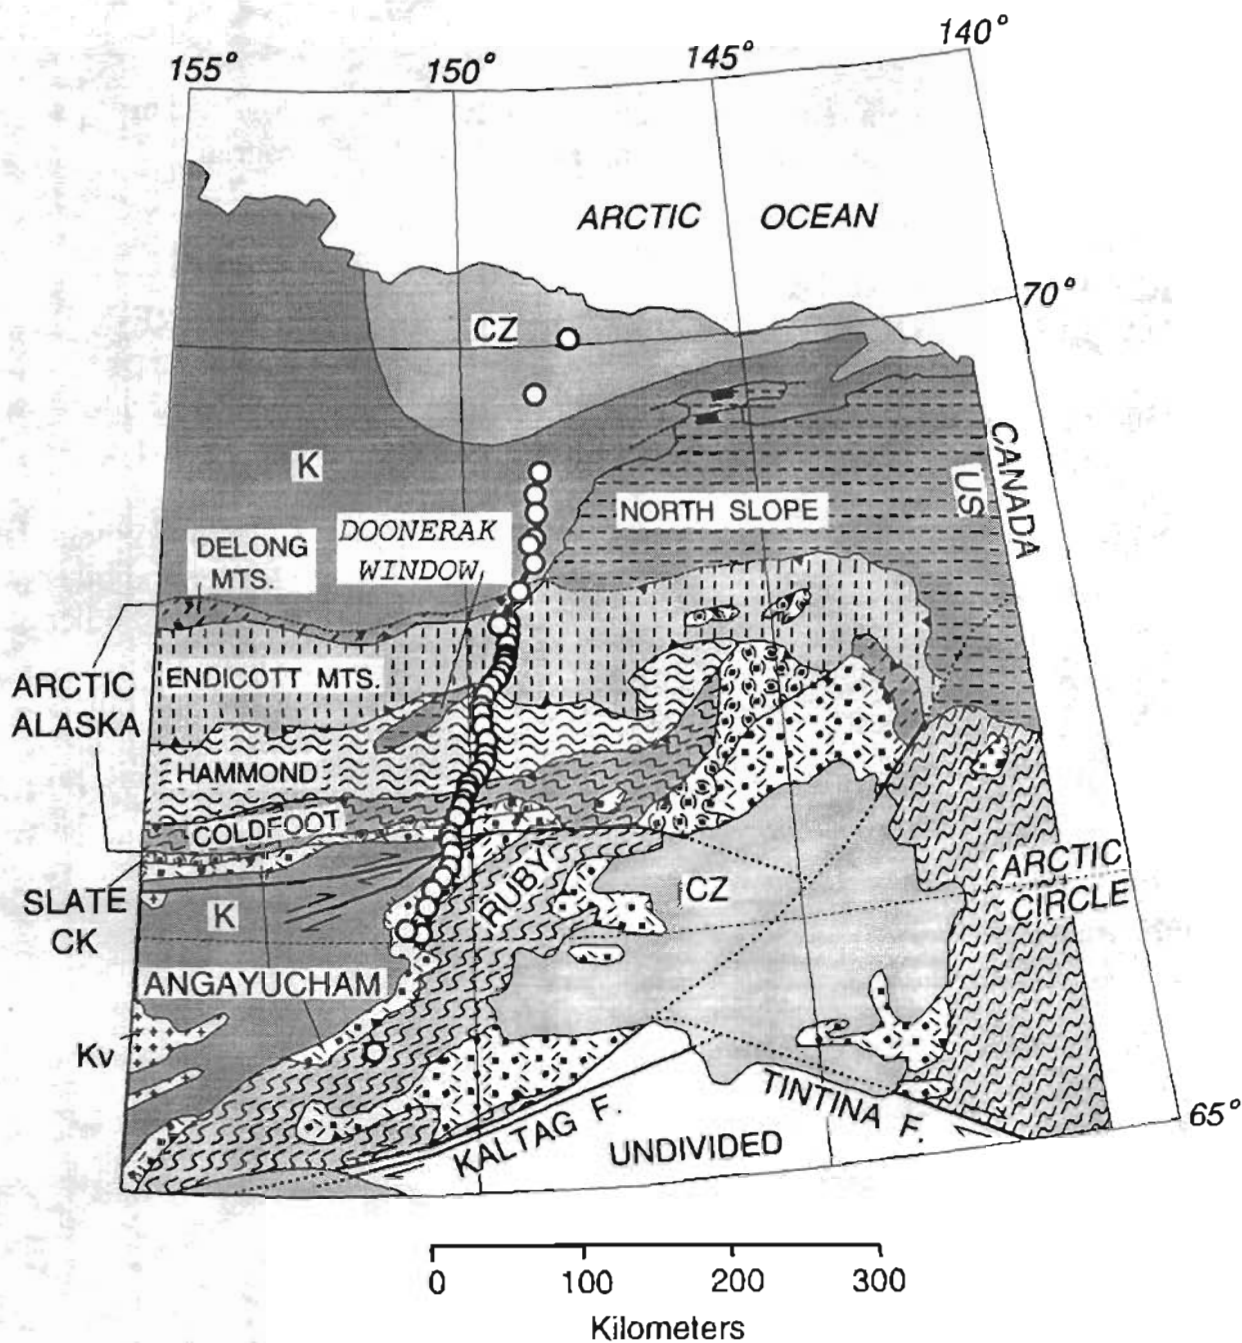


Figure 2. Experiment location map, showing terranes and subterrane. Circles represent shotpoint locations. From south to north terranes include the Ruby, Angayucham, Slate Creek, and Arctic Alaska terranes. Subterrane of the Arctic Alaska terrane include the Coldfoot, Hammond, Endicott Mts., Delong Mts. and North Slope subterrane.

TABLE 1

Seismic data reports produced under the U. S. Geological Survey's  
Trans-Alaska Crustal Transect (TACT) program

<b>REGION OF ALASKA/ DATE(S) OF AQUISITION</b>	<b>DATA TYPE</b>	<b>DATA REPORT</b>
Gulf of Alaska/ 1988	Marine reflection/ refraction	Brocher and Moses, 1990
Southern Alaska/ 1984, 1985	Land refraction	Daley and others, 1985 Meador and others, 1986 Wilson and others, 1987 Wilson, 1987
	Land reflection	Fisher and others, 1989
Central Alaska/ 1987	Land refraction	Beaudoin and others, 1989 Goldman and others, 1992
Northern Alaska/ 1990	Land reflection/ reflection	This report

TABLE 2 SHOT LIST

SHOT	LOCATION		ELEV (m)	DEPTH (m)	CHARGE (lbs)	SHOT TIME	
	NUMBER	LATITUDE	LONGITUDE			I-DAY	HR:MIN:SEC
1	154	65.883474	-151.422256	453	2.4	2500	193 06:00:00
2	120	66.557153	-150.811307	357	18.3	1500	193 06:02:00
3	122	66.818726	-150.675938	326	15.2	600	193 06:03:00
4	124	66.972430	-150.334079	444	12.5	200	193 06:04:00
5	170	67.082496	-150.357750	368	14.3	200	193 06:05:00
6	140	68.382100	-149.467612	811	4.0	4000	193 06:06:00
7	121	66.717523	-150.670852	327	17.4	600	193 09:02:00
8	123	66.894944	-150.512740	387	15.2	200	193 09:03:00
9	125	67.039388	-150.304716	522	15.8	600	193 09:04:00
10	126	67.142029	-150.333568	335	4.0	2500	193 09:05:00
11	132	67.680728	-149.740251	474	17.7	2500	193 12:04:00
12	120	66.557153	-150.811307	357	16.8	2500	196 06:00:00
13	127	67.232044	-150.222638	334	14.3	600	196 06:02:00
14	171	67.324269	-150.153394	370	13.1	200	196 06:03:00
15	130	67.435596	-150.092280	389	12.8	600	196 06:04:00
16	132	67.680728	-149.740251	474	14.6	1500	196 06:05:00
17	140	68.382100	-149.467612	811	4.0	2500	196 06:06:00
18	126	67.142029	-150.333568	335	4.0	1500	196 09:00:00
19	128	67.292665	-150.163629	370	16.8	600	196 09:02:00
20	129	67.398463	-150.087932	443	13.1	200	196 09:03:00
21	172	67.459744	-150.039080	381	14.0	100	196 09:04:00
22	143	68.848389	-148.905796	473	8.5	3500	196 09:05:00
23	124	66.972430	-150.334079	444	8.5	200	196 09:07:00
24	70	66.601460	-150.989089	224	3.0	4000	203 05:00:00
25	175	68.012652	-149.727377	741	17.7	200	203 05:02:00



TABLE 2 SHOT LIST (continued)

SHOT	LOCATION	LATITUDE	LONGITUDE	ELEV (m)	DEPTH (m)	CHARGE (lbs)	SHOT TIME	
	NUMBER						J-DAY	HR:MIN:SEC
26	176	68.087215	-149.561513	1057	12.8	200	203	05:03:00
27	138	68.172276	-149.440437	1052	13.4	200	203	05:04:00
28	139	68.375031	-149.317897	832	15.2	1500	203	05:05:00
29	142	68.567661	-149.166966	907	7.6	600	203	05:06:00
30	126	67.142029	-150.333568	335	4.0	2500	203	08:00:00
31	136	67.953935	-149.776641	663	12.8	200	203	08:02:00
32	137	68.052783	-149.613887	980	15.8	600	203	08:03:00
33	177	68.132094	-149.438985	1204	13.1	200	203	08:04:00
34	178	68.217446	-149.391466	997	15.2	600	203	08:05:00
35	143	68.848389	-148.905796	473	8.5	2500	203	08:06:00
36	132	67.680728	-149.740251	474	13.4	1500	203	11:00:00
37	130	67.435596	-150.092280	389	10.1	200	203	11:01:00
38	135	67.885910	-149.814978	610	12.5	200	203	11:02:00
39	126	67.142029	-150.333568	335	4.0	4000	200	05:00:00
40	142	68.567661	-149.166966	907	7.6	600	200	05:02:00
41	179	68.247330	-149.420864	952	15.8	600	200	05:03:00
42	141	68.406008	-149.326622	859	15.2	1000	200	05:04:00
43	189	69.282368	-148.737392	246	18.6	2500	200	05:05:00
44	153	70.078227	-148.173320	13	2.4	3500	200	05:06:00
45	145	69.033481	-148.852984	383	2.1	1000	200	07:30:00
46	180	68.313317	-149.346289	910	14.9	600	200	07:31:00
47	188	69.146067	-148.830549	293	19.8	200	200	07:32:00
48	149	69.744689	-148.787624	98	2.7	3000	200	07:33:00
49	186	68.876024	-148.854803	440	14.3	200	200	10:00:00
50	132	67.680728	-149.740251	474	15.5	3000	200	10:01:00

TABLE 2 SHOT LIST (continued)

<u>SHOT</u>	<u>LOCATION</u>	<u>LATITUDE</u>	<u>LONGITUDE</u>	<u>ELEV</u> <u>(m)</u>	<u>DEPTH</u> <u>(m)</u>	<u>CHARGE</u> <u>(lbs)</u>	<u>SHOT TIME</u>	
	<u>NUMBER</u>						<u>J-DAY</u>	<u>HR:MIN:SEC</u>
51	139	68.375031	-149.317897	832	13.1	2000	200	10:02:00
52	150	68.730744	-148.929179	556	2.7	600	200	10:03:00
53	136	67.953935	-149.776641	663	12.8	250	205	05:00:00
54	134	67.844424	-149.816350	577	13.1	600	205	05:01:00
55	133	67.775798	-149.783164	547	16.2	600	205	05:02:00
56	132	67.680728	-149.740251	474	15.5	200	205	05:03:00
57	135	67.885910	-149.814978	610	12.5	120	205	05:04:00
58	174	67.594497	-149.786844	453	16.2	600	205	07:00:00
59	173	67.555575	-149.836354	465	16.8	600	205	07:01:00
60	131	67.501135	-149.854582	432	13.7	200	205	07:02:00
61	172	67.459744	-150.039080	381	14.0	120	205	07:03:00
62	127	67.232044	-150.222638	334	14.3	120	206	05:01:00
63	126	67.142029	-150.333568	335	4.0	240	206	05:04:00

Note: Shot depths less than 9 m correspond to lake shots; all other shots were drill-hole shots.

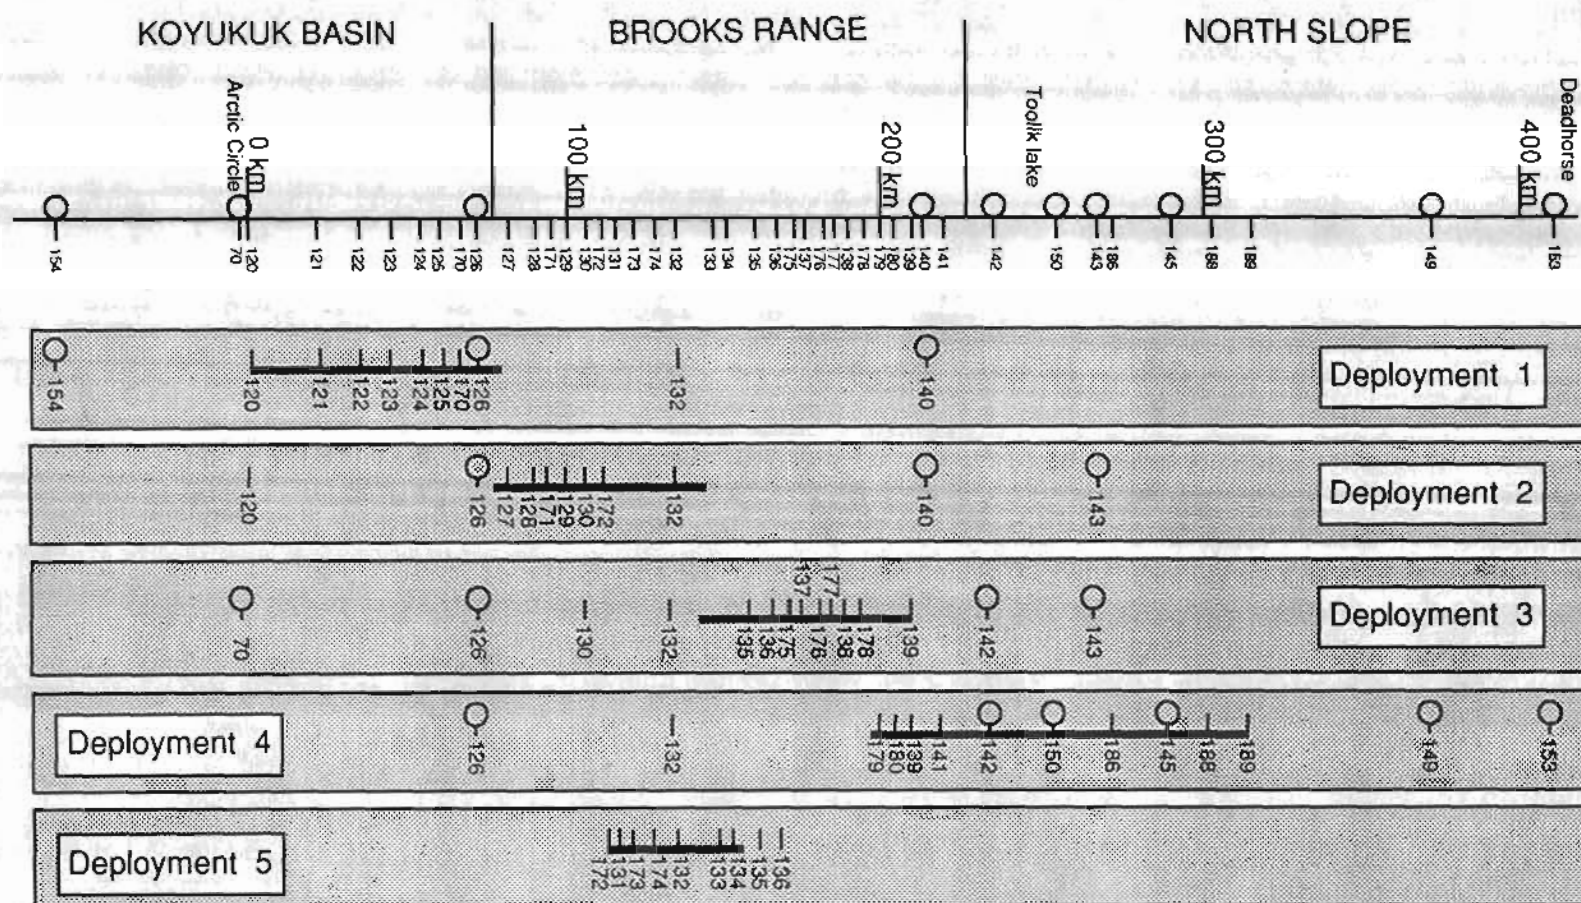


Figure 3. Schematic diagram of experiment. Numbered short lines represent drill-hole shotpoints and short lines with attached circles represent lake shotpoints. Shotpoint location numbers are listed opposite each shotpoint.



Seattle, Washington. SEGY-format tapes recorded at 6250 BPI are available from:

NOAA  
National Geophysical Data Center  
E/GC1  
325 Broadway  
Boulder, CO 80303

Telephone: (303) 497-6123

The data are also available through the IRIS Data Management Center at:

IRIS DMC  
1408 NE 45th Street  
Seattle, WA 98105

Telephone: (206) 547-0393

A description of the tape format and headers is given below in the Data Processing section.

## GEOLOGIC SETTING

The following is summarized from Oldow and others(1987), Grantz and others (1991), and Moore and others (1989). The Brooks Range and North Slope consists of North American continental-marginal rocks, and the Koyukuk basin consists of island-arc and ocean-basin rocks. In a general way, rocks in the northern Brooks Range are younger (Miss.-Jur.), stable-shelf, marine and non-marine sedimentary rocks, and rocks in the southern Brooks Range are older (Precamb.-Dev.), deeper-water, continental-marginal sedimentary rocks. Metamorphic grade increases toward the south to greenschist-blueschist(?) grade. Rocks of the Brooks Range were telescoped and thrust beneath oceanic rocks of the Koyukuk basin, beginning in the Early Cretaceous, as the Canada basin opened to the north. Sediments eroded from the uplifting range were deposited chiefly in the Coleville foredeep basin on the North Slope. Uplift and compression continued into the Cenozoic in the north part of the Range, including the vicinity of the Doonerak window. Collapse and extension of unknown magnitude interpreted as

mid-Cretaceous age occurred in the south part of the range (see also Miller and Hudson, 1991; Oldow and others, 1991).

The Brooks Range and North Slope comprise the Arctic Alaska terrane, which has been subdivided, from north to south, into the North Slope, Endicott Mountains, Hammond (or Skajit), and Coldfoot (or Schist ) subterrane (Figure 2). On the south, the Arctic Alaska terrane is separated from the Angayucham terrane, consisting of oceanic crust and ultramafic rocks, and the basinal rocks of the Koyukuk basin by melange of the Slate Creek terrane. Vergence is to the north in the Brooks Range structures. The North Slope subterrane is exposed both on the North Slope, where it is overlain by and locally over thrust upon the sedimentary rocks of the Coleville basin, and in the Doonerak window, which is located on an antiform in the central Brooks Range near the contact between the Endicott and Hammond subterrane.

Two cross sections that represent prior, testable models of Brooks Range structure (Oldow and others, 1987; Moore and others, 1991) are reproduced in Figure 4. These both show the following features in the central and northern Brooks Range: (1) the Endicott Mountains allochthon is a lens-shaped body on the north limb of the Doonerak antiform, with internal, north-verging thrust faults; (2) the rocks beneath the Endicott Mountains allochthon include sedimentary rocks of the Coleville basin (explicitly shown in Figure 4A) and displaced rocks of the North Slope subterrane; (3) the Doonerak antiform is underlain by deformed, lens-shaped bodies of rock; and (4) the "master" decollement is subhorizontal beneath the southern North Slope and Endicott Mountains allochthon, but ramps downward on the south side of the Doonerak antiform. The dimensions of rock bodies and depths of interfaces are similar between the two cross sections, although Figure 4B is admittedly schematic. The cross sections differ primarily in interpretation of stratigraphic and structural separation of the Endicott Mountains and Hammond (Skajit) subterrane. The cross section of Grantz and others (1991) is also similar to Figures 4A and 4B, although the depth to the "master" decollement is shallower ( $< 10$  km) and the package of displaced Coleville basin and North Slope rocks beneath the Endicott Mountains allochthon is much thinner ( $< 2$  km).

## EXPERIMENT PLANNING AND DESIGN

The 1990 Brooks Range experiment was conceived in 1984 during a planning session for the Trans-Alaska Lithosphere Investigation at the Seismological Society of America annual meeting in Anchorage, Alaska (see Stone

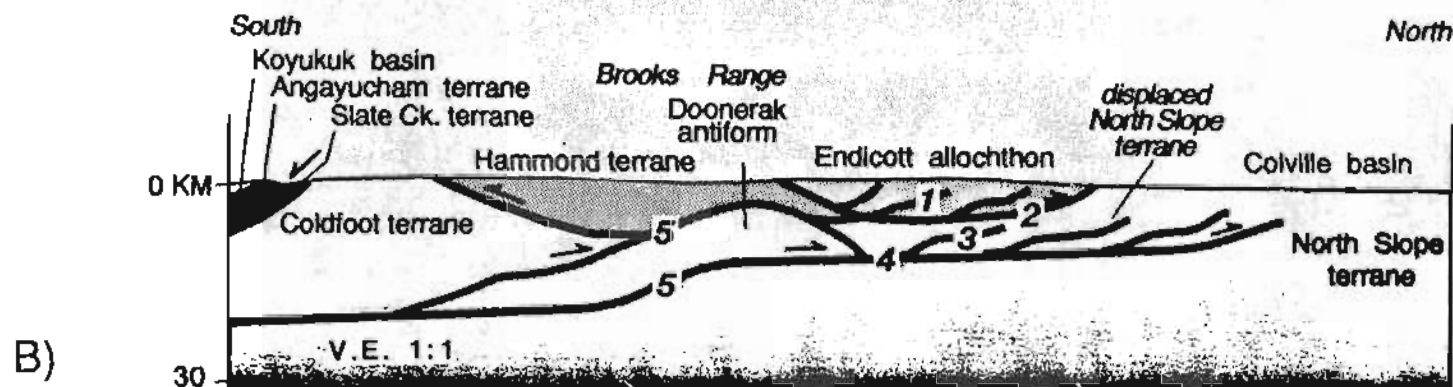
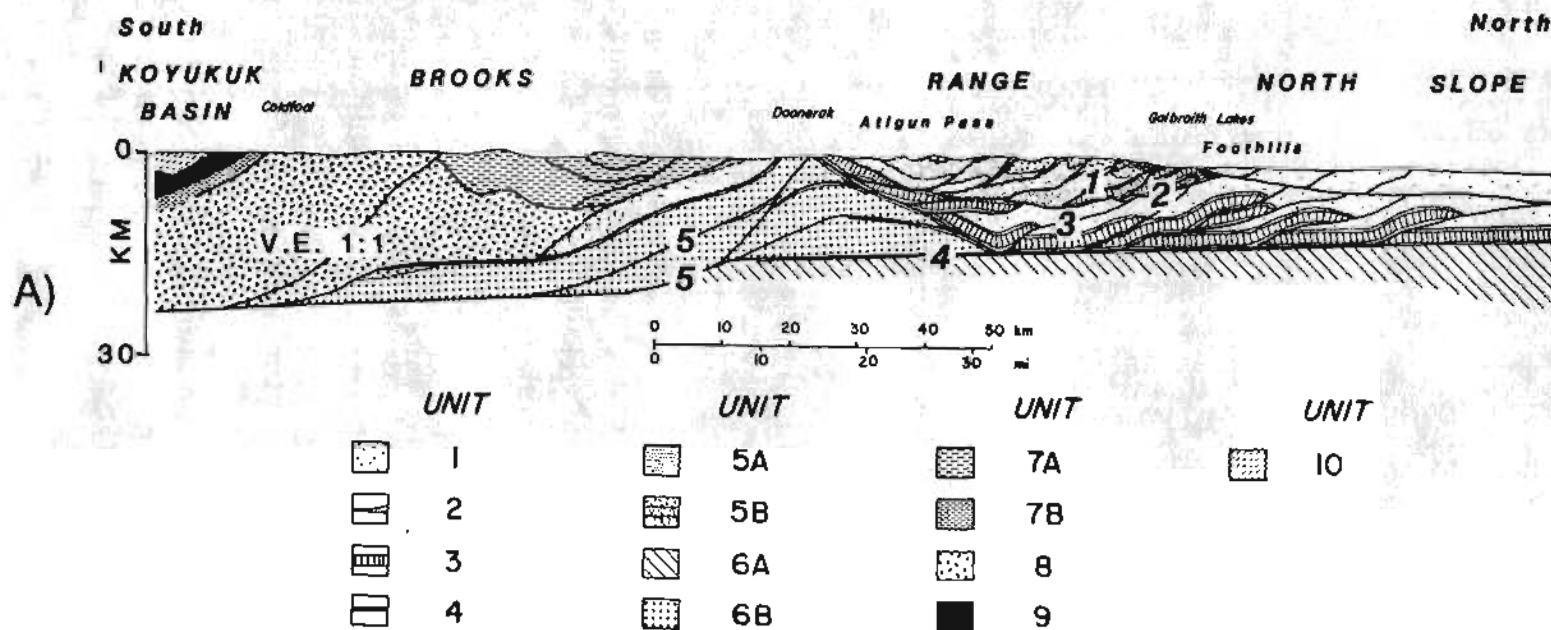


Figure 4. Two possible models for a cross section of the Brooks Range. The explanation is given on the following page.

#### **Explanation for Figure 4.**

a) Cross section from Oldow and others (1987: Atigun Pass Transect, Section IIA). Numbered units are 1--Coleville basin sediments; 2--Sadlerochit Group, Shublik Fm., and Kingak Fm.; 3--Lisburne Limestone; 4--Kayak Shale and Kekiktuk Conglomerate; 5A--(not present); 5B--Endicott Mountains Allochthon: Kanayut Conglomerate, Hunt Fork Shale, and Beaucoup Fm.; 6A--Nerukpuk Fm. (basement of North Slope subterrane); 6B--Apoon Fm. (basement of North Slope subterrane seen in Doonerak Window); 7A--Skajit Allochthon; 7B--Rosie Creek Allochthon (oceanic rocks); 8--Schist belt (Coldfoot subterrane); 9--Angayucham subterrane (ophiolite); 10--Cretaceous sedimentary rocks of the Koyukuk basin.

b) Schematic cross section from Moore and others (1991). Numbers on both cross sections 4A and 4B indicate reflecting horizons that are seen in the data (see Levander and others, 1991; Fuis and others, 1991)

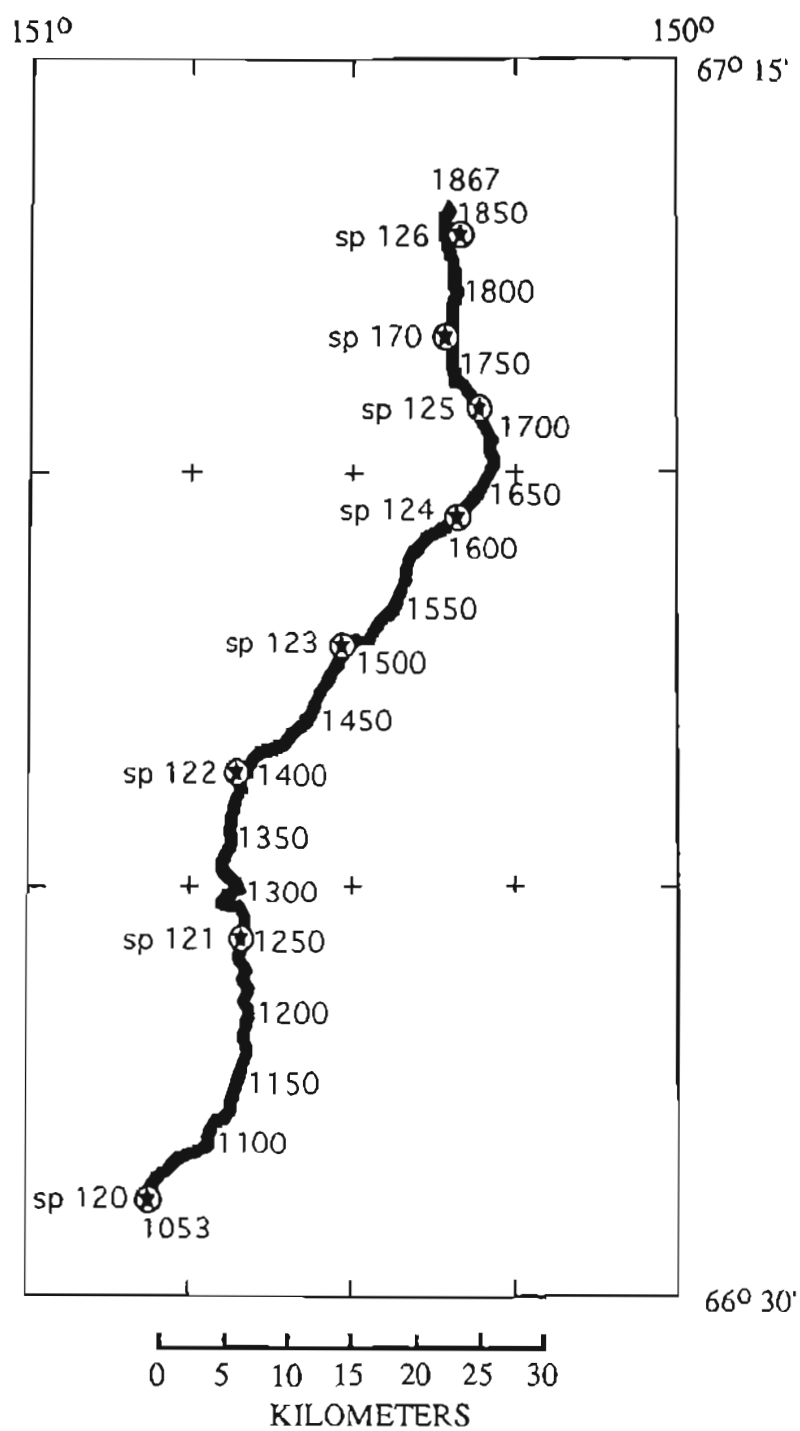


Figure 5a. Deployment 1 location map. Shotpoint location numbers (e.g. sp 120) and selected instrument location numbers (e.g. 1053) are given.

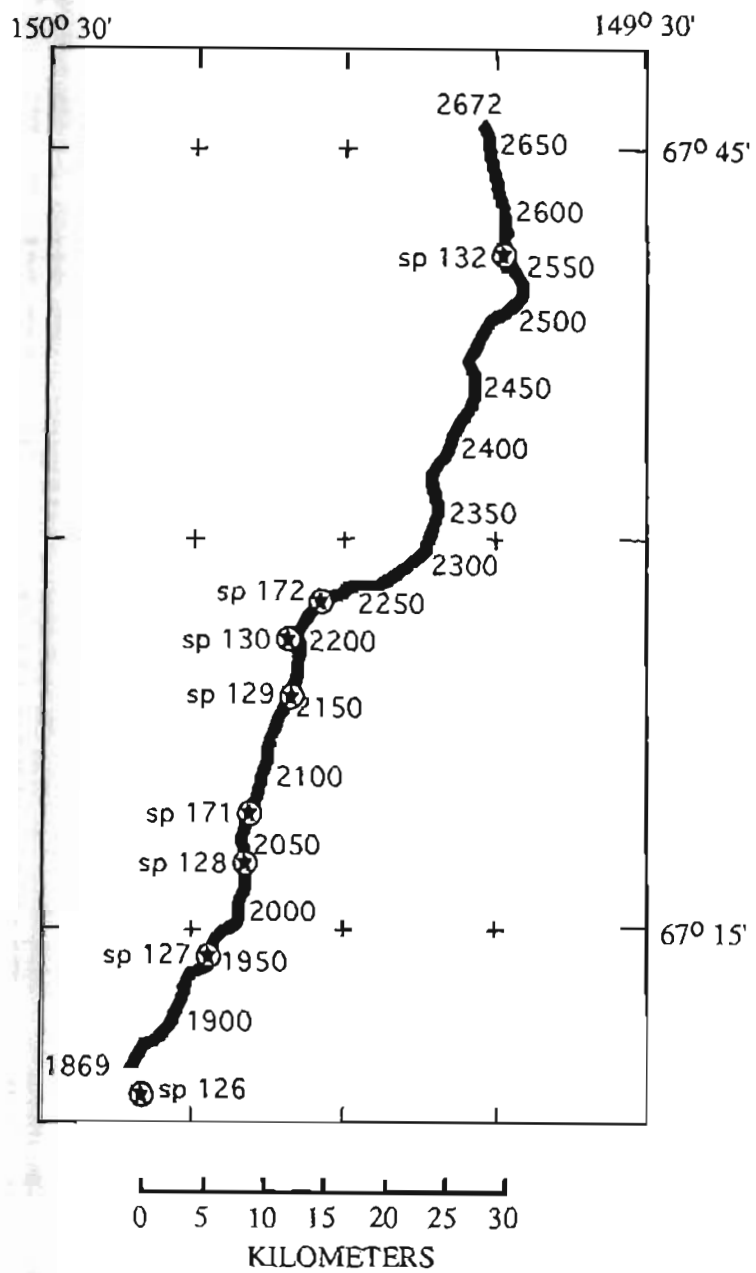


Figure 5b. Deployment 2 location map.

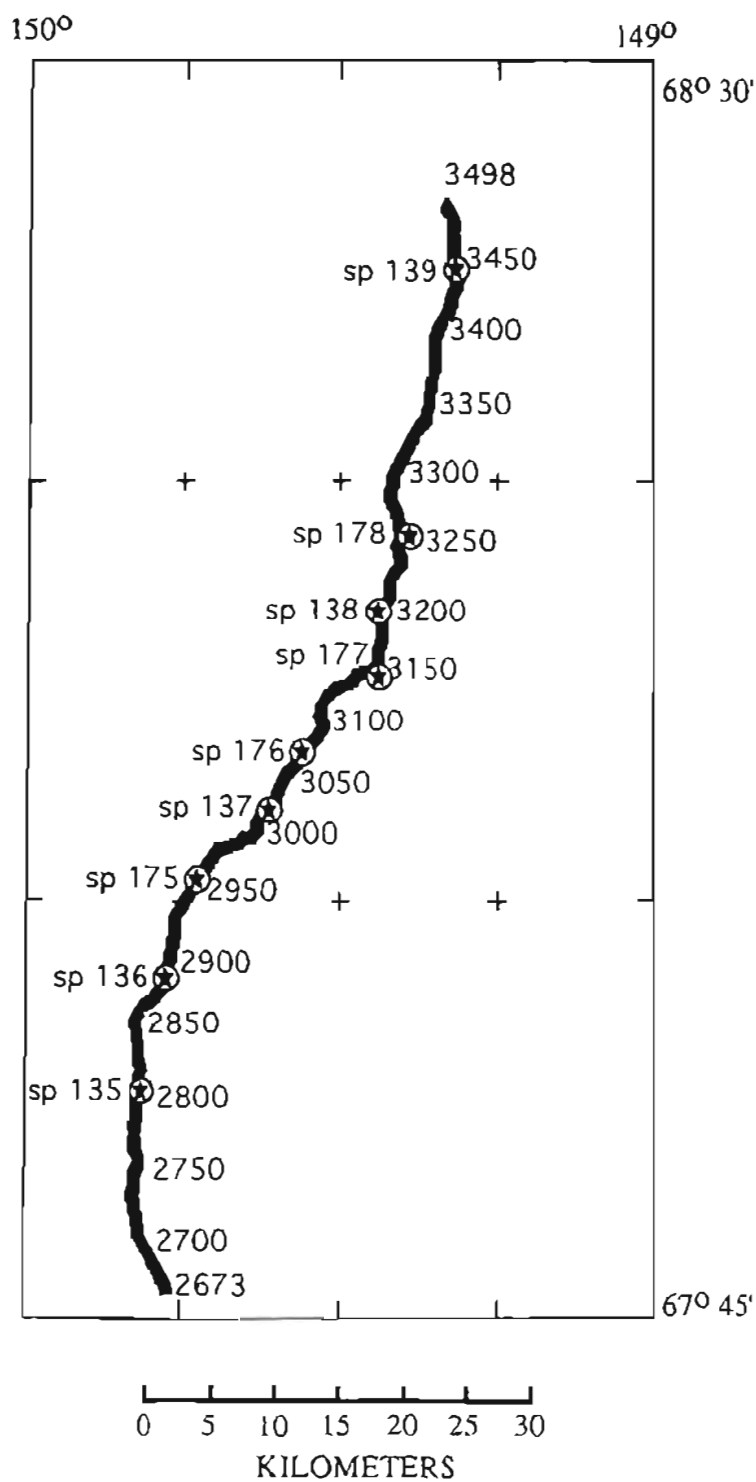


Figure 5c. Deployment 3 location map.

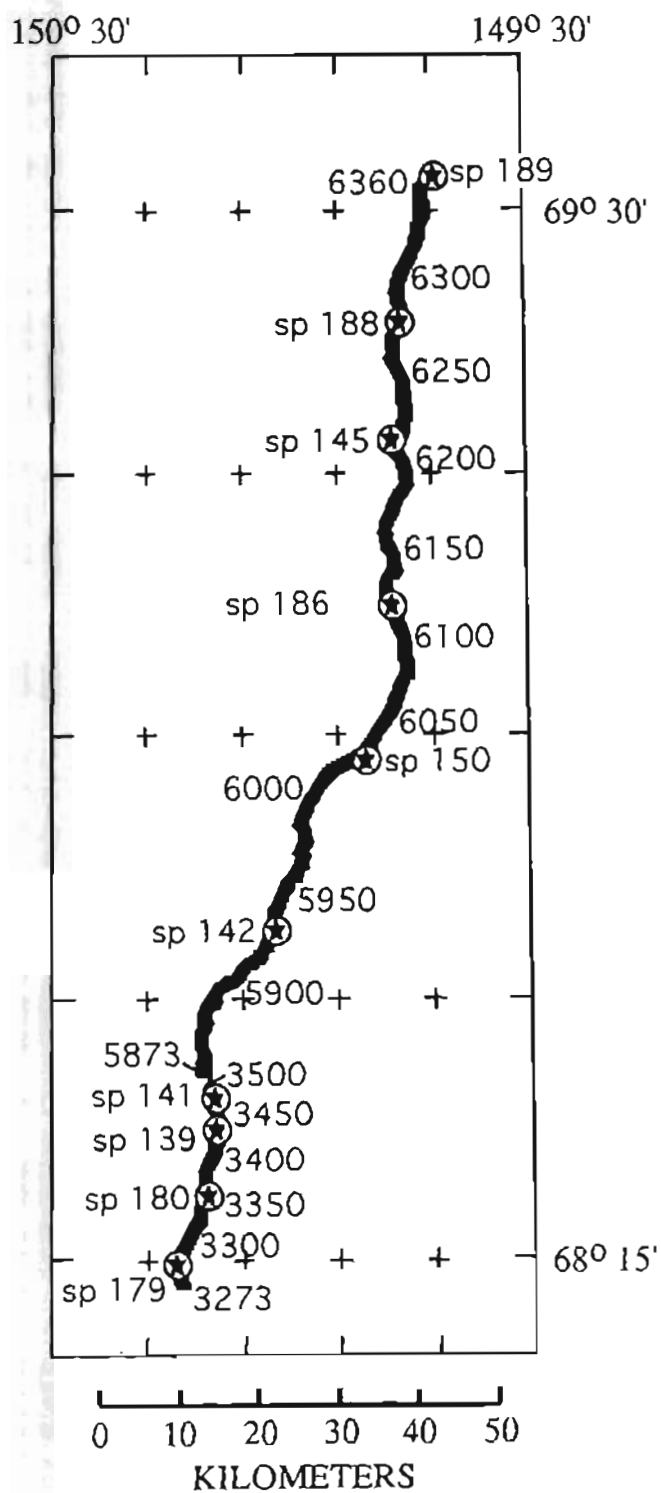


Figure 5d. Deployment 4 location map.



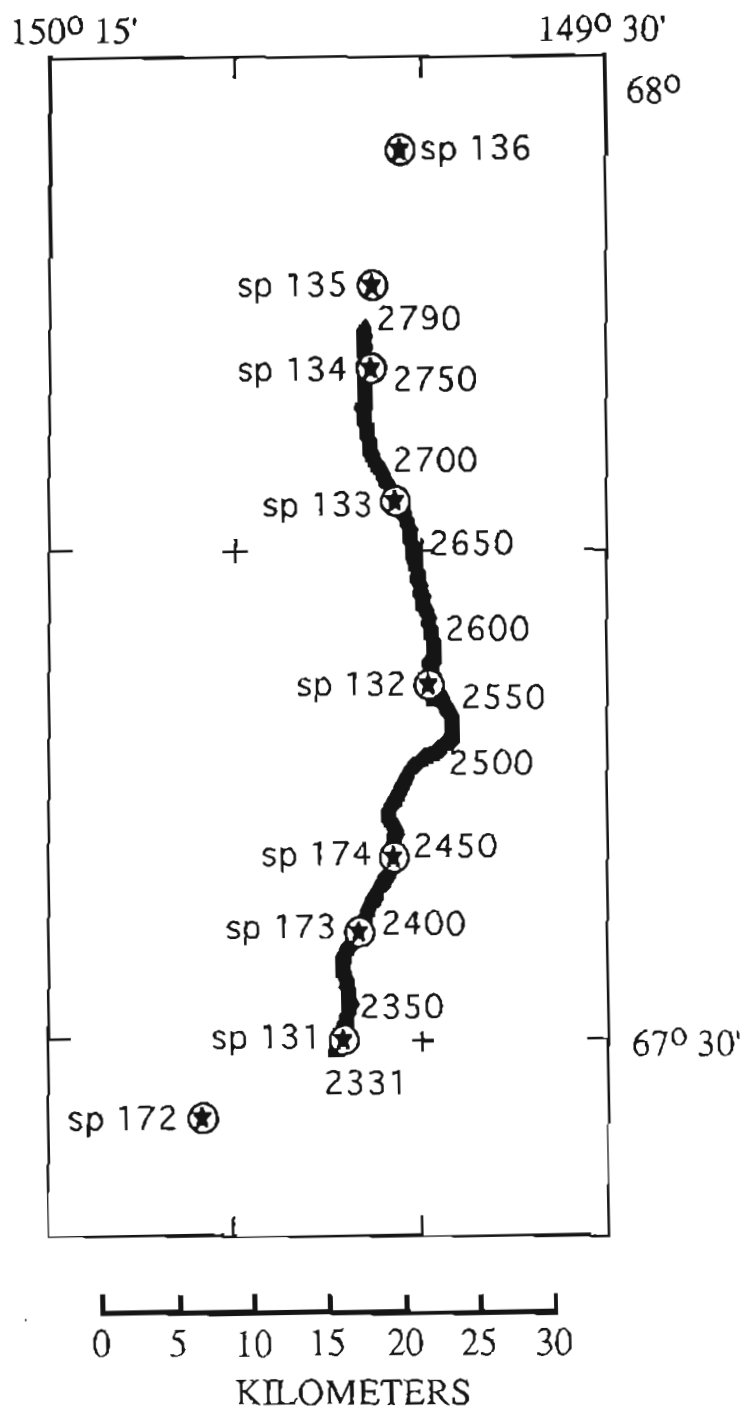


Figure 5e. Deployment 5 location map.

through the Brooks Range onto the North Slope. Ten in-line shots and four off-end shots were fired into the deployment (Figures 1, 3, 5d). Deployment 5 was laid out such that it overlapped both deployments 2 and 3; it filled in a gap in high-frequency coverage. Seven in-line shots and two off-end shots were fired into the deployment (Figures 1, 3, 5e).

Seismic stations and shotpoints were located using two Global Positioning Satellite navigation systems (GPS; the Trimble Navigation Pathfinder). These locations are estimated to be accurate to within  $\pm 10$  meters horizontally and  $\pm 30$  meters vertically. Seismic sources were produced by explosions in drilled holes and shallow lakes. Drill-hole shotpoints consisted of a 20-cm-diameter drill hole filled with an ammonium-nitrate-based blasting agent, boosters, and detonating cord. Shallow lake shotpoints consisted of a distributed charge at the bottom of the lake with detonating cord extending to shore. The amount of explosive and the depth to the top of the charge for each shotpoint are listed in table 2. At shot time, a signal from a USGS master reference clock triggered the shooting system to fire an electric blasting cap, which sequentially caused the detonating cord, boosters, and blasting agent to detonate. The shot origin times are determined by the master clocks, assuming that the explosives detonated at the exact time of the cap break. Generally, master clocks drift less than 1 millisecond per week. However, during this experiment some master clocks had large errors. These errors were corrected during data processing and are described below (see Data processing section). The corrected shot times are listed in Table 2.

## SEISMIC RECORDERS

Four different instruments were used to collect data during this experiment - USGS Seismic Cassette Recorders (SCR), GSC PRS1s, Stanford Seismic Group Recorders (SGR III), and PASSCAL Ref Tek 72A-02s. A general description of each is given here. For more detailed descriptions see Murphy (1988) regarding the SCR's, Asudeh and others (1992) regarding the PRS1's, and the SGR II seismic group recorder field system technical manual and the Mark Products L-10 geophone specifications for the Stanford SGR III's.

The SCR's are a single-channel instrument consisting of a Mark Products L-4A 2-Hz vertical-component geophone, a set of three parallel amplifier boards with adjustable gain settings, a clock (temperature-compensated oscillator, TCXO), a VCO (voltage controlled oscillator), and a cassette recorder (Figure 6). The use of three parallel amplifier boards with gains set so that the dynamic ranges of the

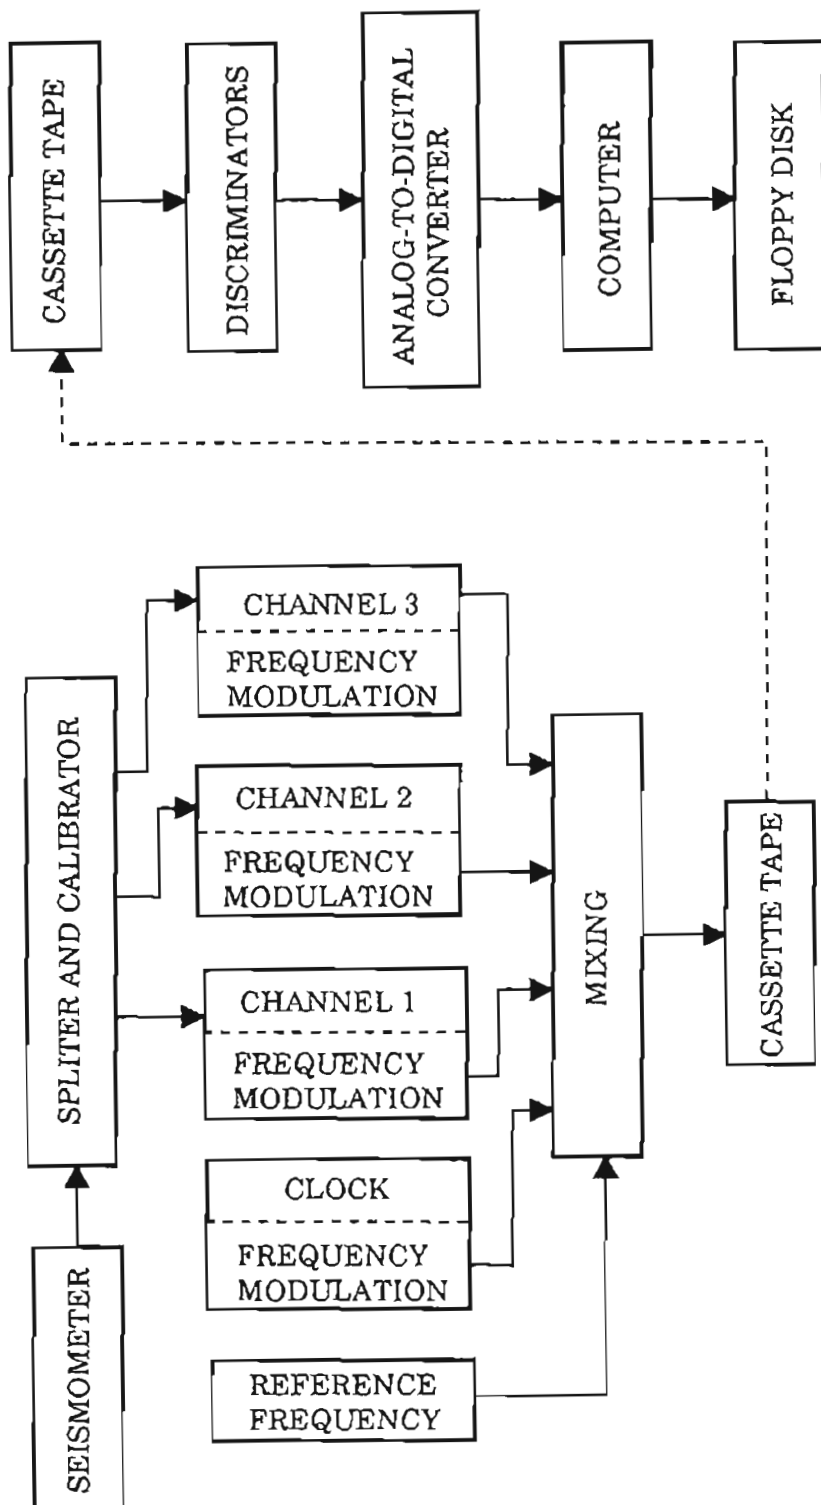


Figure 6. Schematic diagram of the Seismic Cassette Recorder (SCR) data acquisition and processing system

amplifiers overlap, affords a variable total dynamic range. All three data channels and the time code signal (IRIG E) are frequency modulated. The three data carrier frequencies, the clock carrier frequency, and a tape-speed compensation carrier frequency are summed and recorded on cassette tape. During the digitizing process, the cassette tapes are played back and the signals are demultiplexed and demodulated. To prevent accidental shifting of the data-carrier frequencies, the tape-speed compensation carrier frequency is demultiplexed and sent to a circuit board which continuously adjusts the speed of the tape deck such that the tape-speed compensation carrier frequency matches a locally generated reference frequency. A 12-bit analog-to-digital (A/D) converter converts the signals to digital data which are stored on floppy disks. The data are sampled at 200 samples per second. The complete system velocity response is roughly flat between 2 and 30 Hz (Figure 7a) and the approximate ground motion,  $A_g(t)$ , for this frequency range can be calculated:

$$A_g(t) = \frac{A(t)}{R_{GLE} R_{SA} R_{VCO} D_{DSC} D_{A/D}} = \frac{A(t)}{(409.6) R_{SA}}$$

where  $A(t)$  is the amplitude response and  $R_{GLE}$ ,  $R_{SA}$ ,  $R_{VCO}$ ,  $D_{DSC}$ , and  $D_{A/D}$  are the amplitude factors of the major components (Table 3). Phase characteristics are shown in Figure 7b. Prior to deployment, the clocks in each unit are synchronized to a USGS master clock which drifts approximately one millisecond per week and is checked periodically against satellite clocks. When the cassette recorders are retrieved, a clock drift is measured and these data are used to calculate chronometer corrections at shot time (assuming linear drifts). Most clocks drift less than 20 milliseconds during a 24 hour period.

TABLE 3

<u>Component</u>	<u>Value</u>
$R_{GLE}$	1 V/cm/sec
$R_{SA}$	dimensionless gain variable (V/V)
$R_{VCO}$	25 Hz/V
$D_{DSC}$	0.04 V/Hz
$D_{A/D}$	409.6 counts/V

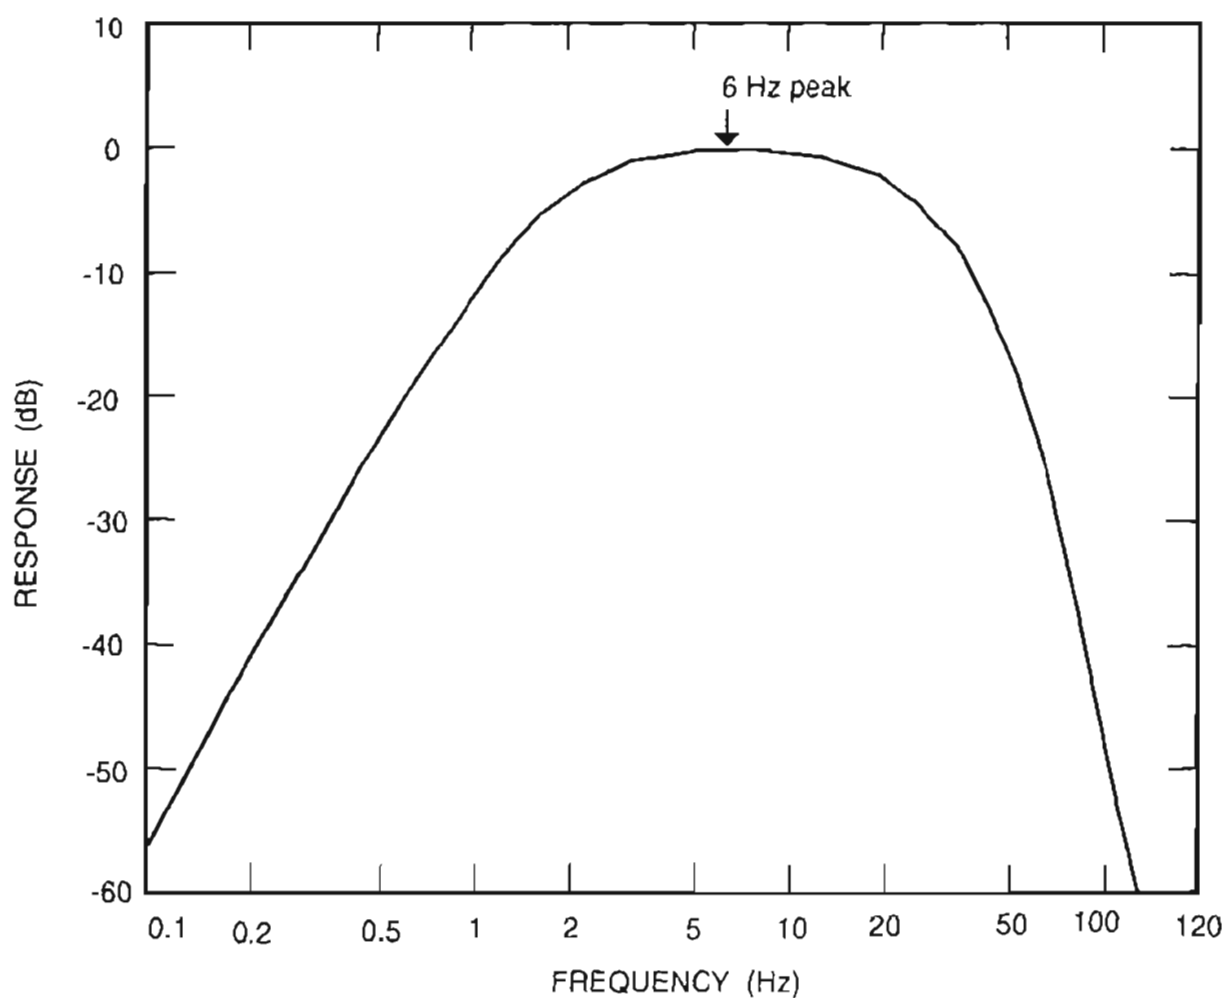


Figure 7a. Theoretical velocity response for the USGS seismic cassette recorder (SCR) and digitizing system with a Mark Products L-4A geophone (2-Hz). (From Dawson and Stauber, 1986)

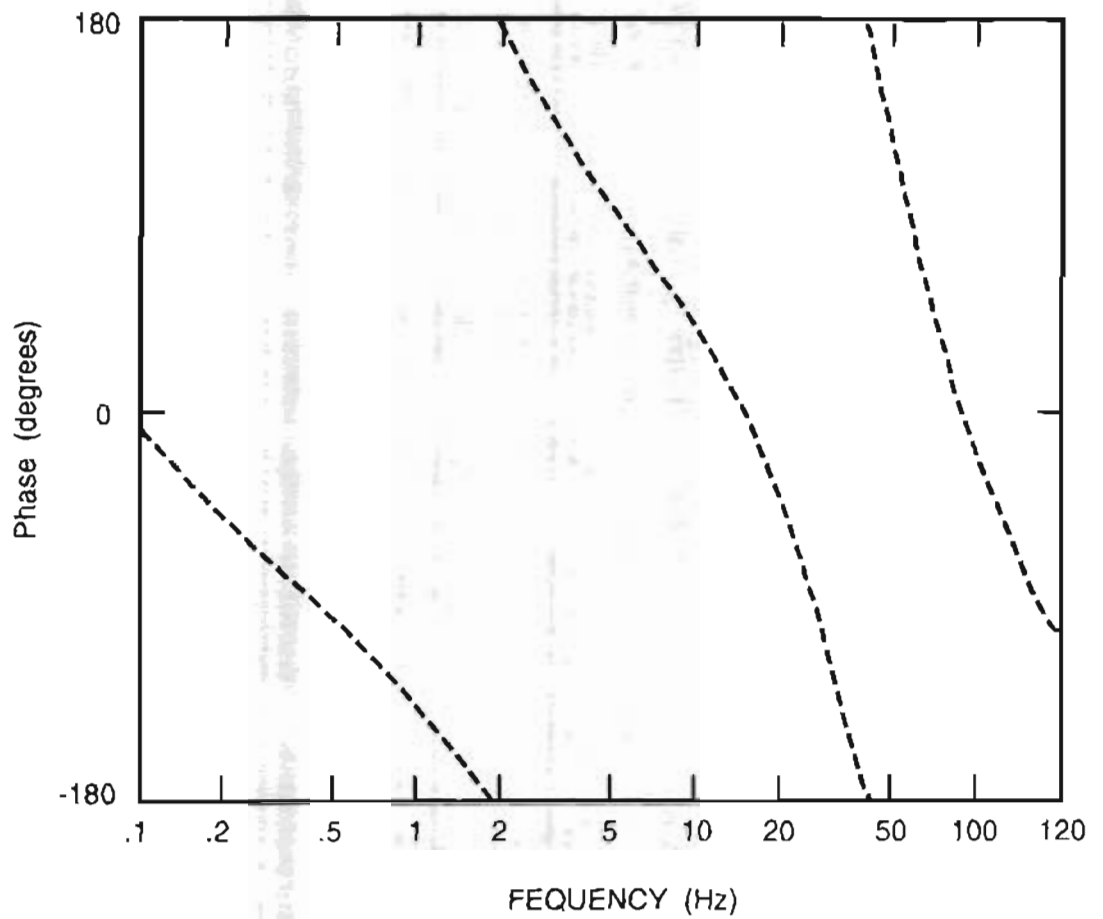


Figure 7b. Phase characteristics of the USGS seismic cassette recorder (SCR) and digitizing system. (From Dawson and Stauber, 1986)

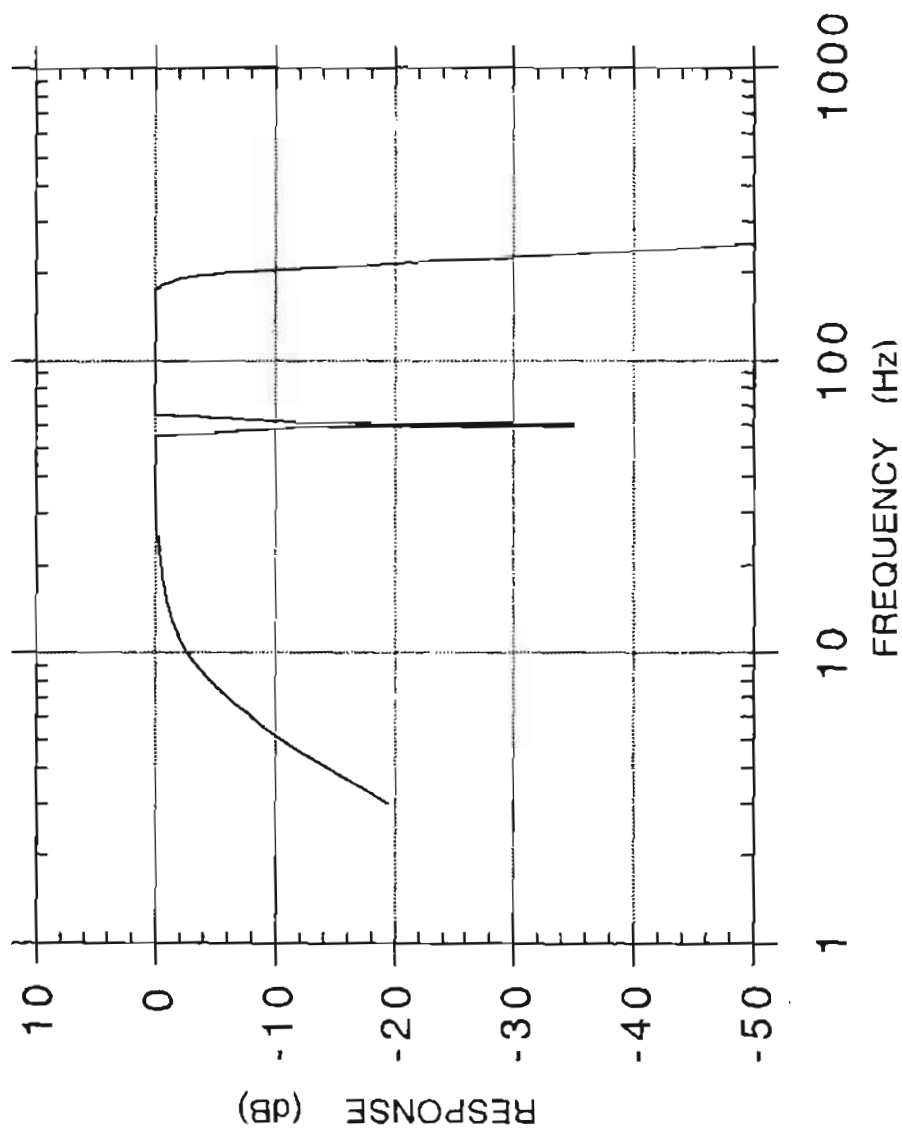


Figure 9b. The amplitude response for the SGR III with the modified Mark Products L10-B geophone string.

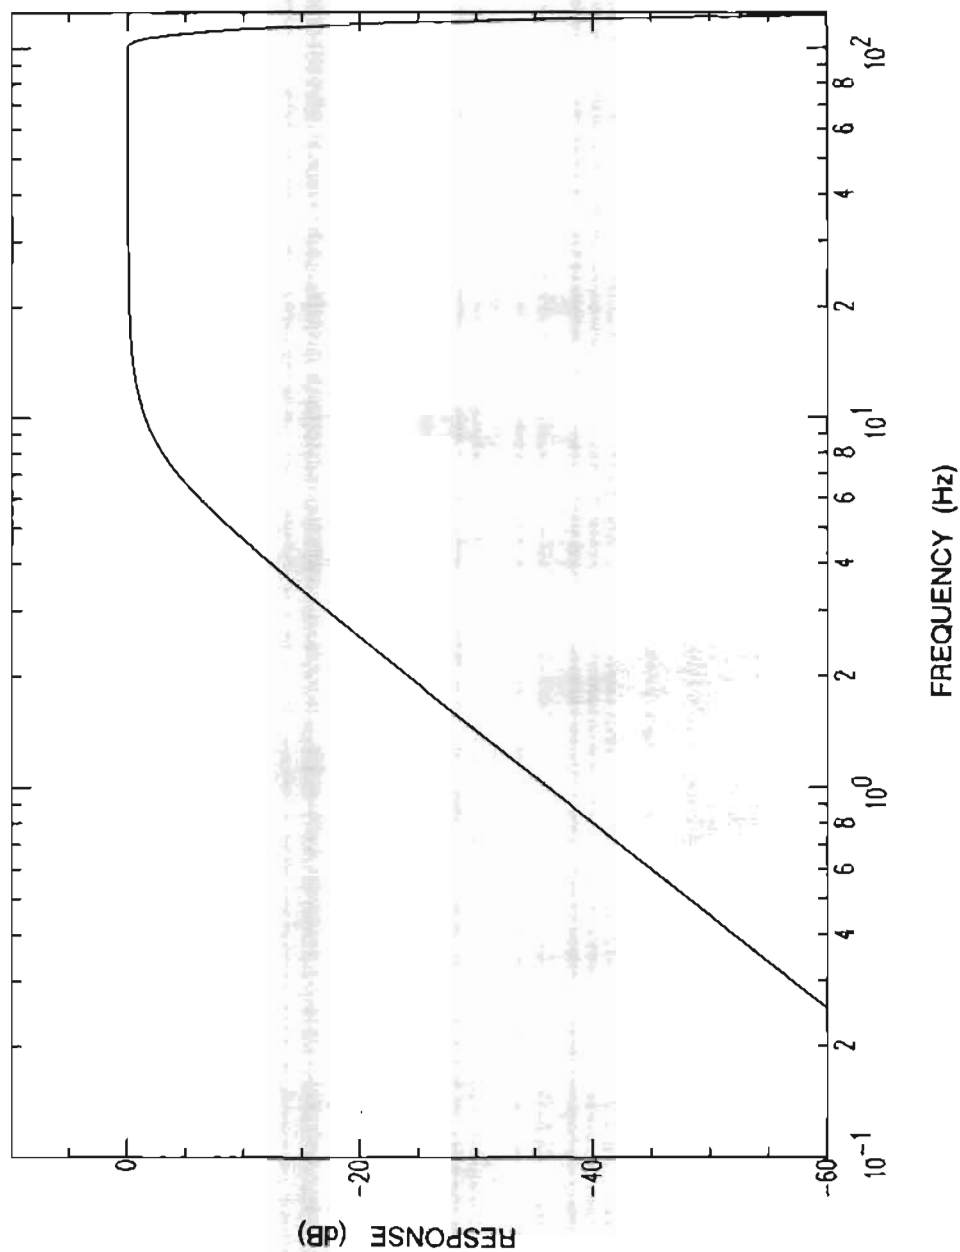


Figure 10. The amplitude response for the REF TEK 72A-02 seismic recorder with the Mark Products L10-B geophone string.



## DATA PROCESSING

The mix of instruments posed several unique recording problems. The SCR and PRS1 instruments have nearly matched instrument responses designed for lower-frequency refraction recording (2-30 Hz), whereas the SGR and Ref Tek recorders are matched and were equipped with industry geophones designed for higher-frequency reflection recording ( $\geq 10$  Hz). Although all four playback systems produce SEG Y data tapes, the header files and sample rates are different for each system. Record sections and normal-moveout (NMO) corrected shot gathers were produced in the field within 48 hours of shooting because each seismic instrument system had its own data playback facility. However, merging the data required extensive processing.

Processing of the data was undertaken at Rice University on a SUN SPARC 4/390 computer using the Cogniseis DISCO processing system. Geometry for recording sites was defined for each of the five deployments (Figures 3 and 5) and shotpoints were defined by distance to the nearest recording site. No geometry was defined for shots 62 and 63. Processing proceeded deployment by deployment in 3 stages (Figure 11). In the first stage, major trace header variables were established for each instrument type including shot and receiver parameters. Timing corrections associated with instrument recording and geometry corrections were applied in the first phase along with a reducing velocity of 8 km/sec. In the second stage, data belonging to each of the different instrument types were merged and sorted into shot order. Additional trace header variables were assigned and all shots were plotted and tables for the trace headers were compiled. Finally, in stage III, the shot ordered data were written in SEG Y format to tape.

### Stage I

Each of the different instrument systems produced raw SEG Y formatted data tapes with different predefined trace headers. Certain key variables, namely the field file identification, FFID, trace sequence number, SEQNO, and the receiver station location, XSTA, were used to define a consistent set of major trace headers; SHOT (bytes 9-12), SP (bytes 17-20), and CHAN (bytes 13-16). To identify the different instrument types, a BOXTYPE (bytes 211-212) trace header was defined; 1 = SCR, 2 = SGR, 3 = PRS1, and 4 = Ref Tek.

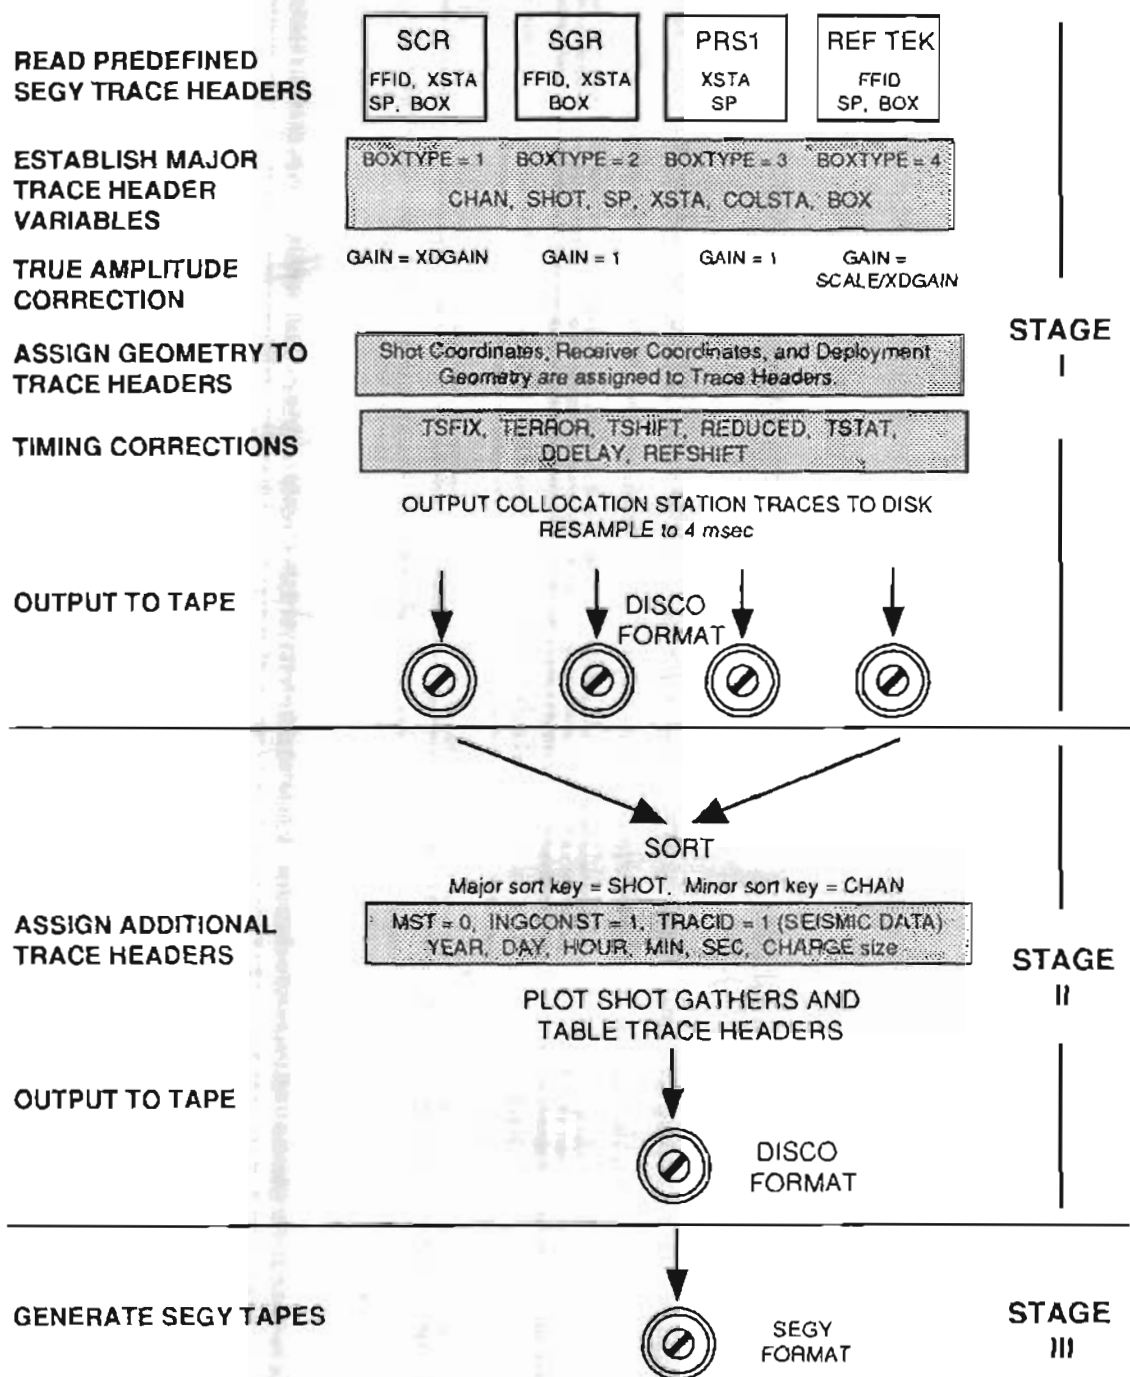


Figure 11. Schematic diagram showing the steps used to process the Brooks Range data.

During each deployment, one site was chosen to collocate all instrument types. The trace header COLSTA (bytes 235-236) was defined to indicate which traces are from collocation sites. COLSTA is set to 1 for collocation sites; otherwise it is 0. Table 4 lists station locations used for collocation sites. Collocation traces were used to check timing corrections and trace polarity. The amplitude of these traces can be used to obtain absolute amplitude corrections.

TABLE 4

<u>Deployment</u>	<u>Collocation Station</u>	<u>Box type</u>
1	1679	2,3,4
2	2100	1,2,3,4
3	3055	1,3,4
4	3480	3,4
5	2515	2,4

Amplitude corrections or scaling ratios of one instrument type to another have been calculated in two ways. The first (Table 5, A), a more approximate method, compared maximum and average amplitudes for collocated box-types 1, 2, and 4 for only deployment 2. In a second more thorough evaluation (Table 5,B), collocation amplitudes for all Brooks Range deployments were calculated by averaging both positive and negative amplitudes over a time window. A 'mean' or average scale factor for each box type was then calculated. These two estimates provide scale factors within a factor of 2 of each other (Table 5)

TABLE 5

<u>Box Type</u>	<u>Instrument</u>	<u>Scaling Factor</u>	
		<u>A</u>	<u>B</u>
1	SCR	1.0	/ 1.0
2	SGR	$4.5 \times 10^6$	/ $6.79 \times 10^6$
3	PRSI	--	/ 0.641
4	Ref Tek	$7.5 \times 10^7$	/ $9.73 \times 10^7$

The timing corrections applied to the Brooks Range data include: a correction due to shot errors, instrument drift corrections, and a reduction time correction. To ensure that the original data can be recovered or that the timing errors can be recomputed, the major timing variables are placed in the extended SEG Y trace header space (user defined space). The following is a definition of those headers:

TSFIX	digitizing start time in msec. Bytes 203-204.								
DRIFT	instrument drift in msec. Bytes 205-206.								
TERROR	shot time correction in msec (due to master clock error). Bytes 207-208.								
MST	MST is set equal to 0. Bytes 181-184 Timing correction so that digitized traces start on the second. For SGR data, this correction is done in the transcribing process by adding MST to the DRIFT term. In the SCR and PRS1 data, the correction is done in the digitizing process.								
TSHIFT	Shifts the beginning of the trace to shot time. Bytes 217-220. TSHIFT is defined for each instrument type as follows: <table> <tr> <td>SCR</td><td><math>XOFFSET/8.0 * + TSFIX + TERROR - DRIFT</math></td></tr> <tr> <td>PRS1</td><td><math>XOFFSET/8.0 * + TSFIX + TERROR - DRIFT</math></td></tr> <tr> <td>SGR</td><td><math>TSFIX + TERROR + DRIFT</math></td></tr> <tr> <td>Ref Tek</td><td><math>TSFIX + TERROR + DRIFT</math></td></tr> </table> <p>* - reduction time applied to data in the field. Bytes 221-224.</p>	SCR	$XOFFSET/8.0 * + TSFIX + TERROR - DRIFT$	PRS1	$XOFFSET/8.0 * + TSFIX + TERROR - DRIFT$	SGR	$TSFIX + TERROR + DRIFT$	Ref Tek	$TSFIX + TERROR + DRIFT$
SCR	$XOFFSET/8.0 * + TSFIX + TERROR - DRIFT$								
PRS1	$XOFFSET/8.0 * + TSFIX + TERROR - DRIFT$								
SGR	$TSFIX + TERROR + DRIFT$								
Ref Tek	$TSFIX + TERROR + DRIFT$								
REDUCED	reduction time applied to the data (- $OFFSET/8.0$ (km/s) ).								
TSTAT	Sum of all time shifts applied to the original data. Bytes 225-228. (TSHIFT + REDUCED).								
DDELAY	Bytes 229-232. If DDELAY is removed the trace is returned to the state that we received it. DDELAY is defined for each instrument type as follows: <table> <tr> <td>SCR</td><td><math>TSTAT - MST*/1000</math></td></tr> <tr> <td>PRS1</td><td><math>TSTAT - MST*/1000</math></td></tr> <tr> <td>SGR</td><td><math>TSTAT + 0</math></td></tr> <tr> <td>Ref Tek</td><td><math>TSTAT - MST*</math></td></tr> </table> <p>* - MST from original field tapes.</p>	SCR	$TSTAT - MST*/1000$	PRS1	$TSTAT - MST*/1000$	SGR	$TSTAT + 0$	Ref Tek	$TSTAT - MST*$
SCR	$TSTAT - MST*/1000$								
PRS1	$TSTAT - MST*/1000$								
SGR	$TSTAT + 0$								
Ref Tek	$TSTAT - MST*$								
REFSHIFT	Empirical static shift applied to the Ref Tek's which experienced large clock drifts. This was calculated using cross correlation's on adjacent SGR traces. Bytes 237-238.								

Based on analysis of first arrival time picks, it is likely that an additional -0.12 sec shift for shot 15 and a -0.1 sec shift for shot 29 is required to satisfy

reciprocity constraints. These shifts (travel-time advances) are approximate. To correct for a missed shot window on the first deployment, traces from shot 63 (sp 126) were merged with shot 10 (sp 126). Data from shot 62 (sp 127) did not fit the defined geometry and therefore, are not presented here. At this stage, the data were resampled to 4 msec and temporary tapes were written for each instrument system.

## Stage II

During the second stage, data from the temporary tapes for each instrument system were merged and sorted into shot ensembles and the data were plotted. In addition, trace headers were tabled and checked. At this stage, trace headers related to the date and time of shots (see extended SEG-Y trace header space of table 6) and shot charge size (CHARGE; bytes 187-188) were added, TRACEID (bytes 29-30) was set to 1 (seismic data), MST (bytes 181-184) was set to 0, and the instrument gain constant, INGCONT (bytes 185-186), was set to 1.

## Stage III

In the third and final stage of processing, SEG-Y-formatted data was written to tape at 6250 bpi and trace header information was written to the EBCDIC reel header (Figure 12). The data were written as shot gathers in deployment order with a sample rate of 4 msec and a trace length of 60 seconds (see appendix B for actual data length). A description of the trace headers is given in Table 6.

Several headers were specially set to ensure compatibility with U.S. Geological Survey record-section plotting programs and software at the Canadian Geological Survey (Luetgert, 1988). Headers MST (bytes 181-184) and COR (bytes 185-186) were set to zero. In addition, the trace start time (bytes 157 through 166) was set to the shot time (bytes 189 through 202). The instrument gain correction (bytes 121-122) was set to one.

\*\*\*\*\*  
 \* SEG-Y BINARY HEADER INFORMATION \*  
 \*\*\*\*\*

MAXNTR..... 800  
 SAMPLE RATE.. 4000 (MICROSECONDS)  
 LENGTH..... 15000 (SAMPLES)  
 DATA FORMAT.. 1 (IBM FLPT)

\*\*\*\*\*  
 \* EBCDIC REEL HEADER \*  
 \*\*\*\*\*

C1 BROOKS RANGE EXPERIMENT 1990 : RICE UNIVERSITY PROCESSING  
 C2 GSC, SGR, PRS1 AND SCR MERGED DATA FOR DEPLOYMENT 2.  
 C3  
 C4 SAMPLE RATE = 4 MS / 60 SECS DATA / 32 BYTE IBM FLOAT FORMAT  
 C5 DATA IS REDUCED (VRED = \*.0KM/SEC)  
 C6 DATA IS DRIFT CORRECTED, AND CORRECTED FOR ALL OTHER TIMING ERROR  
 C7 AND TIMING SHIFTS.  
 C8 HEADERS ARE DESCRIBED AS NAME (XXX,N) WHERE XXX IS THE BYTE LOCATION  
 C9 N IS THE NUMBER OF BYTES  
 C10 SHOT ( 9,4) = SHOT SEQUENCE NUMBER  
 C11 CHAN ( 13,4) = CHANNEL NUMBER  
 C12 ESPNUM ( 17,4) = SHOTPOINT NUMBER, EQUIVALENT TO SP  
 C13 INGCNST(121,2) = TRUE AMPLITUDE FACTOR =1 INSTRUMENT GROUPS ARE TRUE  
 C14 AMPLITUDE WRT THEMSELVES NOT WRT EACH OTHER  
 C15 MST (181,4) = 0 MICROSECONDS OF TRACE START TIME  
 C16 COR (185,2) = 0 MS TIMING CORRECTION (MST AND COR HEADERS USED TO  
 C17 MAINTAIN COMPATABILITY WITH LUTIGERT'S PROGRAMS)  
 C18 CHARGE (187,2) = CHARGE SIZE IN LBS  
 C19 SYEAP (189,2) = SHOT TIME:(YEAR,MOU, DAY,MIN,SEC)EACH IN 2 BYTE HEADER  
 C20 SSMIC (199,4) = SHOT TIME: MICROSECONDS  
 C21 TSFIX (203,2) = MSEC TIME BEFORE SHOT = INITIAL DIGITIZING TIME  
 C22 DRIFT (205,2) = MSEC INSTRUMENT DRIFT  
 C23 ERROR (207,2) = MSEC CORRECTION TO SHOT TIME  
 C24 BOX (209,2) = SERIAL NO. OF THE BOX; PRS1 VALUE SHOULD HAVE 'A' PRE  
 C25 BOXTYPE (211,2) = 1 FOR SCR / 2 FOR SGR / 3 FOR PRS1 / 4 FOR REFTEK  
 C26 REC-STAT(213,4) = RECEIVER STATION  
 C27 TSHIFT (217,4) = TSFIX + ERROR - DRIFT + XOFFSET/8.0 (TSHIFT CORRECTS  
 C28 TO SHOT TIME; -XOFFSET/8.0 IS FAKE REDUCTION APPLIED IN  
 C29 REDUCED (221,4) = -XOFFSET/8.0 (OFFSET IS TRUE (R-SC OFFSET)  
 C30 ISTAT (225,4) = TSHIFT + REDUCED (WHAT WE APPLIED TO DATA)  
 C31 CDLAY (229,4) = TSHIFT + REDUCED - MST/1000.  
 C32 (MST IS A MICROSECOND ERROR ASSOCIATED WITH TURNON TIME  
 C33 OF SCR AND PRS1 INSTRUMENTS) IF CDLAY IS REMOVED THE  
 C34 TRACE IS RETURNED TO THE STATE IN WHICH WE RECEIVED IT  
 C35 GAIN (233,2) = GAIN THAT APPLIED TO TRACES TO PROVIDE TRUE AMP  
 C36 COLSTA (235,2) = 1 COLLOCATION STATION : ONE TYPE OF EACH INSTRUMENT  
 C37 = 0 OTHERWISE  
 C38 REFSHIFT (237,2) = EMPIRICAL STATIC SHIFT APPLIED TO REFTEKS(CLOCK DRIFT)  
 C39 CONTACT A.R. LEVANDER OR S.A. HENRYS FOR ADDITIONAL INFORMATION  
 C40 PROCESSED BY S.A. HENRYS, A.R. LEVANDER, AND W. LUTTER-END REEL HEADER.

Figure 12. EBCDIC reel header.

**TABLE 6 (continued)**

165-166	Second of trace start time
167-168	Not used
169-170	Not used
171-172	Not used
173-174	Not used
175-176	Not used
177-178	Not used
179-180	Not used
181-184	Microseconds of trace start time
185-186	Millisecond of timing correction
187-188	Amount of explosives (lbs)
189-190	Shot time - Year
191-192	Shot time - Day
193-194	Shot time - Hour
195-196	Shot time - Minute
197-198	Shot time - Second
199-202	Shot time - Microsecond
203-204	Initial digitizing time
205-206	Clock drift rate
207-208	Correction to shot time in microseconds
209-210	Instrument number
211-214	Instrument type (1= SCR, 2= SGR, 3= PRS1, 4 = Ref Tek)
213-216	Receiver location number
217-220	Corrects trace to shot time (see comments in EBCDIC reel header)
221-224	Reduction (- offset / 8.0)
225-228	correction applied to data (see comments in EBCDIC reel header)
229-232	error in turn on time of SCR and PRS1 (in microseconds)
233-234	Gain
235-236	Collocation site for each type instrument (1=yes, 2=no)
237-238	Static shift applied to Ref Tek's (clock drift)

## ACKNOWLEDGMENTS

Our field crew in Alaska included, in addition to the authors, many people without whose hard work and courage under adverse field conditions (rain, mud, dust, mosquitoes, hazardous gravel roads, helicopter hazard, explosive hazard, boat hazard) and difficult logistics in this remote land of the Midnight Sun, this beautiful data set could never have been collected. They include Rufus Catchings, Brian Kilgore, Mike Moses, Gene Wissinger, Rob Luzitano, Joseph Cotton, Mark Goldman, Cliff Gill, John Vanschaack, Dave Reneau, Gray Jensen, Ron Kaderabek, Will Kohler, Mathias Schwab, Mark Geddes, Stephen Hughes, Walter Mooney, Jill McCarthy, Brad Carr, Dean Ballotti, Andy Feustell, Lorraine Wolf, Tim Cartwright, Rebecca Irving, John Hole, Marcel Gervais, Chris Humphreys, John Amor, John Fraser, Carol Petersen, and Jan Kaufmann.

Persons from numerous government and private agencies assisted us with the difficult jobs of permitting and providing logistical support. We are indebted to these persons for making the experiment even possible. They include

- 1) Bob McLean and Carl Hemming of the State of Alaska Department of Fish and Game,
- 2) Elaine Snyder-Conn of the U.S. Fish and Wildlife Service,
- 3) John O'Brien and Michael Miller of the Institute of Arctic Biology at Toolik Lake,
- 4) Roy Masinton, John Cook, Blair Marasco, Tom Dean, and Boyce Bush of the U.S. Bureau of Land Management,
- 5) Dennis Prendeville and Jim Harle of the Alyeska Pipeline Service Company,
- 6) Dave Smith and Dave German of the North Slope Borough,
- 7) Dave Stone and Doug Christianson of the University of Alaska.

Funding for this work was provided by the United States Geological Survey, the National Science Foundation, and the Incorporated Research Institutions for Seismology.



## REFERENCES

- Asudeh, I., F. Anderson, J. Parmelee, S. Vishnubhatla, P. Munro, J. Thomas, 1992, A portable refraction seismograph PRS1: Geological Survey of Canada Open-file Report 2478, 34 p.
- Barry, K.M., D.A. Cavers, and C.W. Kneale, 1975, Recommended standards for digital tape formats: *Geophysics*, v. 32, p1073-1084.
- Beaudoin, B.C., G. Perkins, and G.S. Fuis, 1989, Data report for the TACT 1987 seismic refraction survey: Alaska Range and Fairbanks South deployments: U.S. Geol. Surv. Open File Rep. 89-321.
- Brocher, T.M., and M.J. Moses, 1990, Wide angle seismic recordings conducted during the TACT multichannel reflection profiling in the northern Gulf of Alaska: U.S. Geol. Surv. Open-File Rep. 90-663, 40 p.
- Daley, M. A., E. L. Ambos, and G. S. Fuis, 1985, Seismic refraction data collected in the Chugach Mountains and along the Glenn Highway in southern Alaska in 1984: U.S. Geol. Survey Open-File Report 85-531, 32 p.
- Dawson, P. B., and D. A. Stauber, 1986, Data report for a three-dimensional high-resolution P-velocity structure investigation of the Summit Caldera of Newberry Volcano, Oregon, using seismic tomography: U.S. Geol. Survey Open-File Report 86-352, 45 p.
- Fisher, M. A., T. M. Brocher, G. Plafker, W. J. Nokleberg, and G. L. Smith, 1989, Seismic reflection images of the crust of the north part of the Chugach terrane, Alaska: Results of a survey for the Trans-Alaska Crustal Transect (TACT): *J. Geophys. Res.*, v. 94, p. 4424-4440.
- Fuis, G.S., Lutter, W.J., Levander, A.R., and Wissinger, E.S., 1991, A preliminary seismic-velocity model for the uppermost crust of the Brooks Range, arctic Alaska (abs.): EOS (Transactions American Geophysical Union), v. 72, no. 44 Supplement, p. 296.
- Goldman, M.R., G.S. Fuis, J.H. Luetgert, and D.J. Geddes, 1992, Data report for the 1987 seismic refraction survey: Fairbanks North and Olney deployments: U.S. Geological Survey Open-File Report 92-196, 98 p., 1 magnetic tape.

- Grantz , Arthur, T.E. Moore, and Sarah Roeske, 1991, Gulf of Alaska to Arctic Ocean: Geological Society of America, Centennial Continent/Ocean Transect #15, 72 p., 3 sheets, scale 1:500,000.
- Kohler, W.M., and Fuis, G.S., 1989, Empirical relationship among shot size, shotpoint site condition, and recording distance for 1984-1987 U.S. Geological Survey seismic-refraction data: USGS Open-file Report 89-675, 107 p.
- Kohler, W.M., and Fuis, G.S., 1992, Empirical dependence of seismic ground velocity on the weight of explosives, shotpoint site condition, and recording distance for seismic-refraction data: Bulletin Seismological Society of America, v. 82, p. 2032-2044.
- Levander, A.R., C.F. Lafond, B. Beaudoin, G.S. Fuis, R.A. Page, and D.B. Stone, 1988, The PASSCAL wide-angle seismic experiment in the Brooks Range, Arctic Alaska: EOS, Trans. Am. Geophys. Union, v. 69, p. 1453.
- Levander, A.R., E.S. Wissinger, G.S. Fuis, W.J. Lutter, 1991, The 1990 Brooks Range seismic experiment: near-vertical incidence reflection images, [abs.]: EOS, Trans. Am. Geophys. Union, v. 72, no. 44, p. 296.
- Luetgert, James H., 1988, Users Manual for RSEC88 Interactive Computer Program for Plotting Seismic Refraction Record Sections: USGS Open-file Report 88-262, 89 p.
- Meador, P. G., Ambos, E. L., and Fuis, G., 1986, Data report for the North and South Richardson Highway profiles, TACT seismic refraction survey, southern Alaska: U.S. Geol. Survey Open-File Report 86-274, 51 p., 1 pl.
- Miller, E.L., and T.L. Hudson, 1991, Implications of Cretaceous extension for crustal structure and tectonic evolution of Cordilleran Orogen, Alaska: Geological Society of America Abstracts with Programs, Cordilleran Section, v. 23, n. 2, p. 79.
- Moore, T.E., and G. Mull, 1989, Geology of the Brooks Range and North Slope, in Nokleberg, W.J., and M.A. Fisher, editors, Alaskan Geological and Geophysical Transect, Field Trip Guidebook T104: American Geophysical Union, Washington, D.C., p. 107-131
- Moore, T.E., W.K. Wallace, and D.L. Jones, 1991, TACT geologic studies in the Brooks Range: Preliminary results and implications for crustal

structure: preliminary results and implications for crustal structure (abs): Geological Society of America Abstracts with Programs, Cordilleran Section, v. 23, n. 2, p. 80.

Murphy, J. M., 1988, USGS FM cassette seismic-refraction recording system: U. S. Geological Survey Open-file Report 88-570, 43 p.

Nokleberg W.J., and M.A. Fisher, 1989, Summary of Guidebook, in Nokleberg W.J., and M.A. Fisher, editors, Alaskan Geological and Geophysical Transect, Field Trip Guidebook T104: American Geophysical Union, Washington, D.C., p. 1-3.

Oldow, J. S., C.M. Seidensticker, J.C. Phelps, F.E. Jullian, R.R. Gottschalk, K.W. Boler, J.W. Handschy, and H.G. Ave Lallement, 1987, Balanced cross sections through the central Brooks Range and North Slope, Arctic Alaska: American Association of Petroleum Geologists, Tulsa, 19 p., 8 sheets, scales 1:500,000, 1:66,666.

Oldow, J. S., H.G., Ave Lallement, R.R. Gottschalk, L.W. Snee, and 1991, Timing and Kinematics of Cretaceous contraction and extension in the southern Brooks Range, Alaska, [abs.]: EOS, Trans. Am. Geophys. Union, v. 72, no. 44, p. 295.

Stone, D. B., Page, R. A., and Davies, J. N., 1986, Trans-Alaska Lithosphere Investigation--Program prospectus: U. S. Geol. Survey Circular 984, 24 p.

Wilson, J. M., Meador, P., and Fuis, G., 1987, Data report for the 1985 TACT seismic-refraction survey, south central Alaska: USGS Open-File Report 87-440, 78 p., 1 magnetic tape.

Wilson, J. M., 1987, Supplementary data report (magnetic tape) for Open-File Report 85-531, 1984 TACT Seismic-refraction survey, south-central Alaska: USGS Open-File Report 87-482, 4 p., 1 magnetic tape.

## APPENDIX A

### RECORD SECTIONS

The record sections presented below were plotted as follows. Reducing velocity is 6 km/s. All traces are represented, but we have plotted only positive trace fills and not the trace itself. Traces are plotted from south (left) to north (right) as shown in Figure 13. For offset shots, we show 2 sections; one with an automatic-gain-control (AGC) window of 2 sec, to emphasize all arrivals, and one with an AGC window of 12 sec, to emphasize only the strongest arrivals. Changes in instrument type along the line account for the changes in appearance of arrivals. For example, PRS1's and SCR's emphasize longer-period arrivals (e.g. surface waves). The instrument type for each trace is indicated in the trace header field (bytes 211-214) of the SEG-Y data on the magnetic tapes (see Tables 4, and 6). Profile numbers are the deployment numbers.

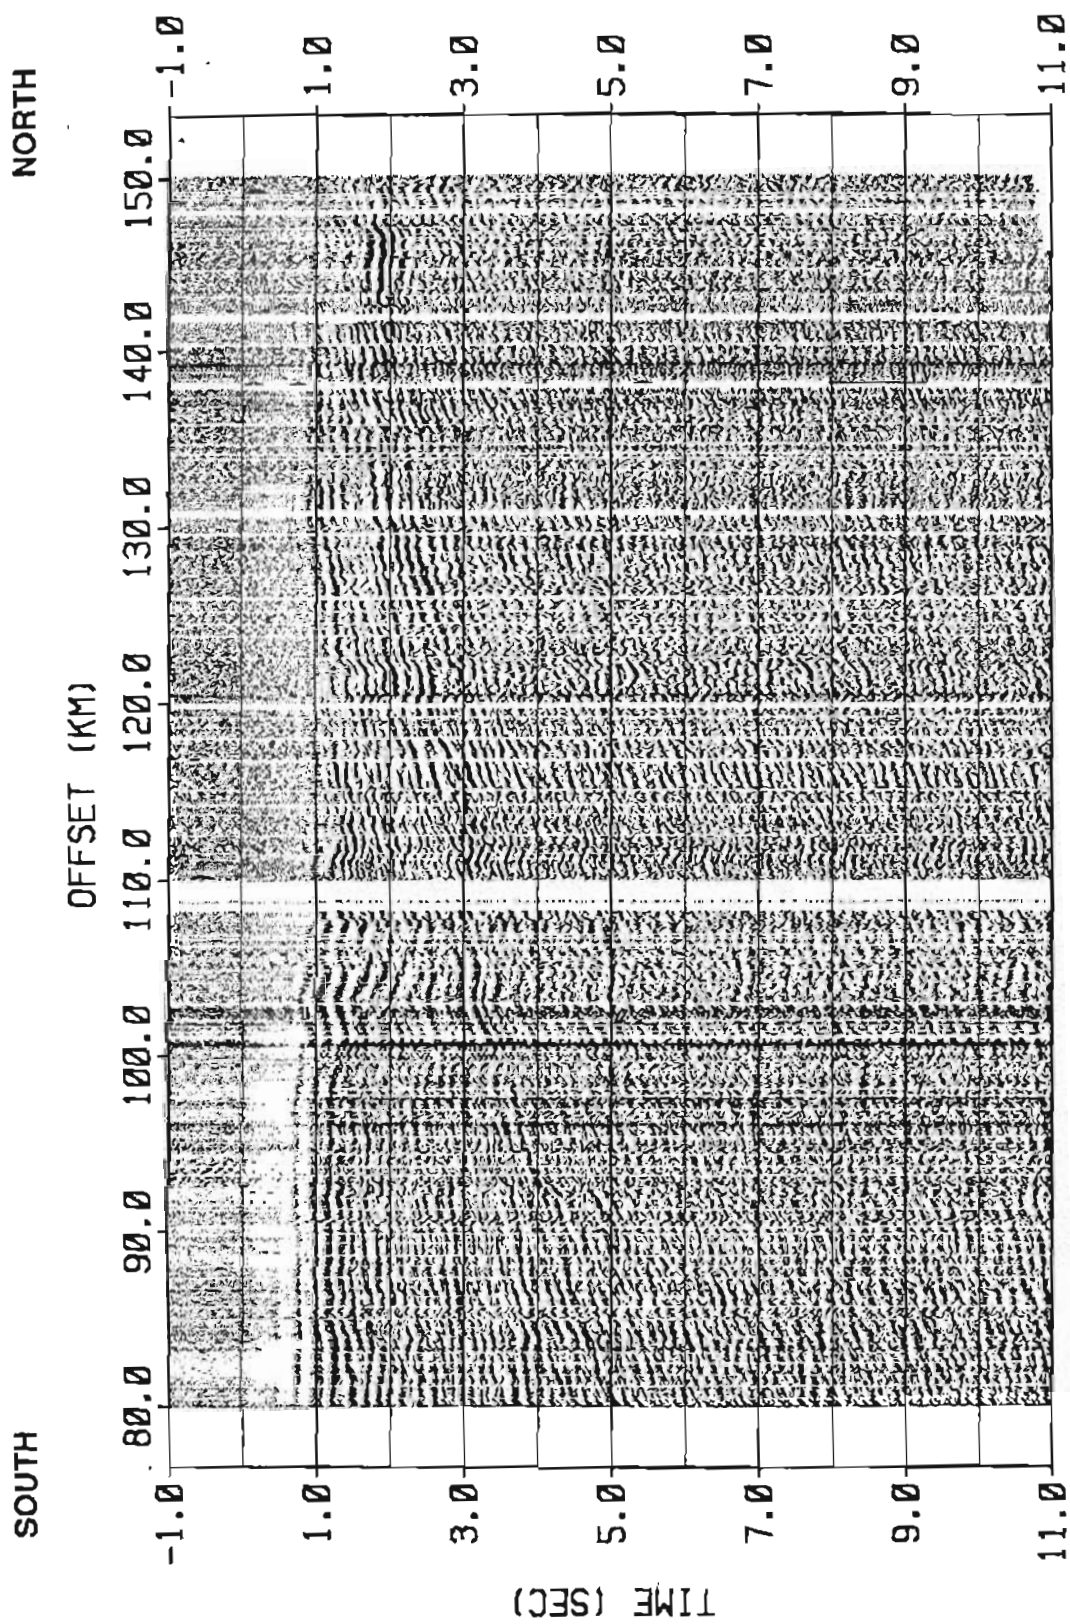


Figure 13 Profile 1  
Shot 1 Shot Point 154 AGC = 2 sec

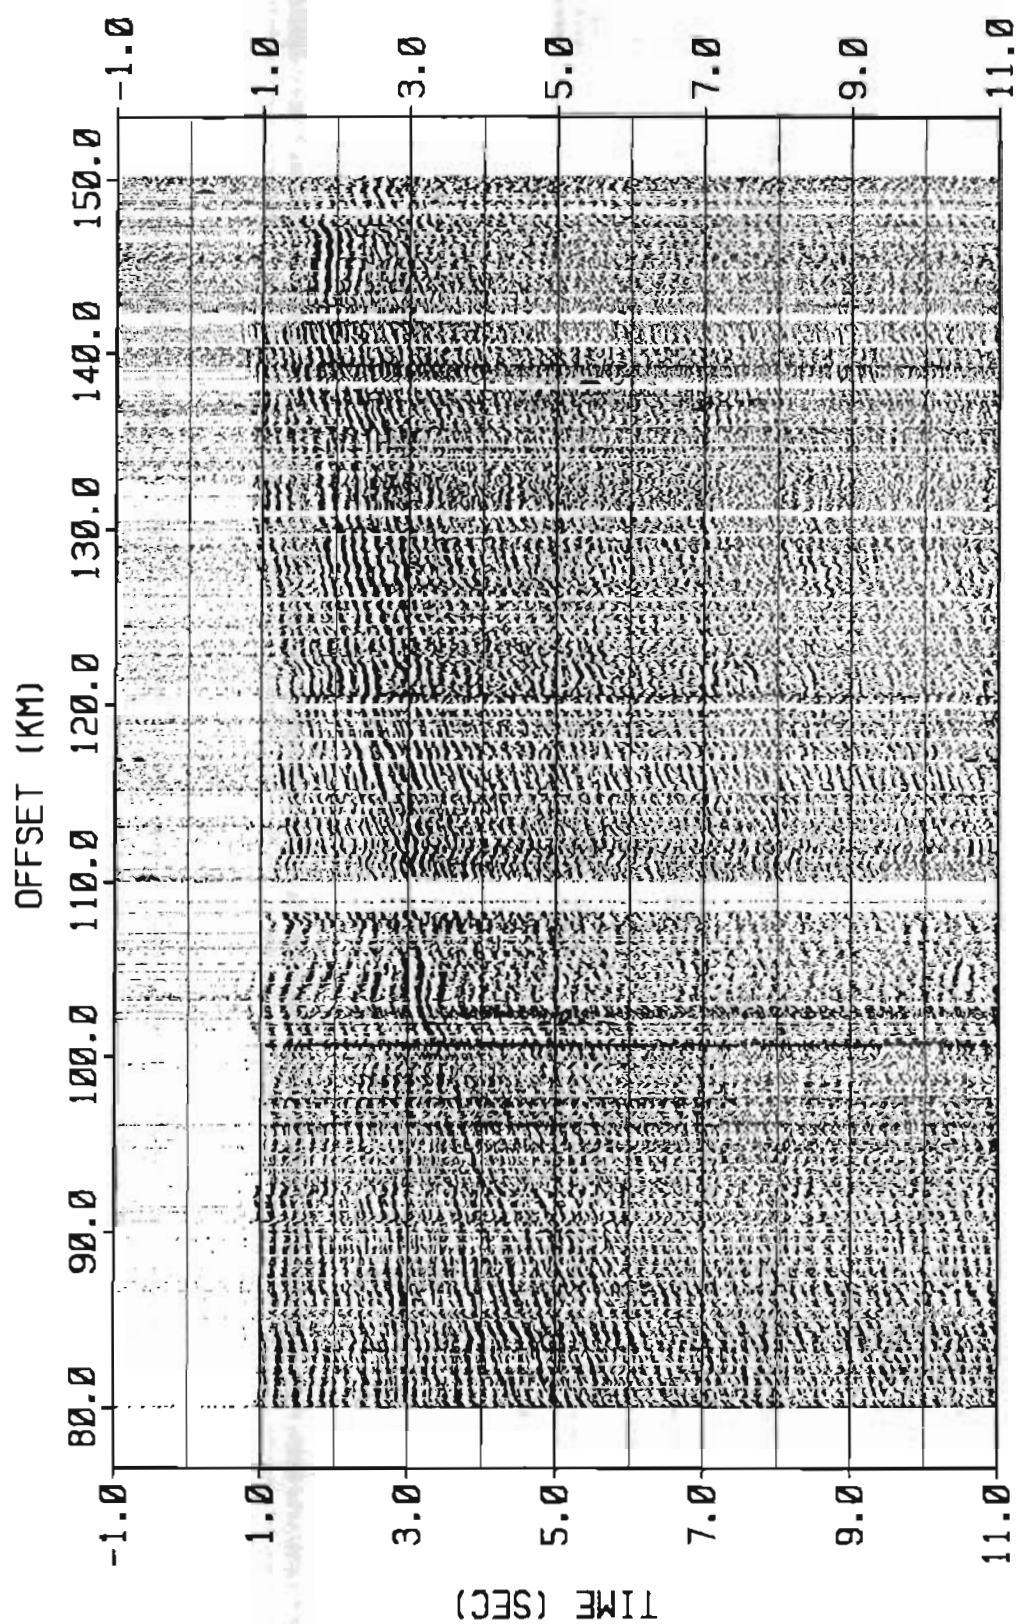


Figure 14    Profile 1  
 Shot 1    Shot Point 154    AGC = 12 sec



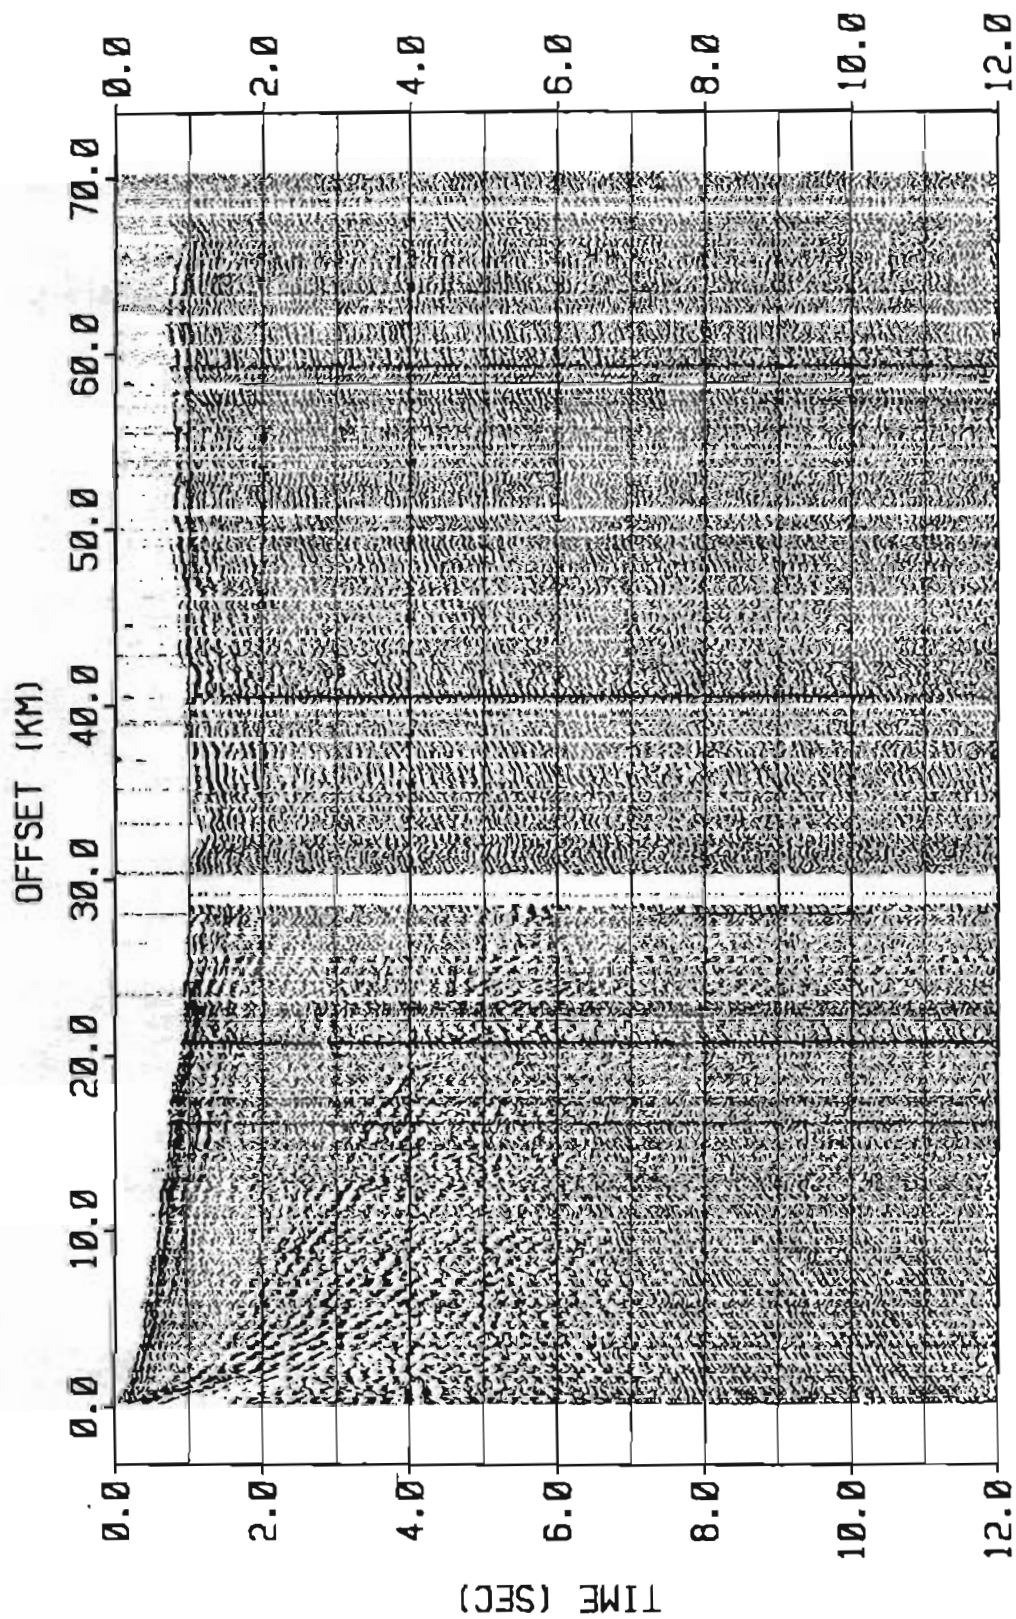


Figure 15 Profile 1  
Shot 2 Shot Point 120 AGC = 2 sec

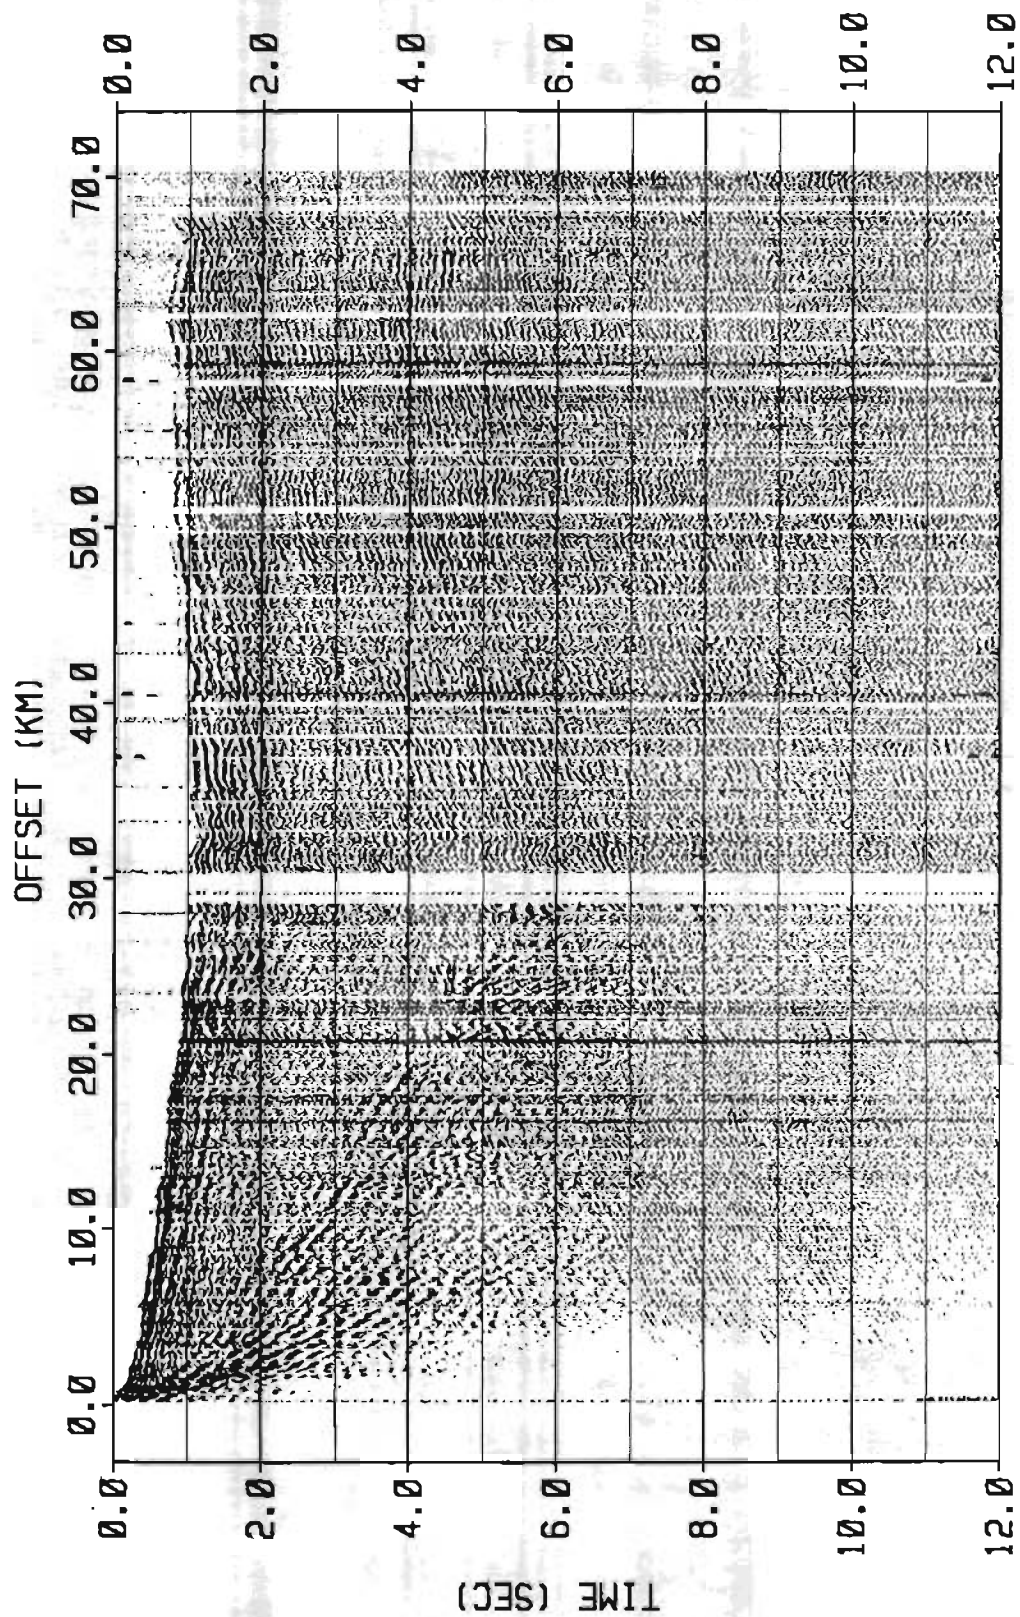


Figure 16 Profile 1  
Shot 2 Shot Point 120 AGC = 12 sec



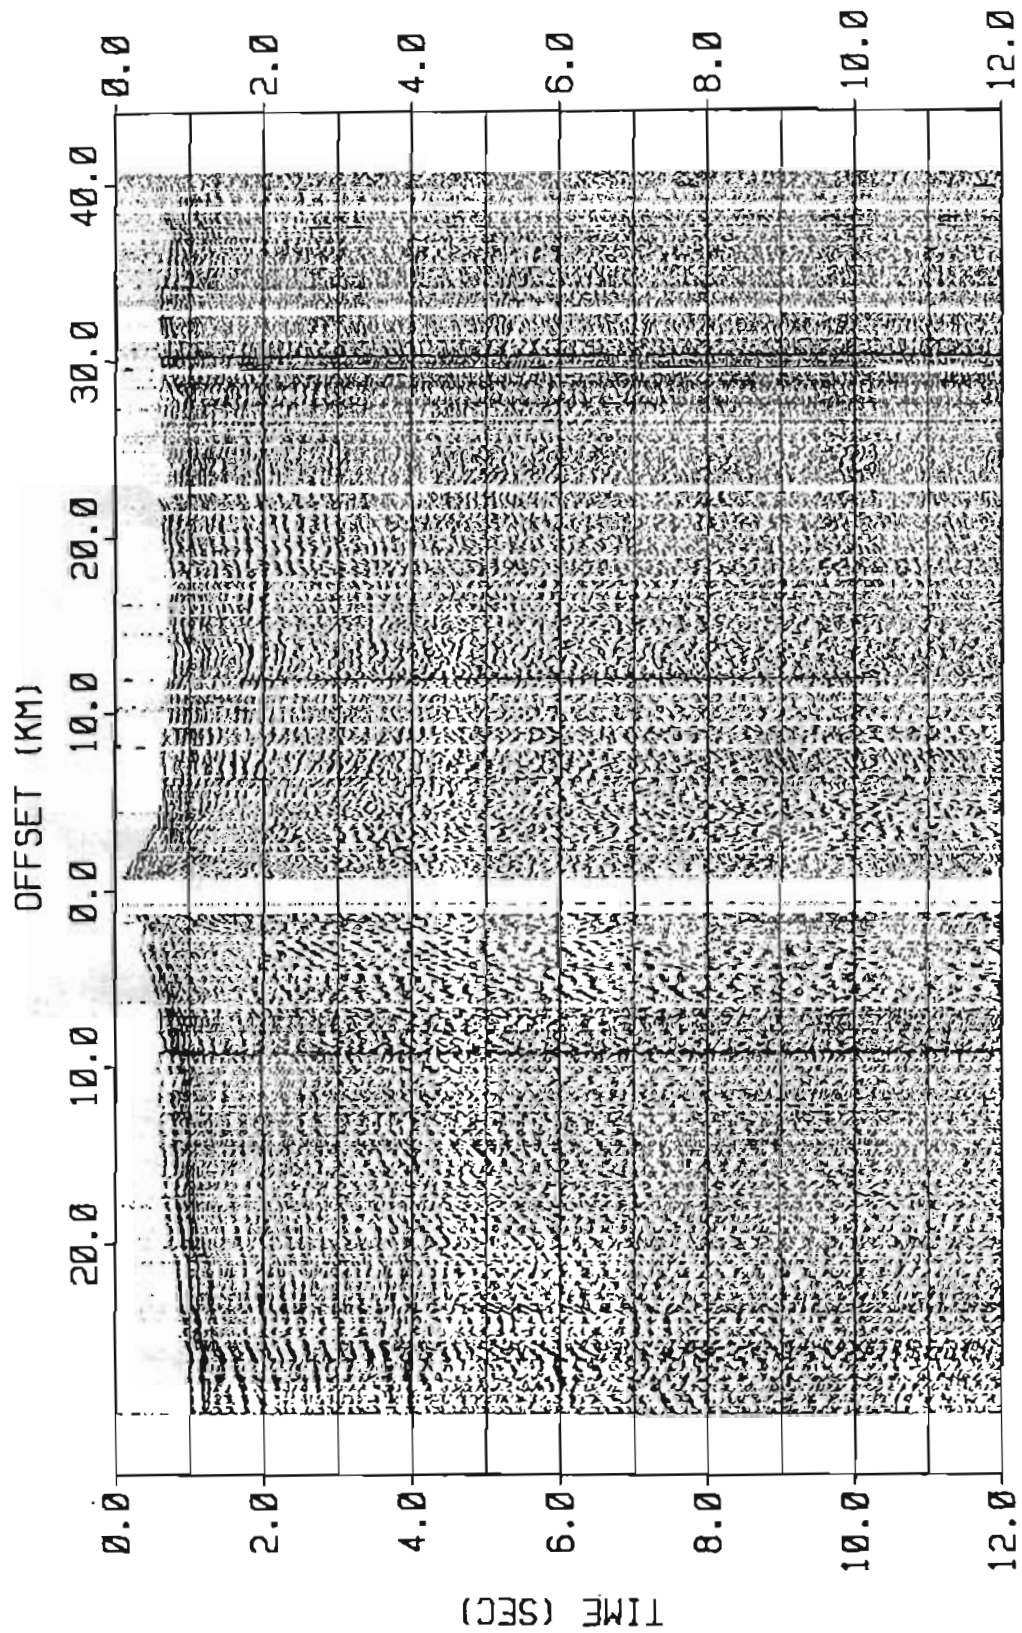


Figure 17 Profile 1

Shot 3 Shot Point 122 AGC = 2 sec


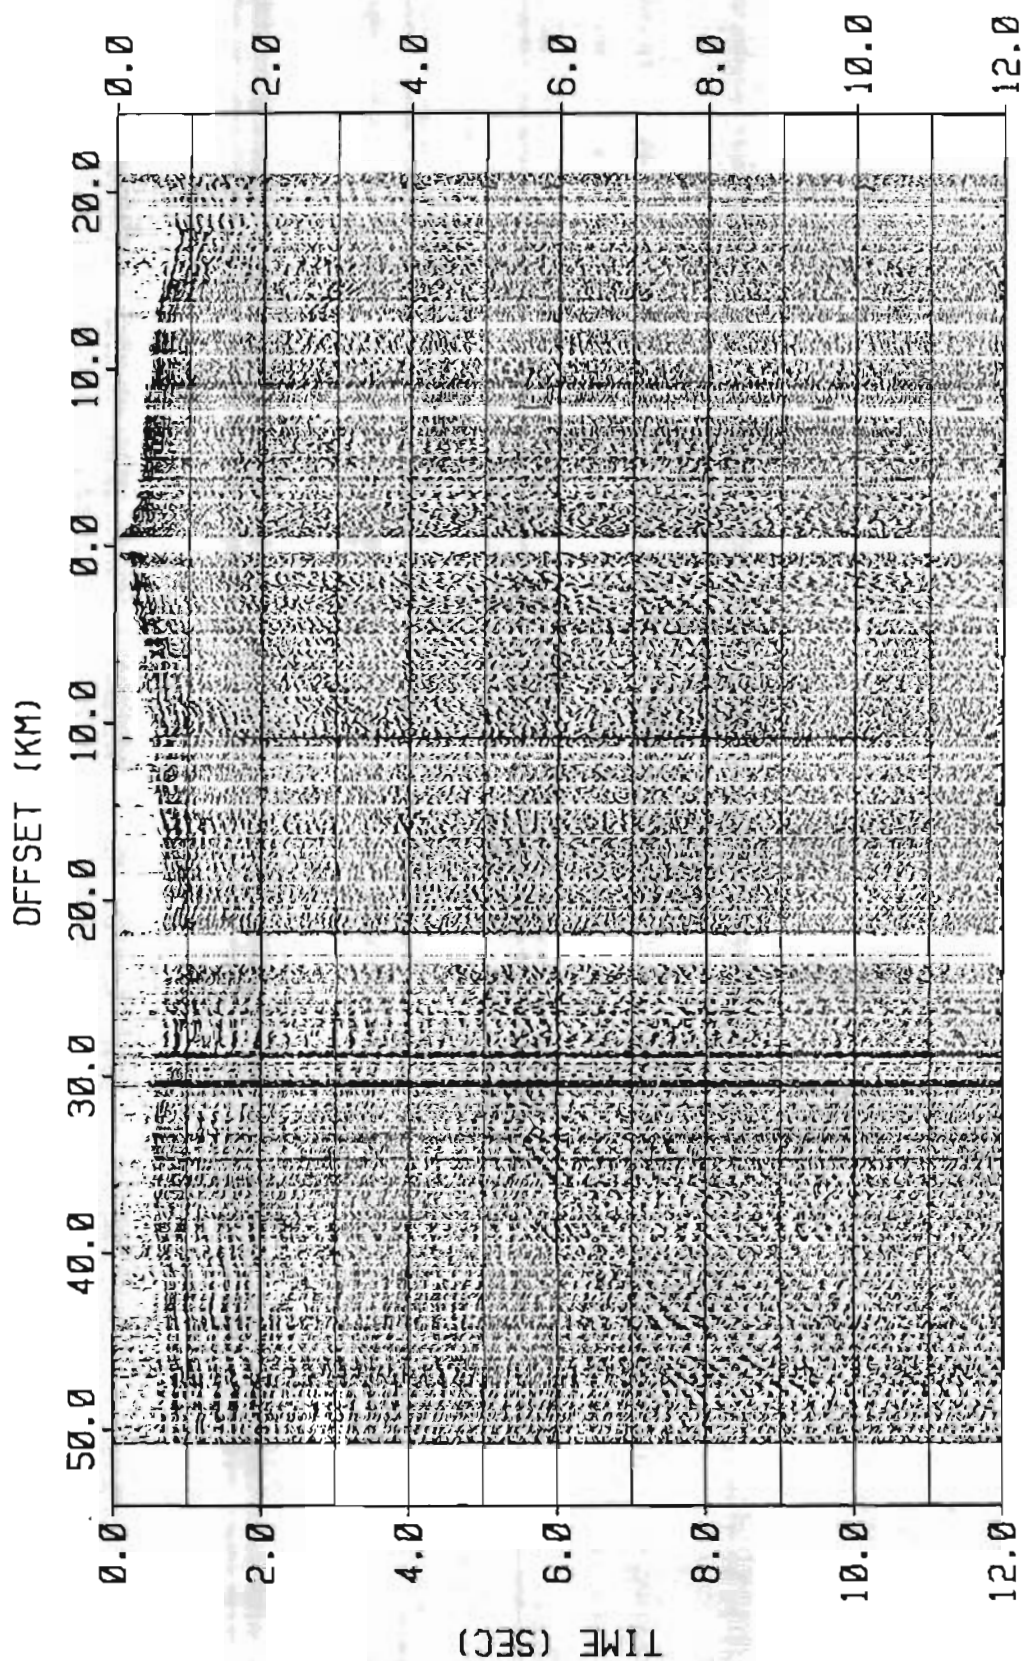


Figure 18 Profile 1  
Shot 4 Shot Point 124 AGC = 2 sec

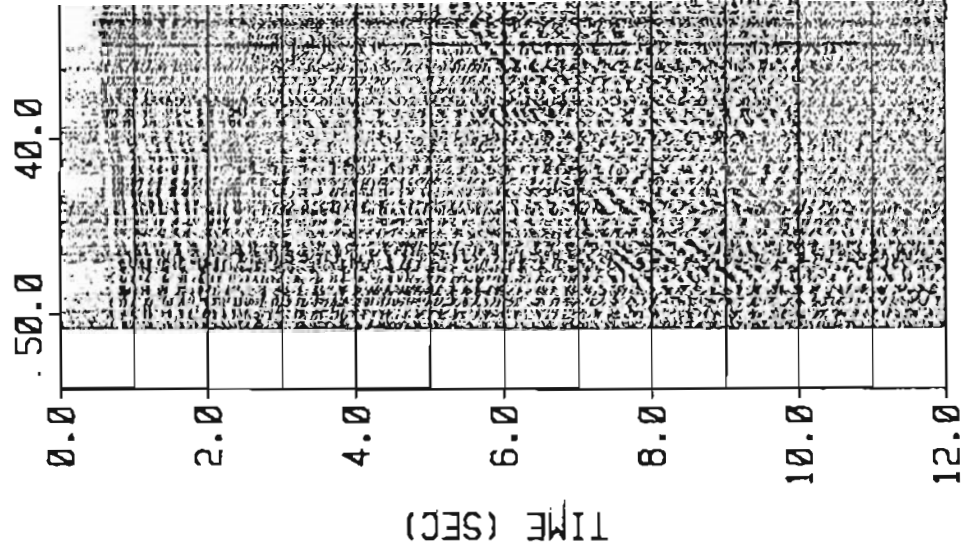

Shot 4

0.0 2.0 4.0 6.0 8.0 10.0 12.0

TIME (SEC)

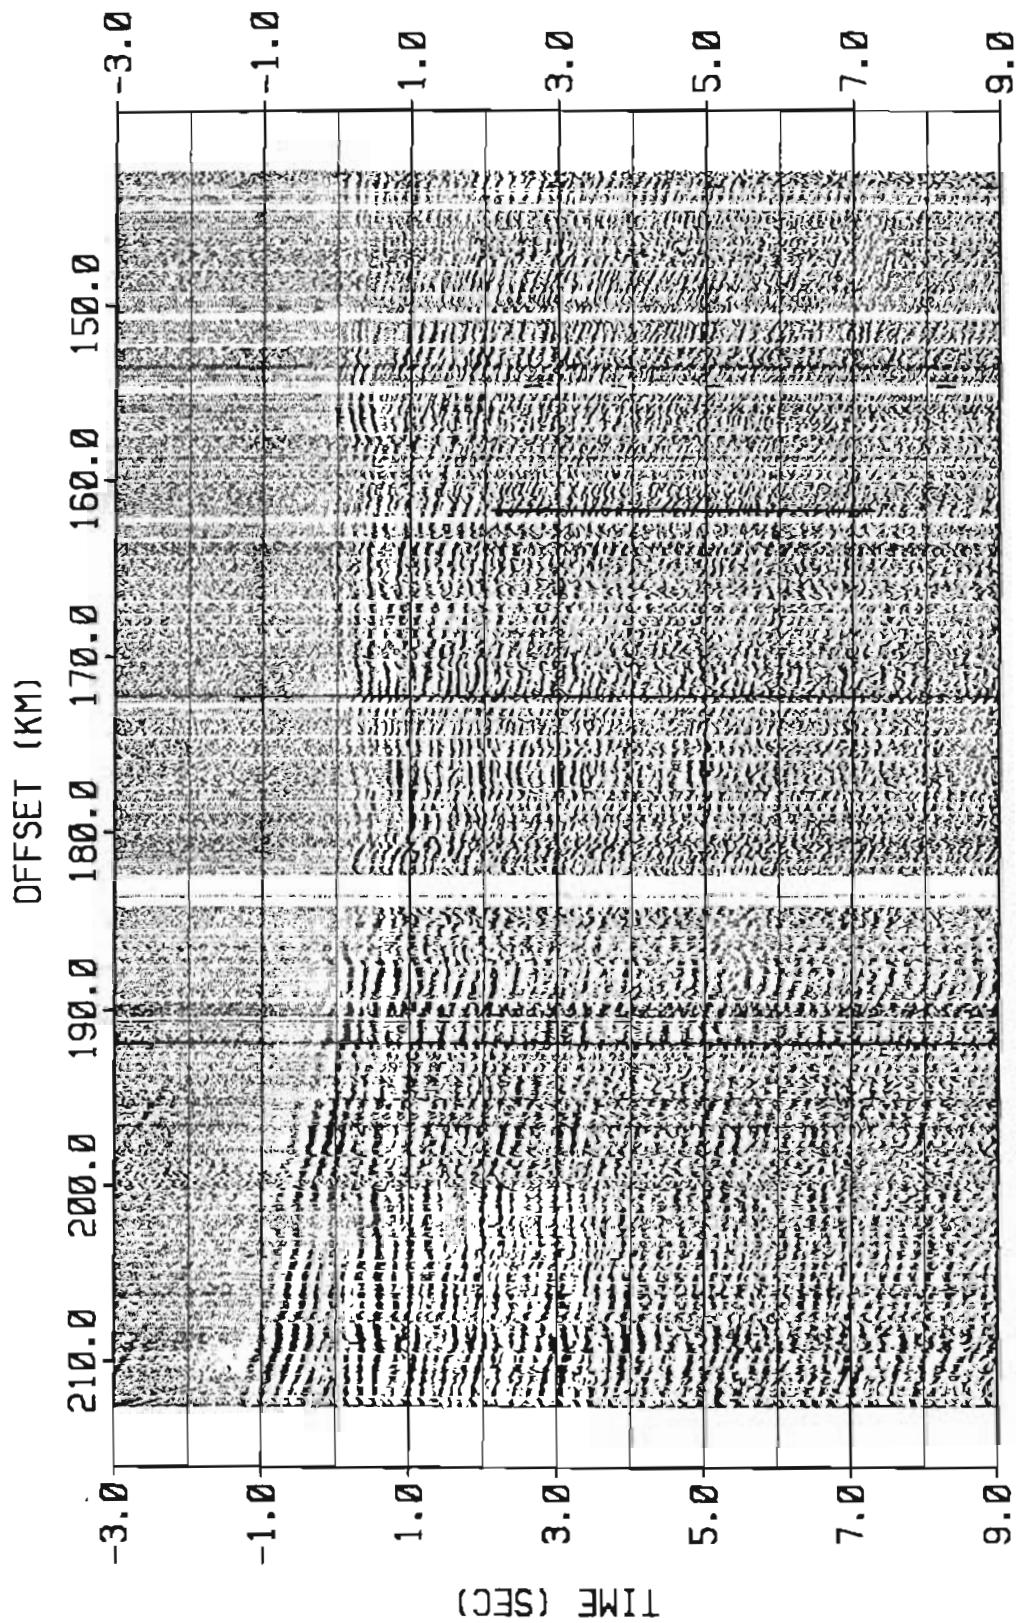


Figure 21 Profile 1  
Shot 6 Shot Point 140 AGC = 2 sec



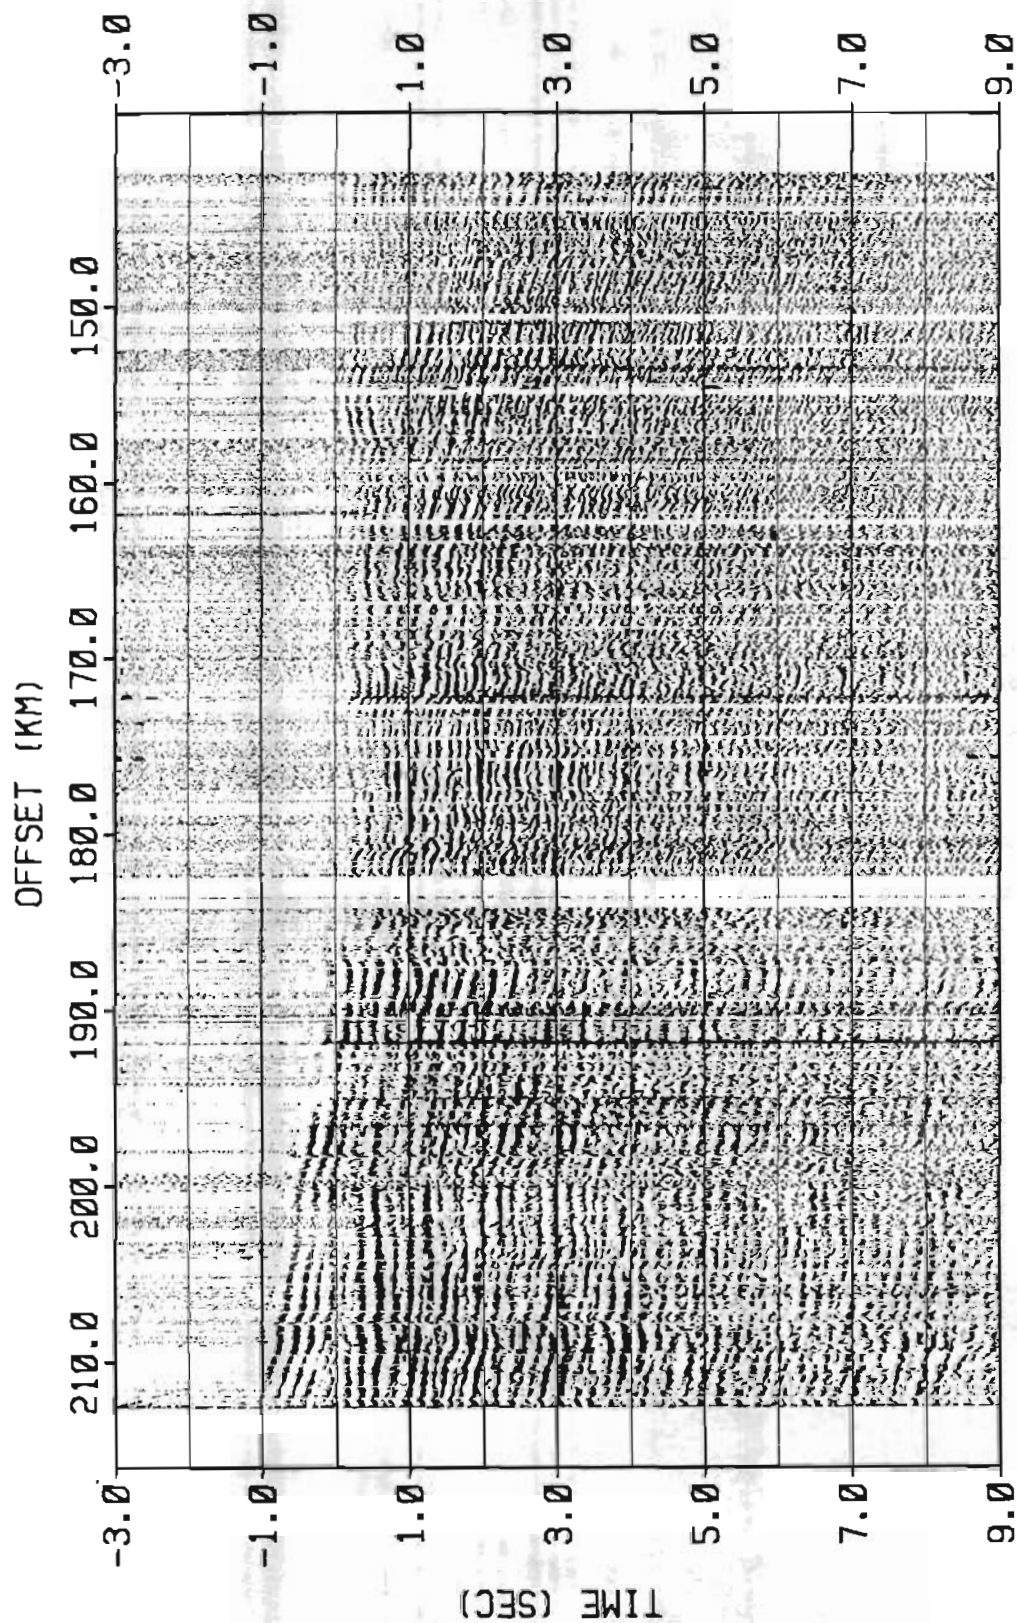


Figure 22 Profile 1  
Shot 6 Shot Point 140 AGC = 12 sec

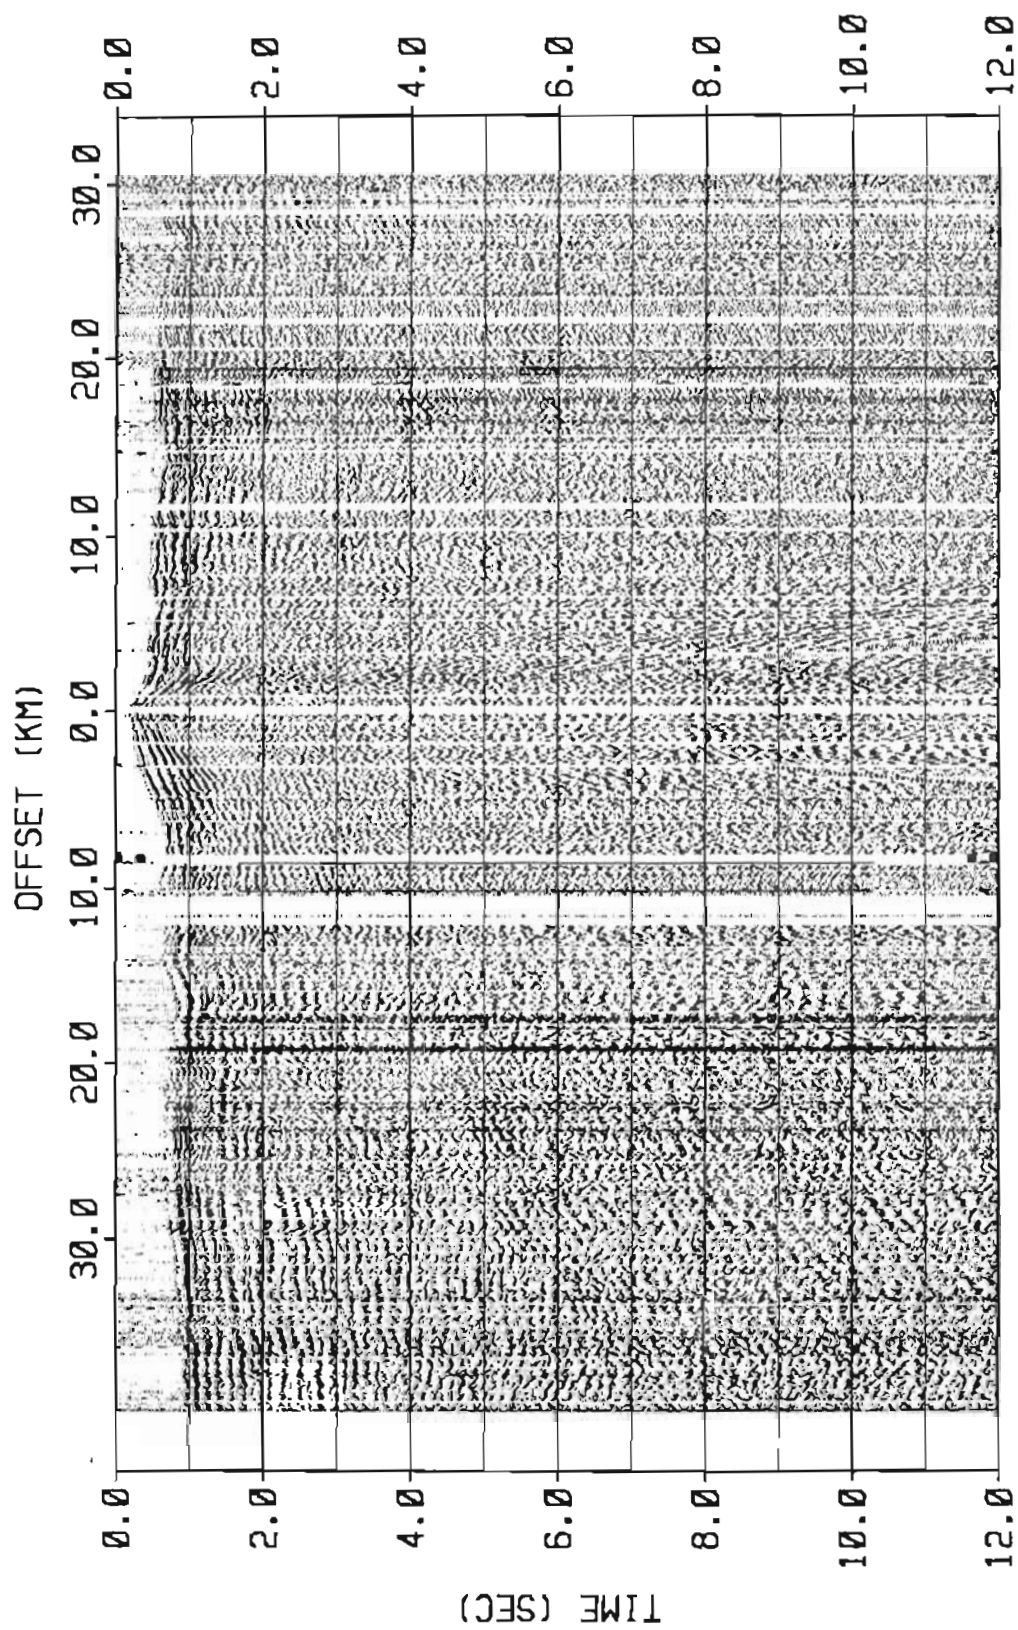


Figure 25      Profile 1  
 Shot 8      Shot Point 123      AGC = 2 sec

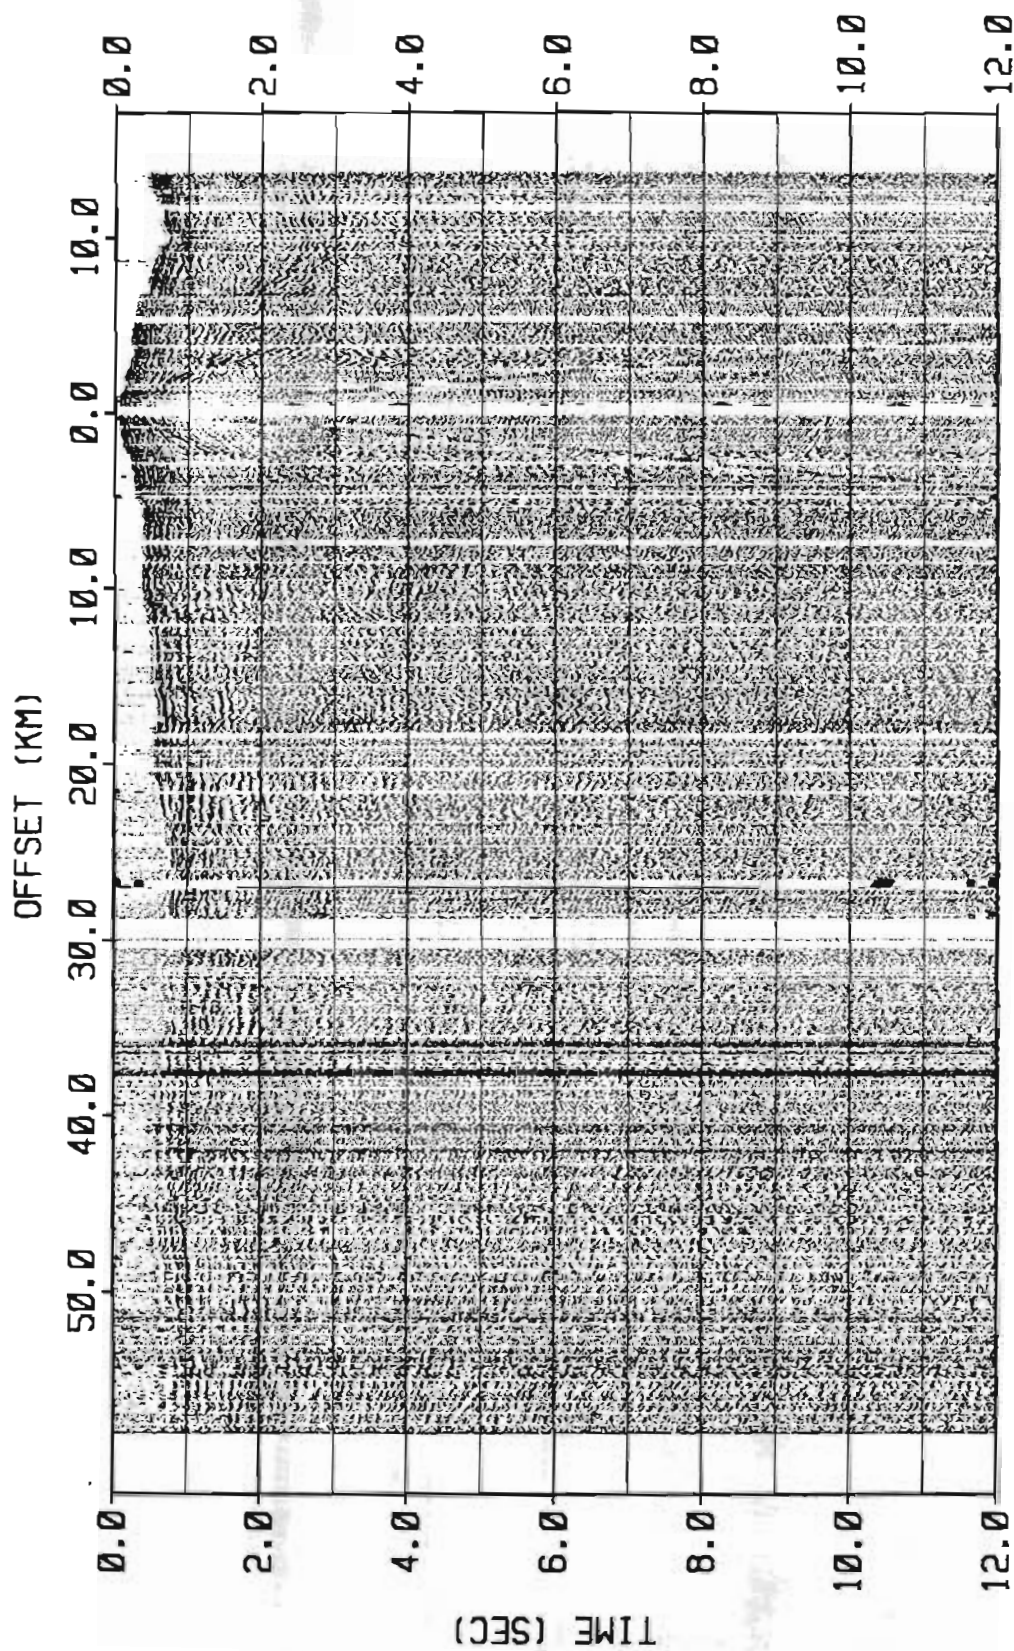


Figure 26 Profile 1  
Shot 9 Shot Point 125 AGC = 2 sec



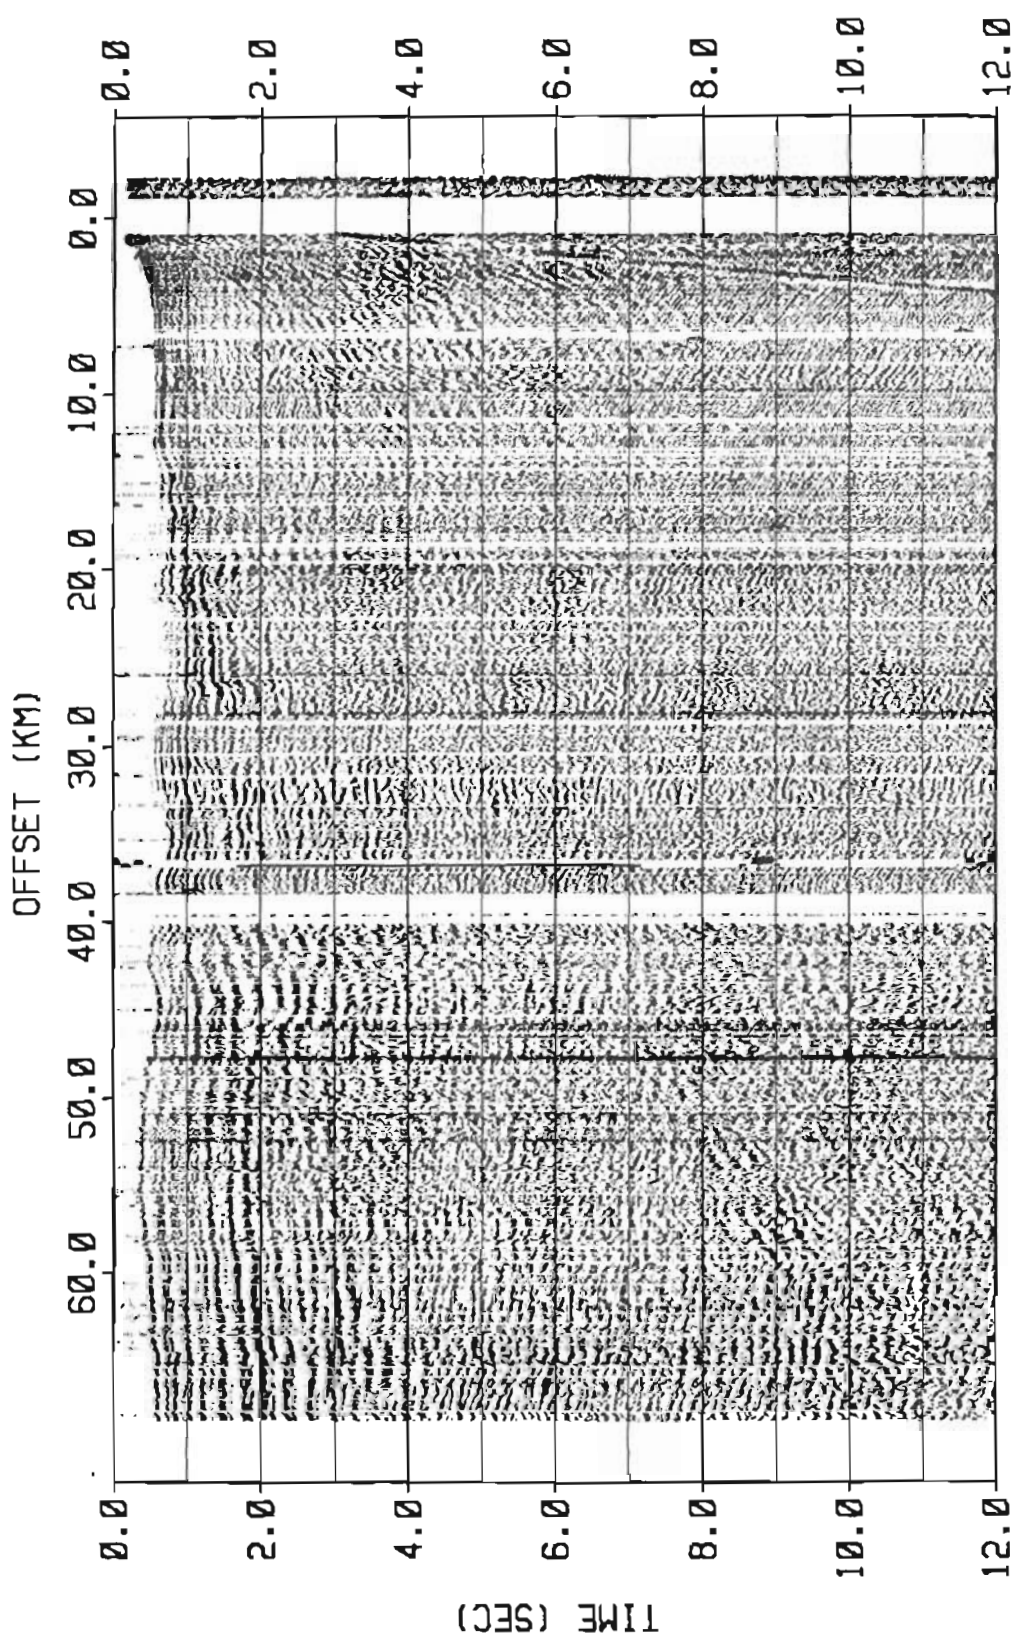


Figure 27    Profile 1  
 Shot 10    Shot Point 126    AGC = 2 sec

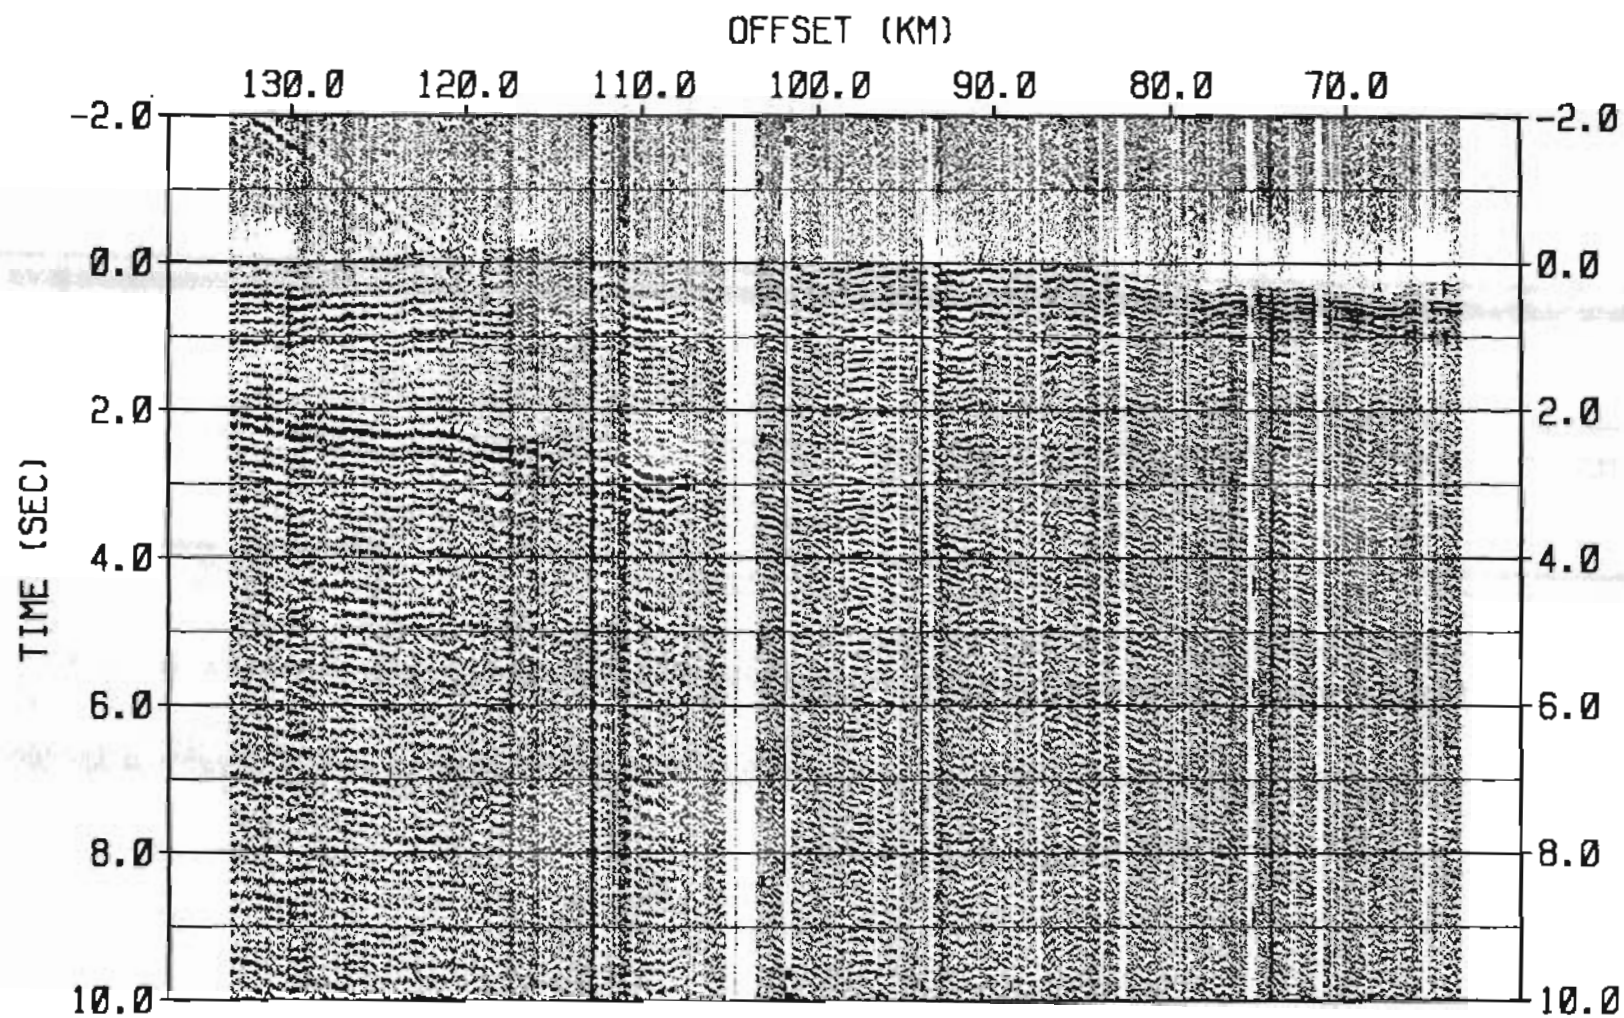


Figure 28      Profile 1  
Shot 11      Shot Point 132      AGC = 2 sec

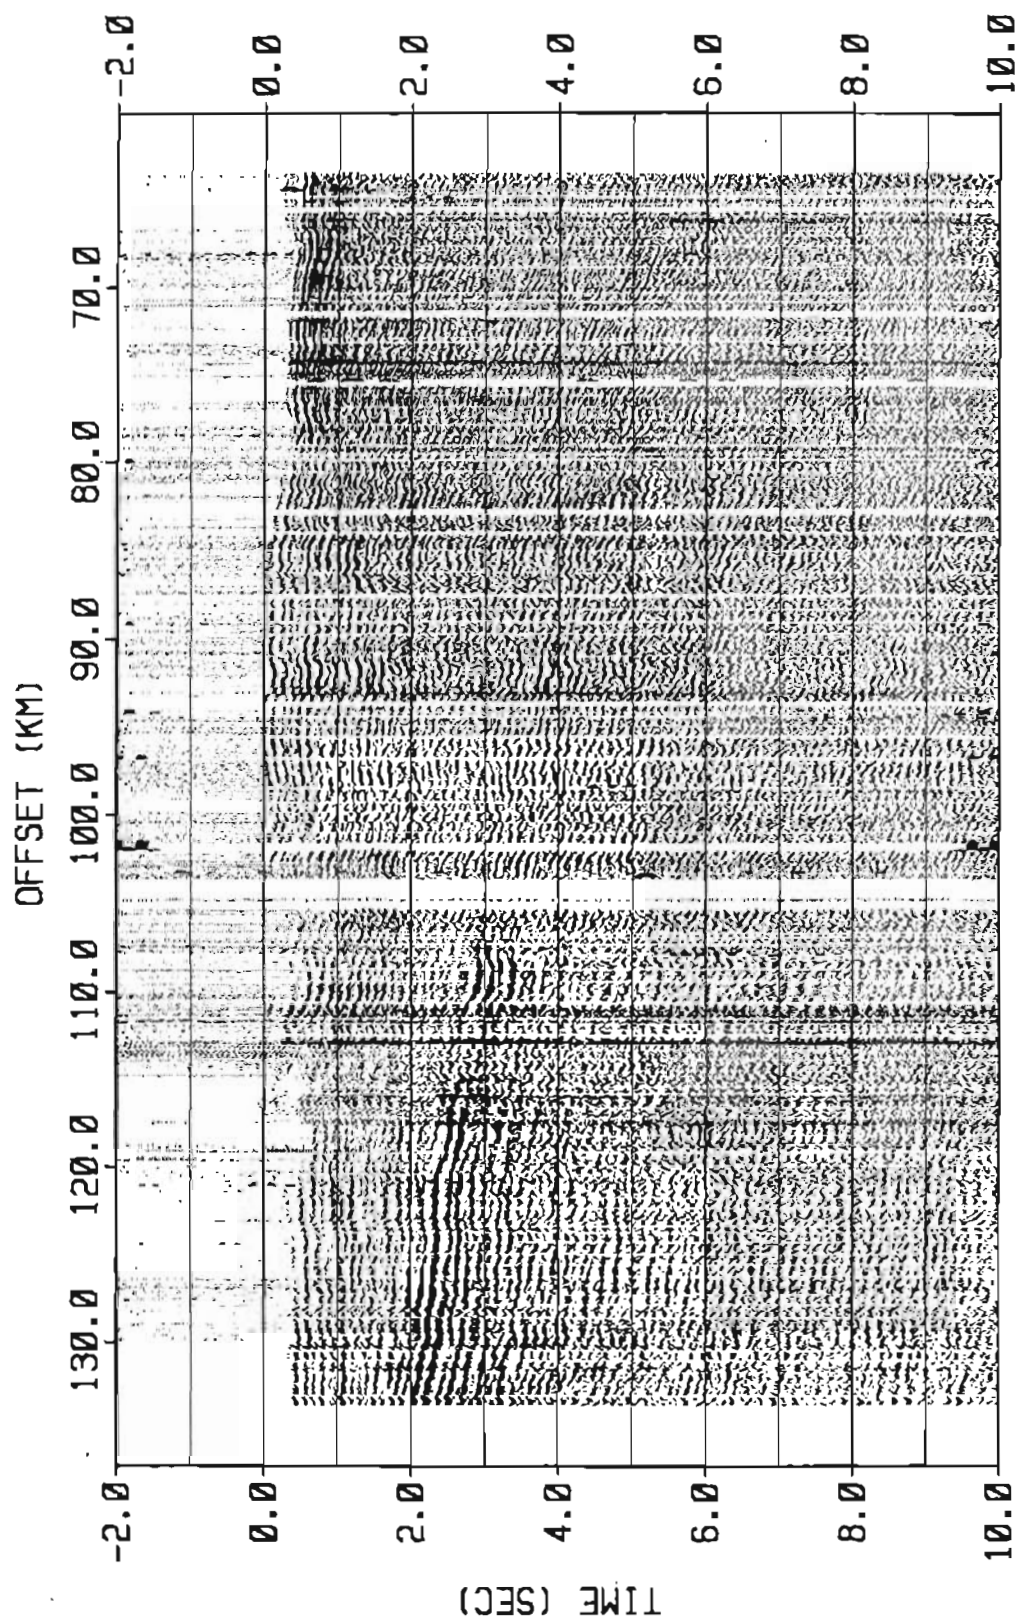


Figure 29    Profile 1  
 Shot 11    Shot Point 132    AGC = 12 sec

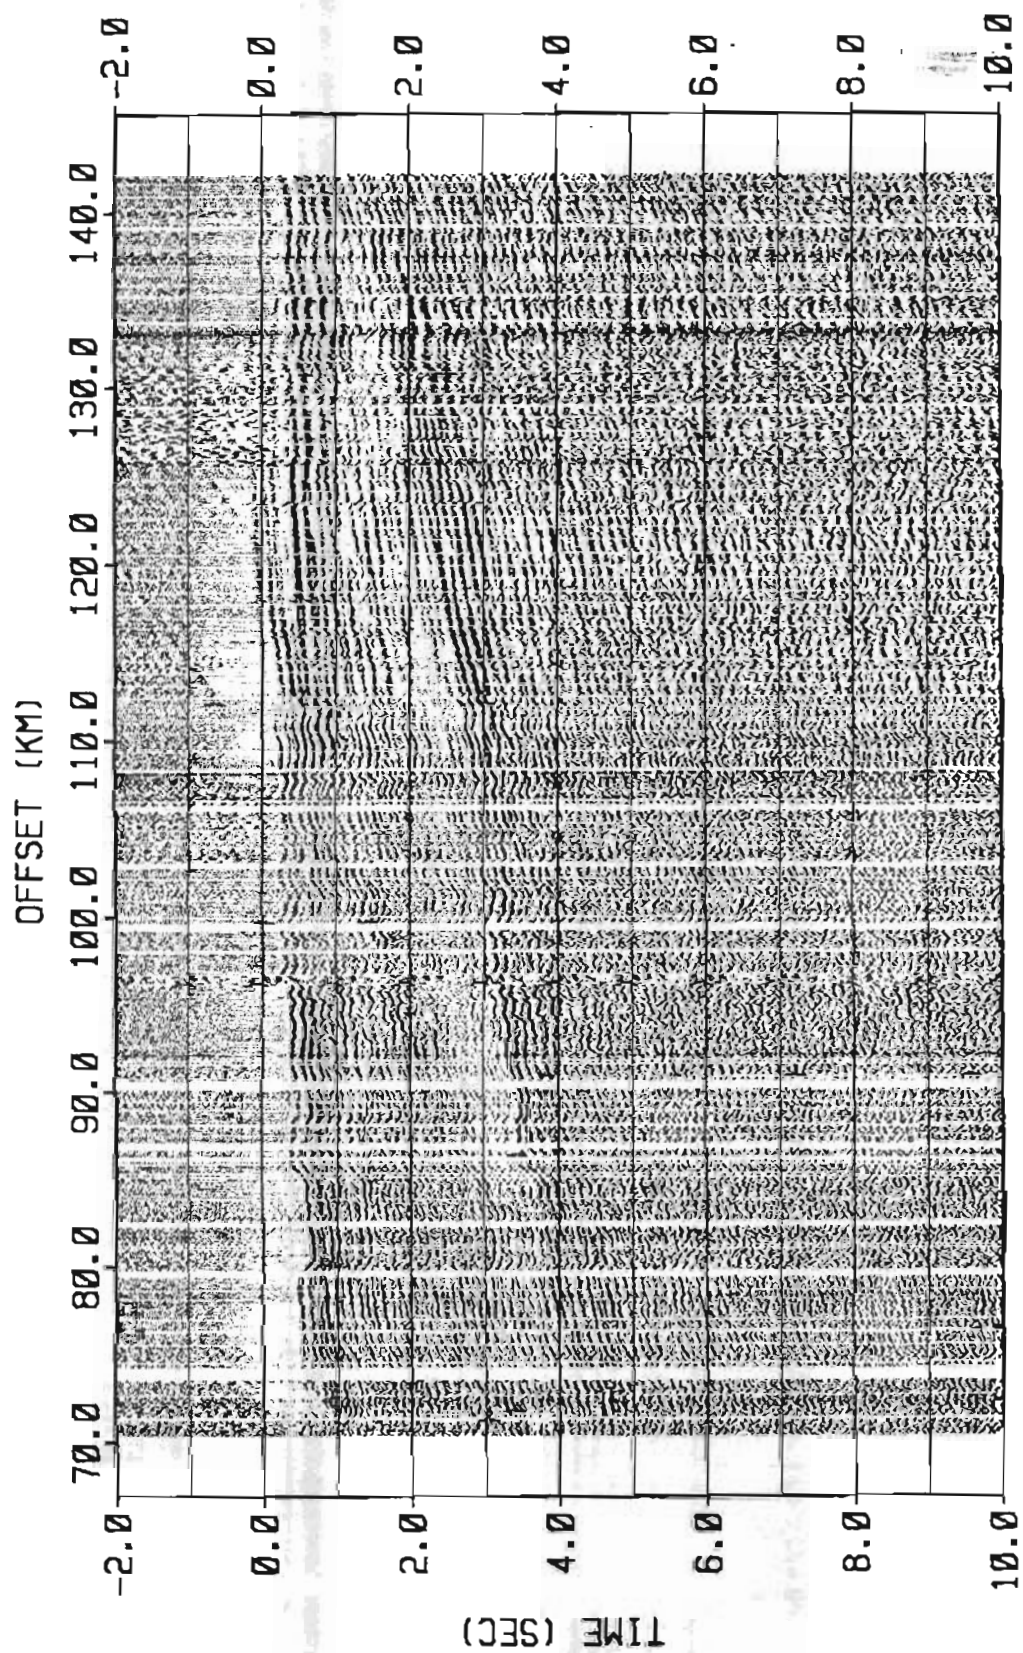


Figure 30 Profile 2

Shot 12 Shot Point 120 AGC = 2 sec



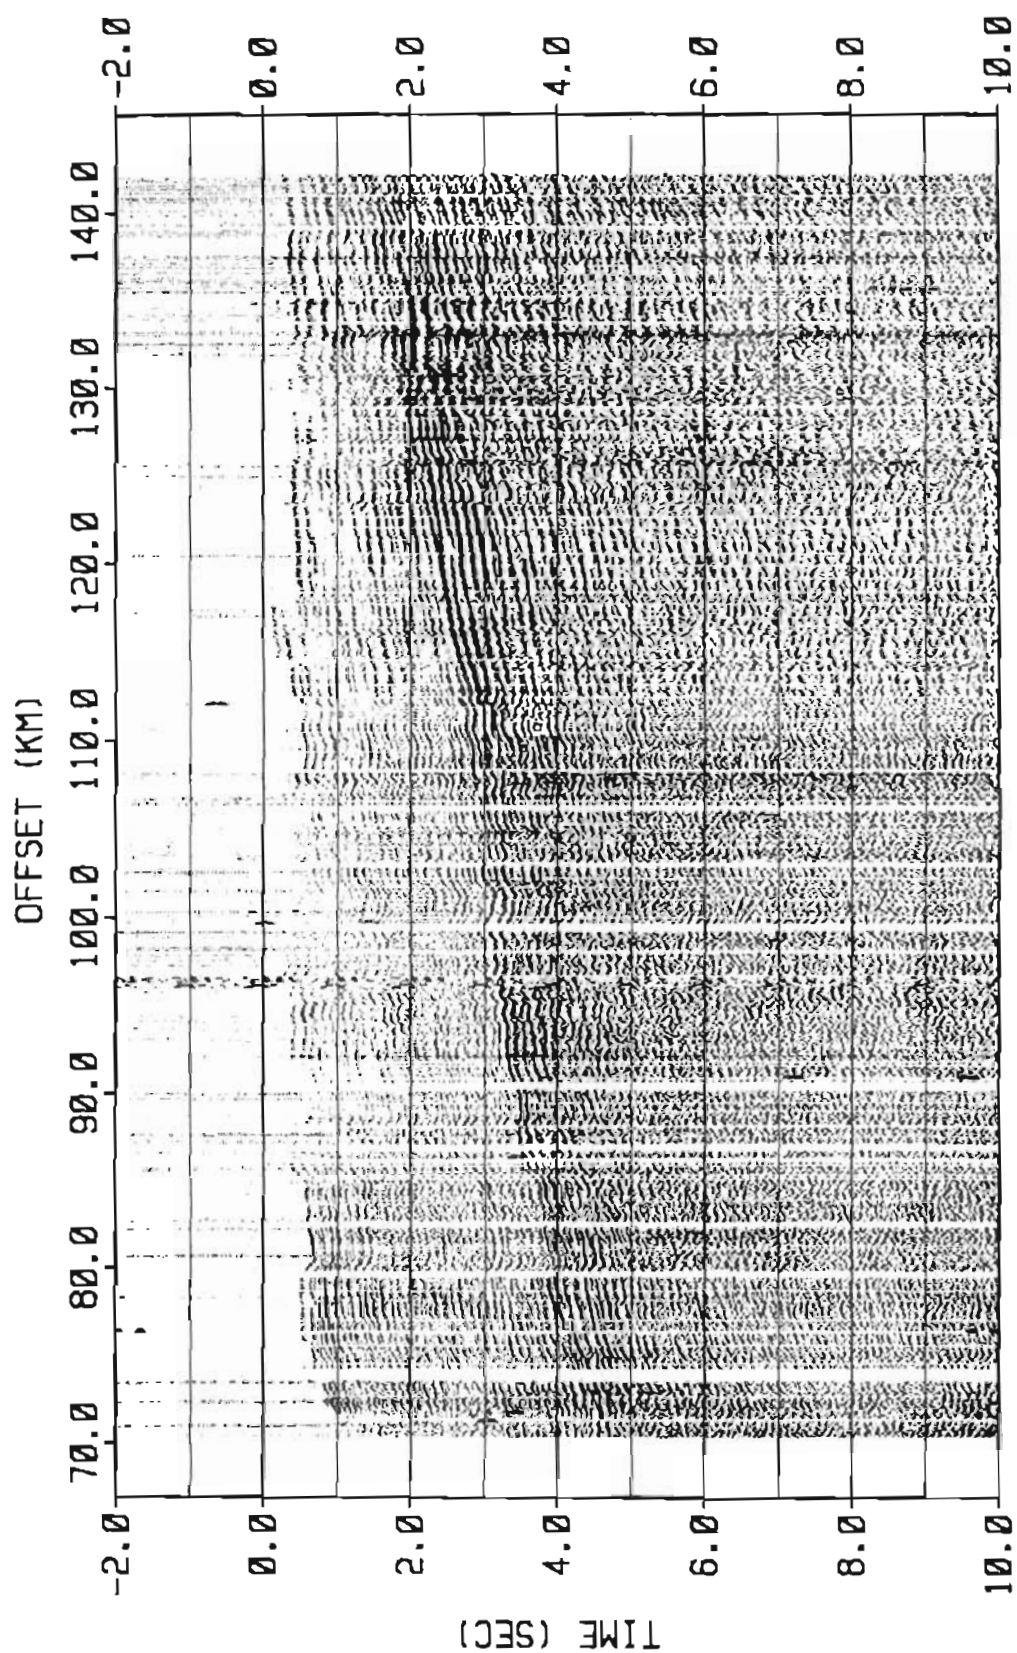


Figure 31 Profile 2  
Shot 12 Shot Point 120 AGC = 12 sec

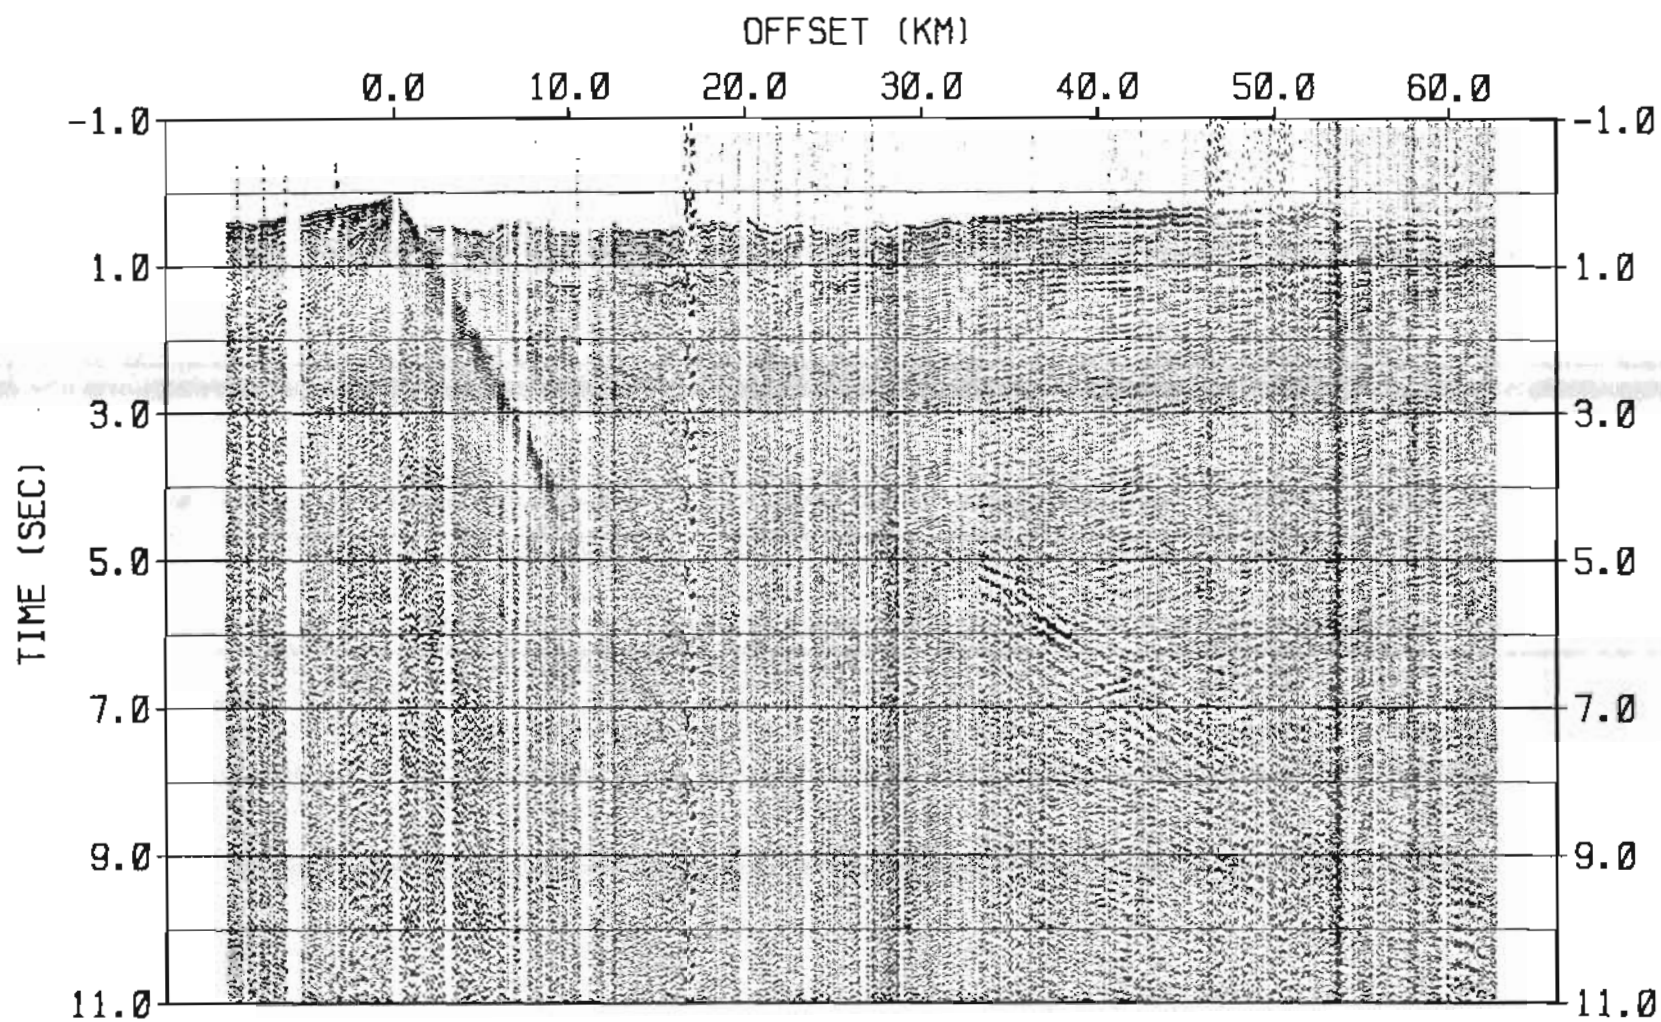


Figure 32      Profile 2  
Shot 13      Shot Point 127      AGC = 2 sec

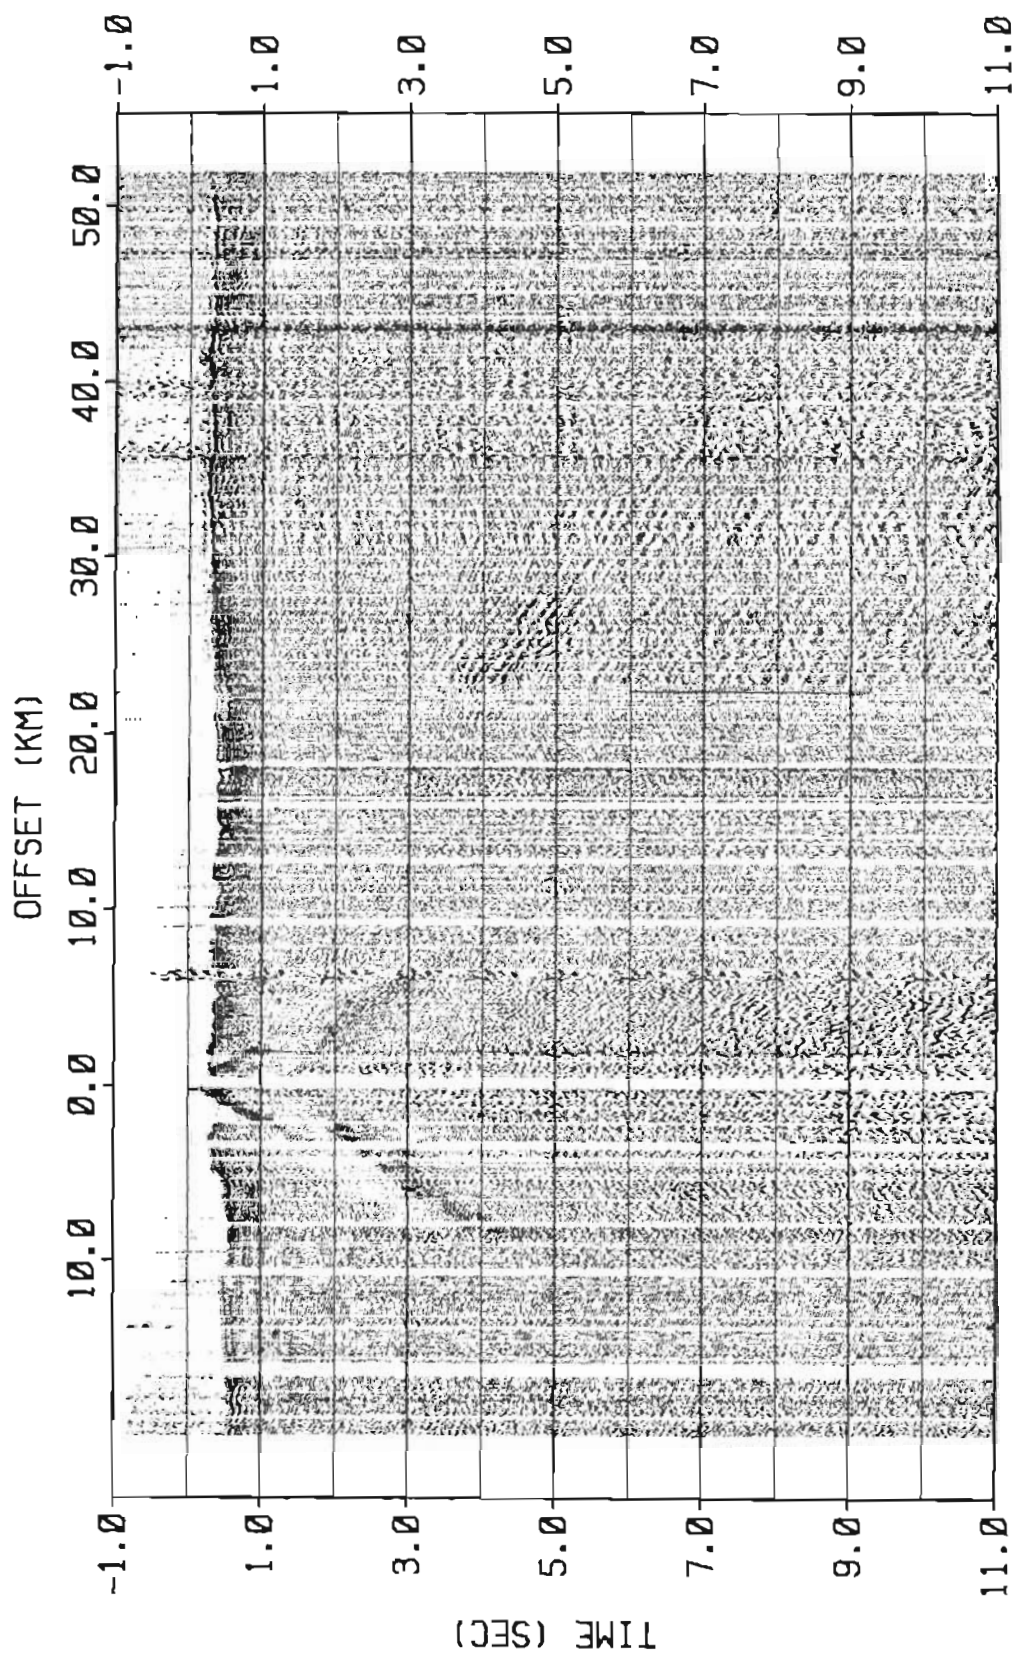


Figure 33      Profile 2  
 Shot 14   Shot Point 171   AGC = 2 sec

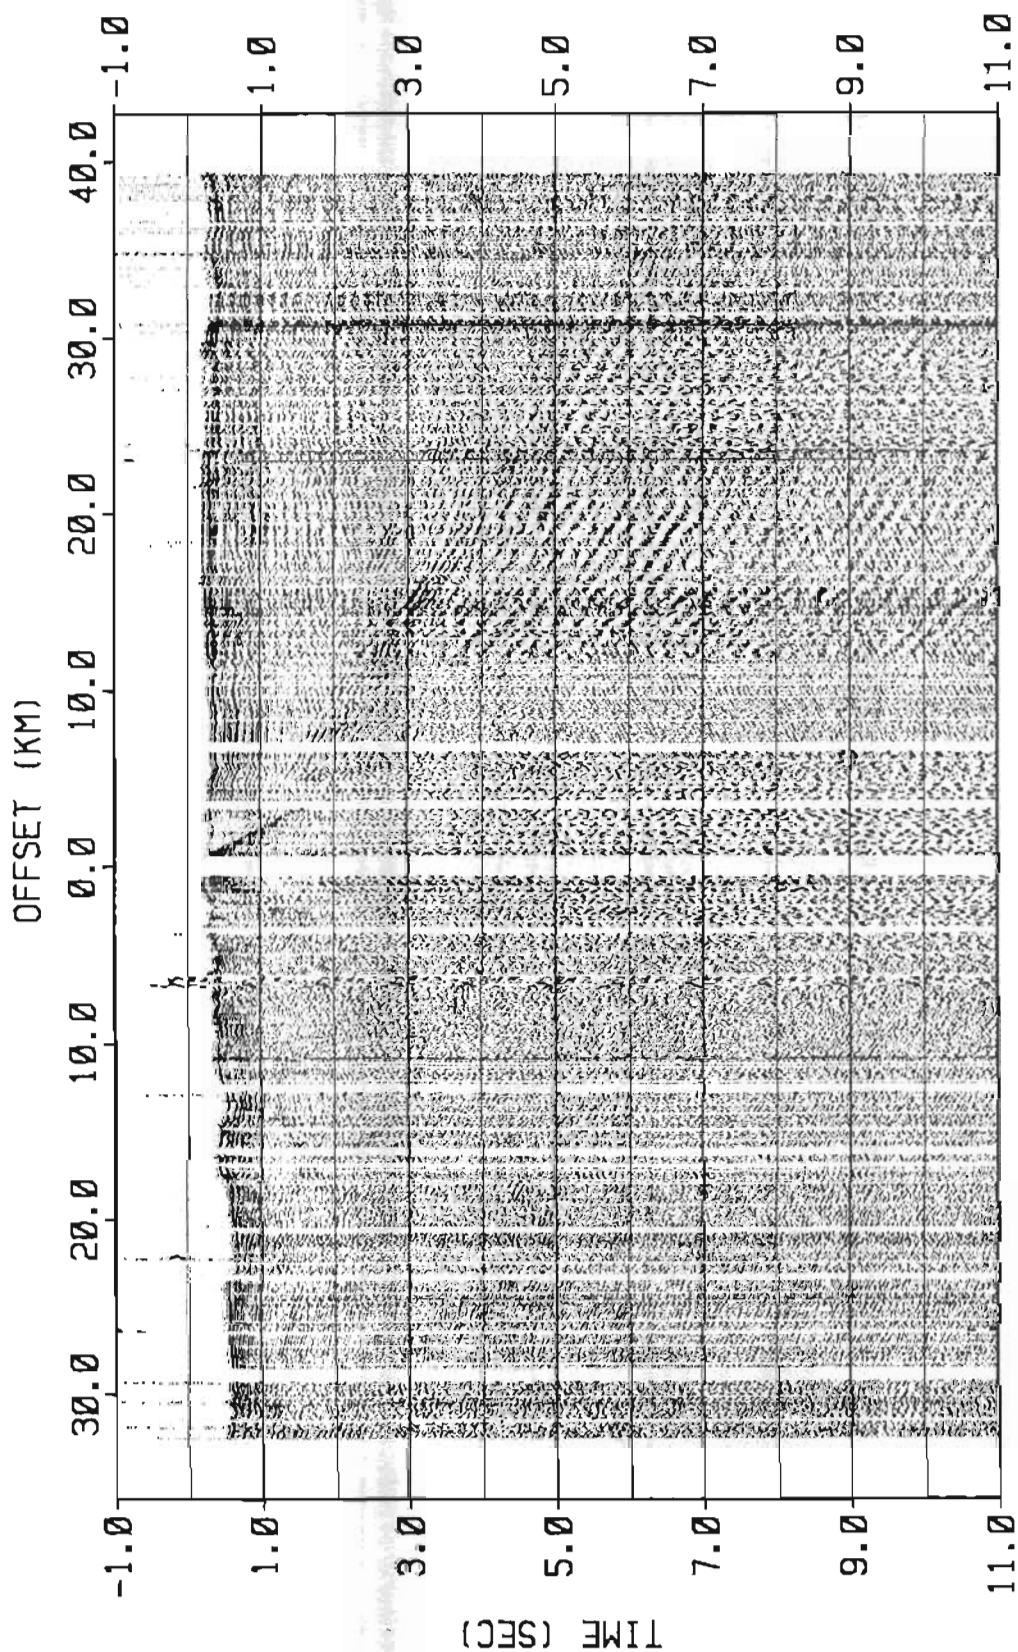


Figure 34      Profile 2  
 Shot 15      Shot Point 130      AGC = 2 sec



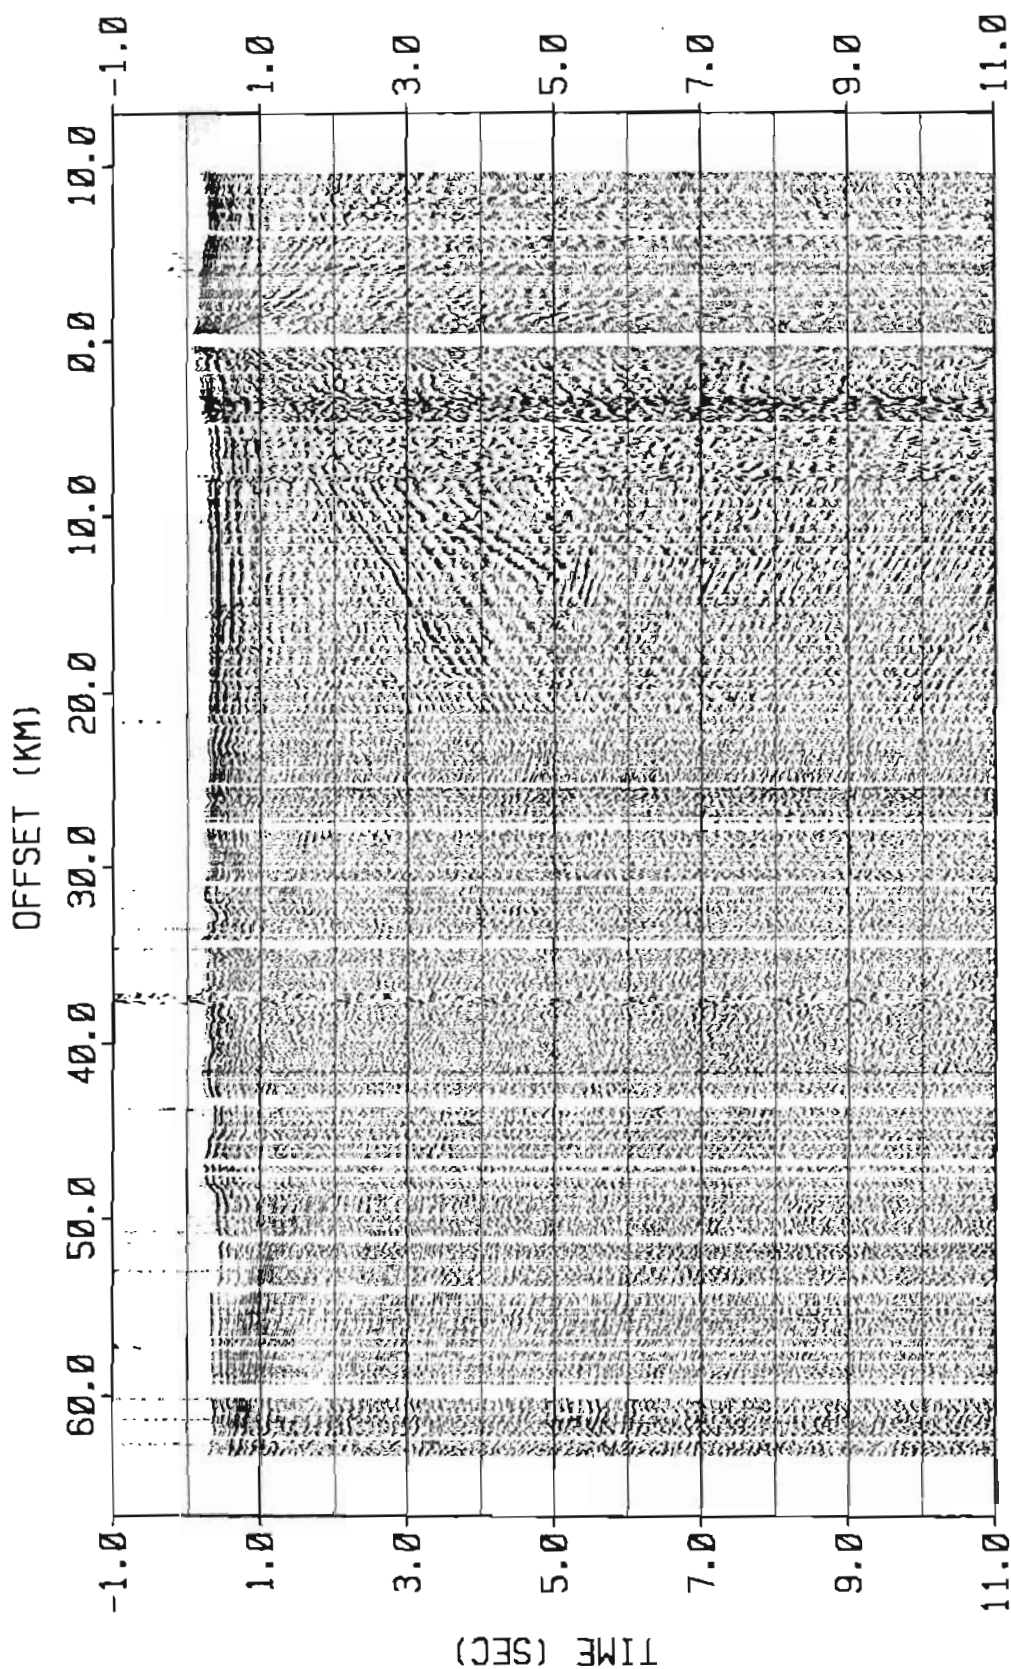


Figure 35 Profile 2  
 Shot 16 Shot Point 132 AGC = 2 sec

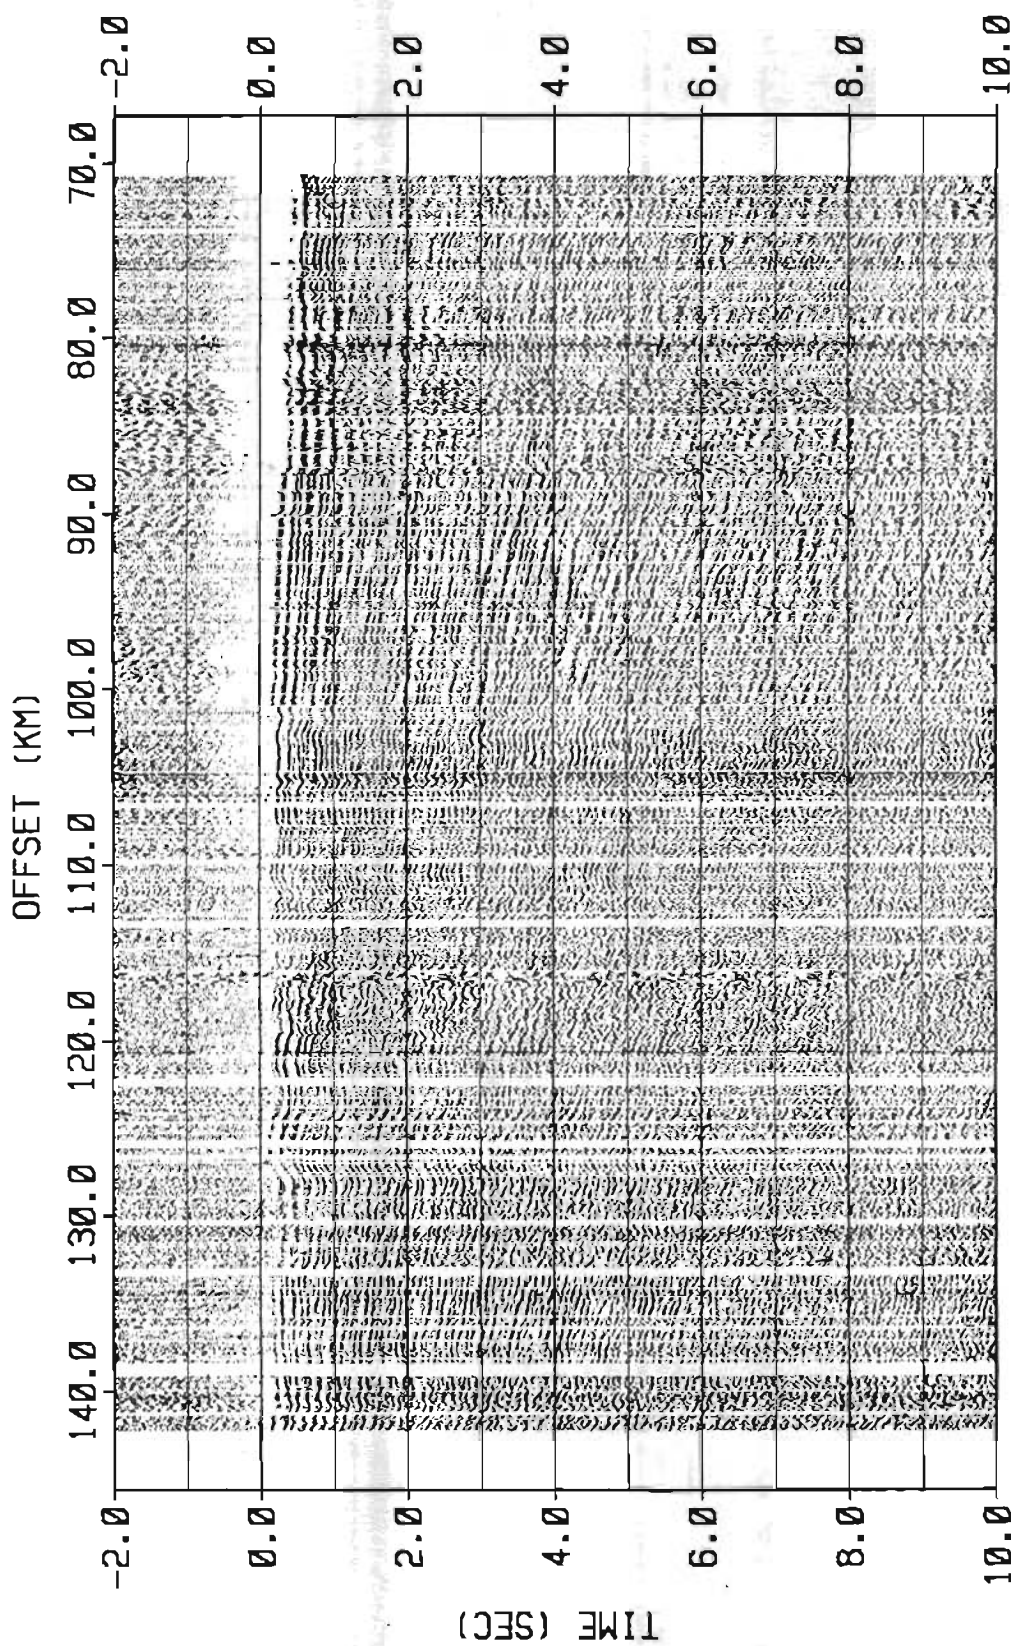


Figure 36      Profile 2  
 Shot 17      Shot Point 140      AGC = 2 sec

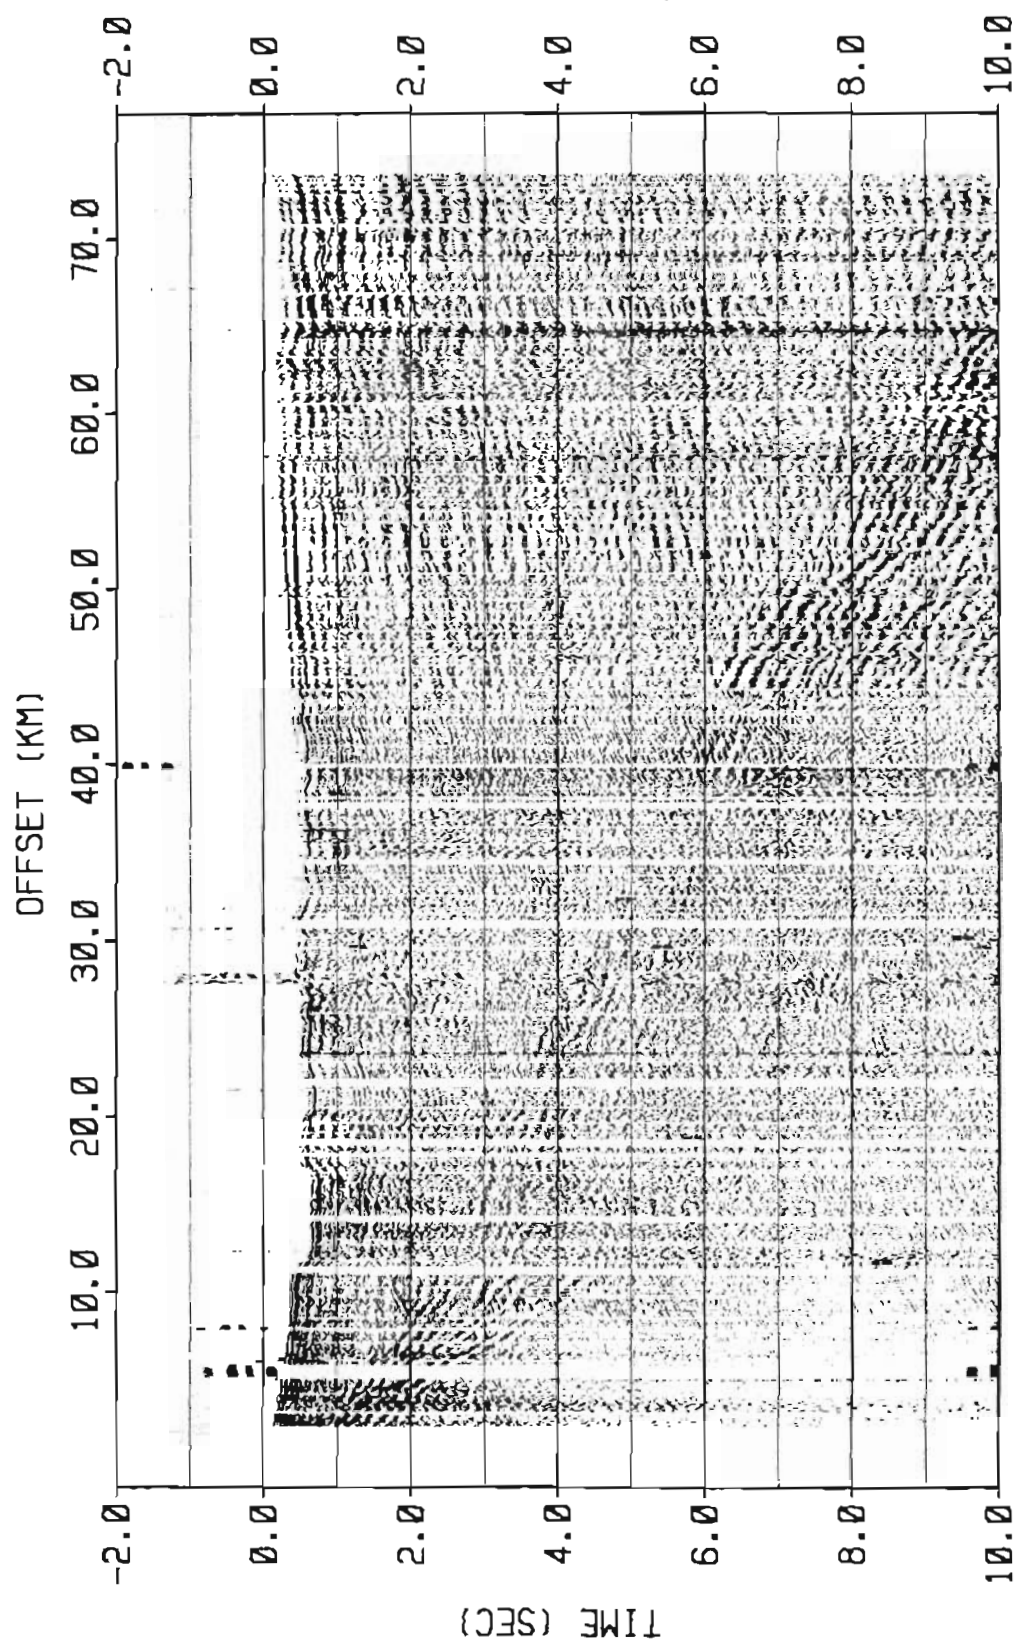


Figure 39 Profile 2  
Shot 18 Shot Point 126 AGC = 12 sec

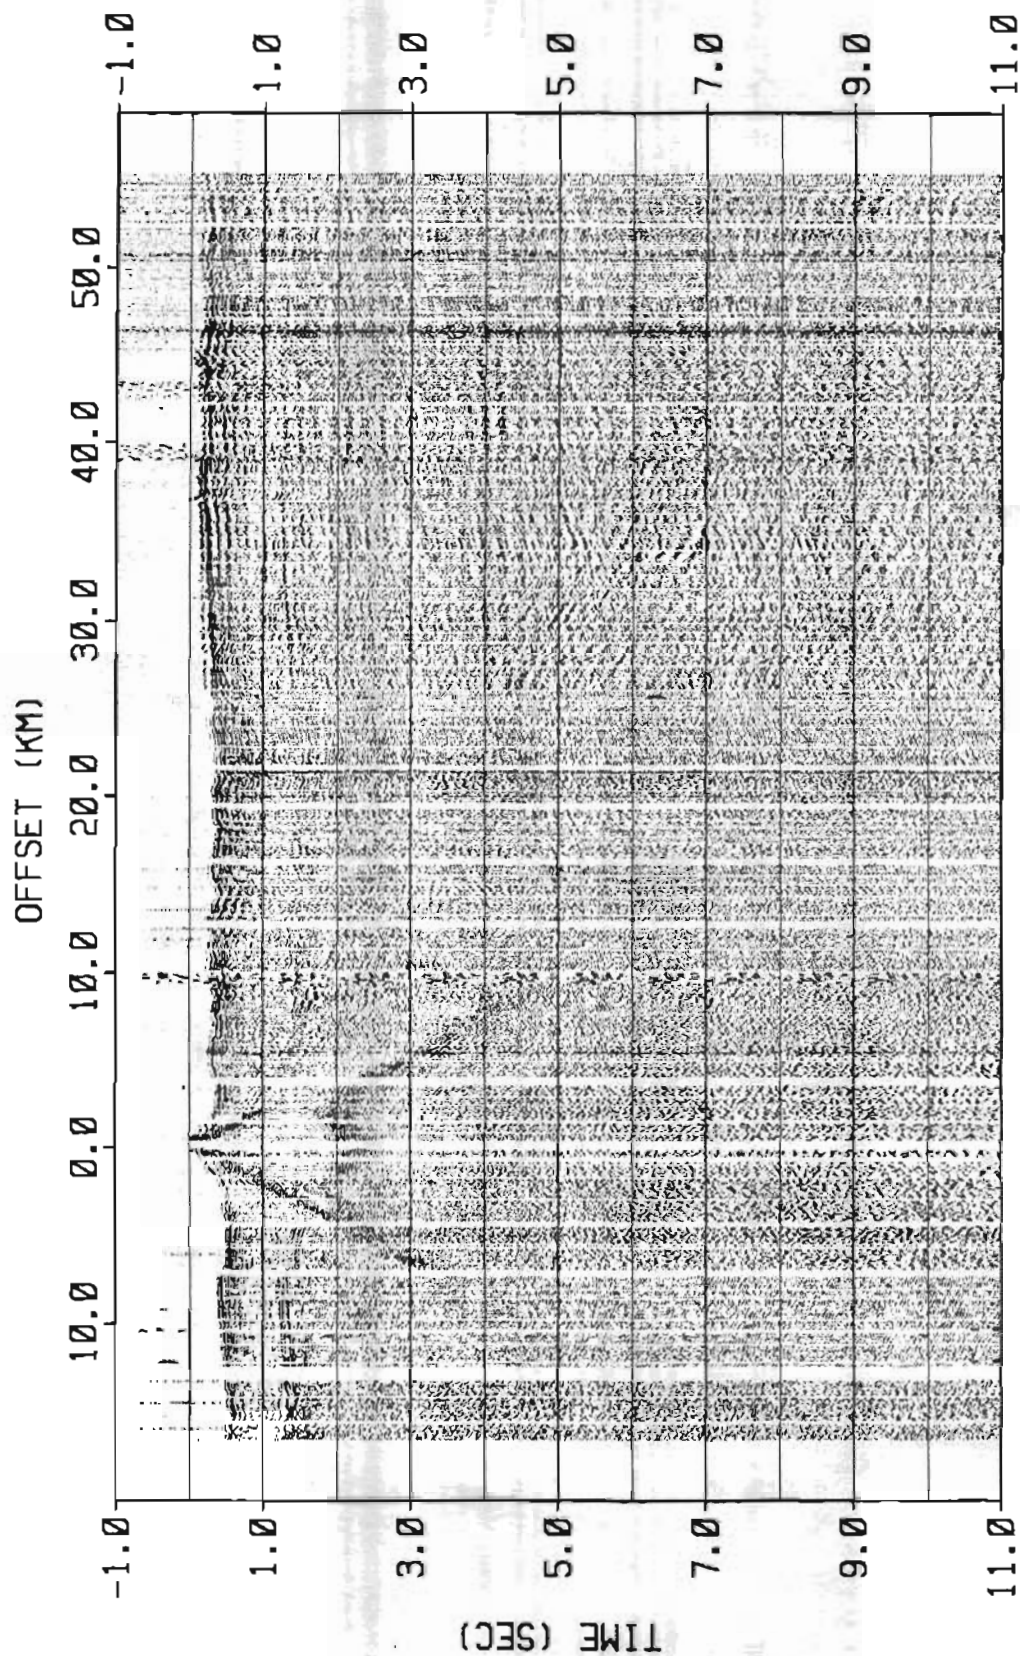


Figure 40      Profile 2  
Shot 19      Shot Point 128      AGC = 2 sec



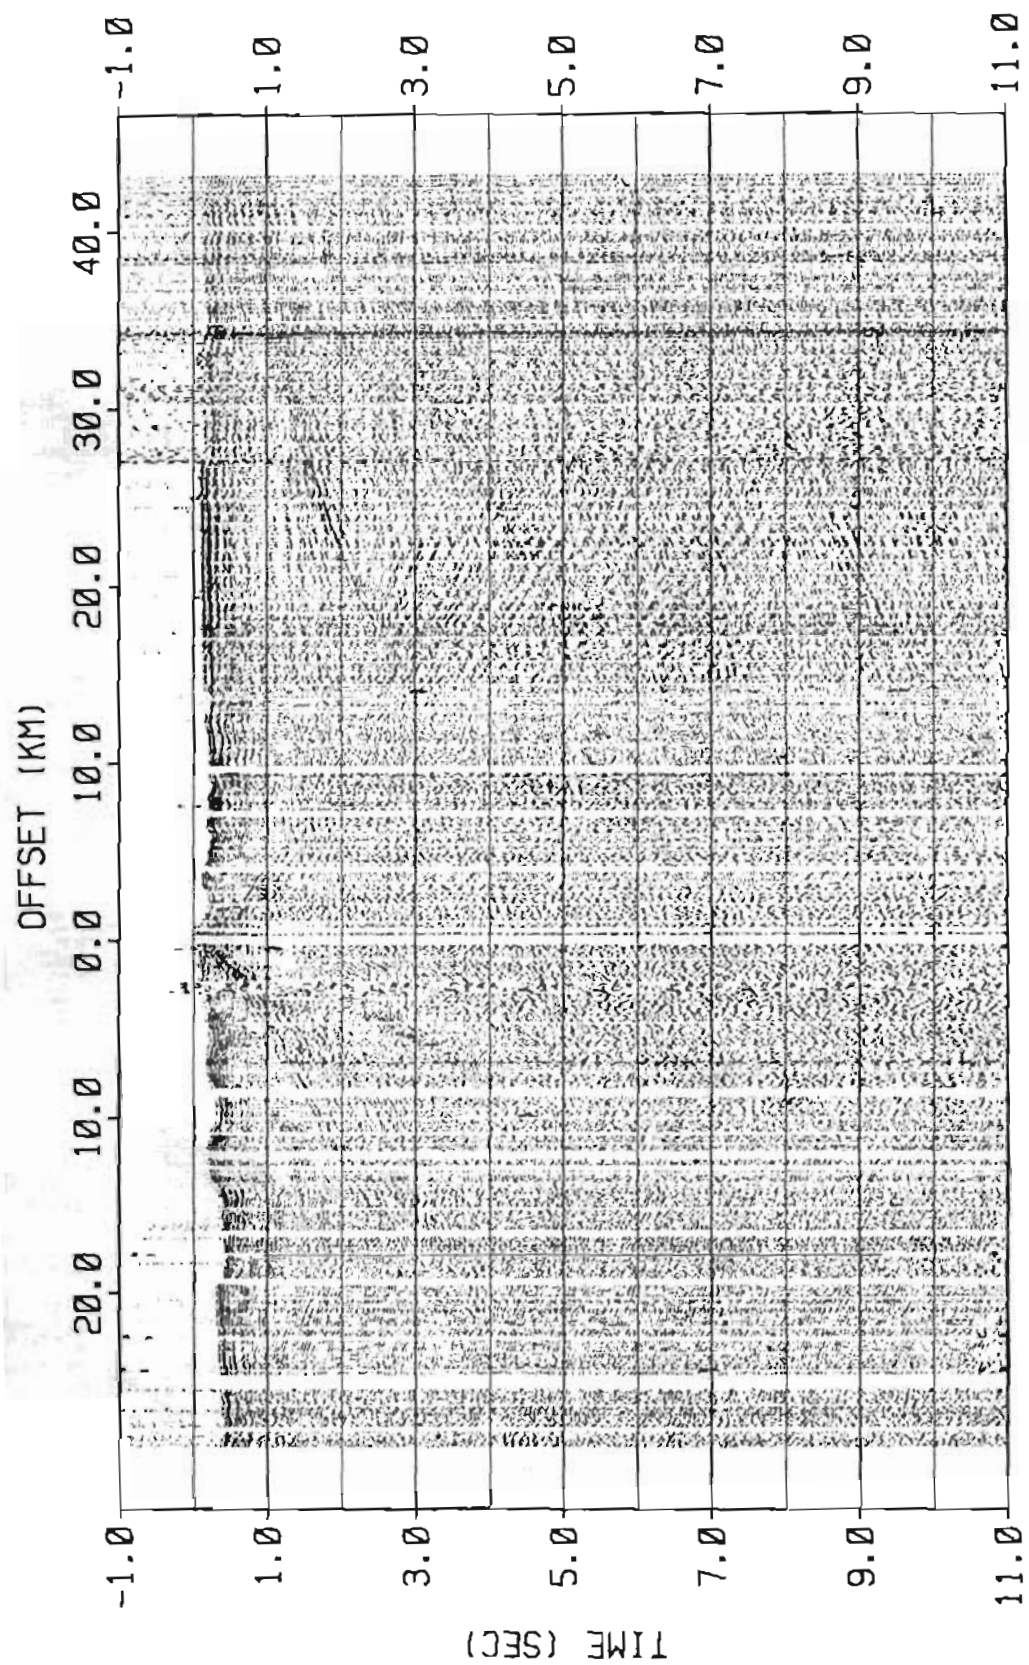


Figure 41 Profile 2  
Shot 20 Shot Point 129 AGC = 2 sec

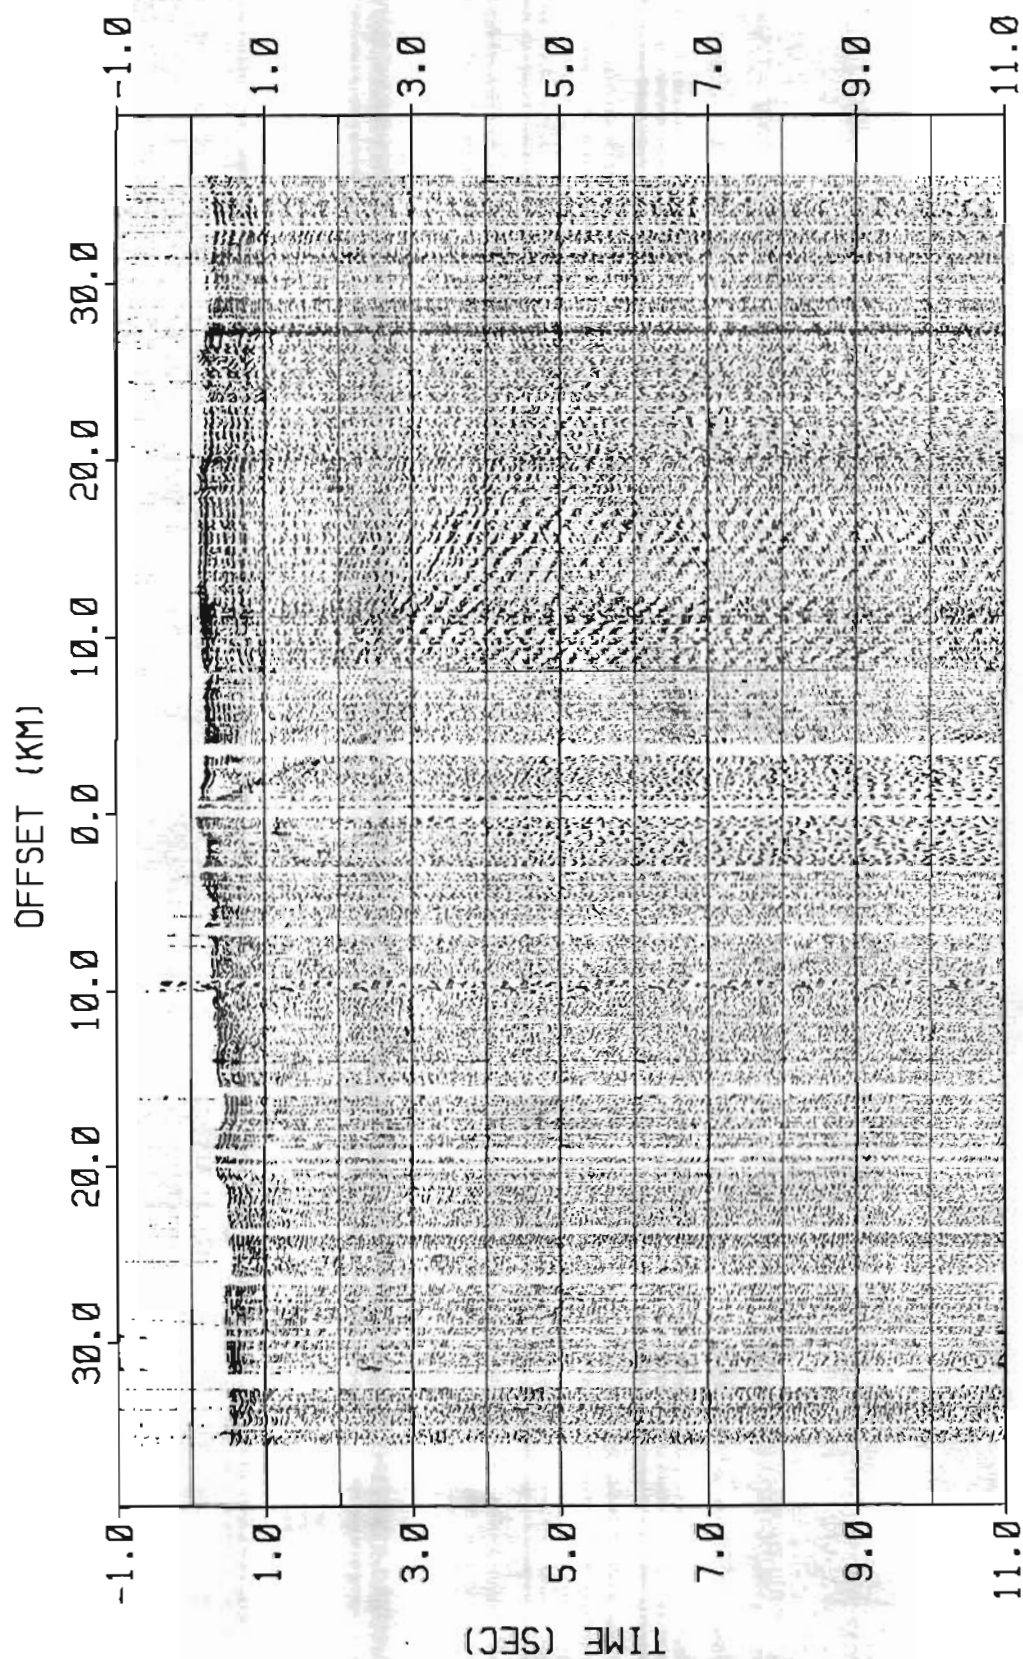


Figure 42 Profile 2  
Shot 21 Shot Point 172 AGC = 2 sec

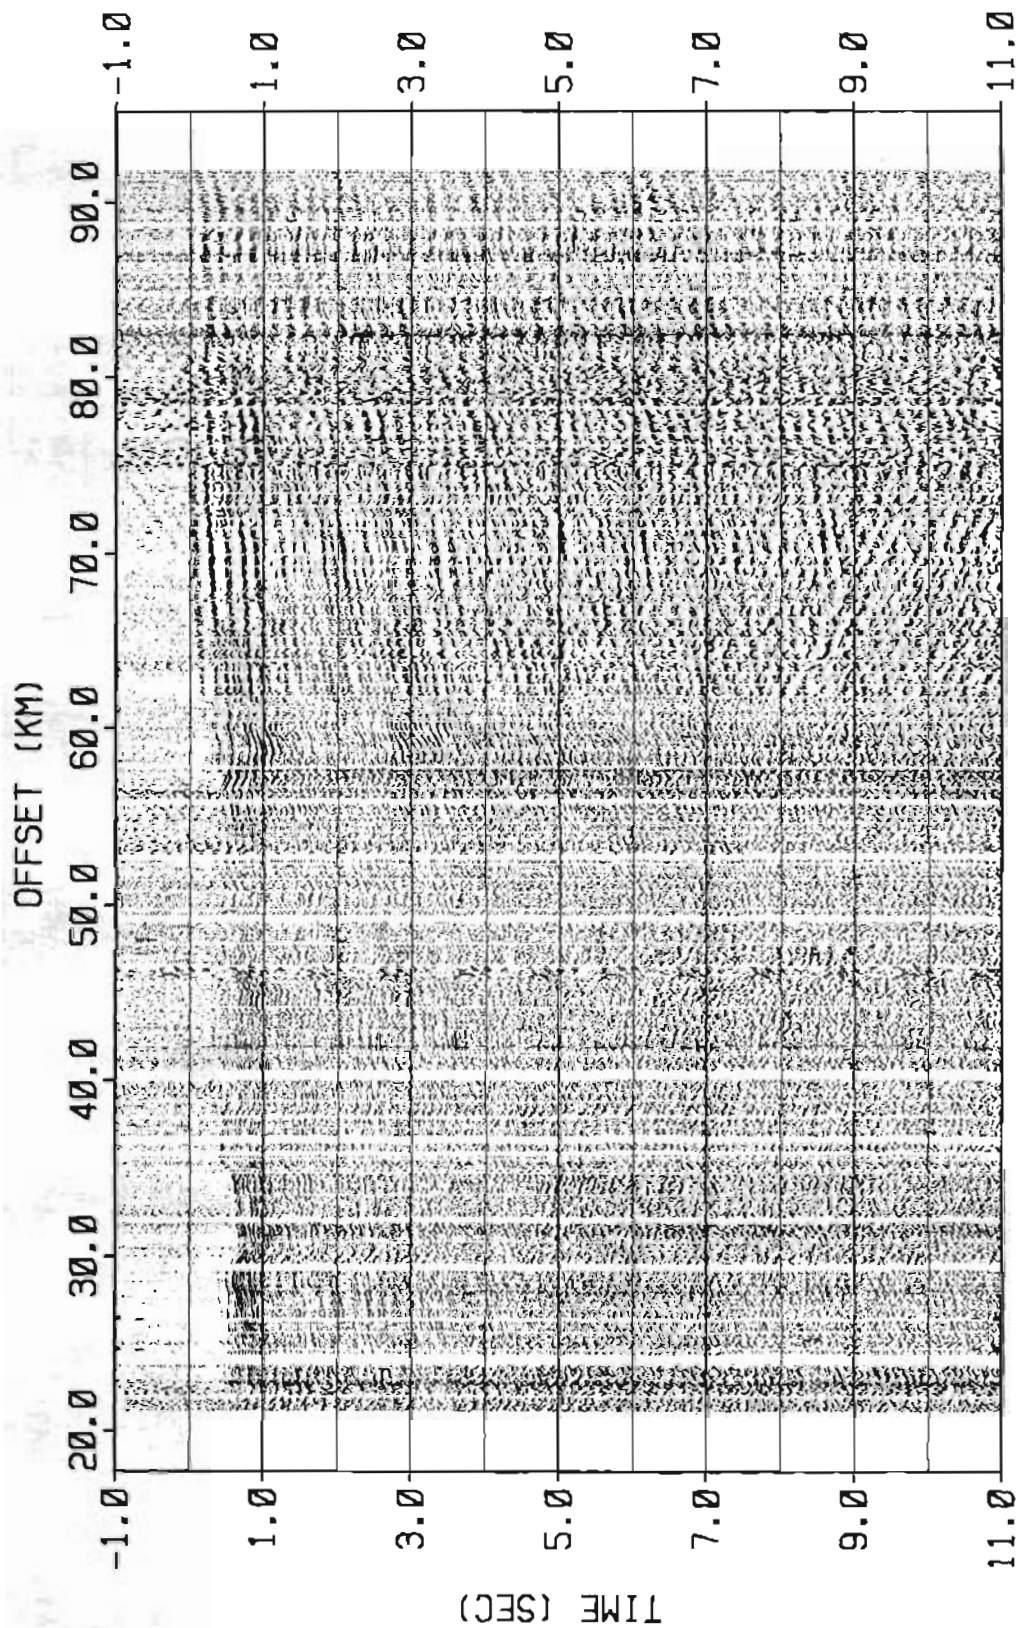


Figure 45 Profile 2

Shot 23 Shot Point 124 AGC = 2 sec

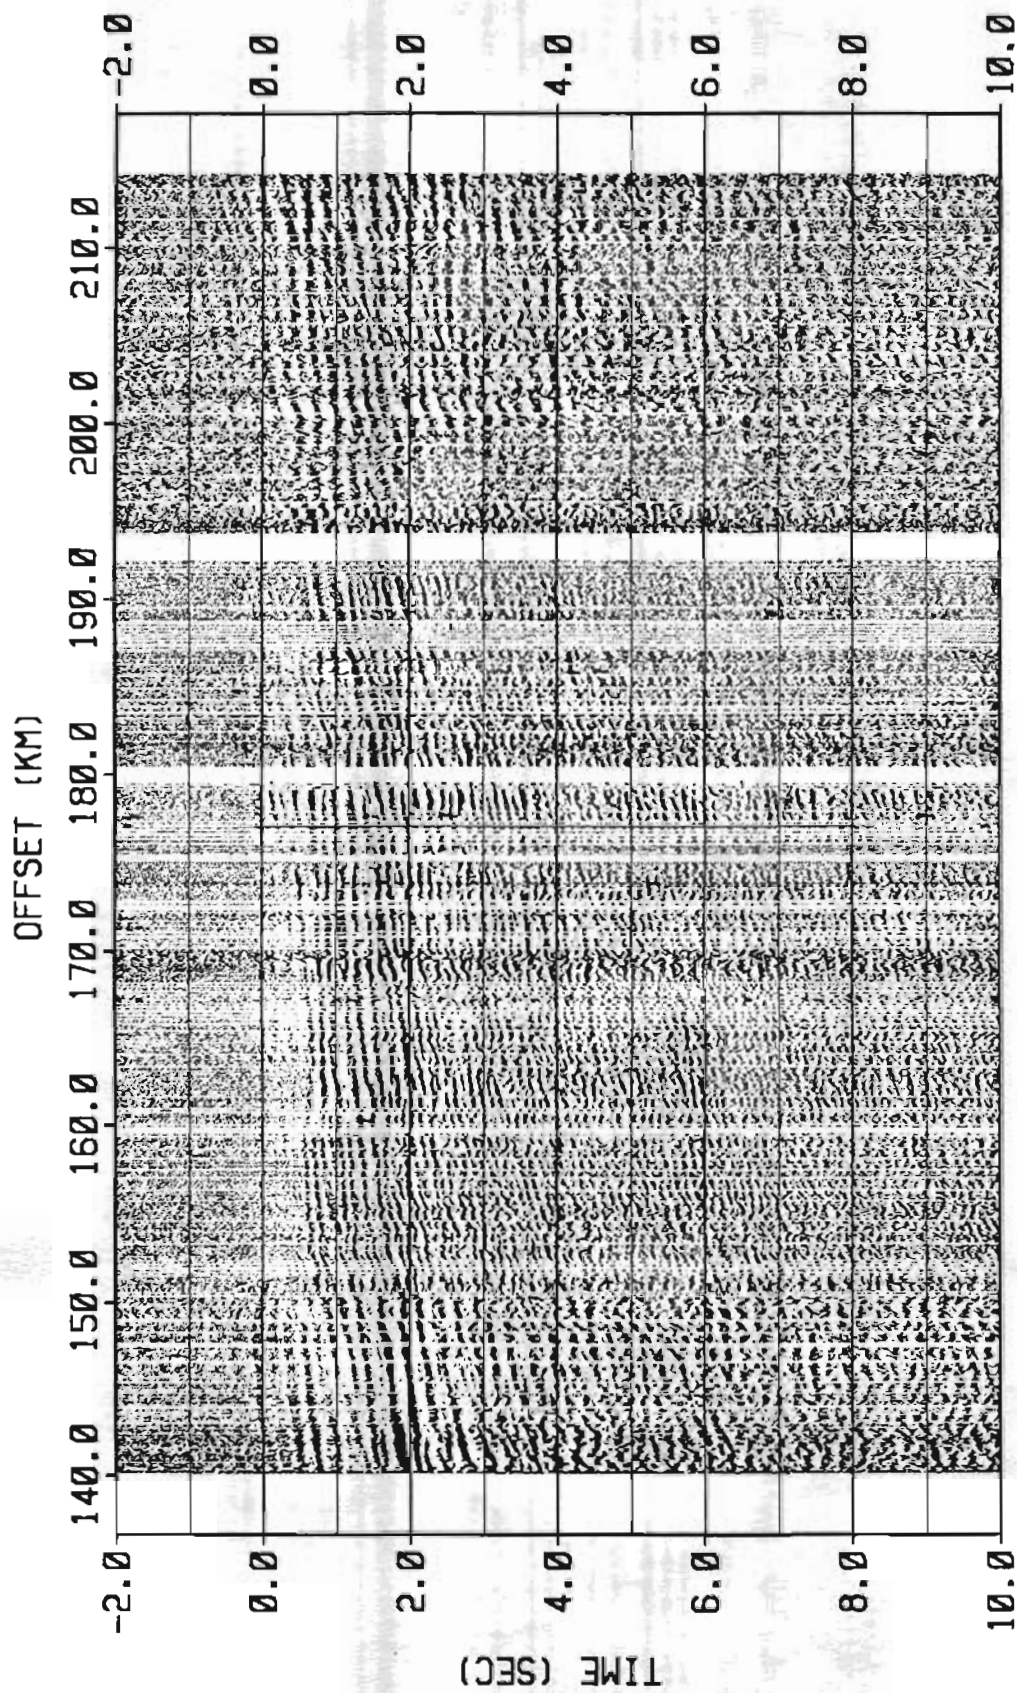


Figure 46      Profile 3  
 Shot 24      Shot Point 70      AGC = 2 sec



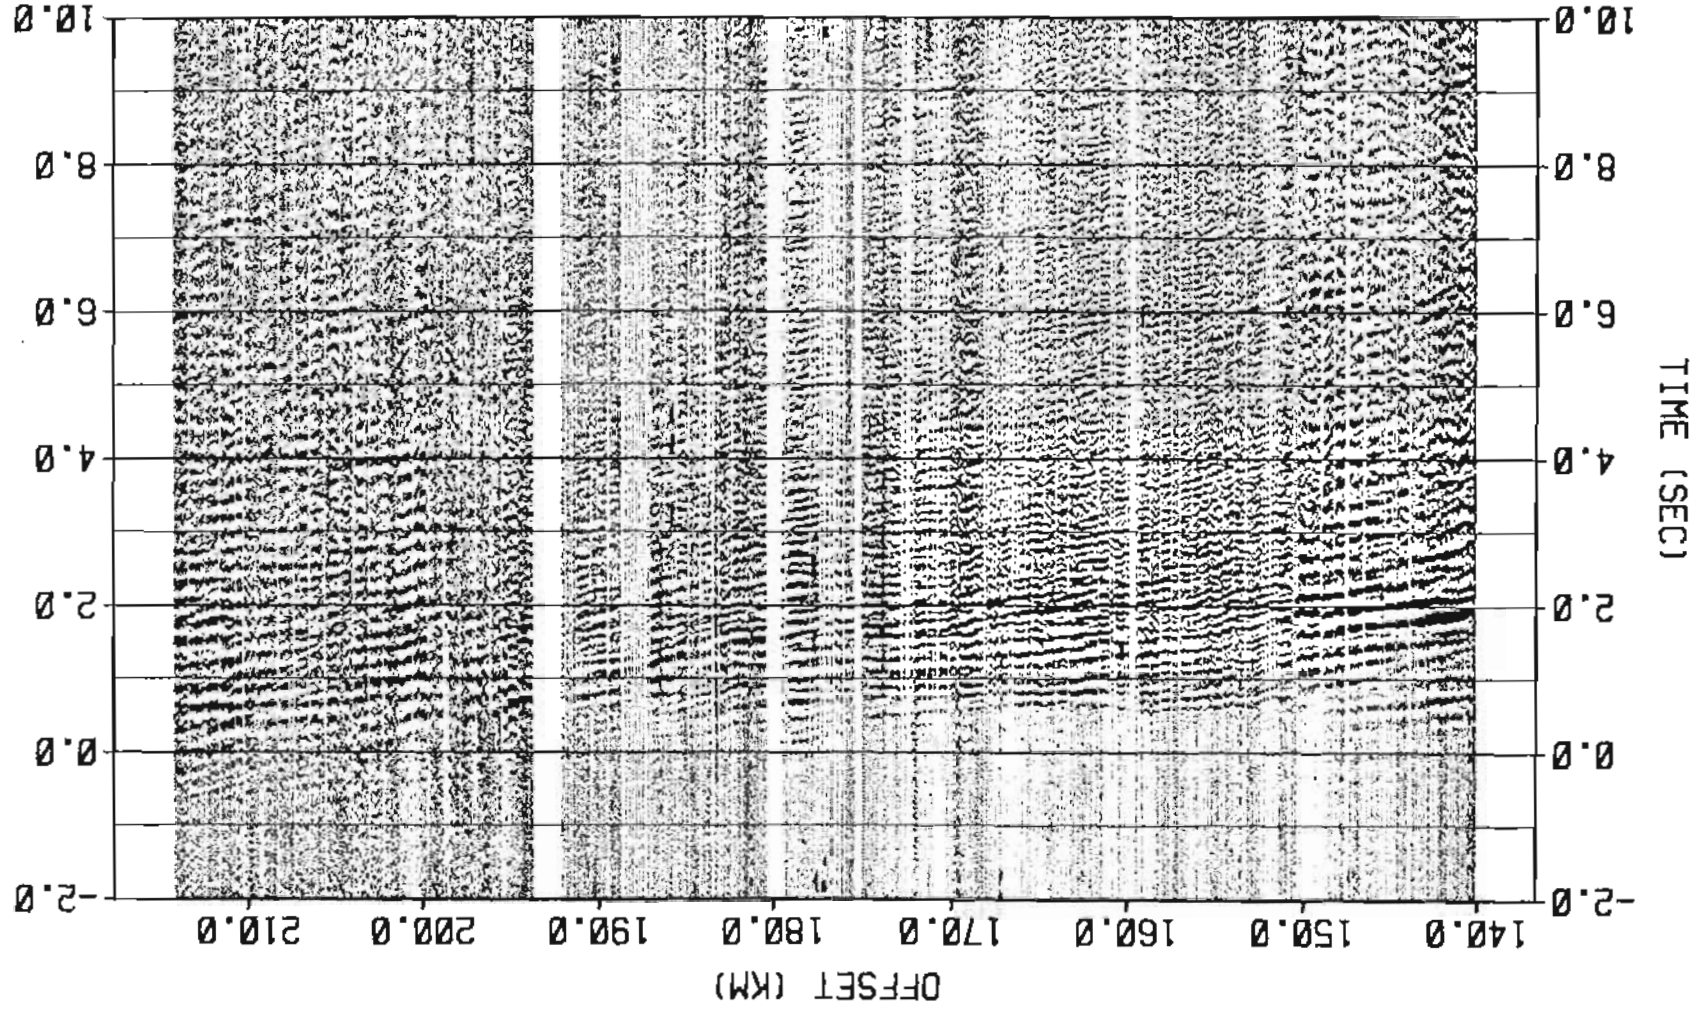


Figure 47  
Profile 3  
Shot 24 Shot Point 70 AGC = 12 sec

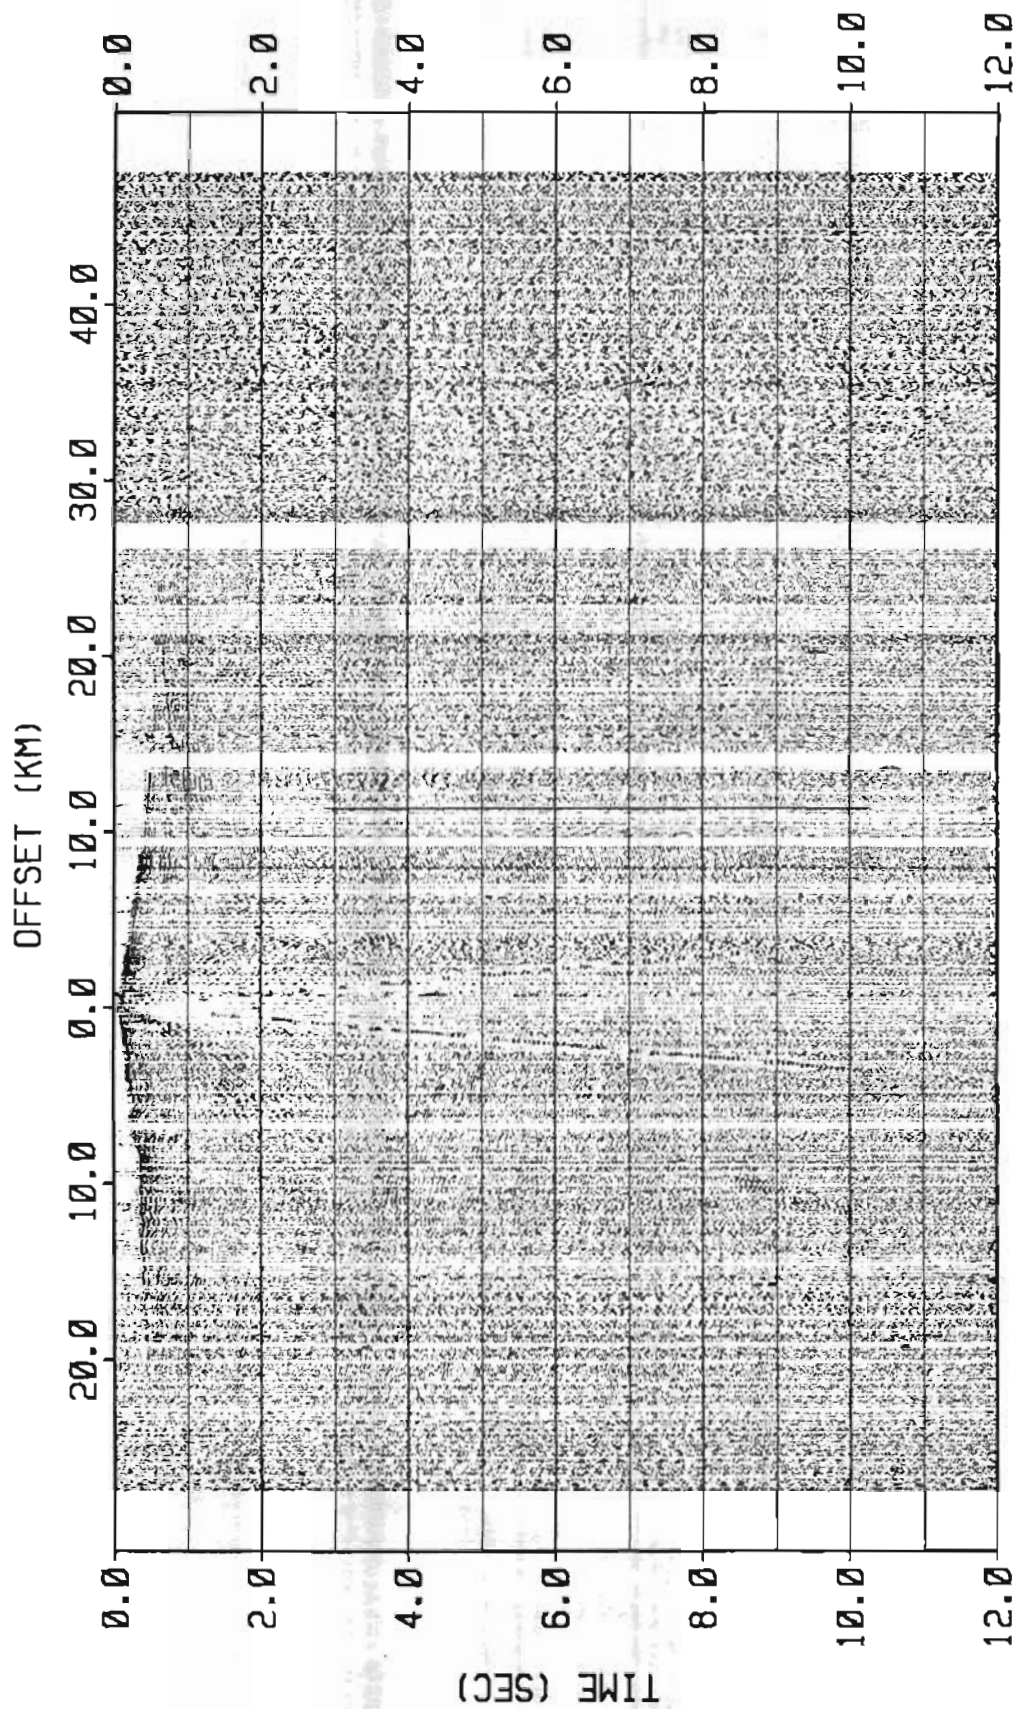


Figure 48 Profile 3  
Shot 25 Shot Point 175 AGC = 2 sec

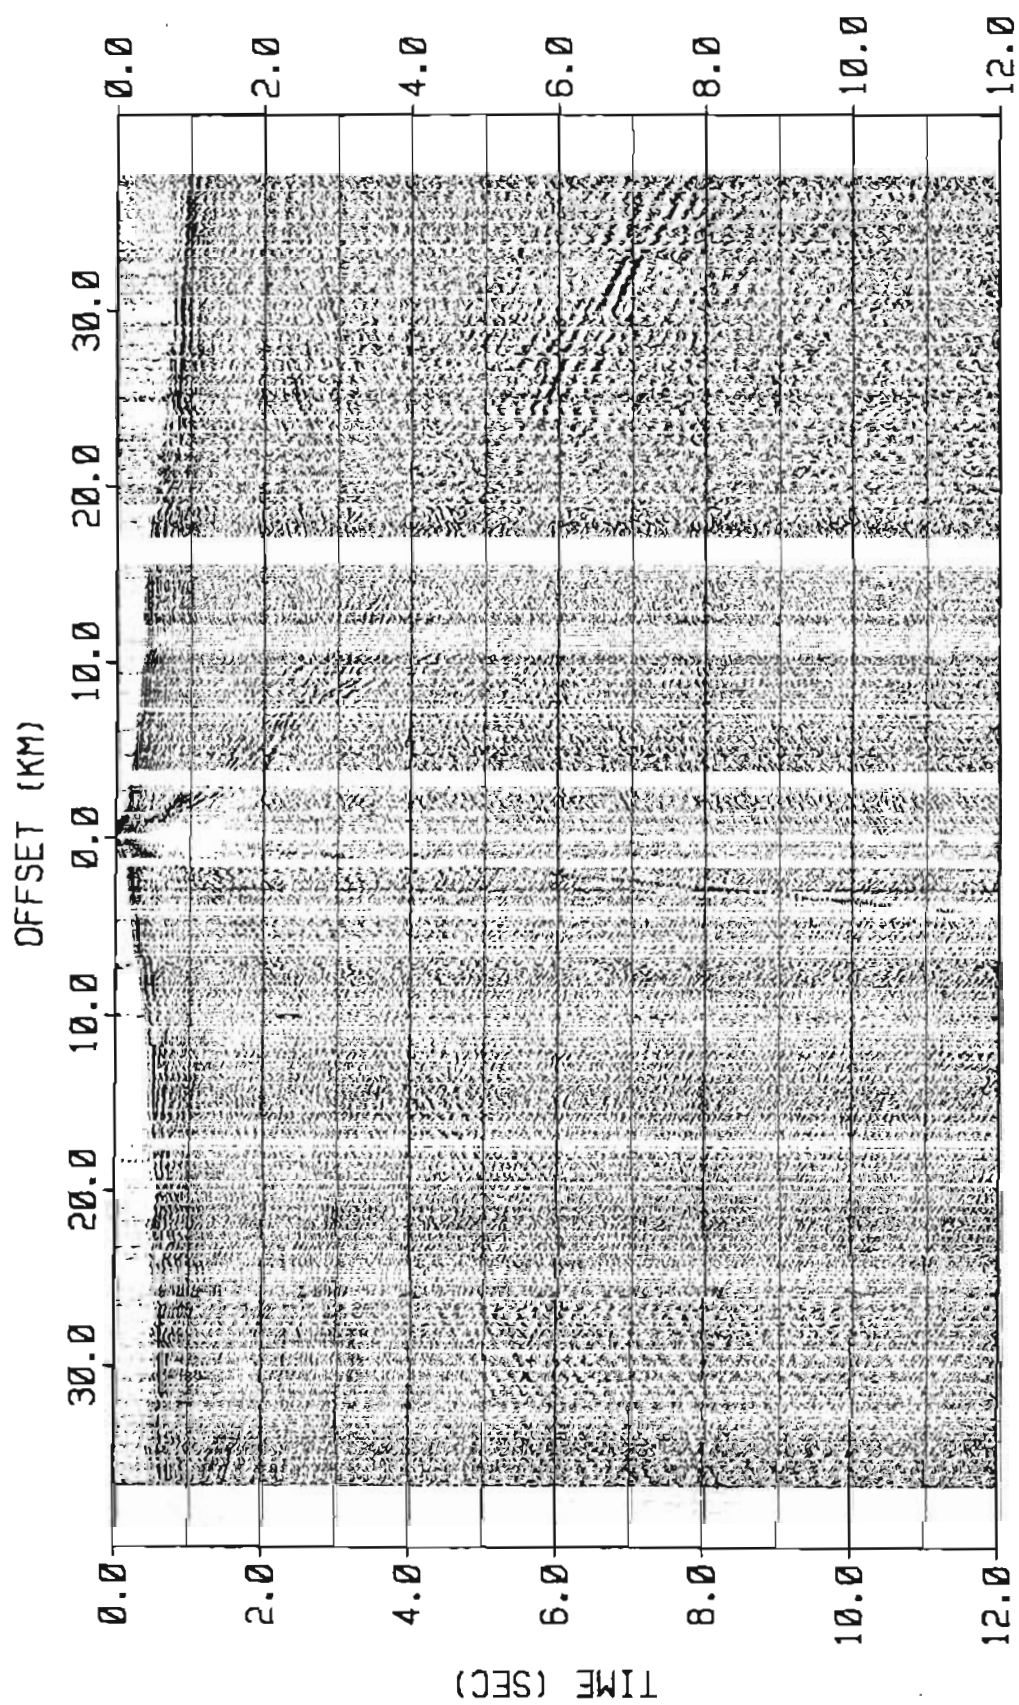


Figure 49      Profile 3  
 Shot 26      Shot Point 176      AGC = 2 sec

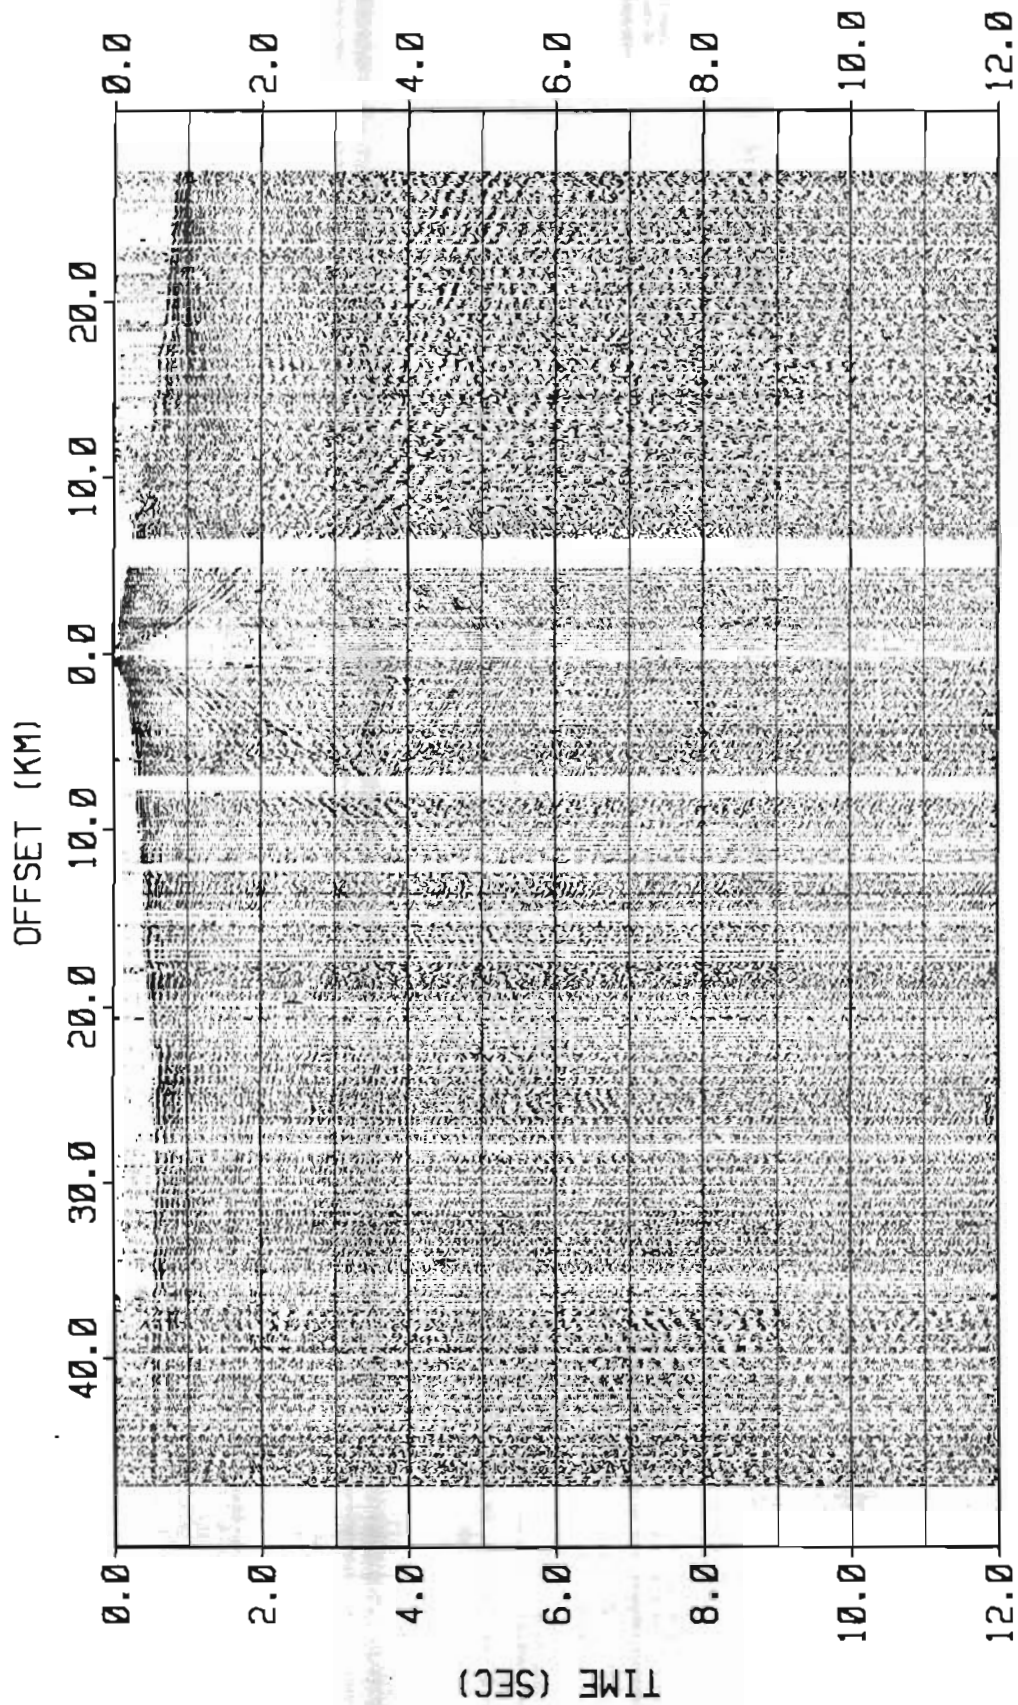


Figure 50      Profile 3  
 Shot 27      Shot Point 138      AGC = 2 sec



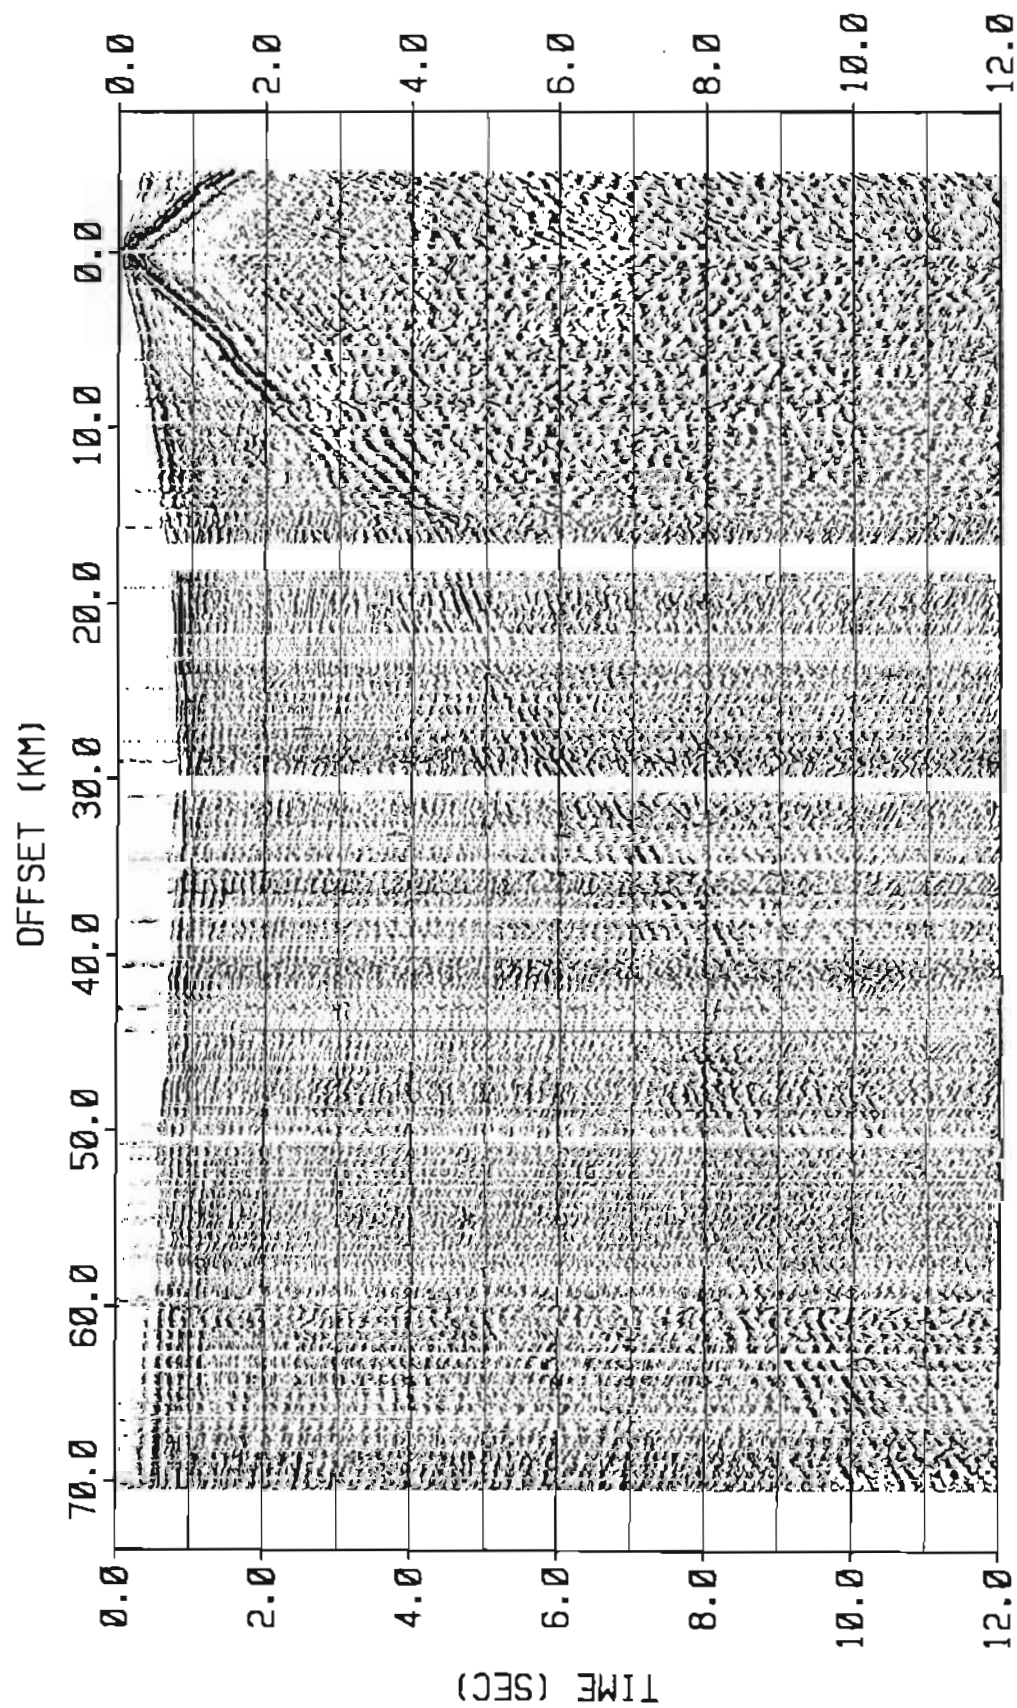


Figure 51      Profile 3  
 Shot 28      Shot Point 139      AGC = 2 sec

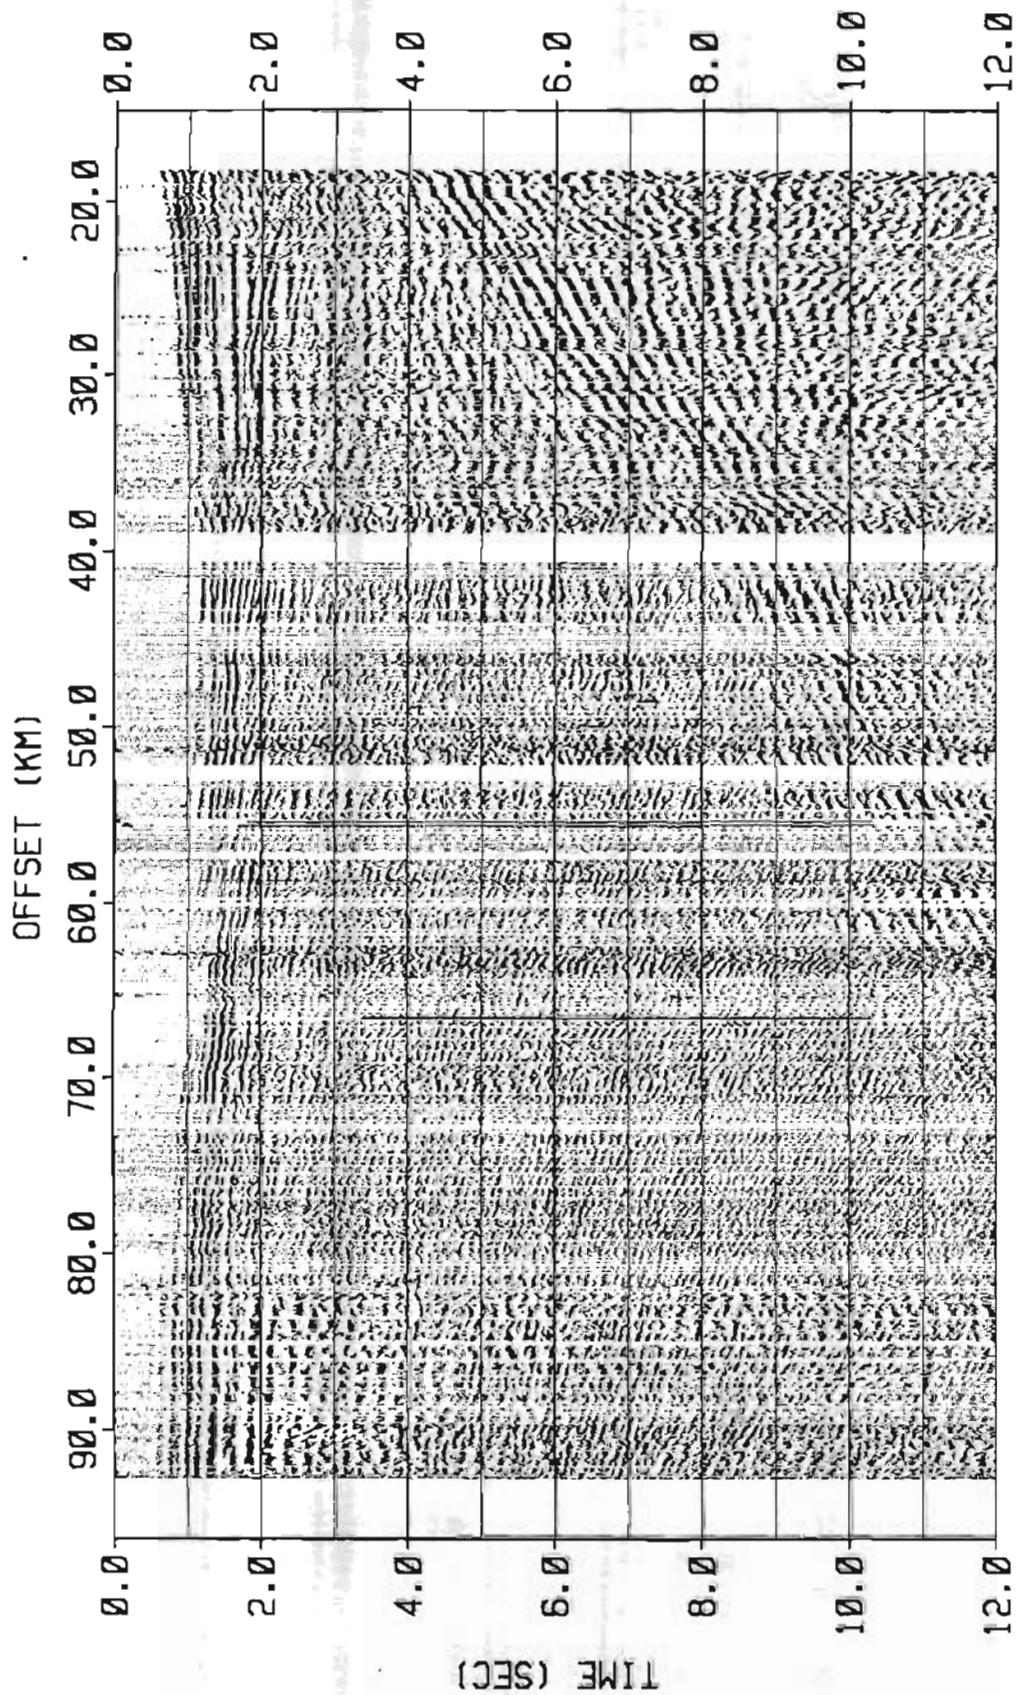


Figure 52      Profile 3  
 Shot 29      Shot Point 142      AGC = 2 sec

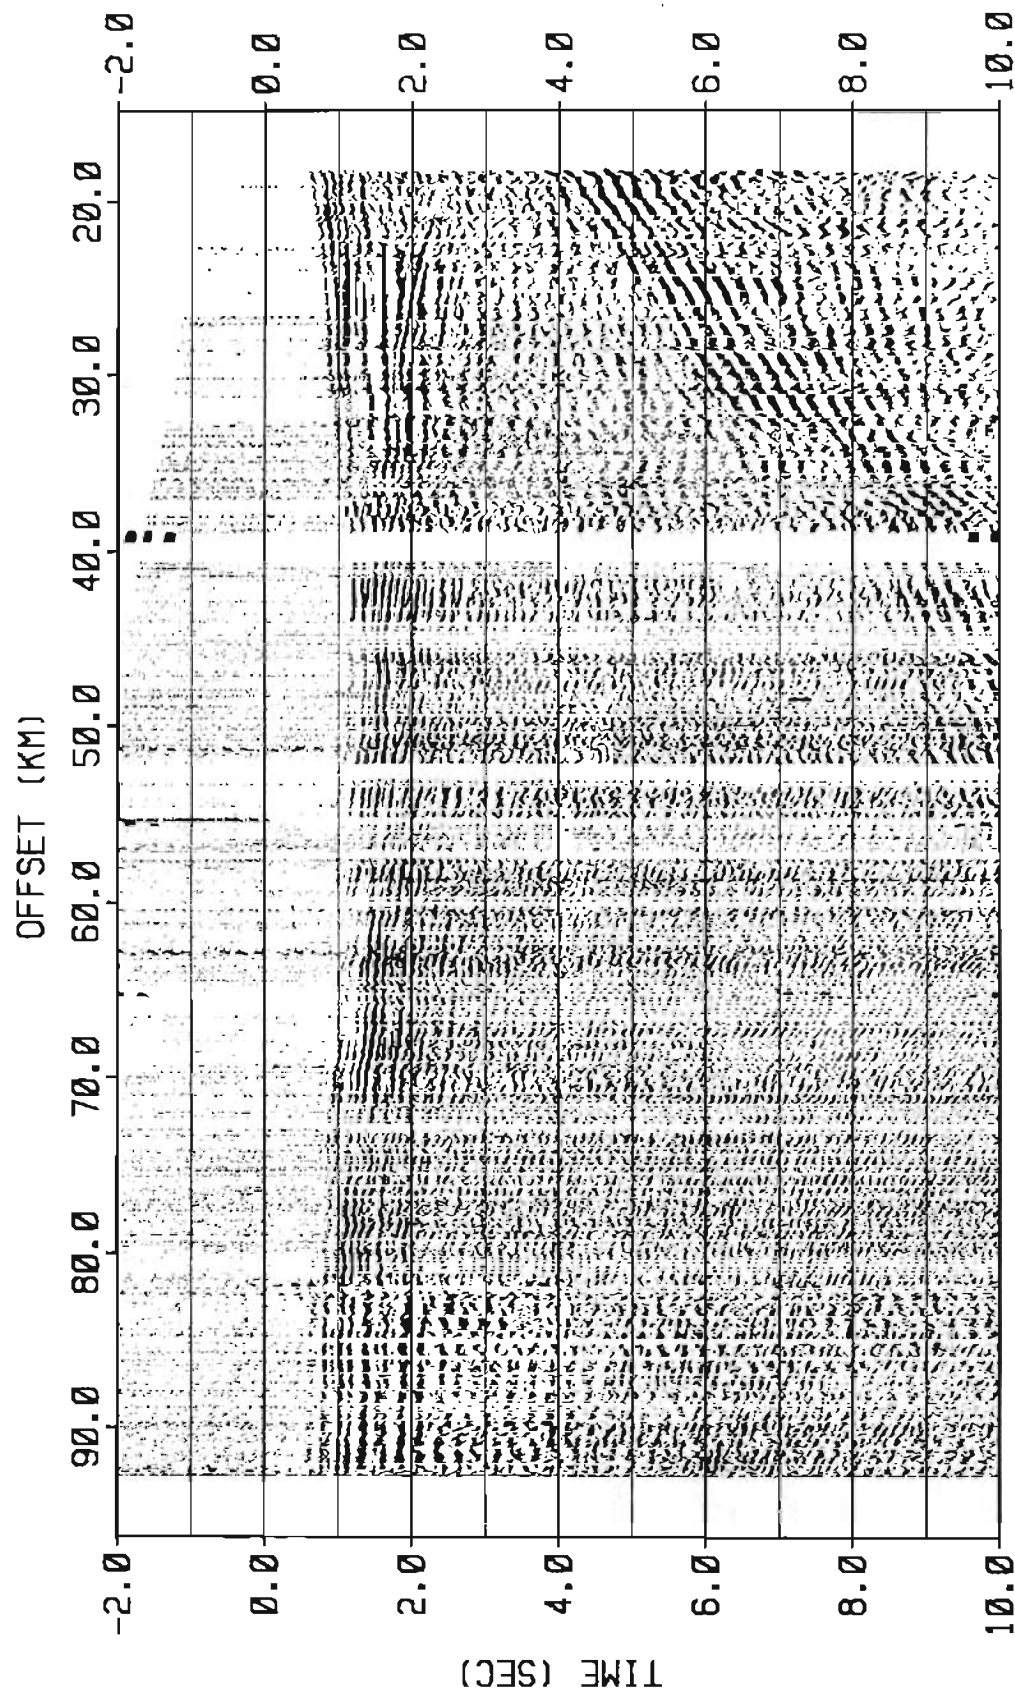


Figure 53 Profile 3  
 Shot 29 Shot Point 142 AGC = 12 sec



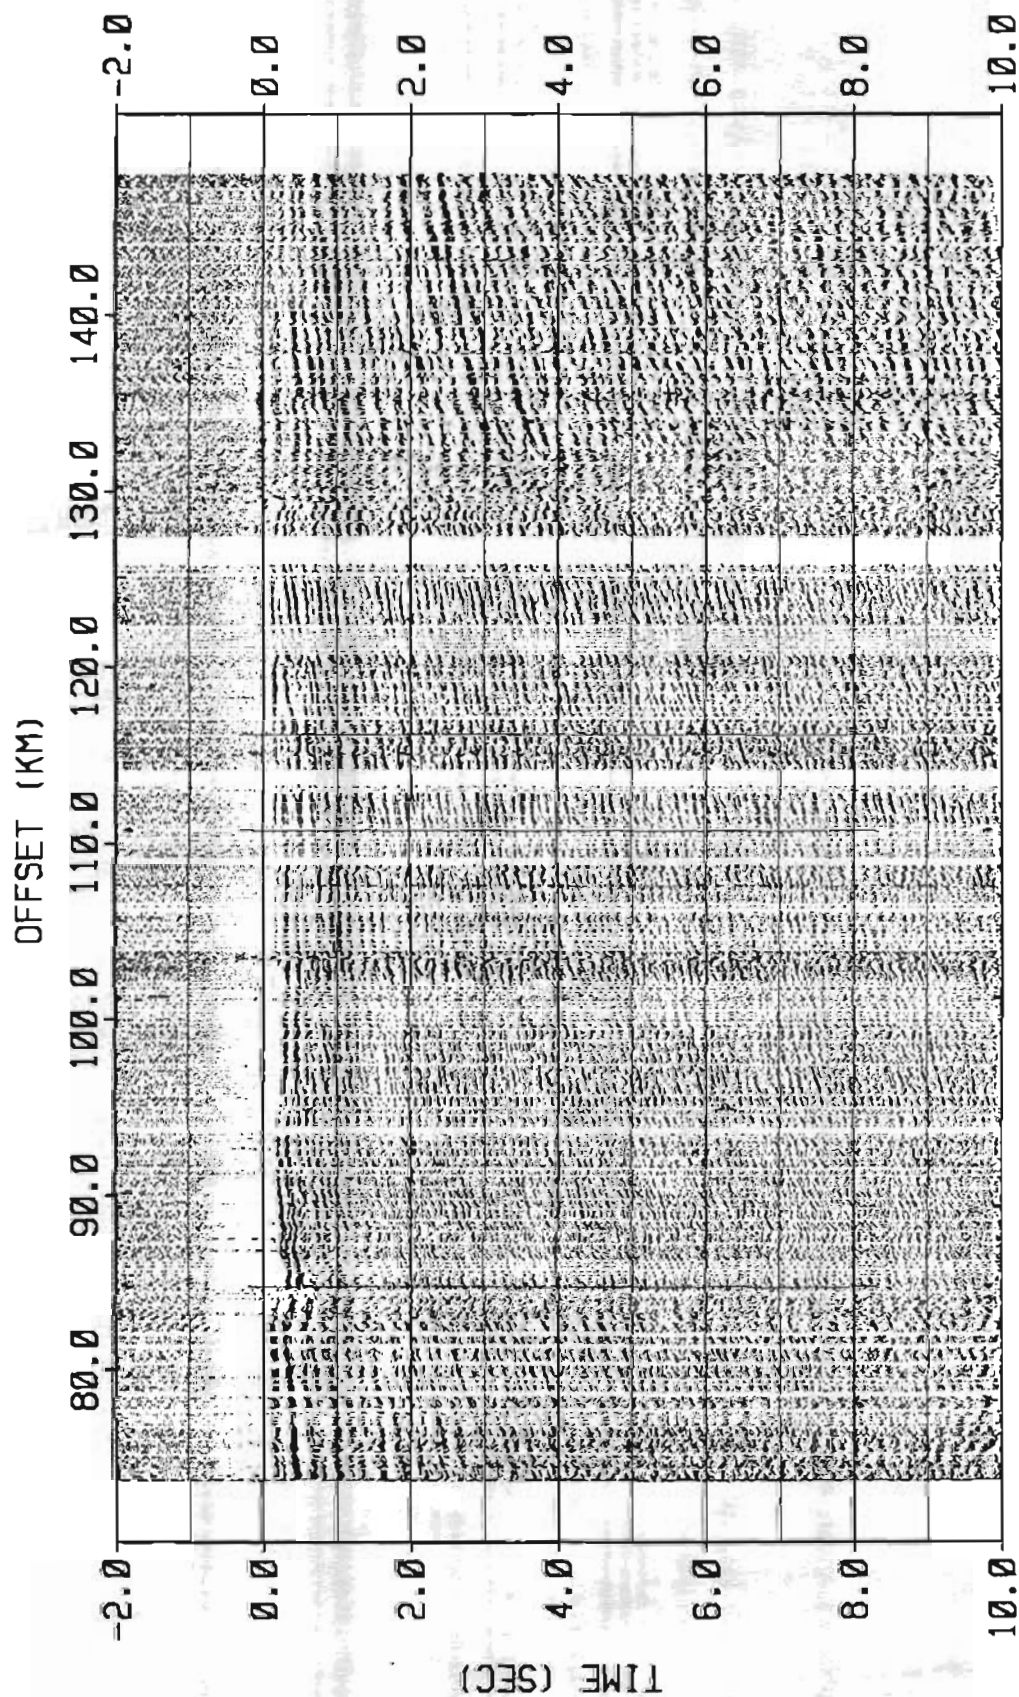


Figure 54 Profile 3  
Shot 30 Shot Point 126 AGC = 2 sec

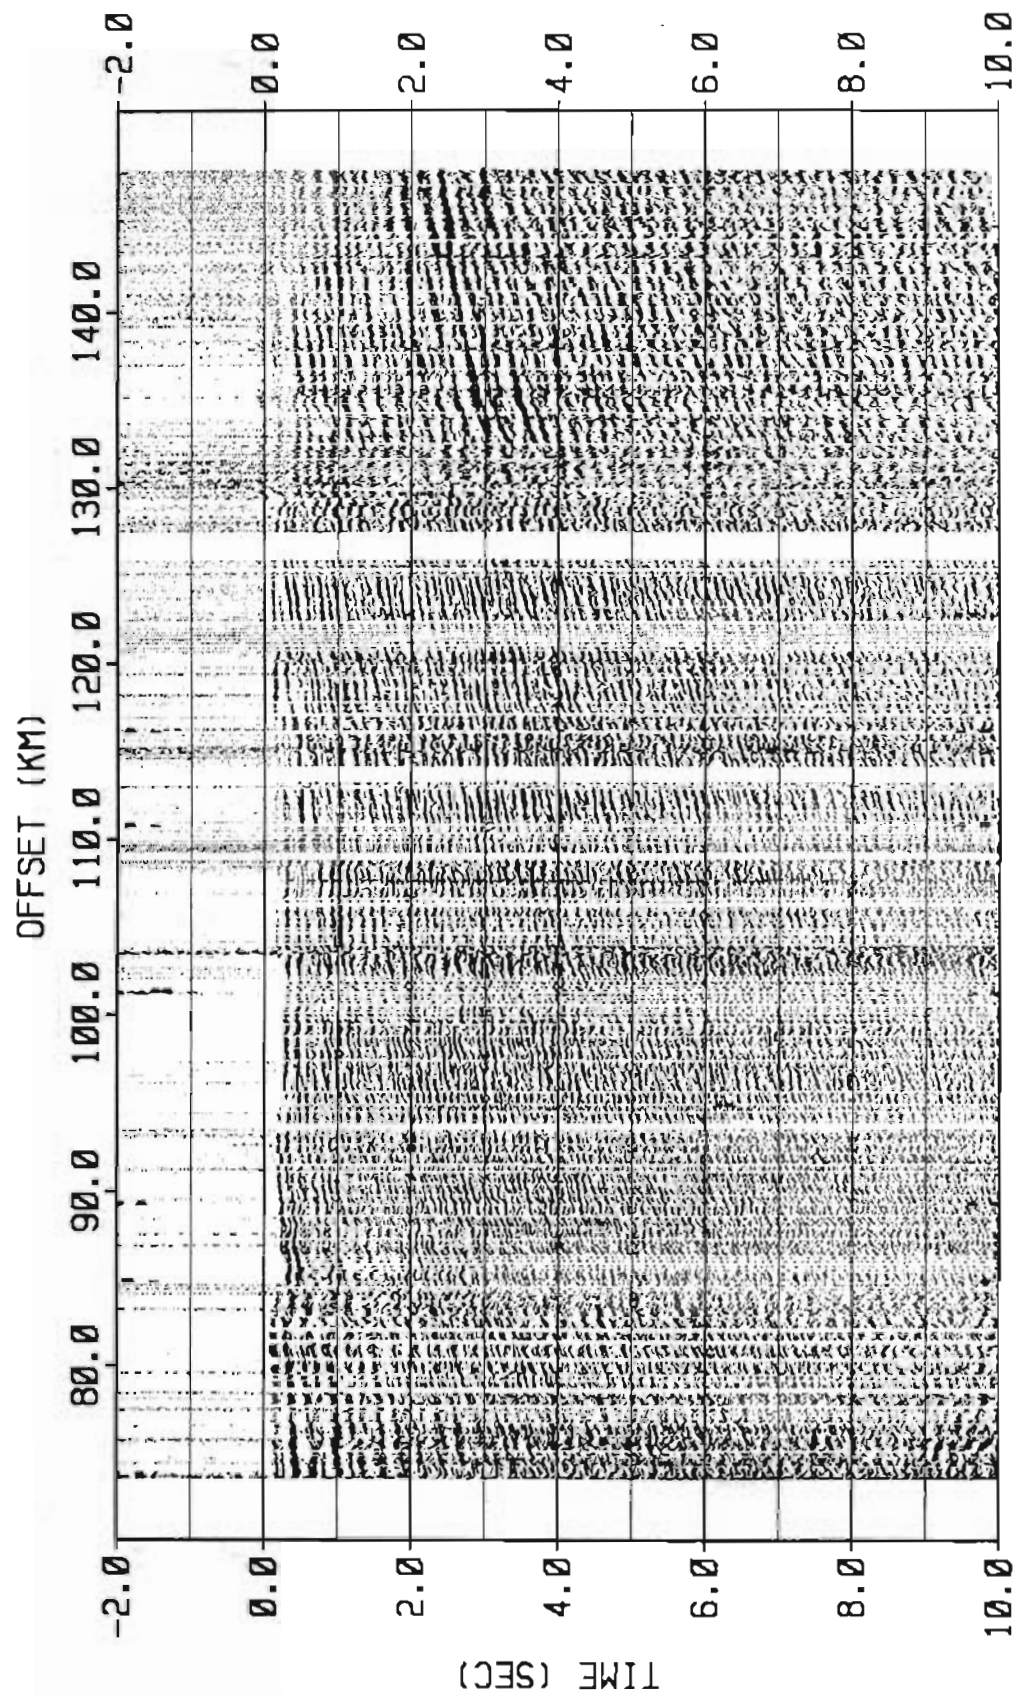


Figure 55 Profile 3  
 Shot 30 Shot Point 126 AGC = 12 sec

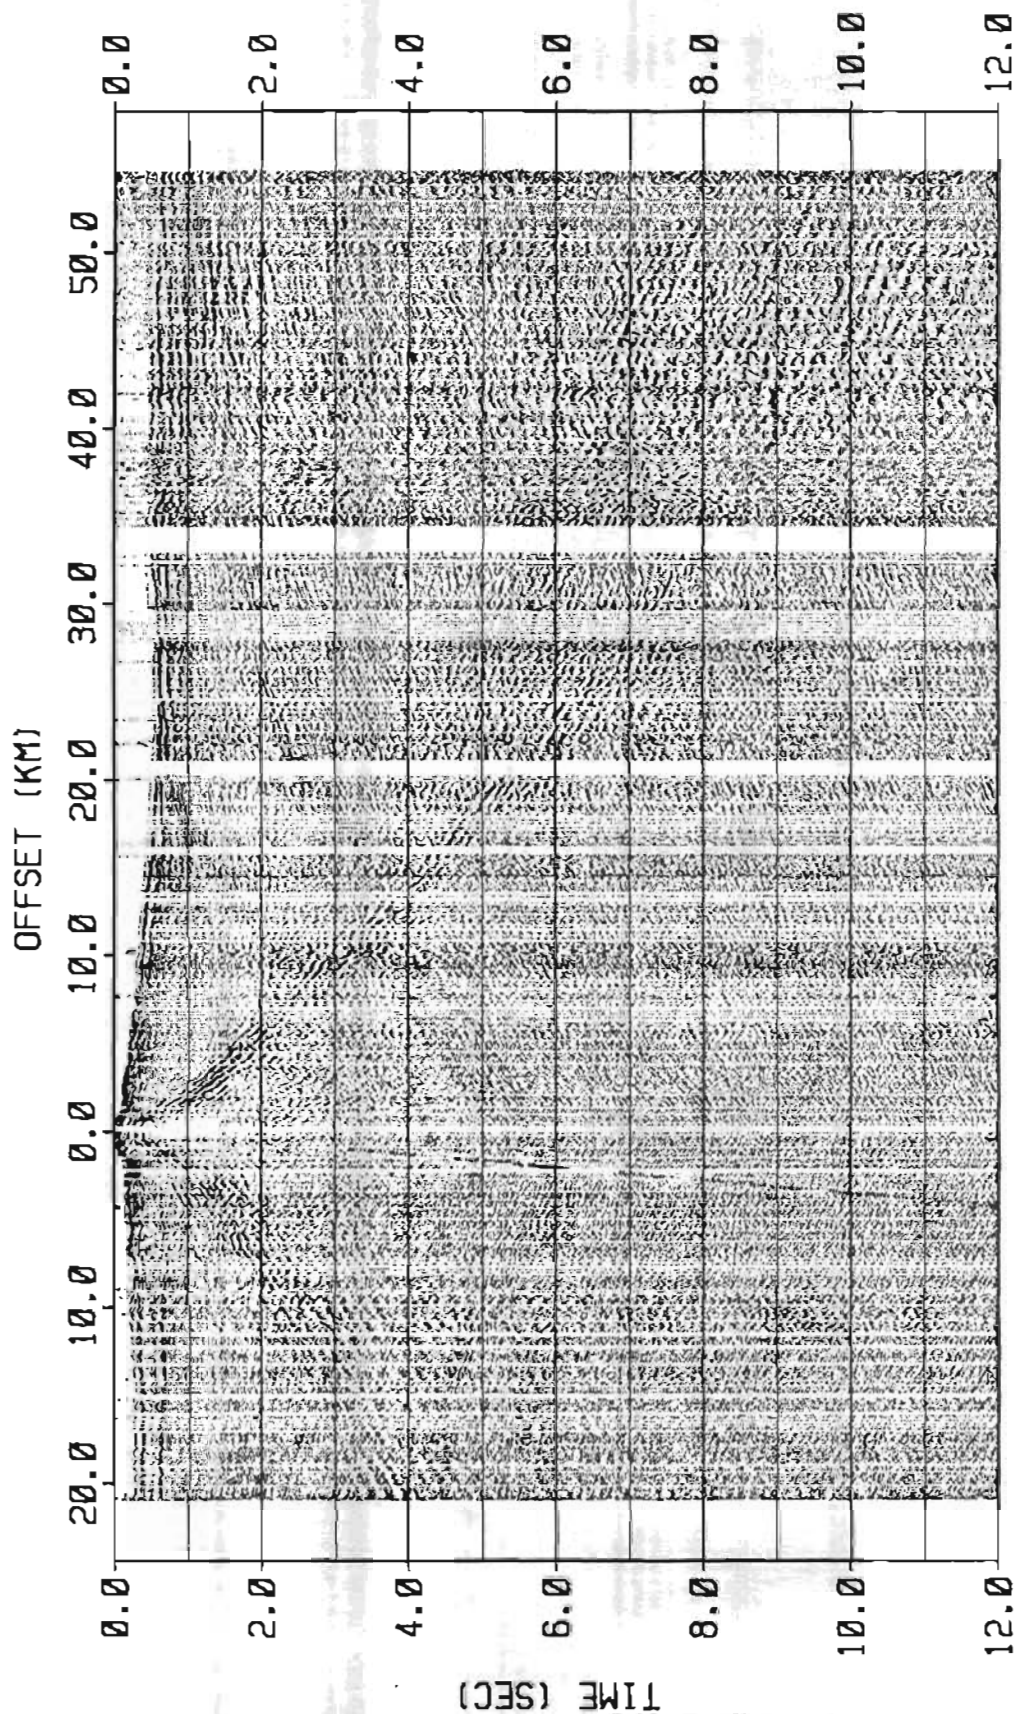


Figure 56 Profile 3  
Shot 31 Shot Point 136 AGC = 2 sec

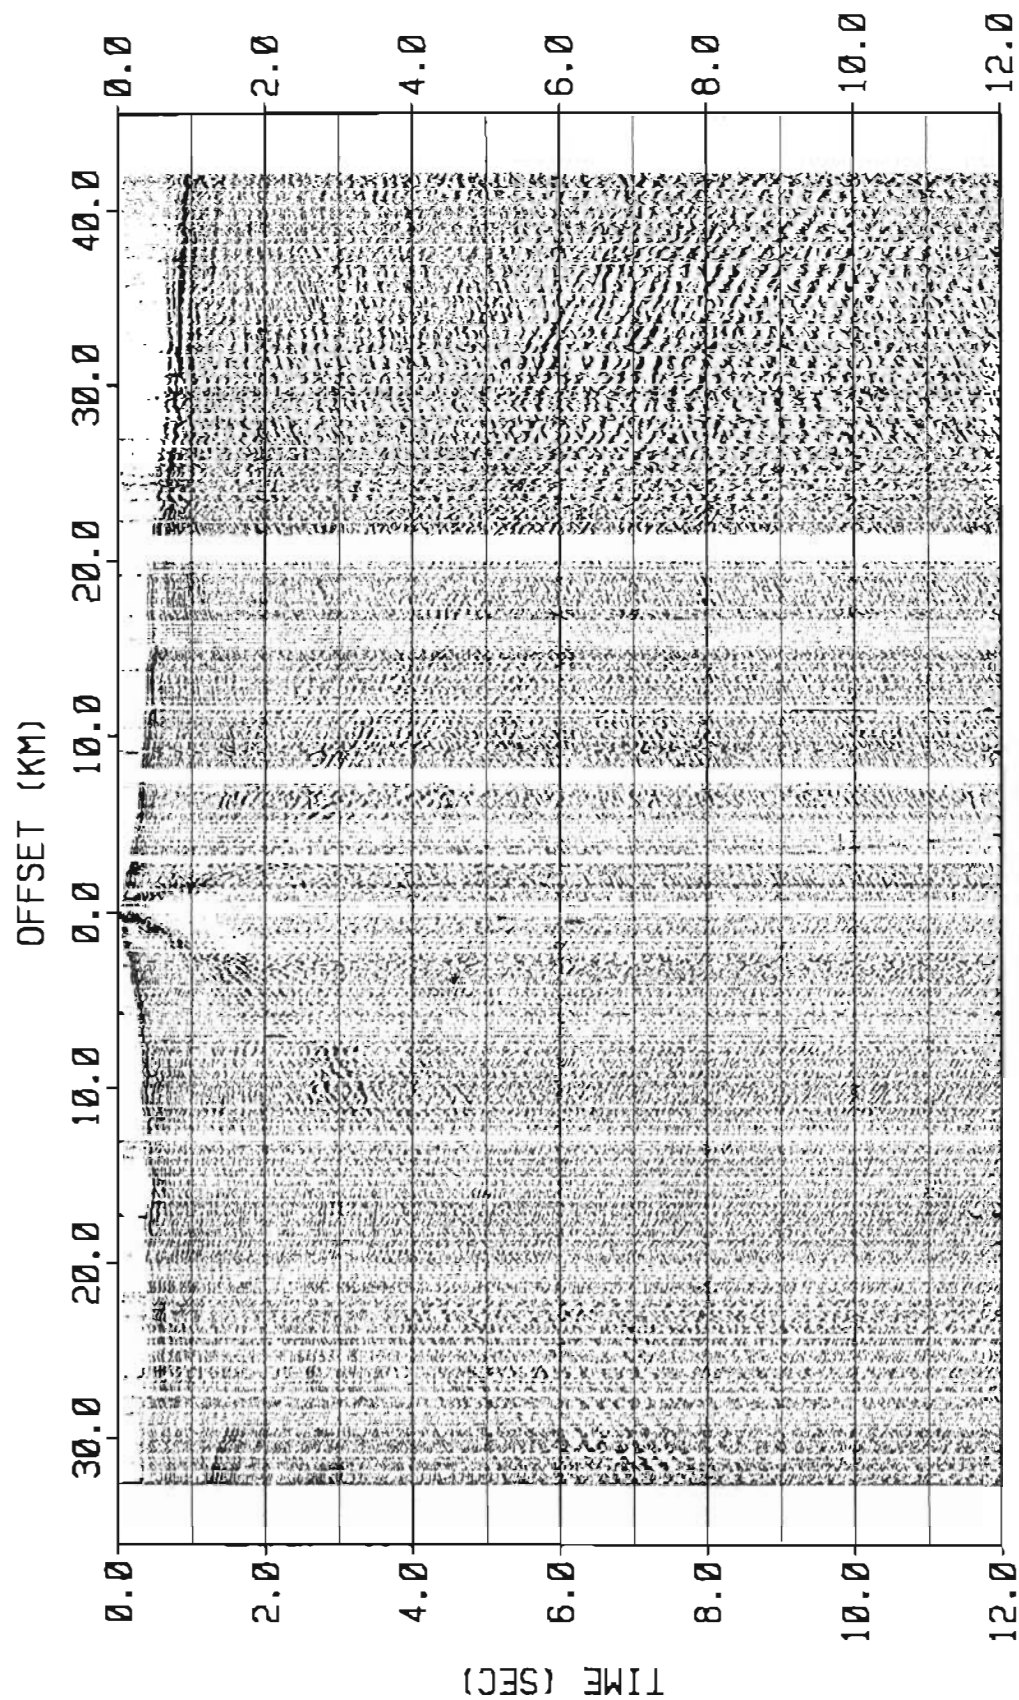


Figure 57 Profile 3  
 Shot 32 Shot Point 137 AGC = 12 sec



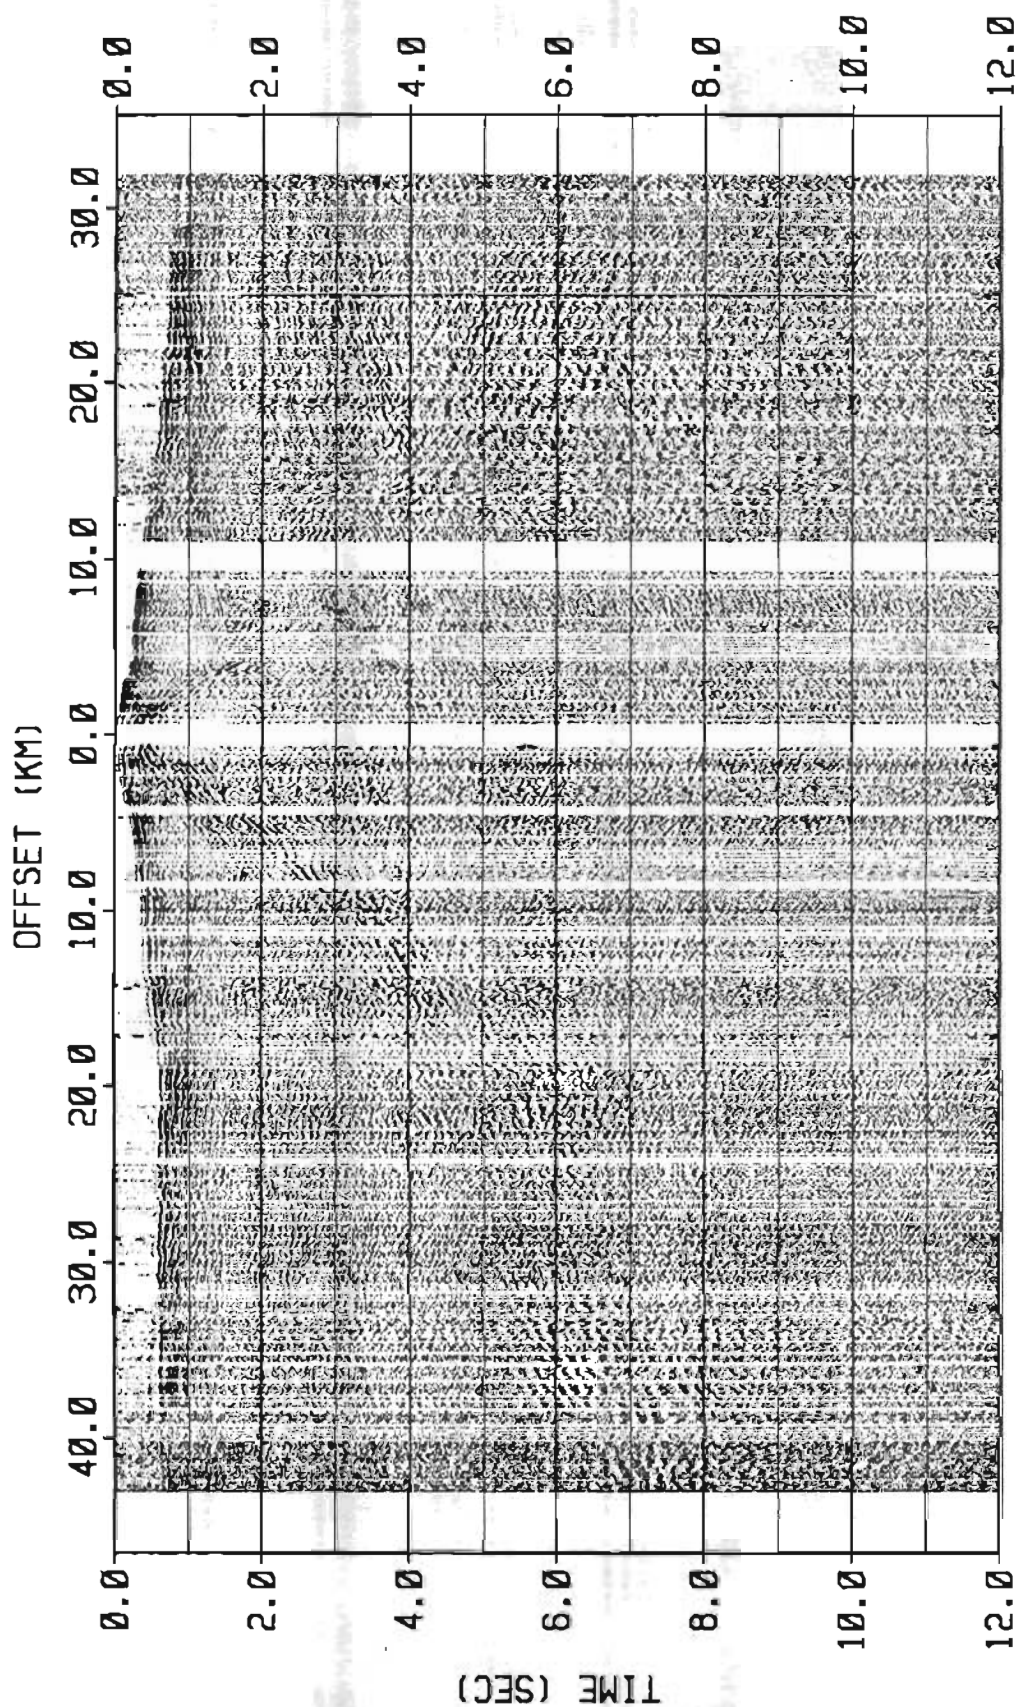


Figure 58 Profile 3

Shot 33 Shot Point 177 AGC = 2 sec

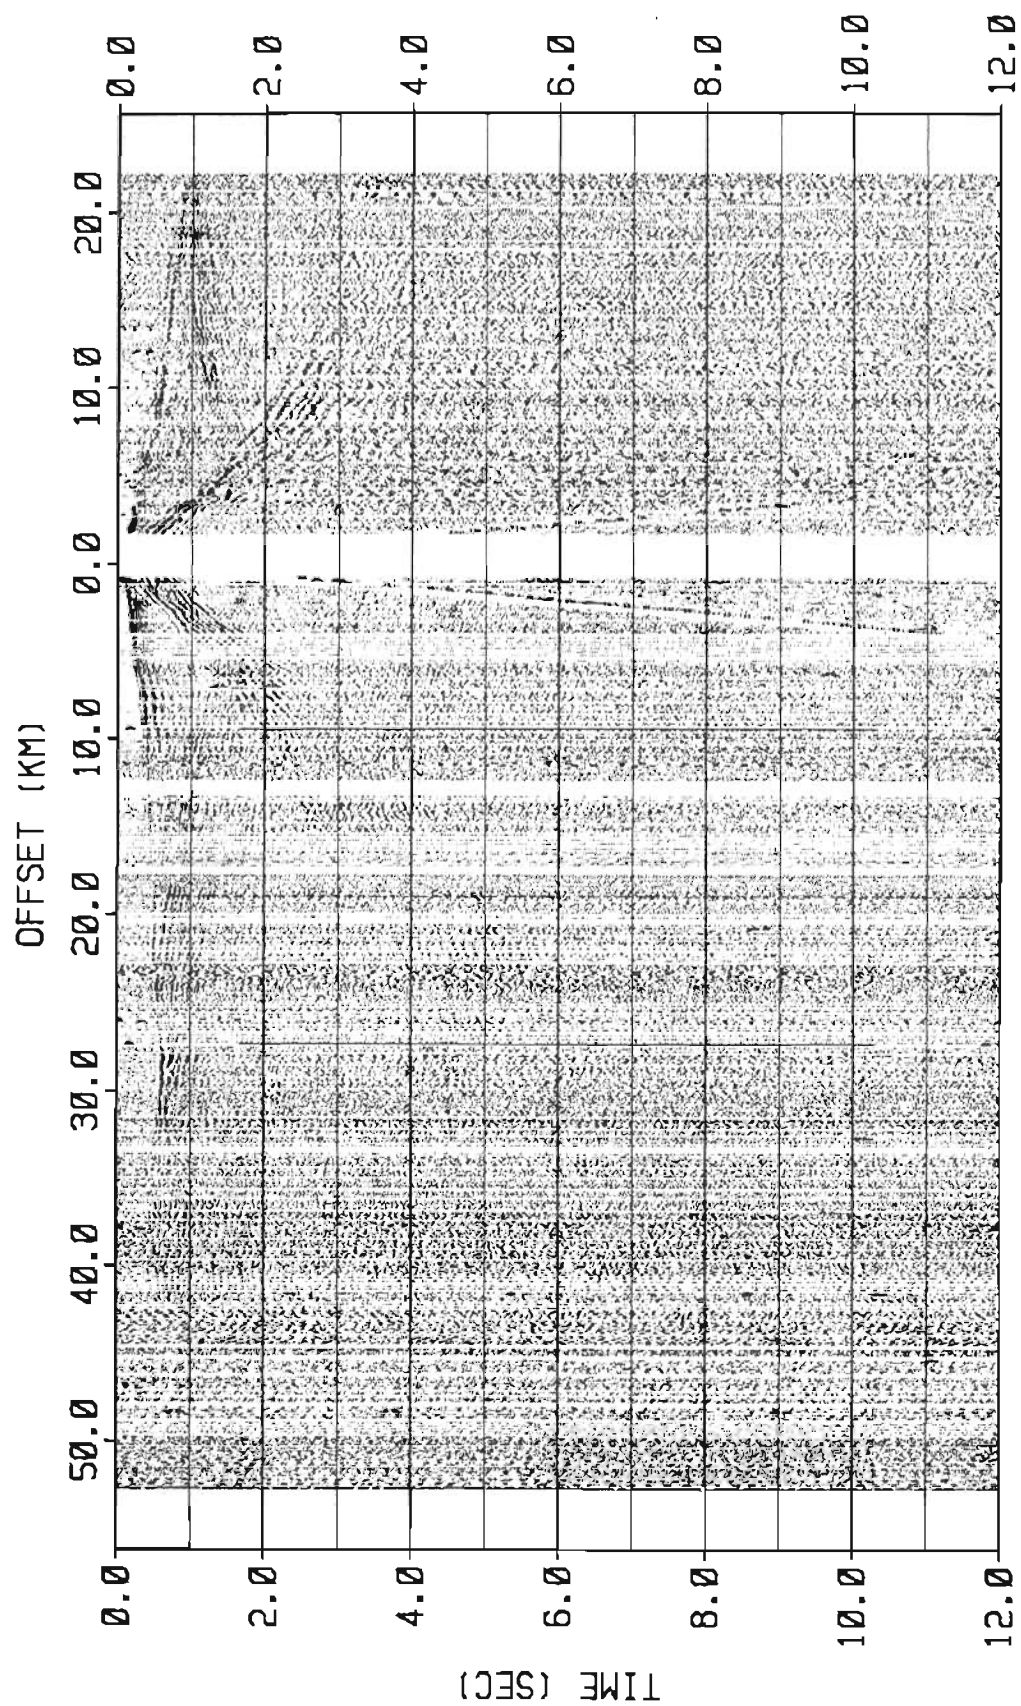


Figure 59 Profile 3  
 Shot 34 Shot Point 178 AGC = 2 sec

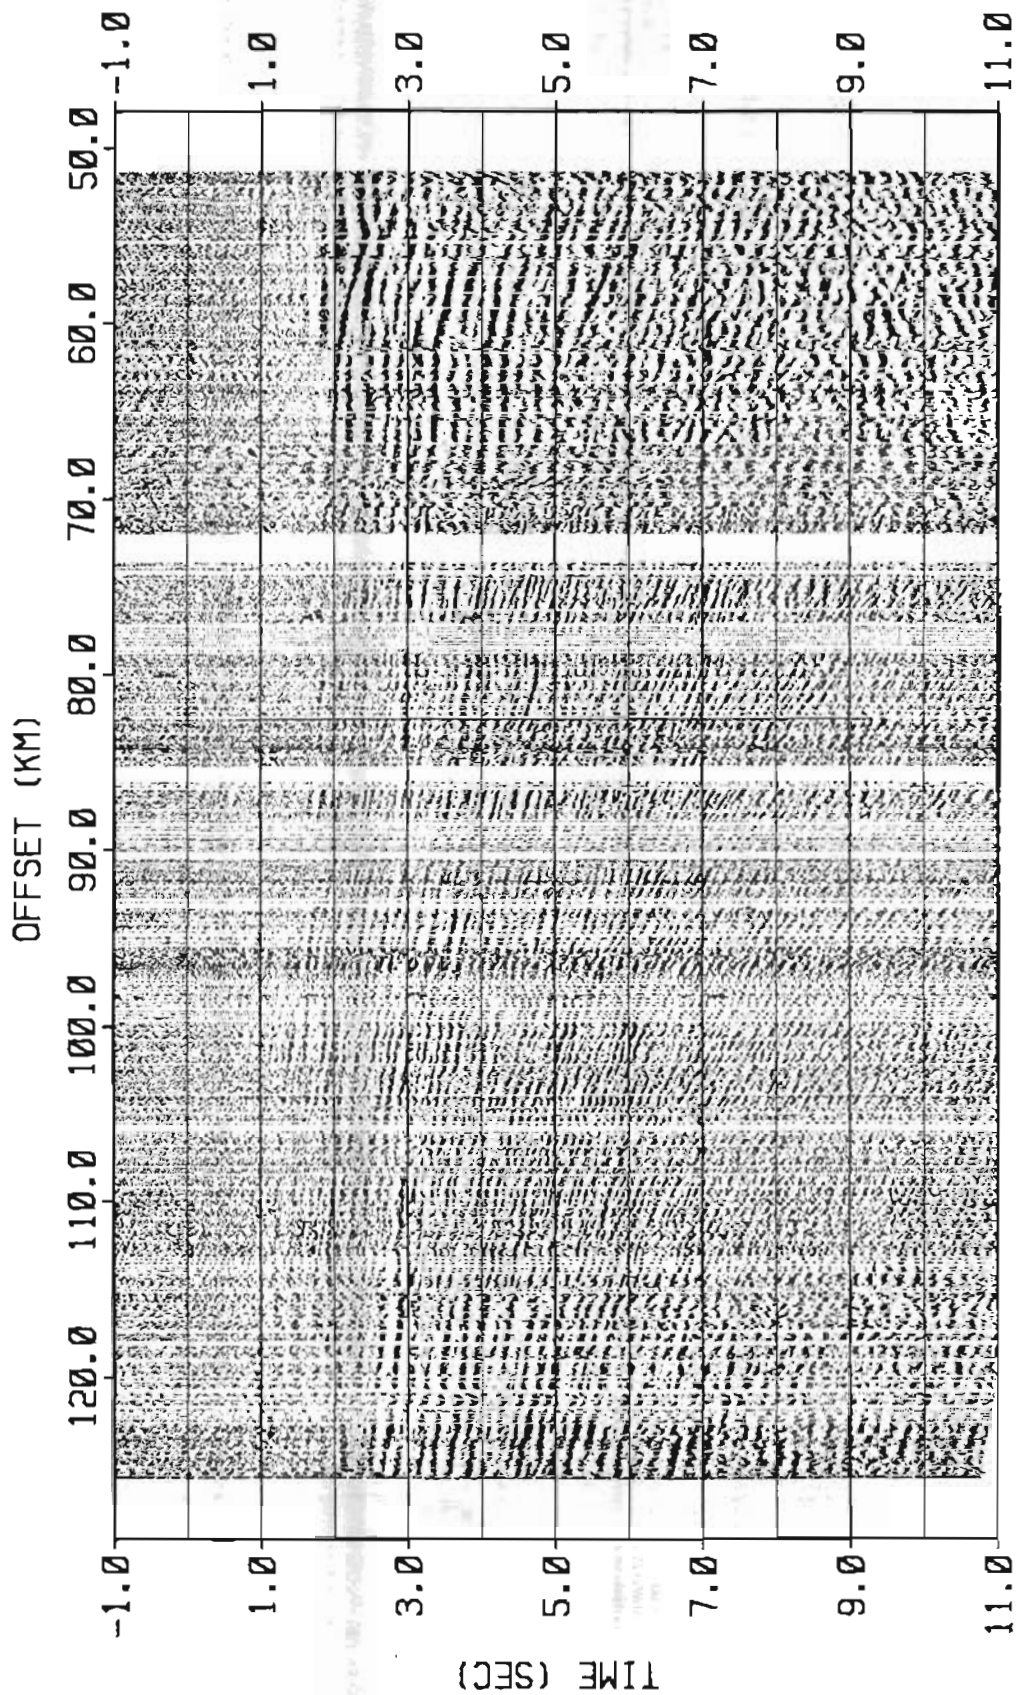


Figure 60 Profile 3

Shot 35 Shot Point 143 AGC = 2 sec



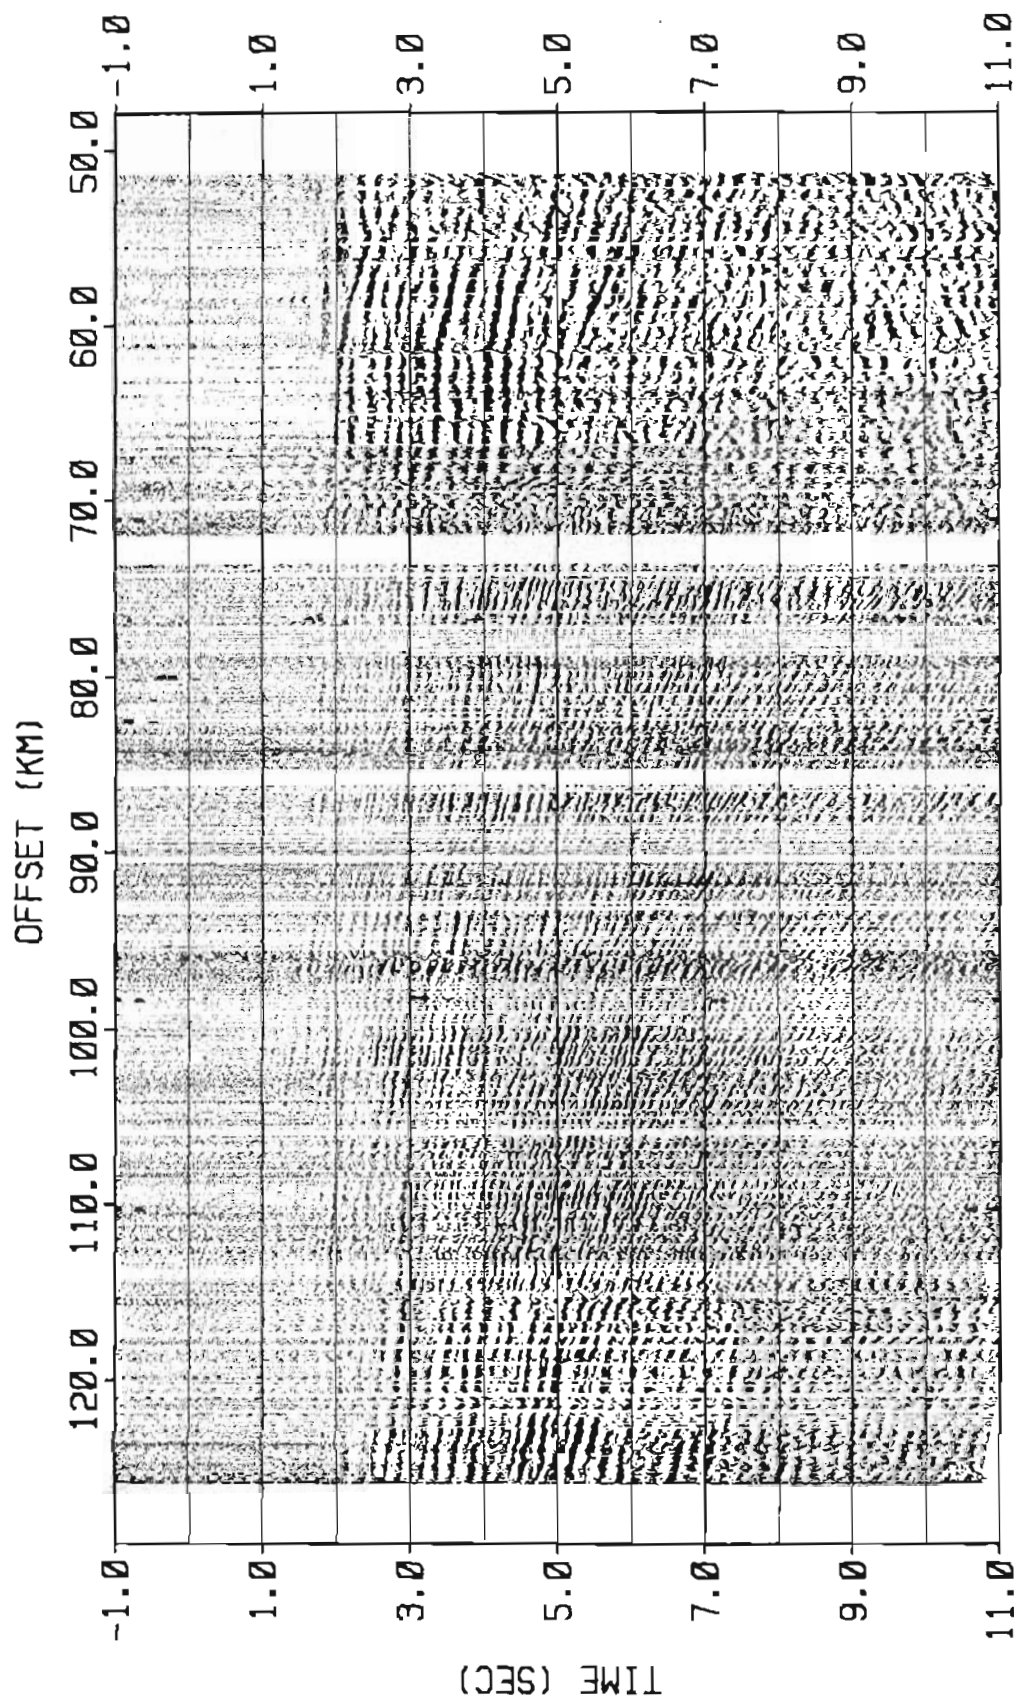


Figure 61 Profile 3

Shot 35 Shot Point 143 AGC = 12 sec

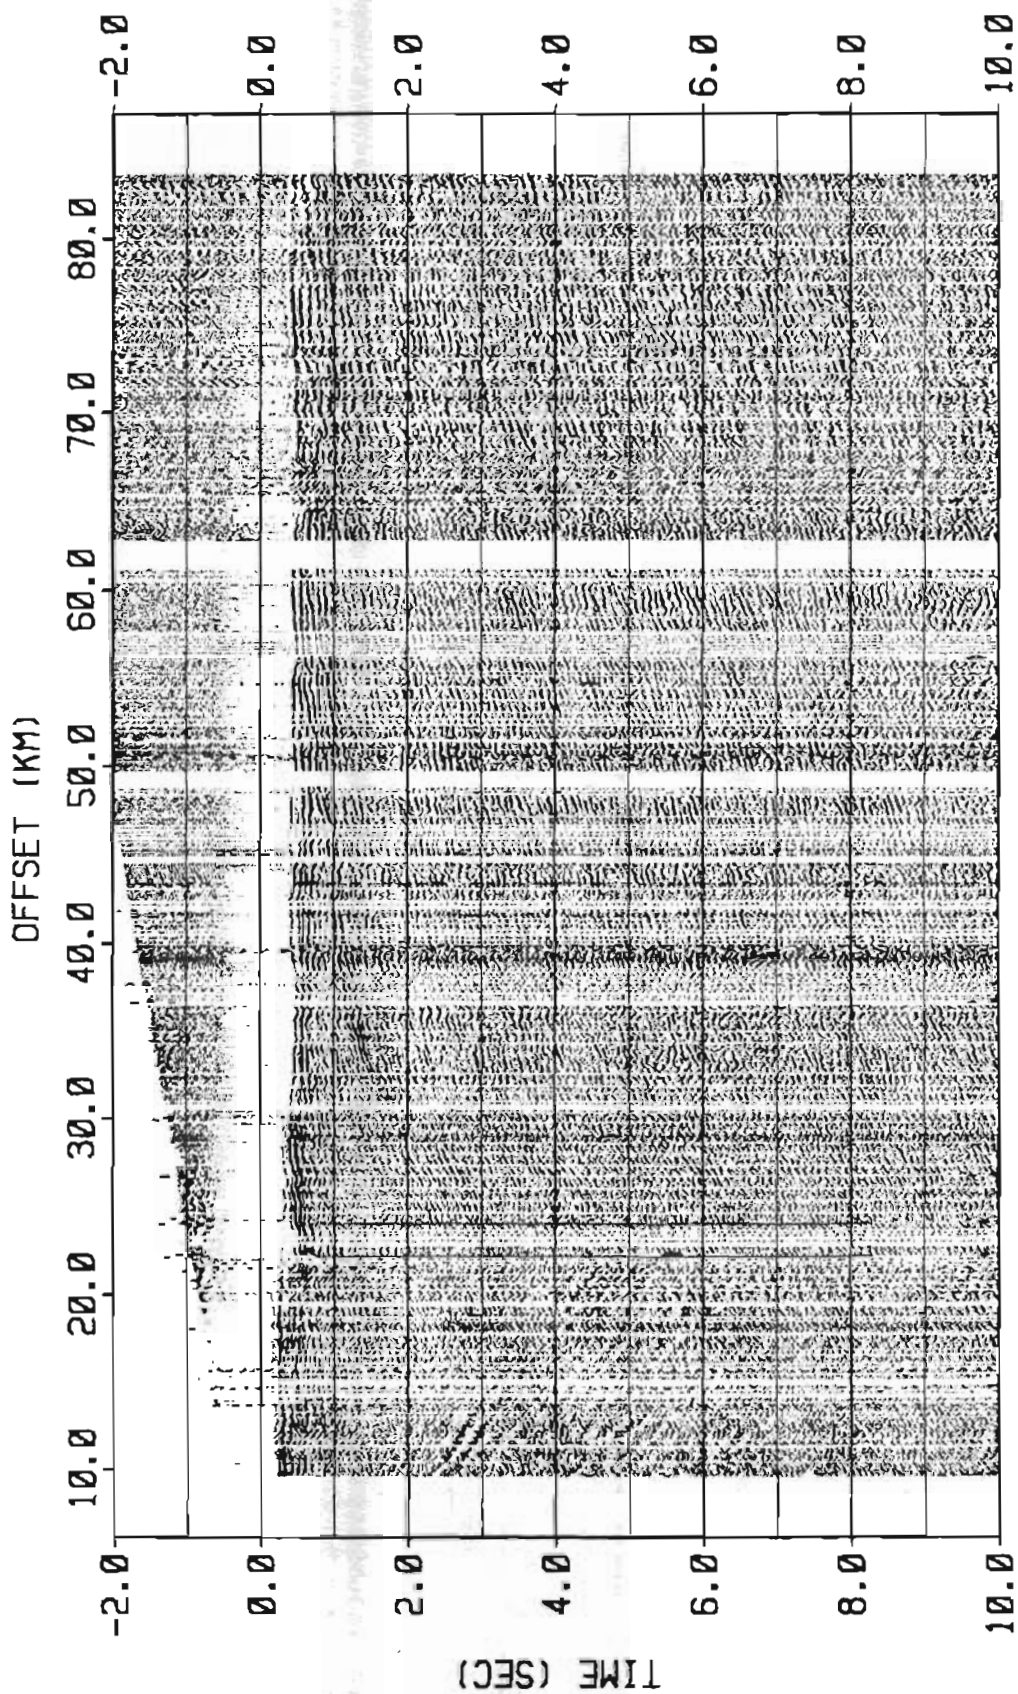


Figure 62 Profile 3  
Shot 36 Shot Point 132 AGC = 2 sec

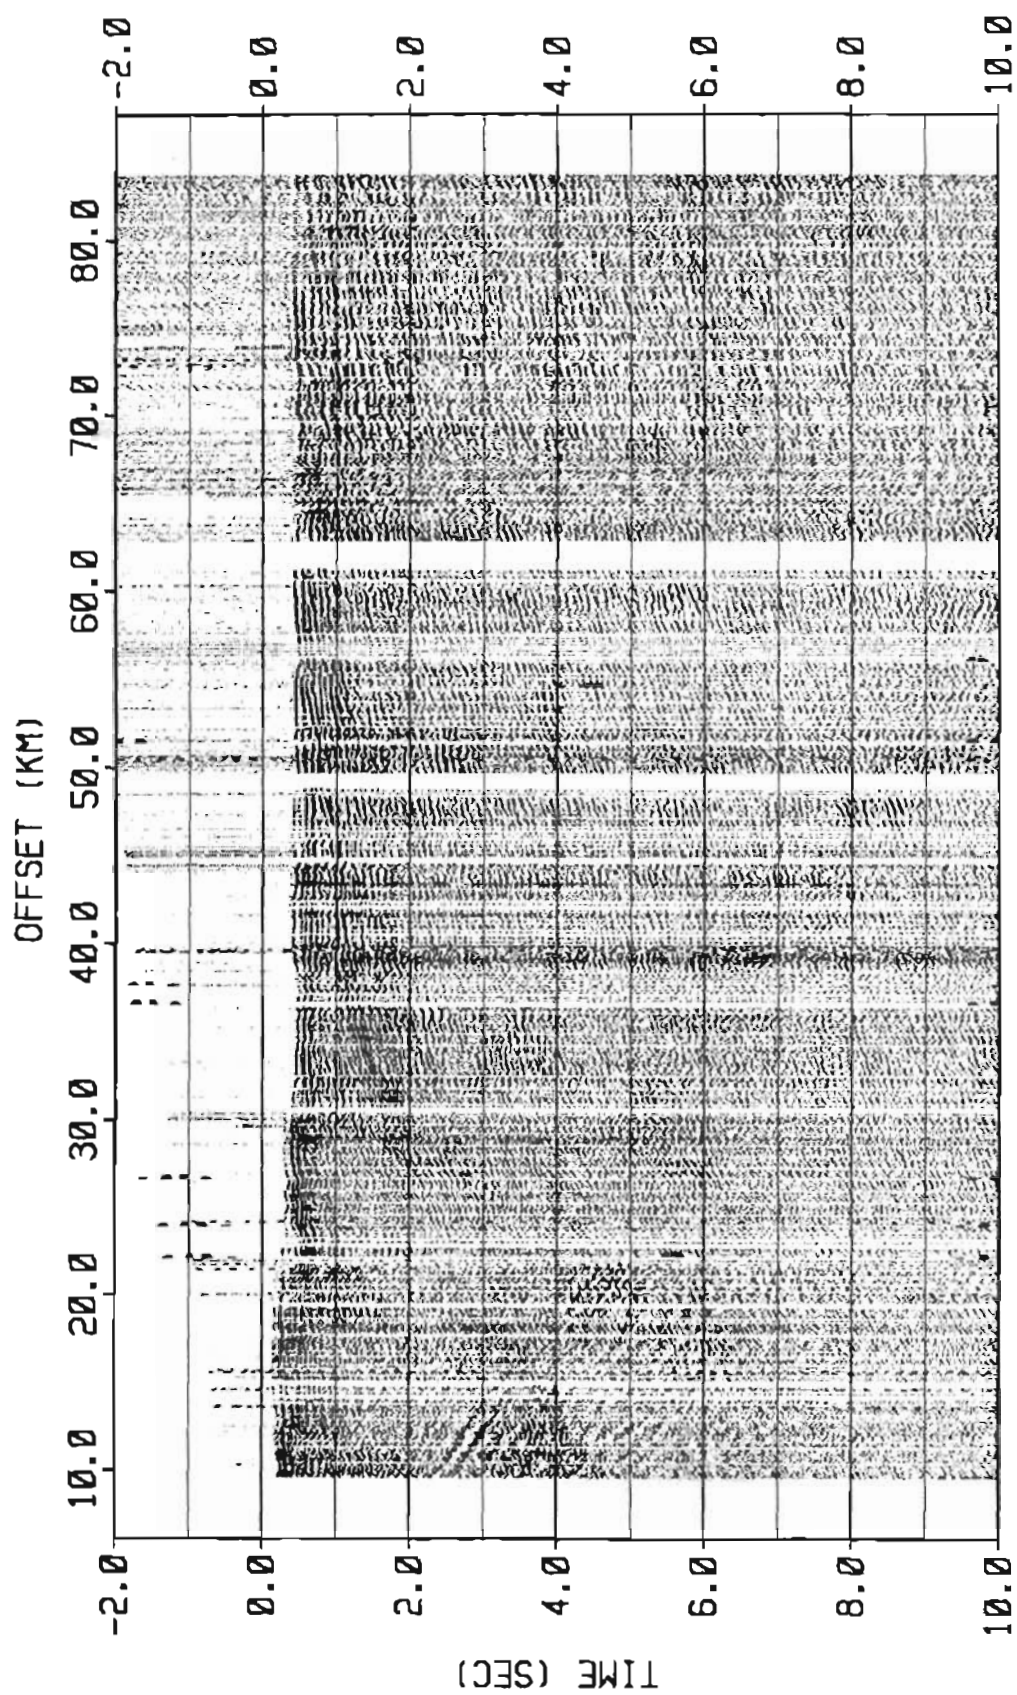


Figure 63      Profile 3  
 Shot 36      Shot Point 132      AGC = 12 sec

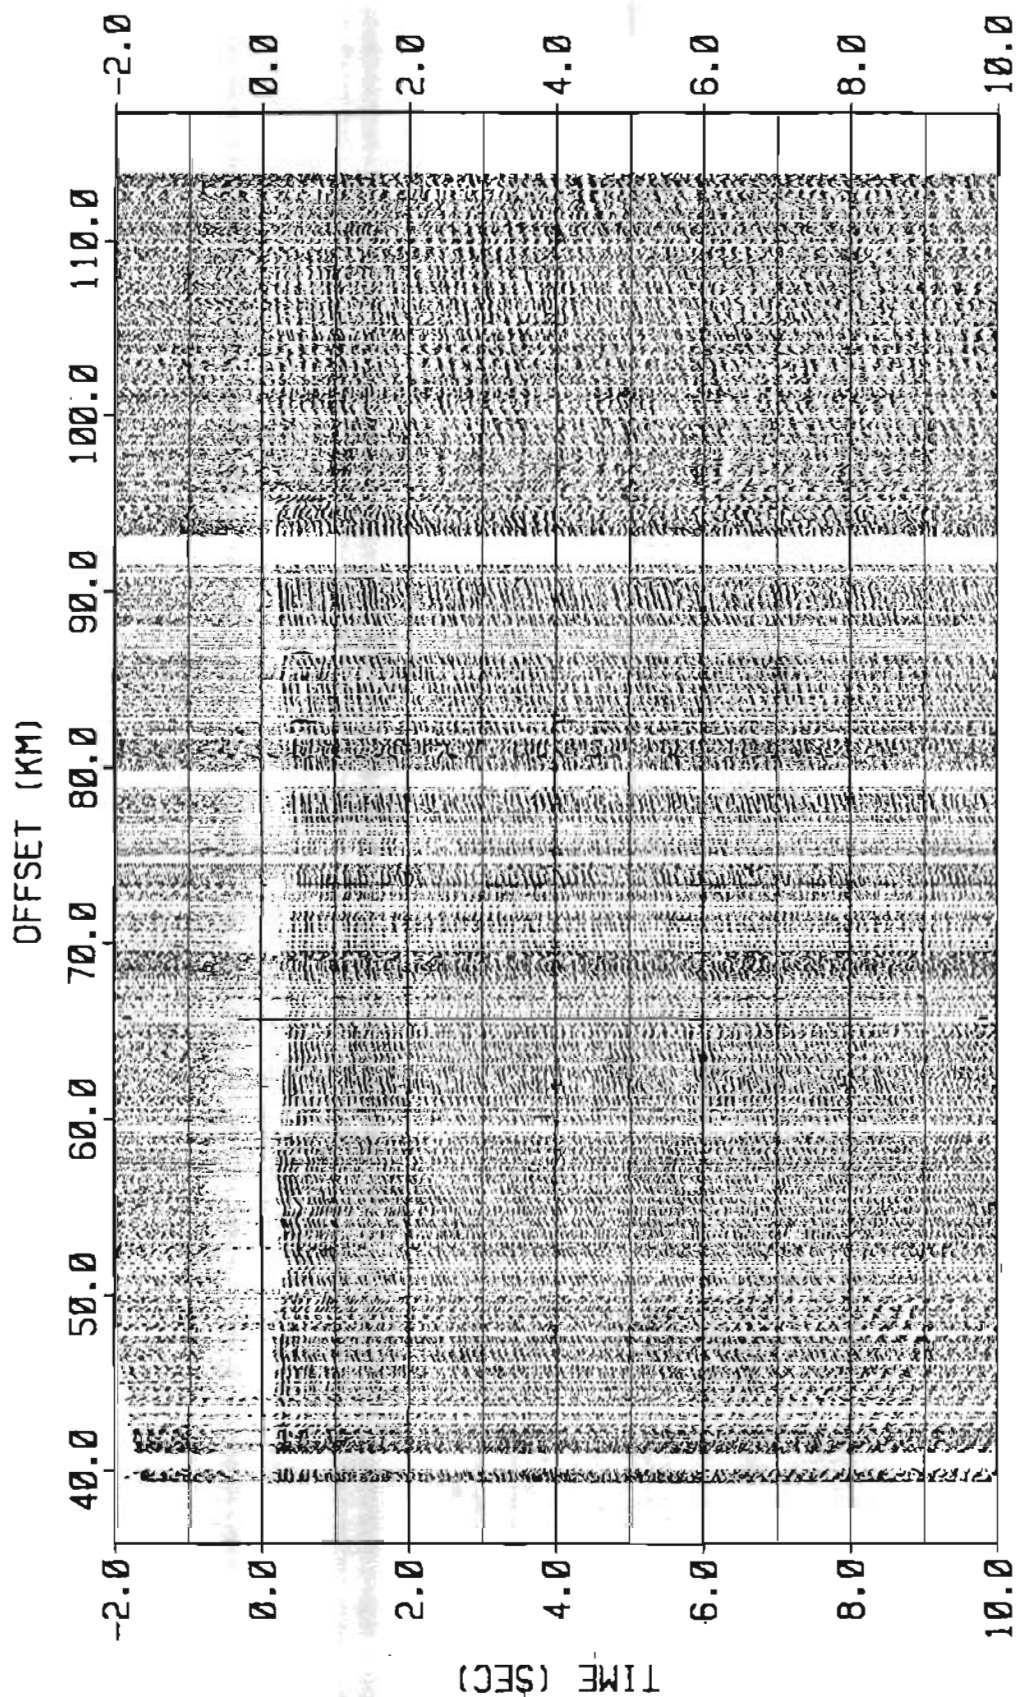


Figure 64      Profile 3  
 Shot 37      Shot Point 130      AGC = 2 sec



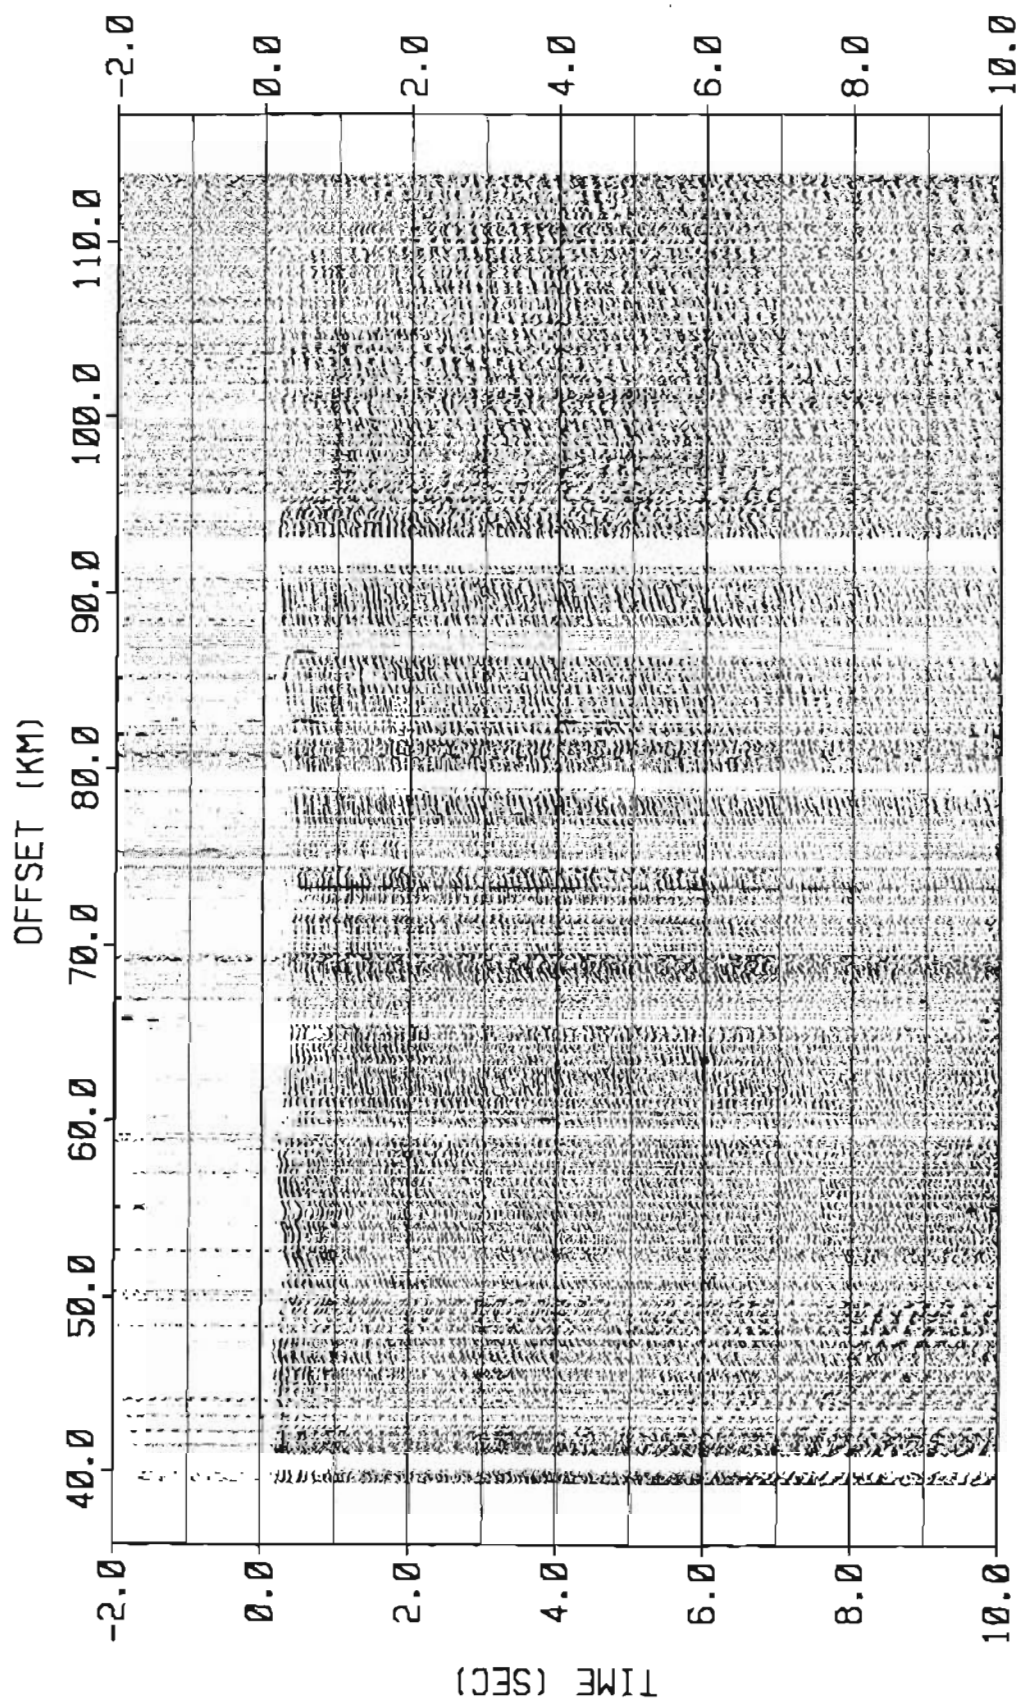


Figure 65 Profile 3  
 Shot 37 Shot Point 130 AGC = 12 sec

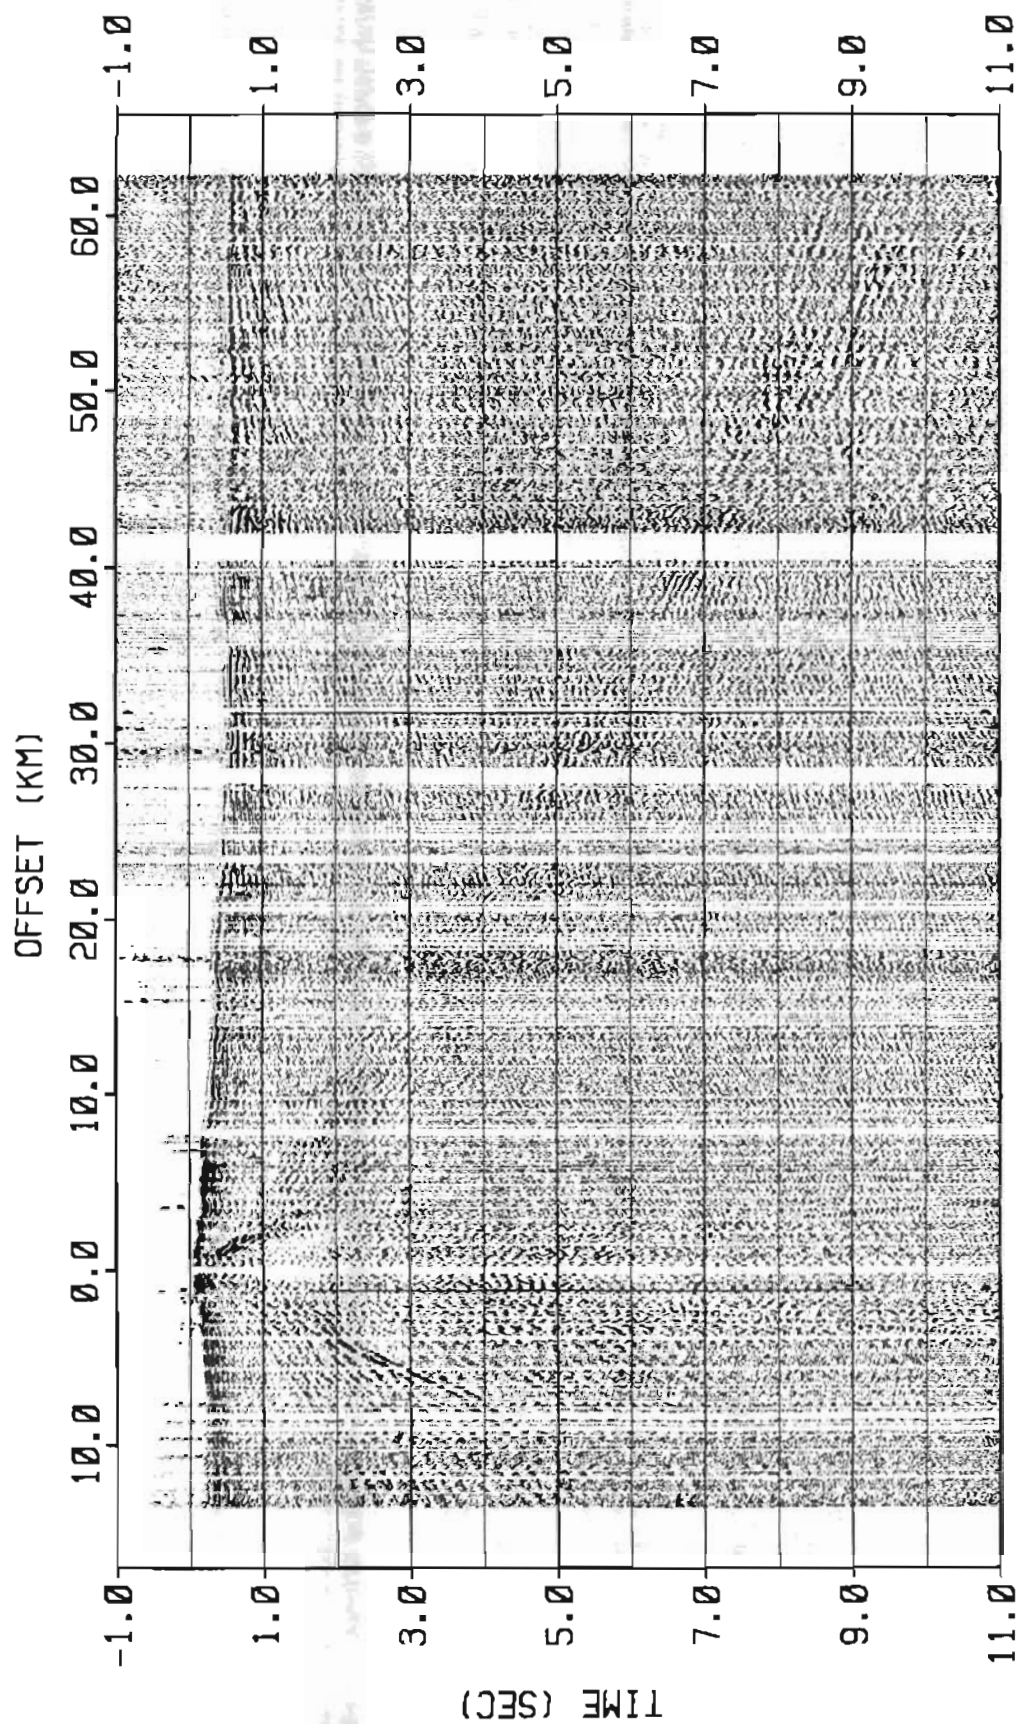


Figure 66      Profile 3  
 Shot 38      Shot Point 135      AGC = 2 sec



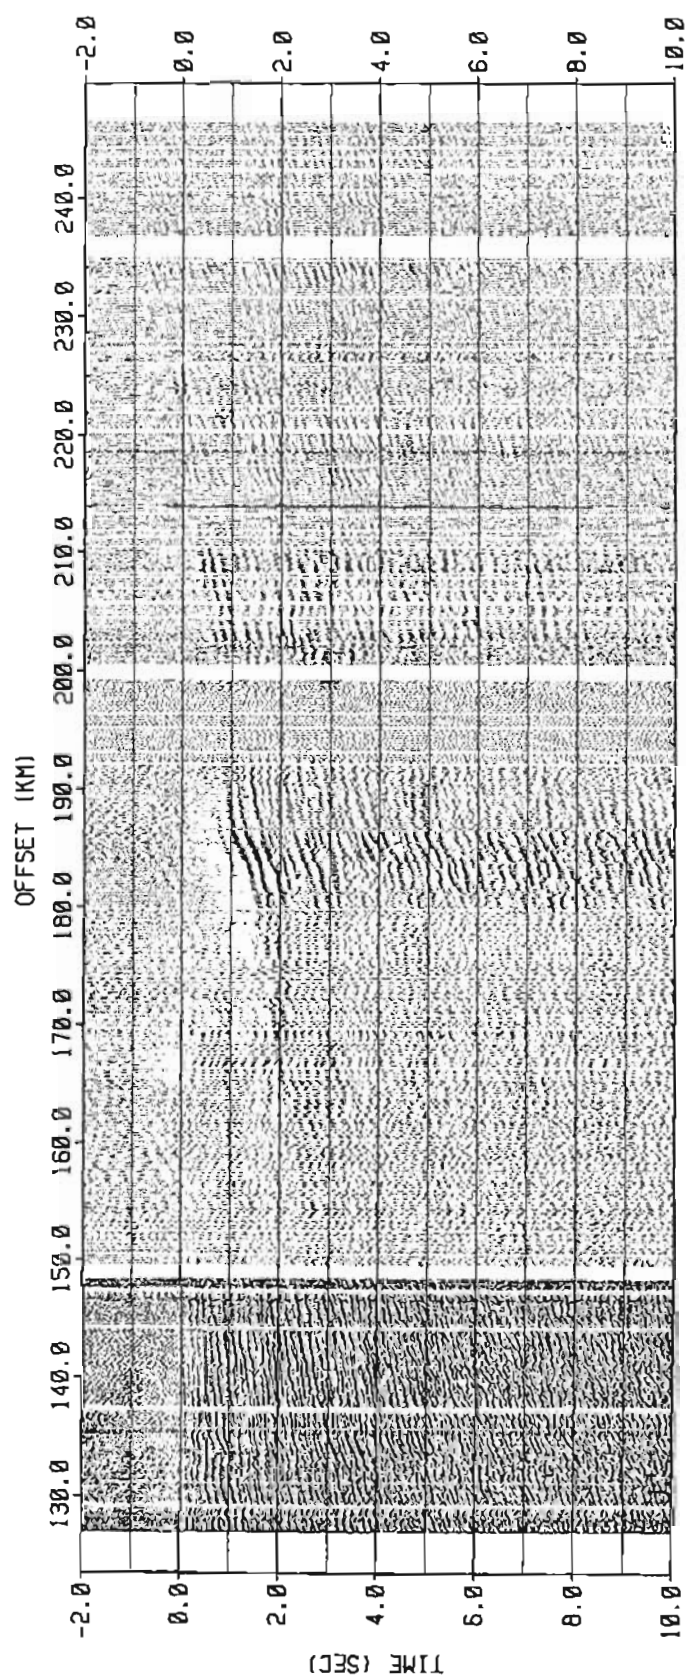


Figure 67      Profile 4  
 Shot 39      Shot Point 126      AGC = 2 sec

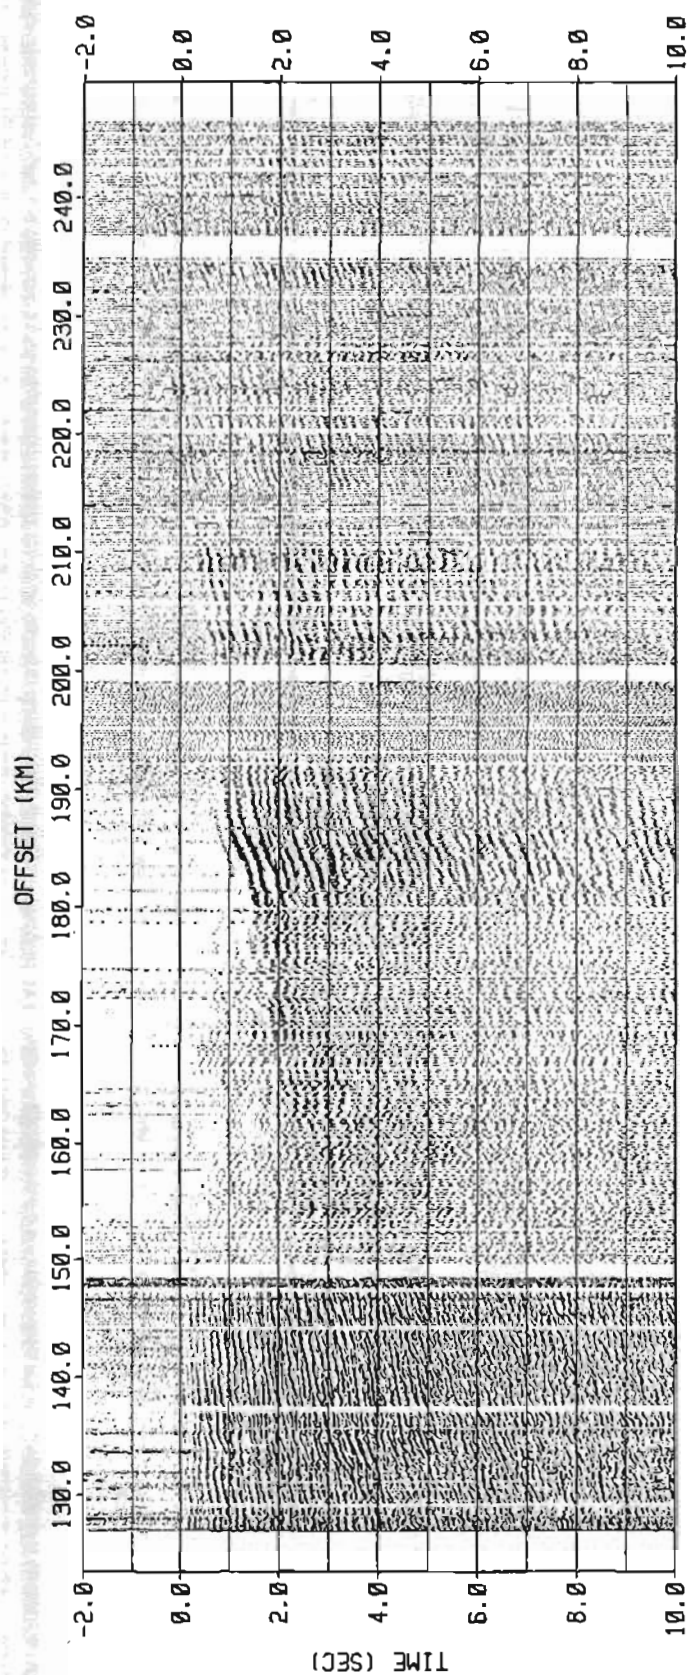


Figure 68      Profile 4  
 Shot 39      Shot Point 126      AGC = 12 sec

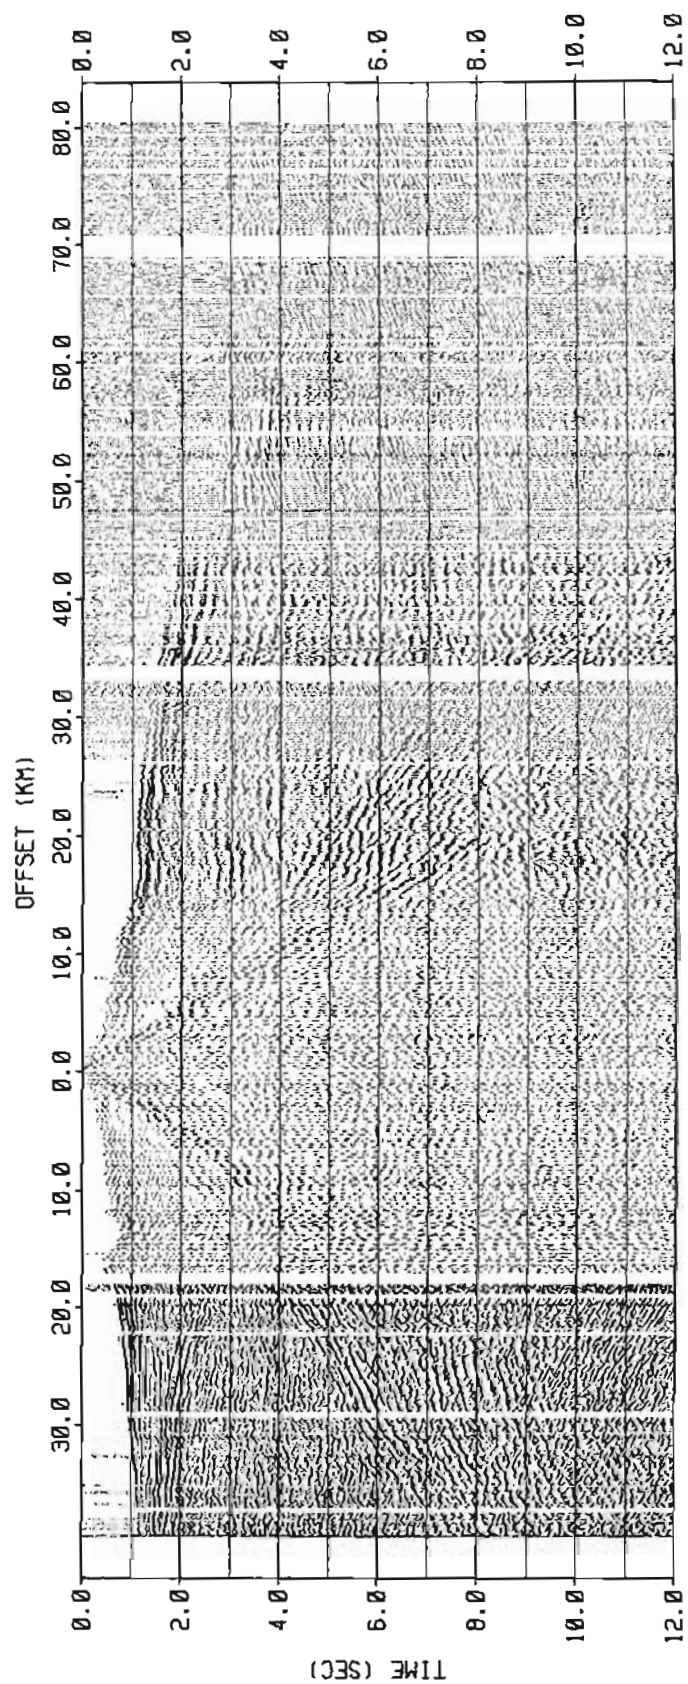


Figure 69      Profile 4  
 Shot 40      Shot Point 142      AGC = 2 sec

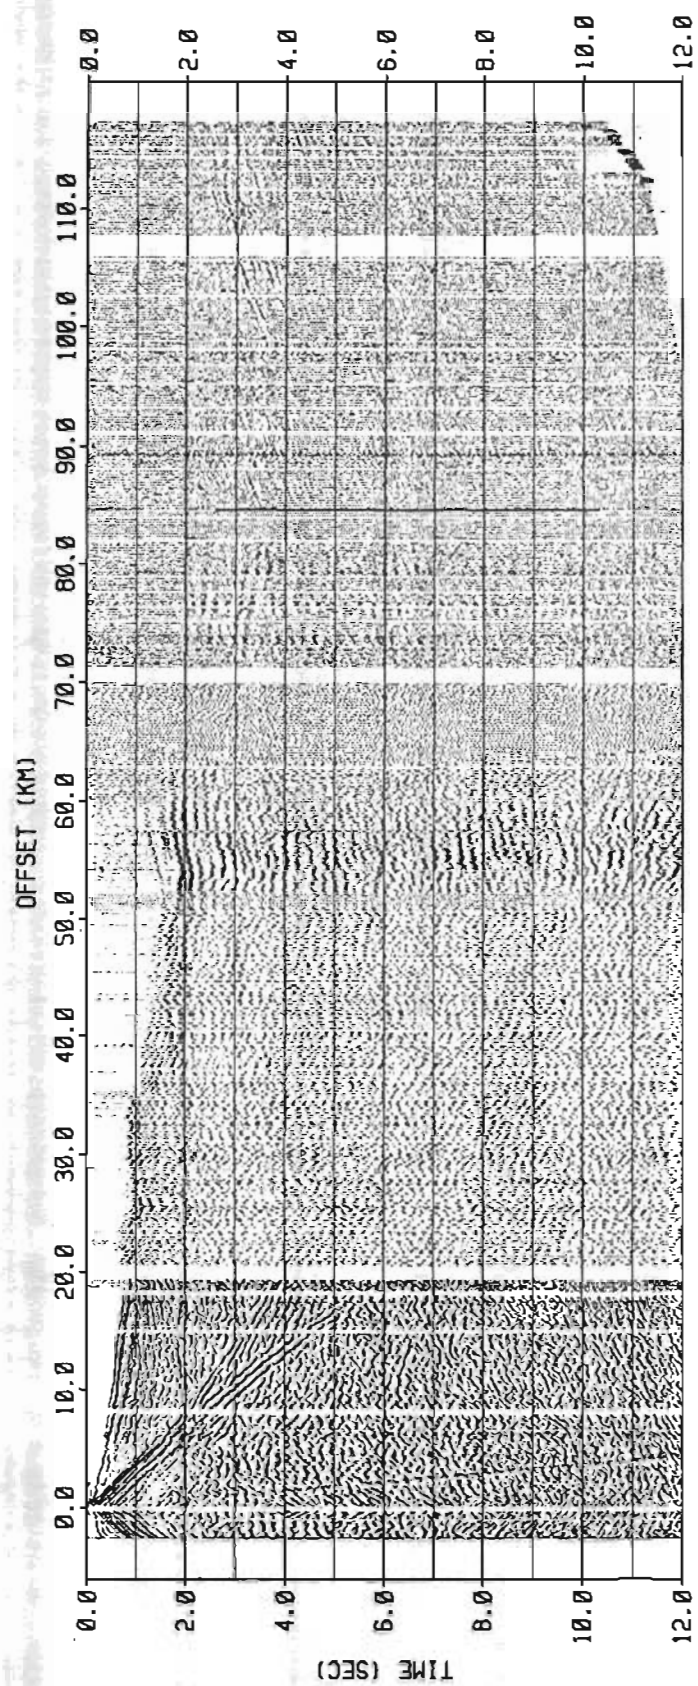


Figure 70 Profile 4  
Shot 41 Shot Point 179 AGC = 2 sec

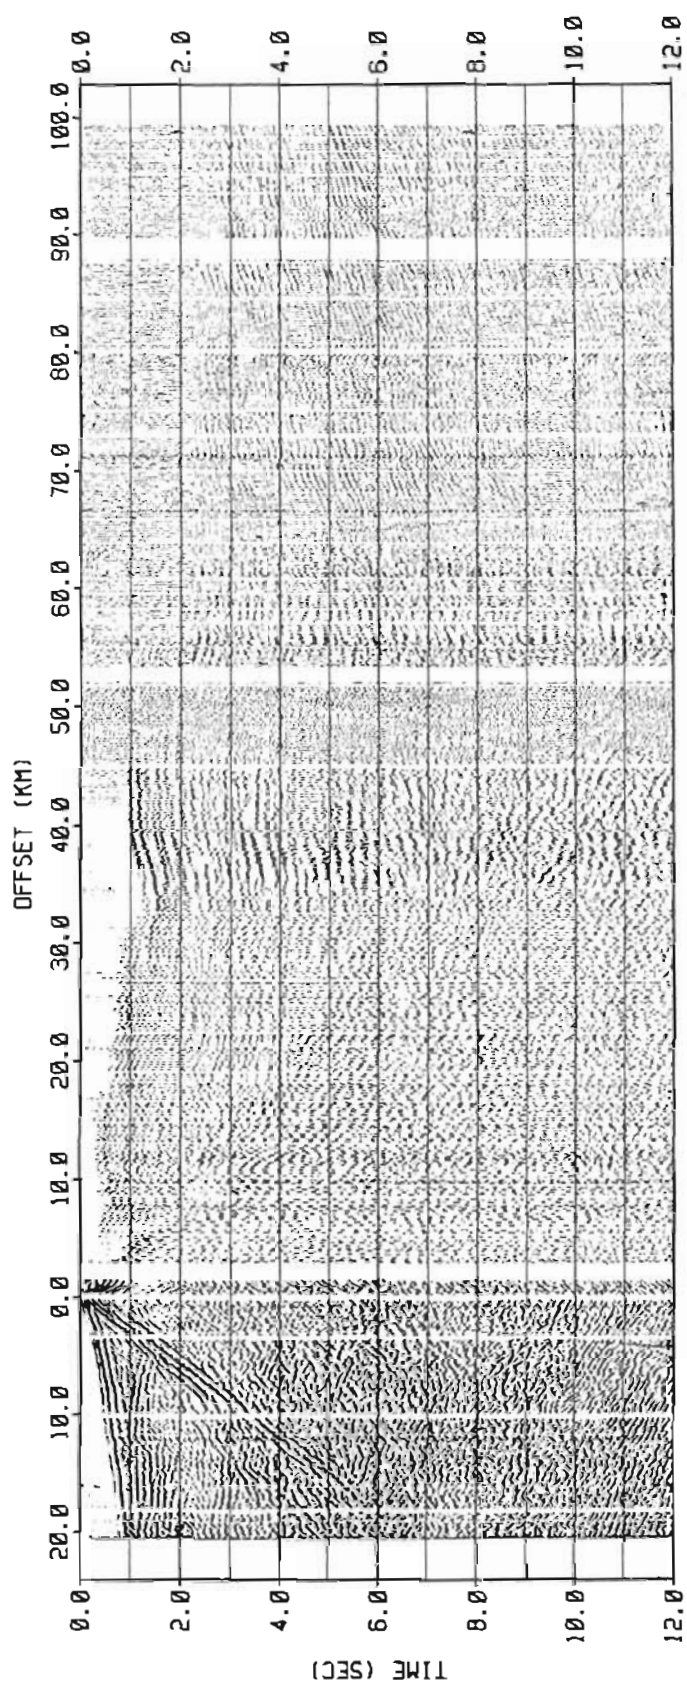


Figure 71 Profile 4  
Shot 42 Shot Point 141 AGC = 2 sec



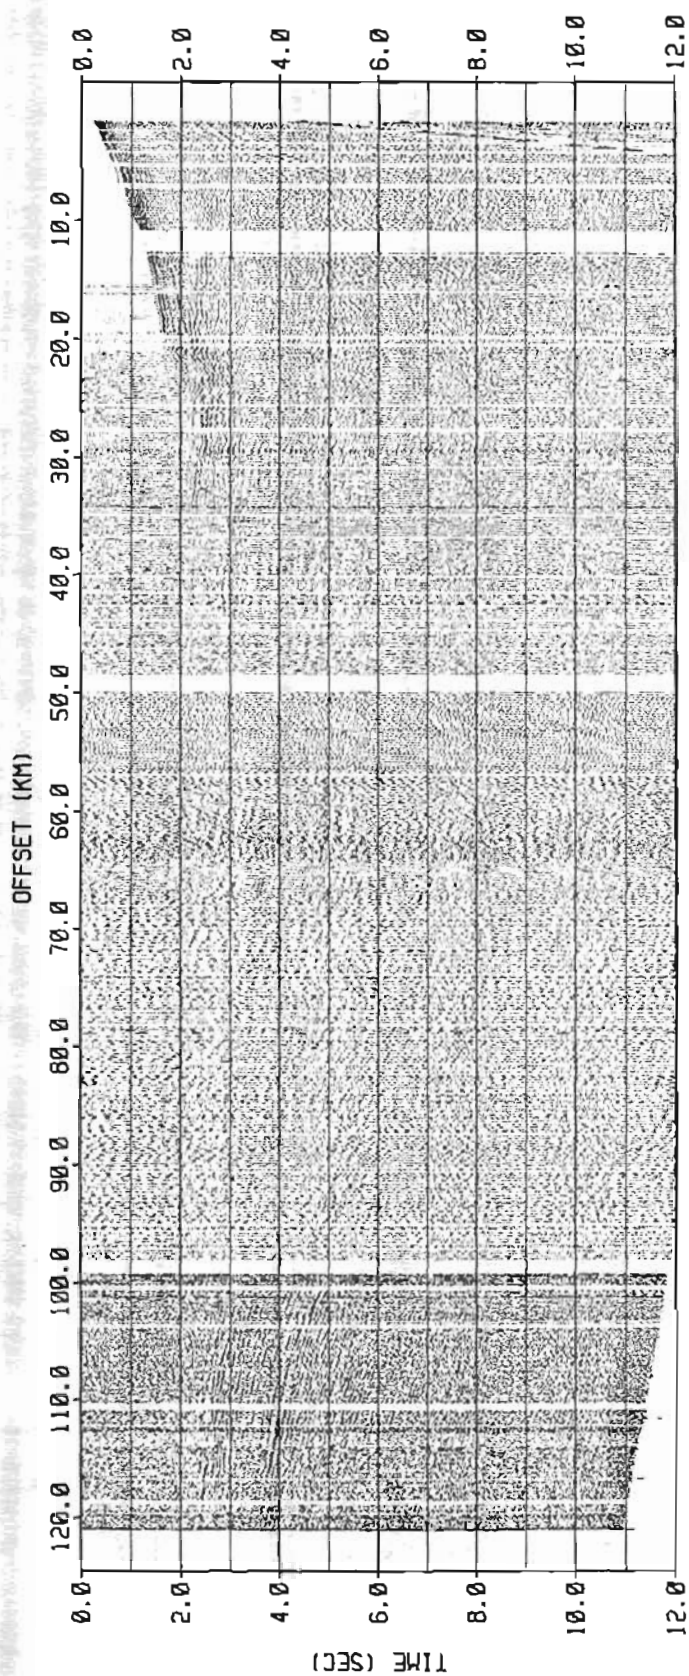


Figure 72 Profile 4

Shot 43 Shot Point 189 AGC = 2 sec



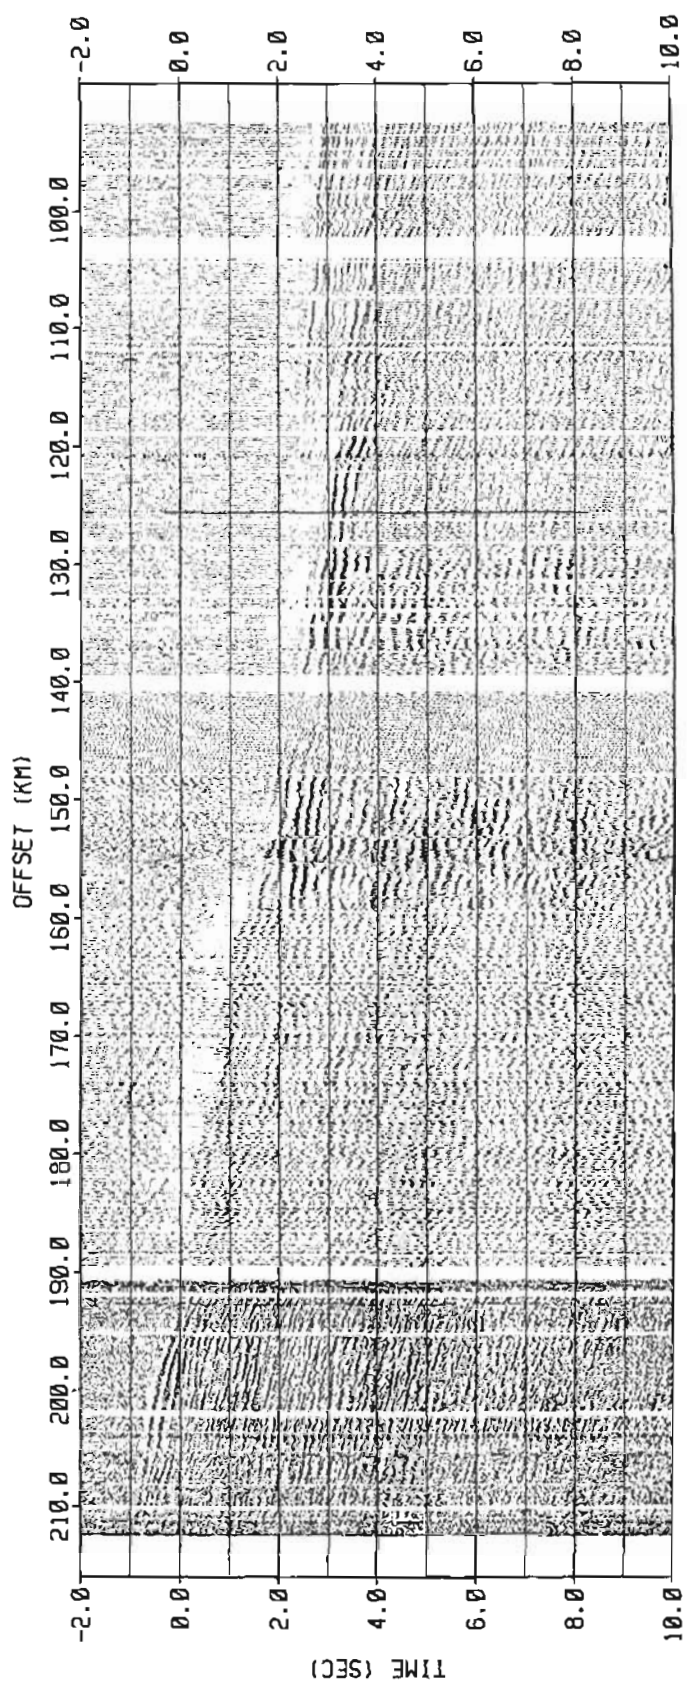


Figure 73      Profile 4  
 Shot 44      Shot Point 153      AGC = 2 sec

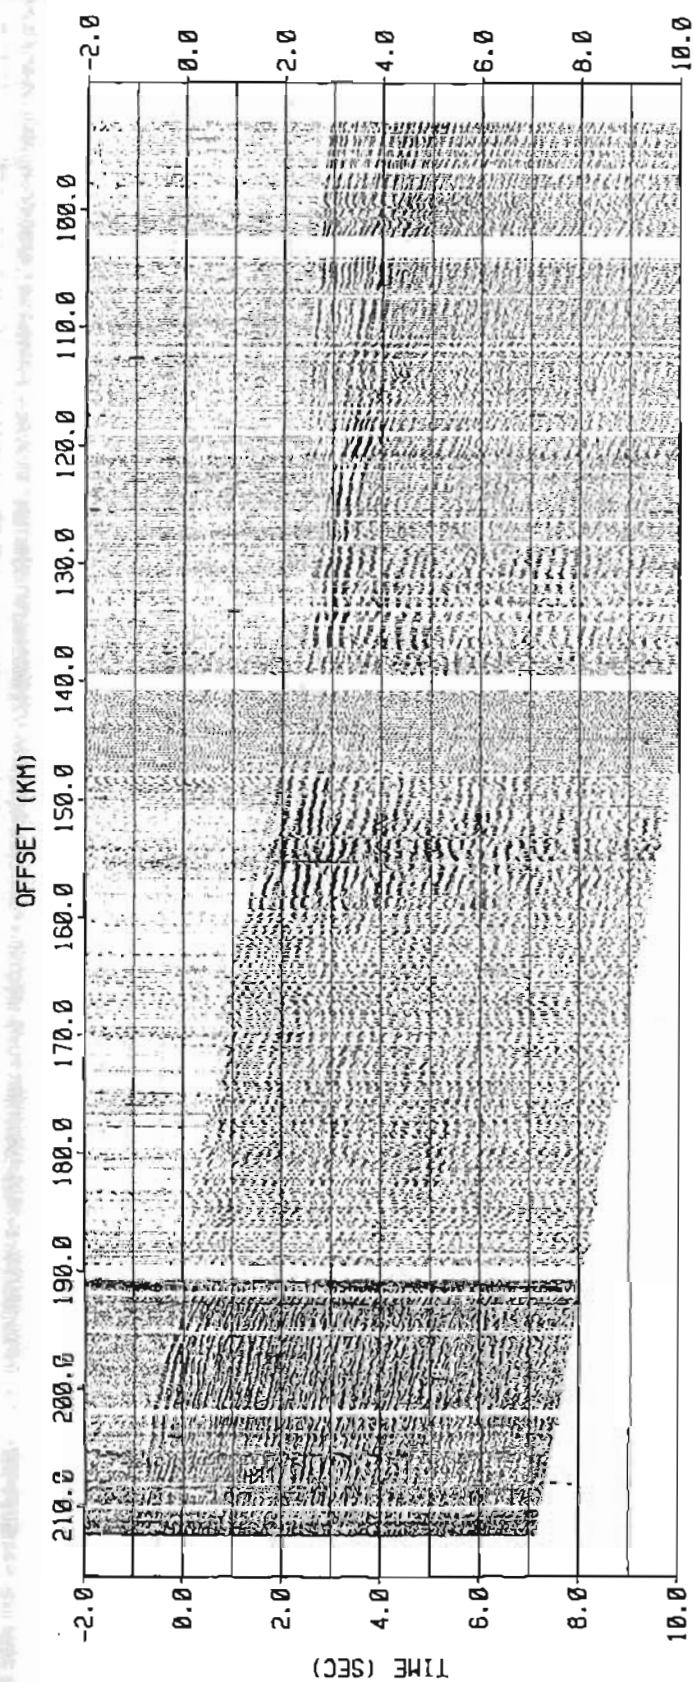


Figure 74      Profile 4  
 Shot 44      Shot Point 153      AGC = 12 sec

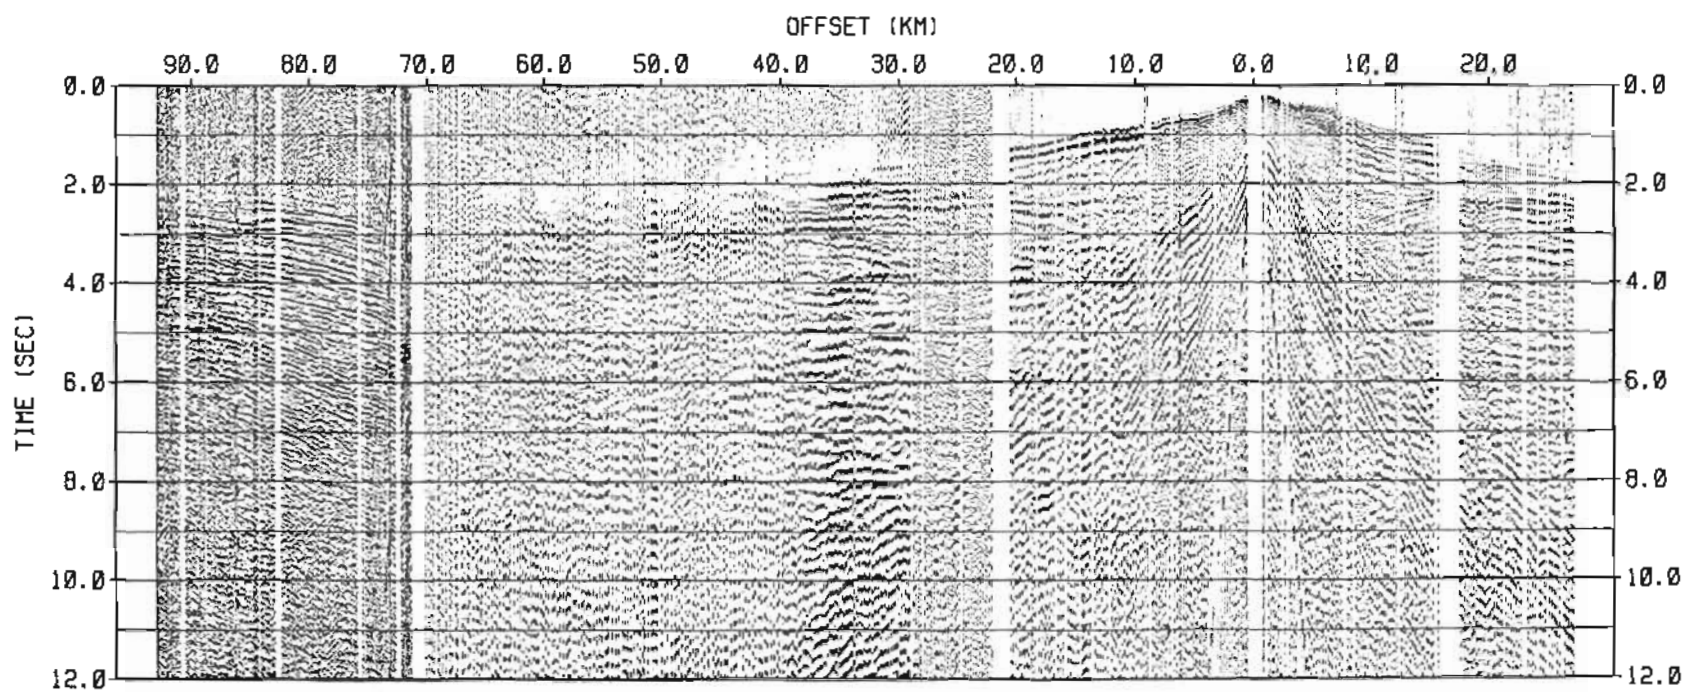


Figure 75      Profile 4

Shot 45      Shot Point 145      AGC = 2 sec

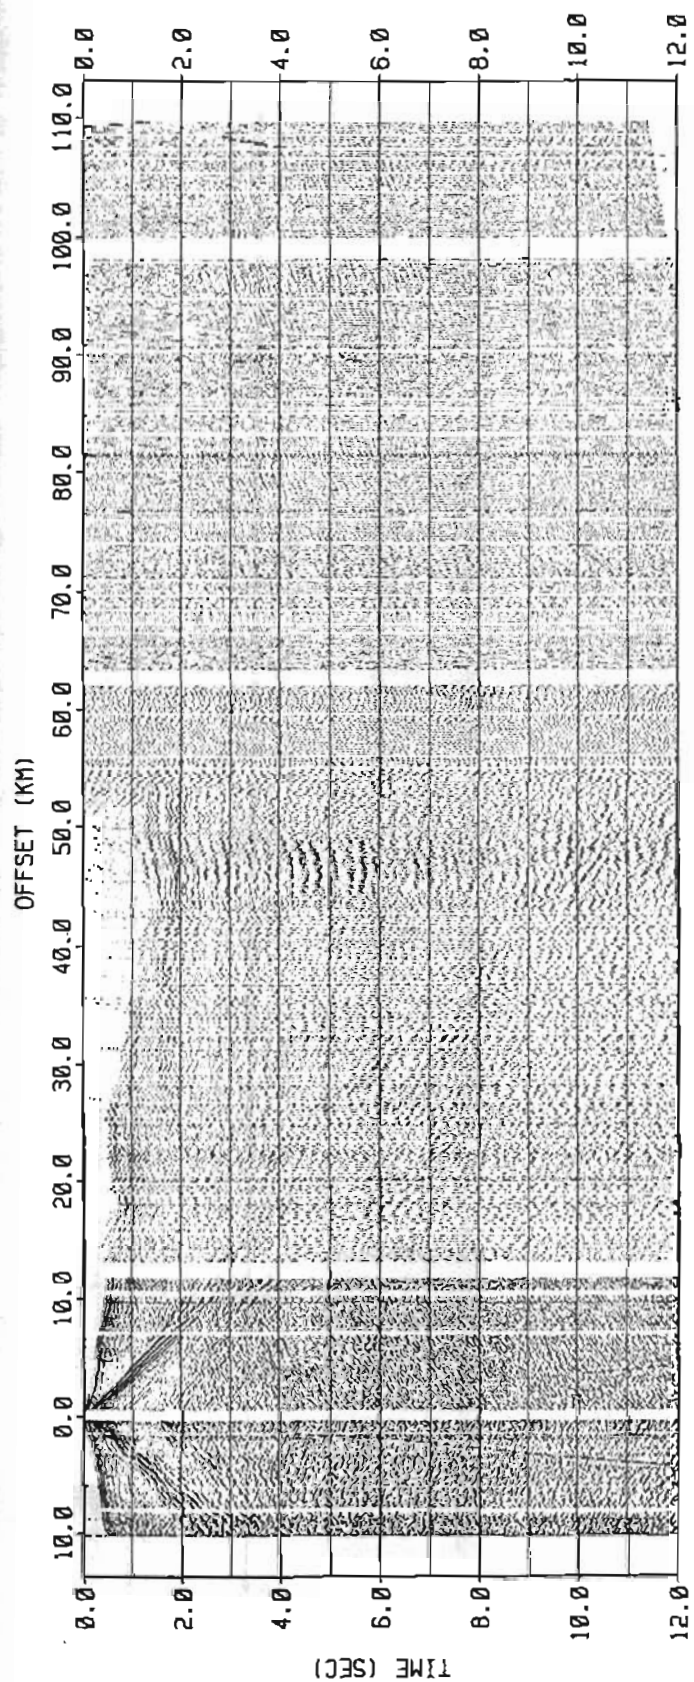


Figure 76 Profile 4  
 Shot 46 Shot Point 180 AGC = 2 sec

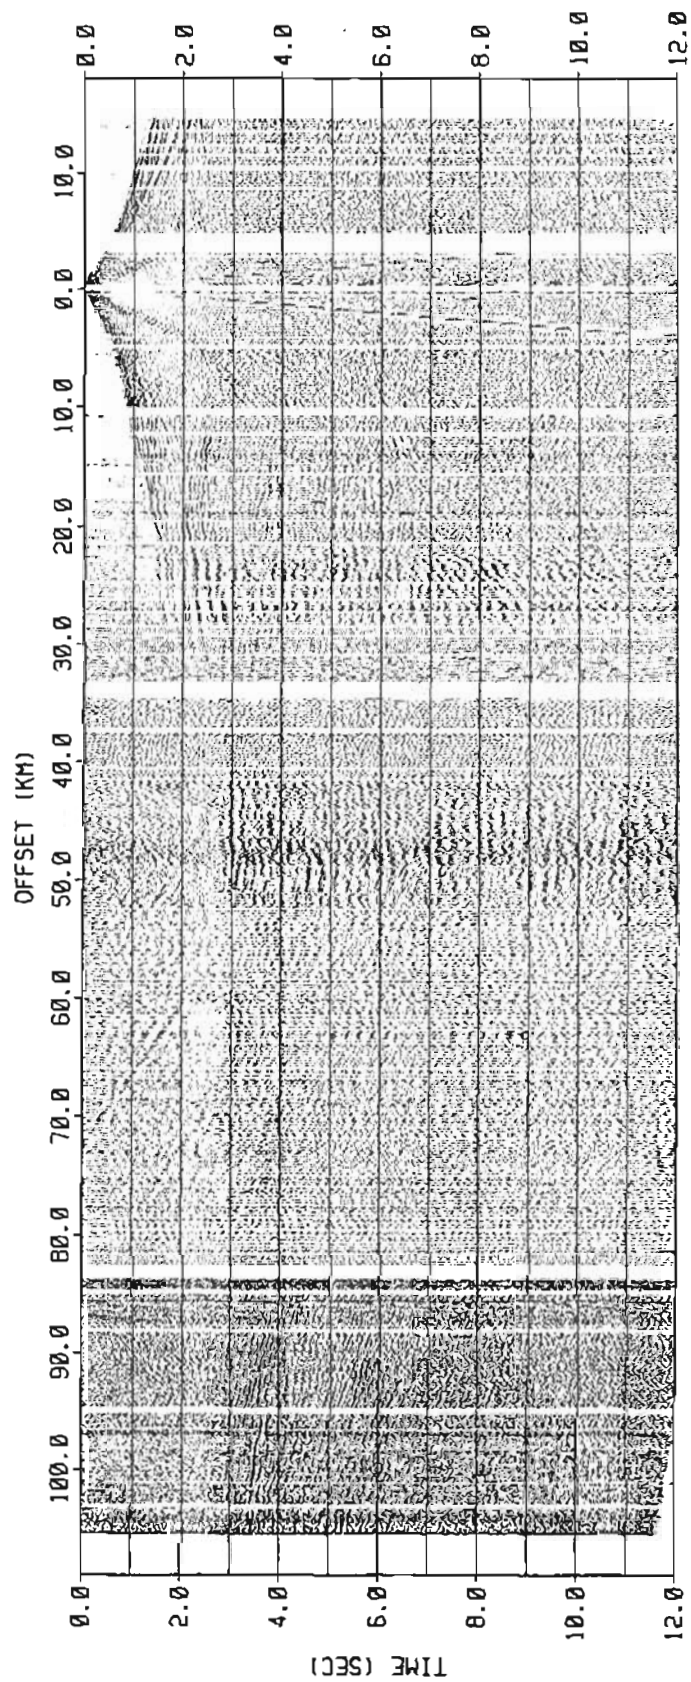


Figure 77      Profile 4  
 Shot 47      Shot Point 188      AGC = 2 sec



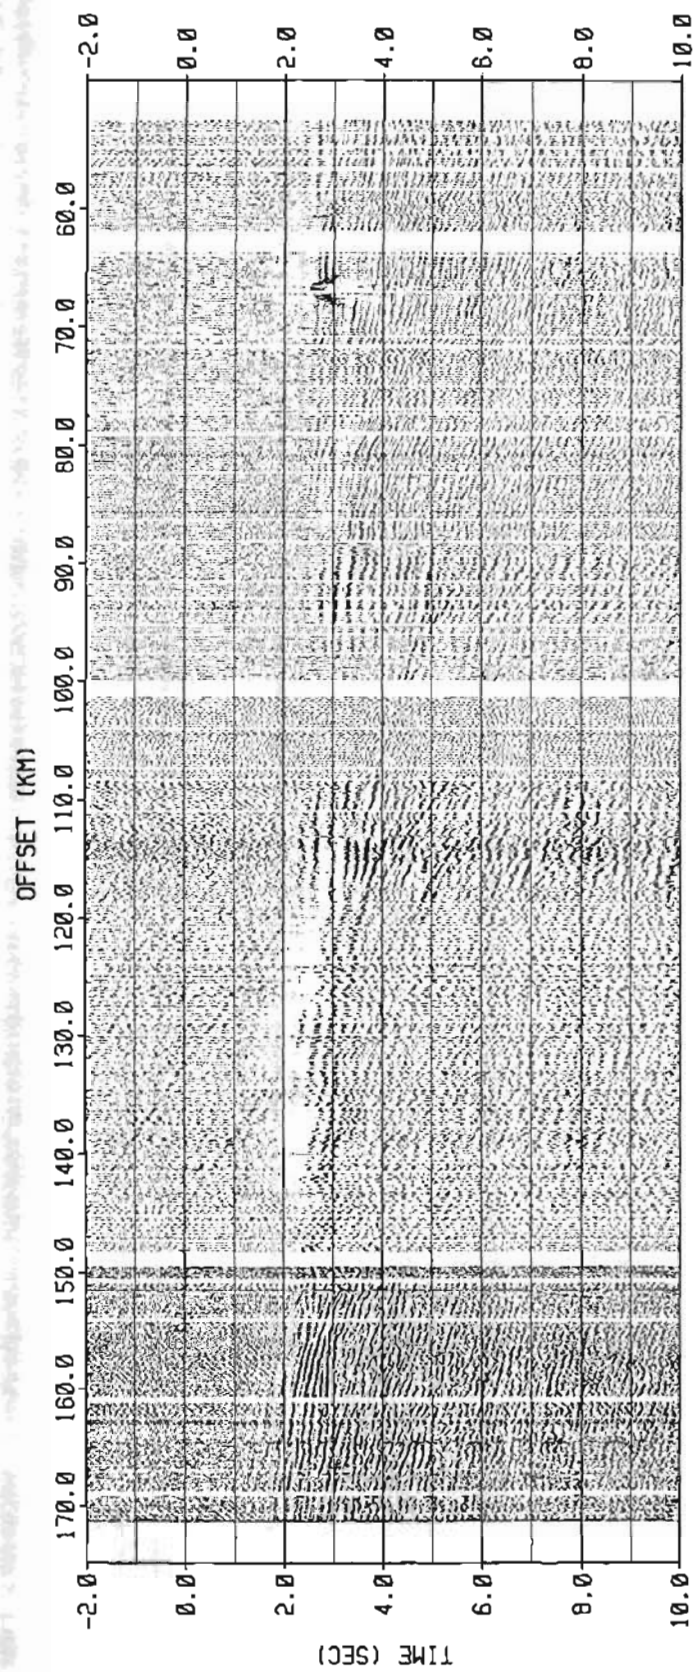


Figure 78 Profile 4  
Shot 48 Shot Point 149 AGC = 2 sec



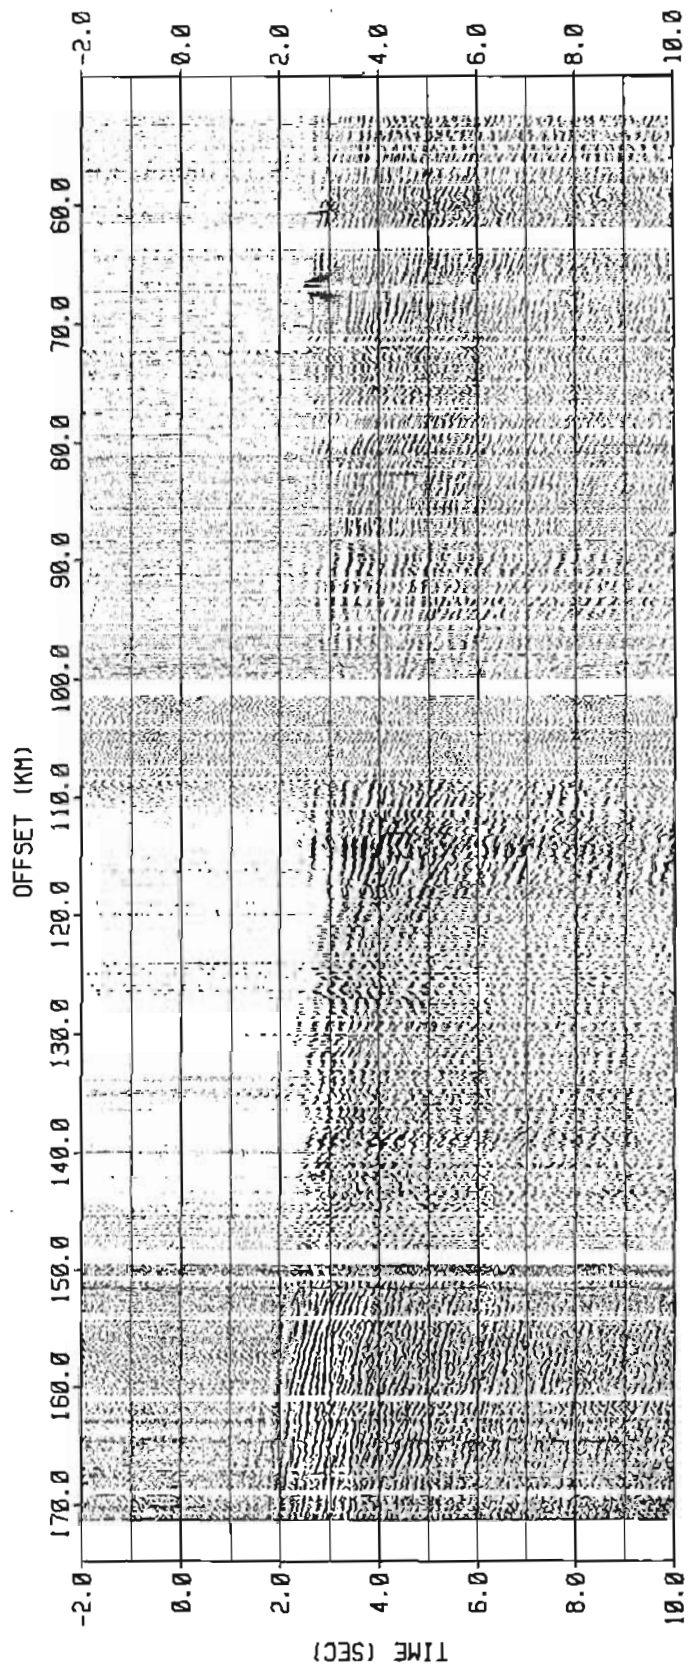


Figure 79      Profile 4  
 Shot 48      Shot Point 149      AGC = 12 sec

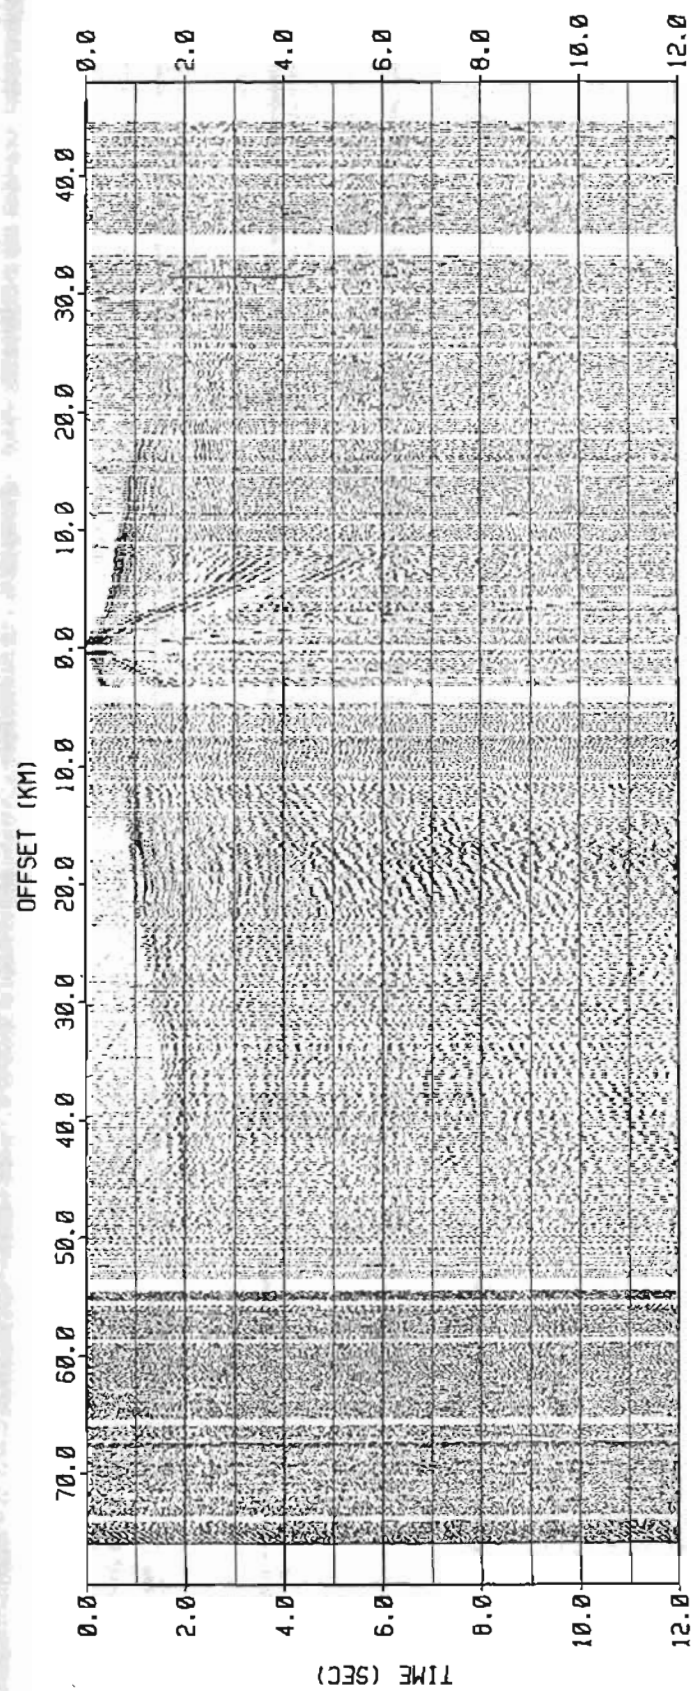


Figure 80      Profile 4  
Shot 49      Shot Point 186      AGC = 2 sec

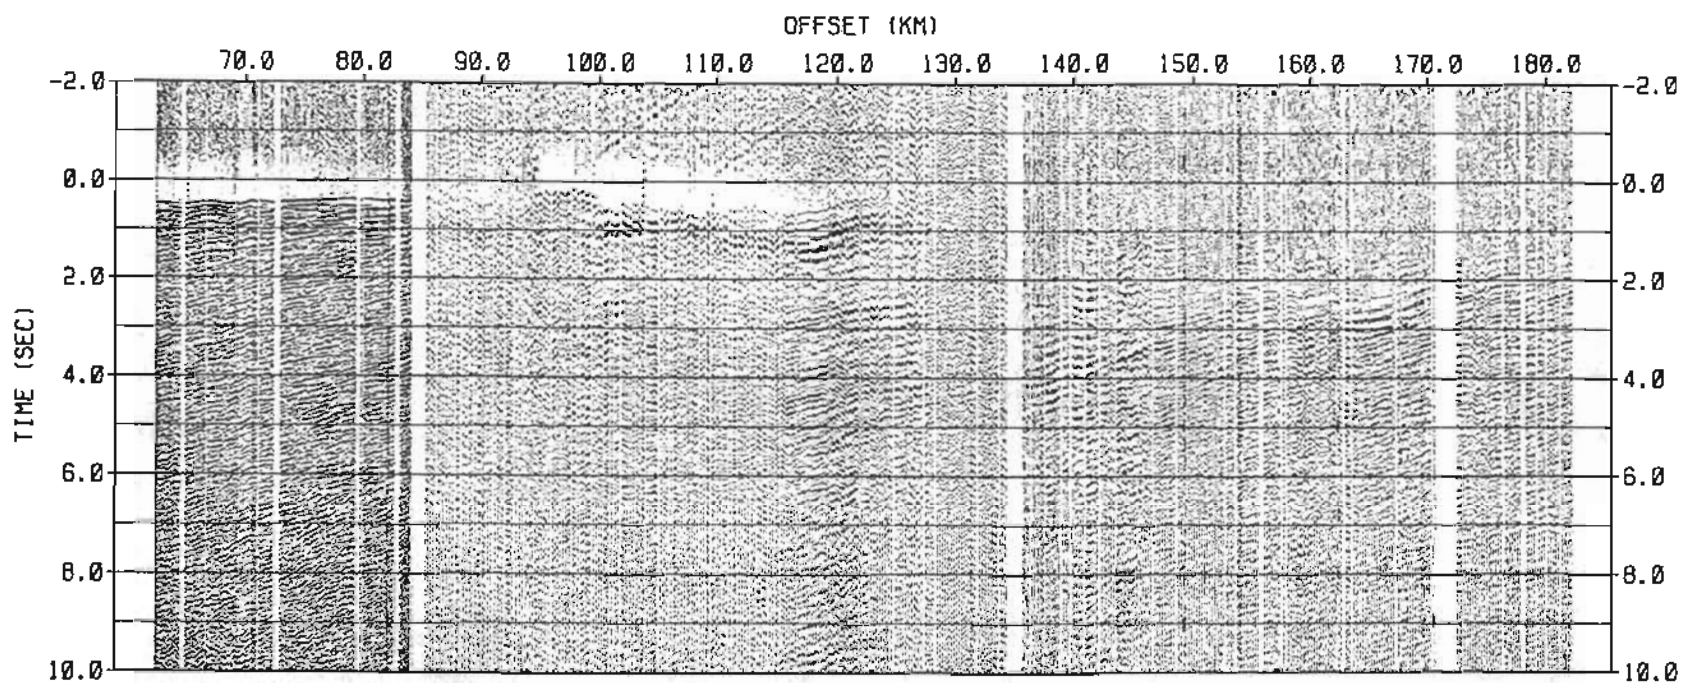


Figure 81      Profile 4

Shot 50      Shot Point 132      AGC = 2 sec

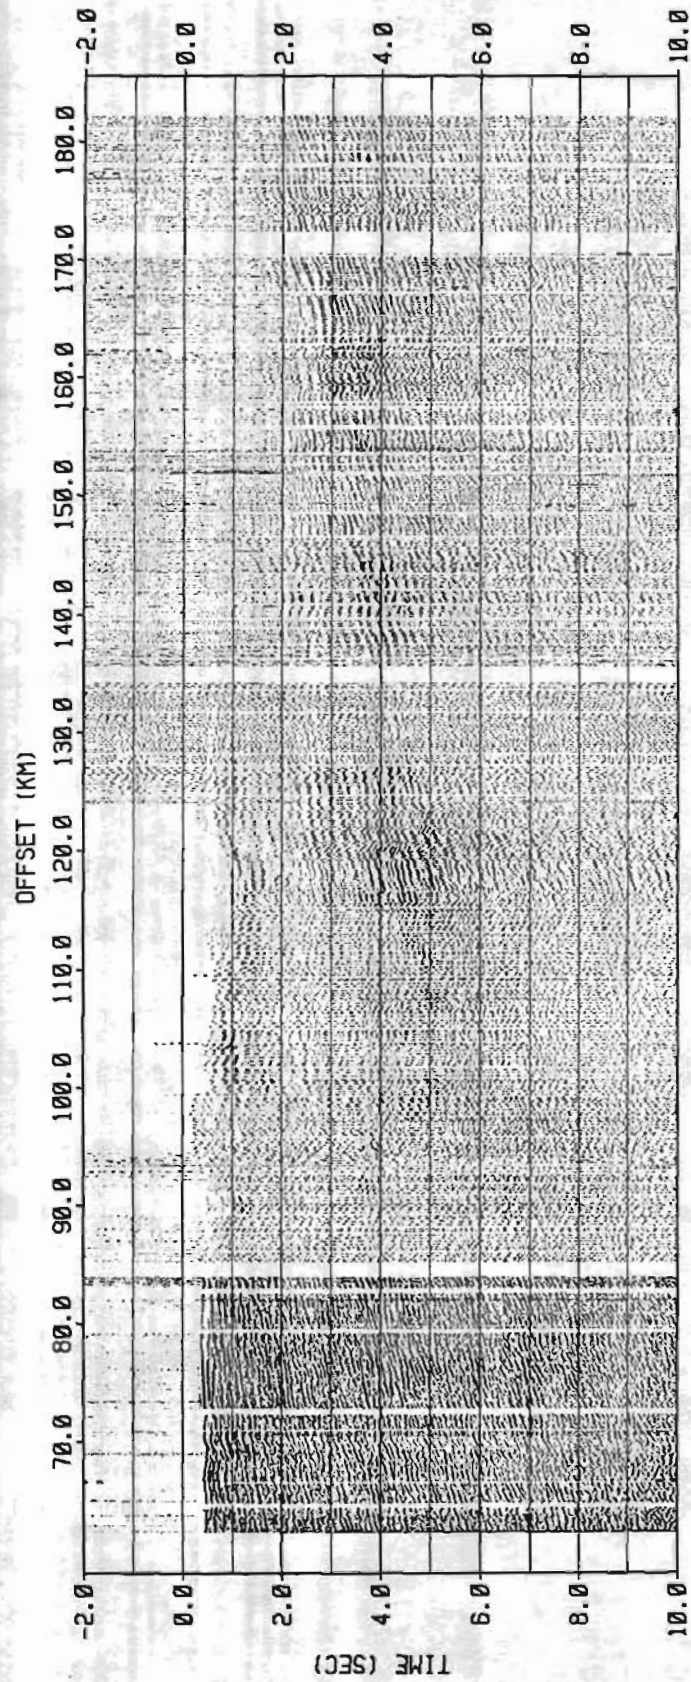


Figure 82      Profile 4  
 Shot 50      Shot Point 132      AGC = 12 sec



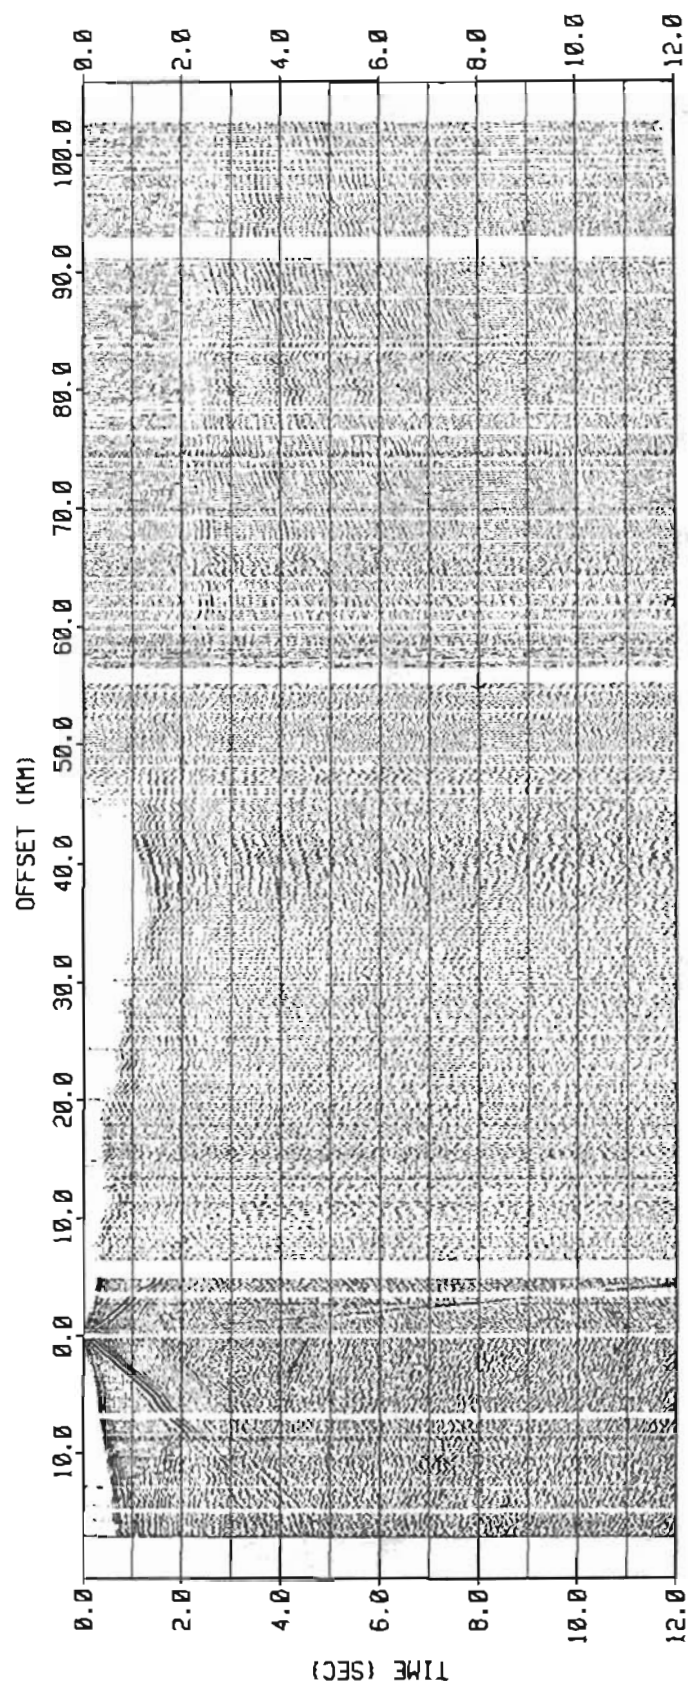


Figure 83      Profile 4  
 Shot 51    Shot Point 139    AGC = 2 sec



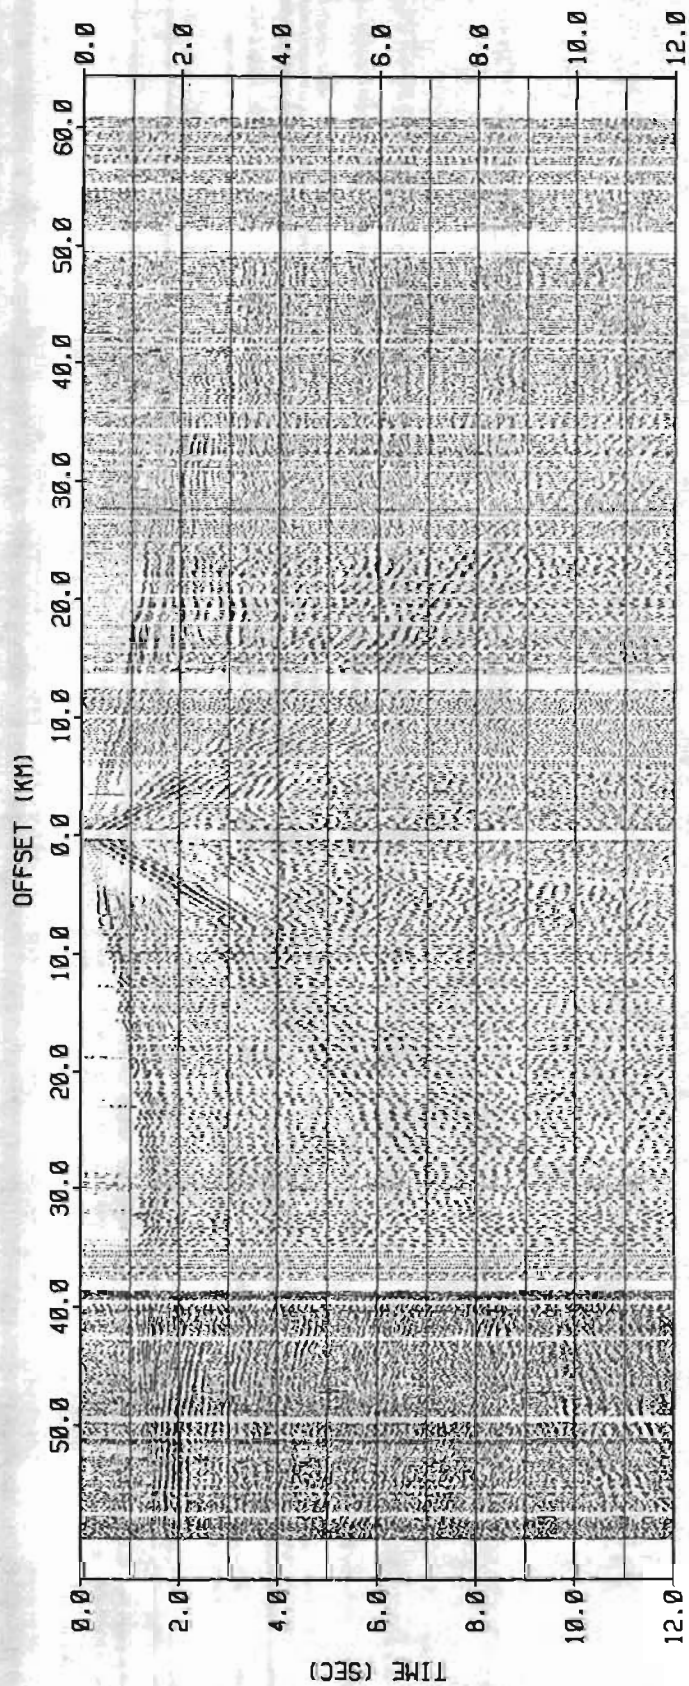


Figure 84 Profile 4  
Shot 52 Shot Point 150 AGC = 2 sec

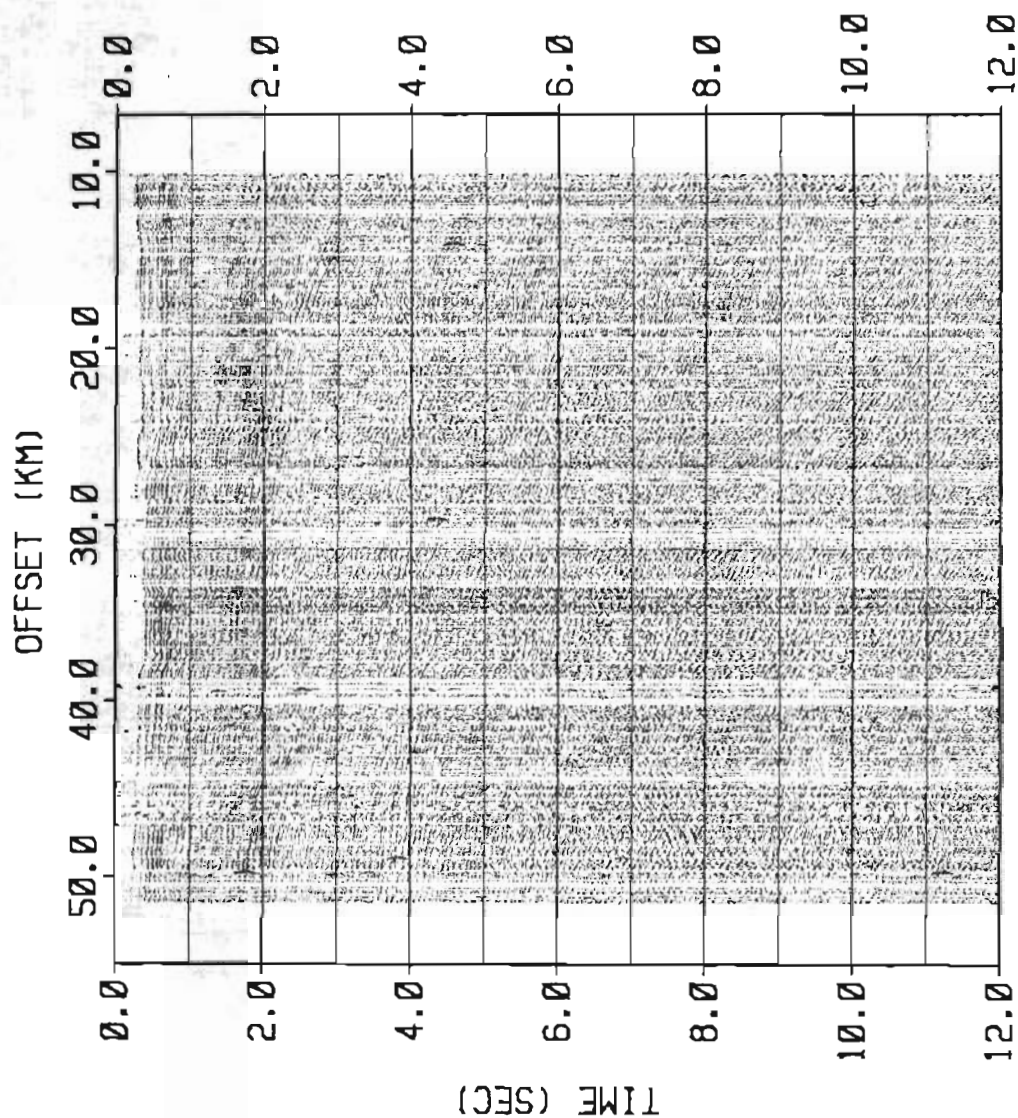


Figure 85 Profile 5  
Shot 53 Shot Point 136 AGC = 2 sec

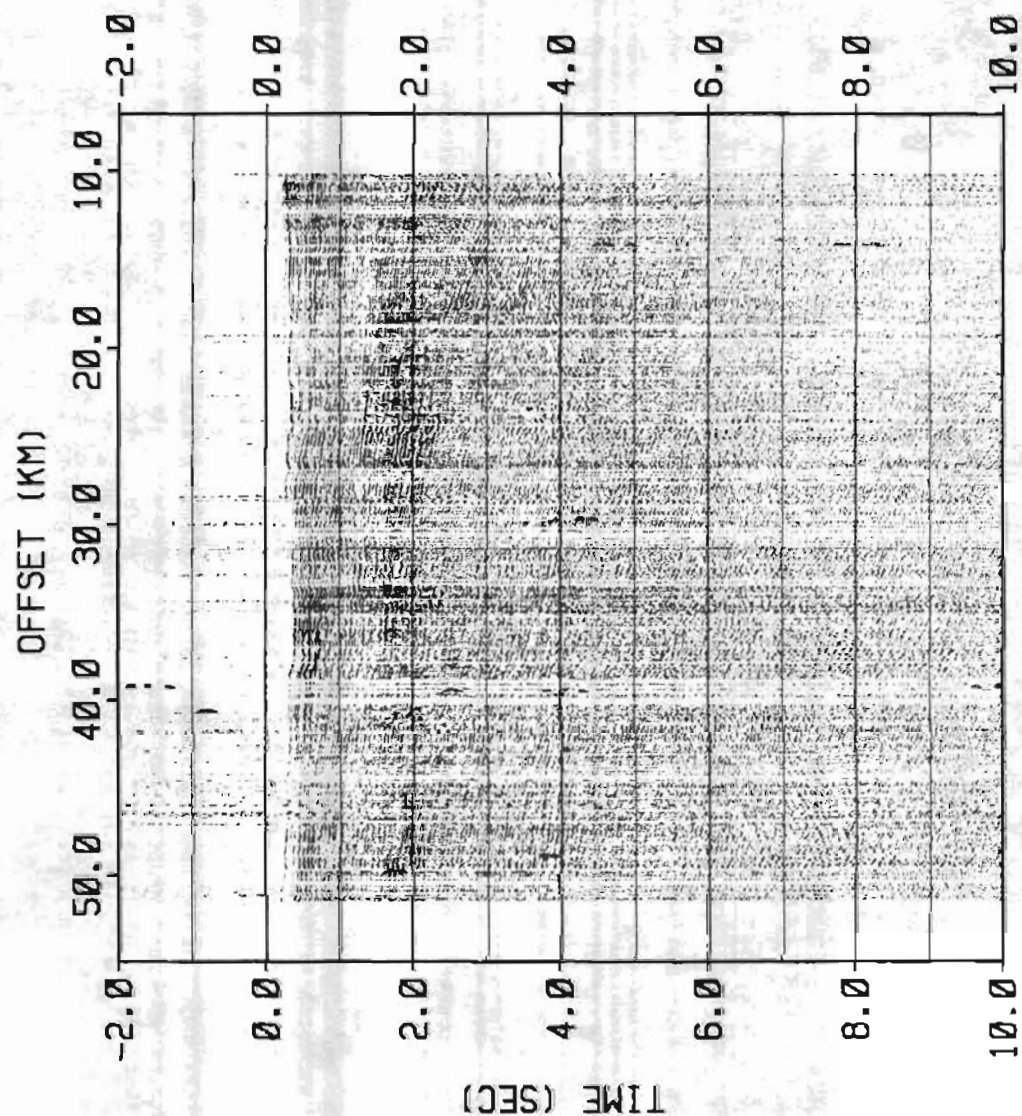


Figure 86 Profile 5  
Shot 53 Shot Point 136 AGC = 12 sec

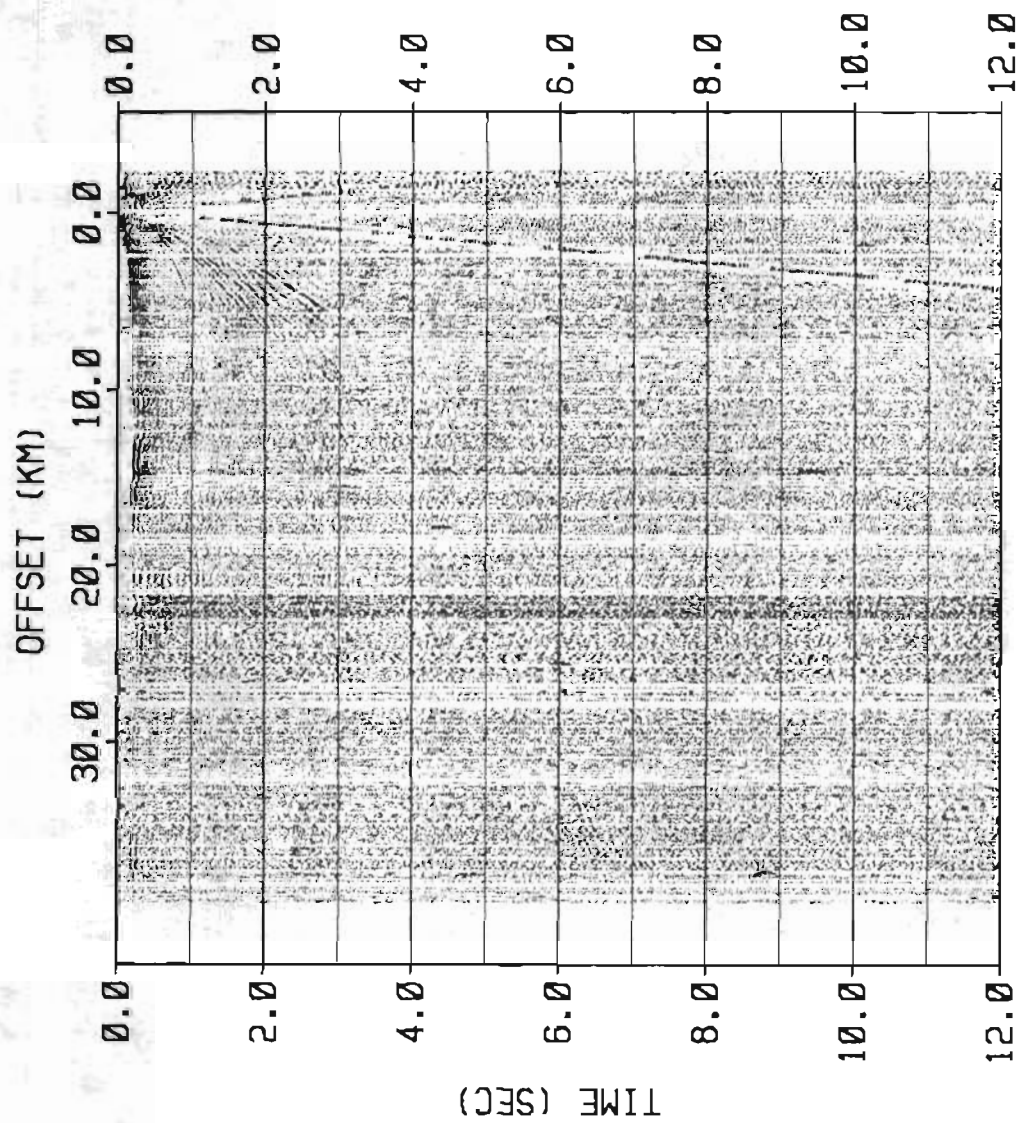


Figure 87 Profile 5  
 Shot 54 Shot Point 134 AGC = 2 sec



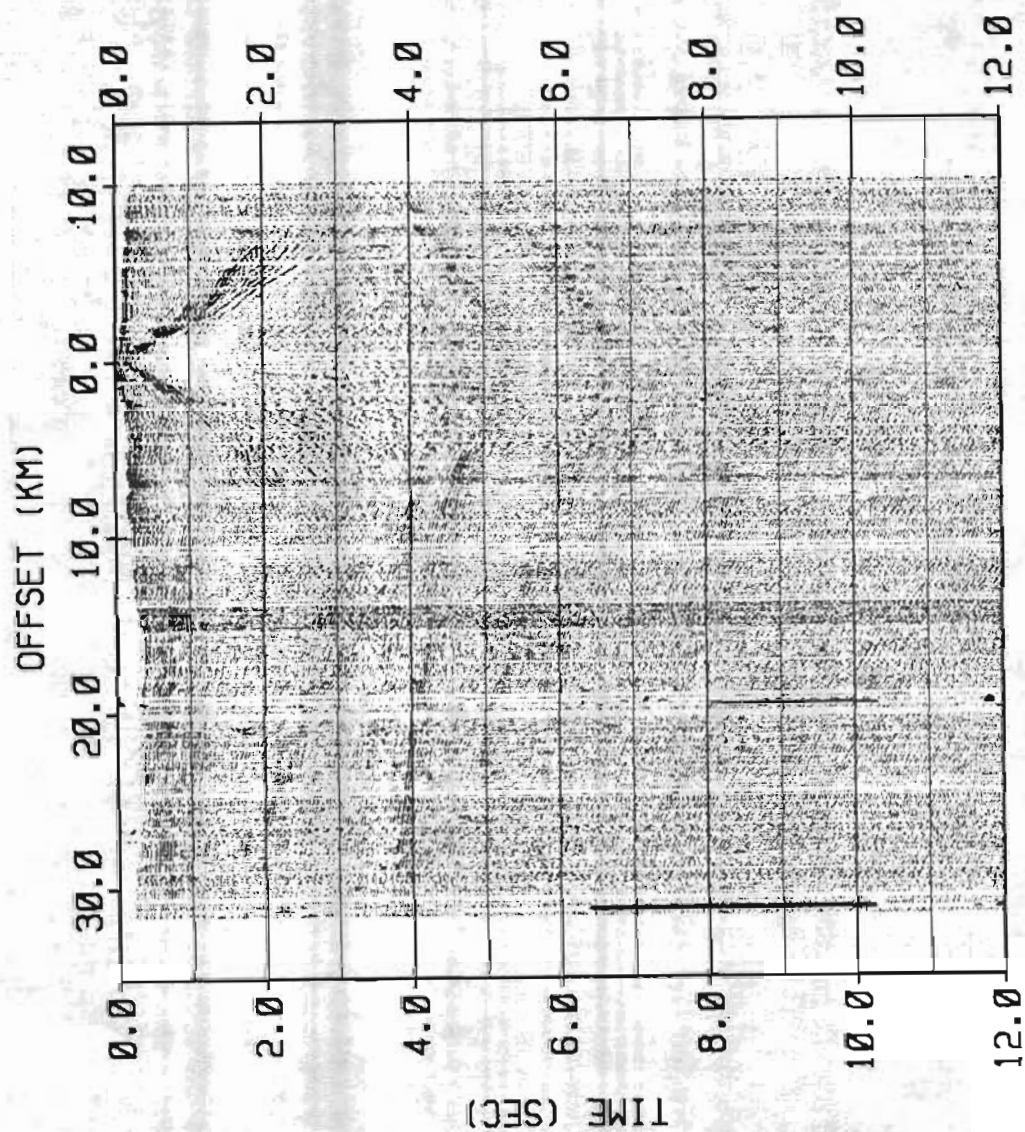


Figure 88 Profile 5

Shot 55 Shot Point 133 AGC = 2 sec



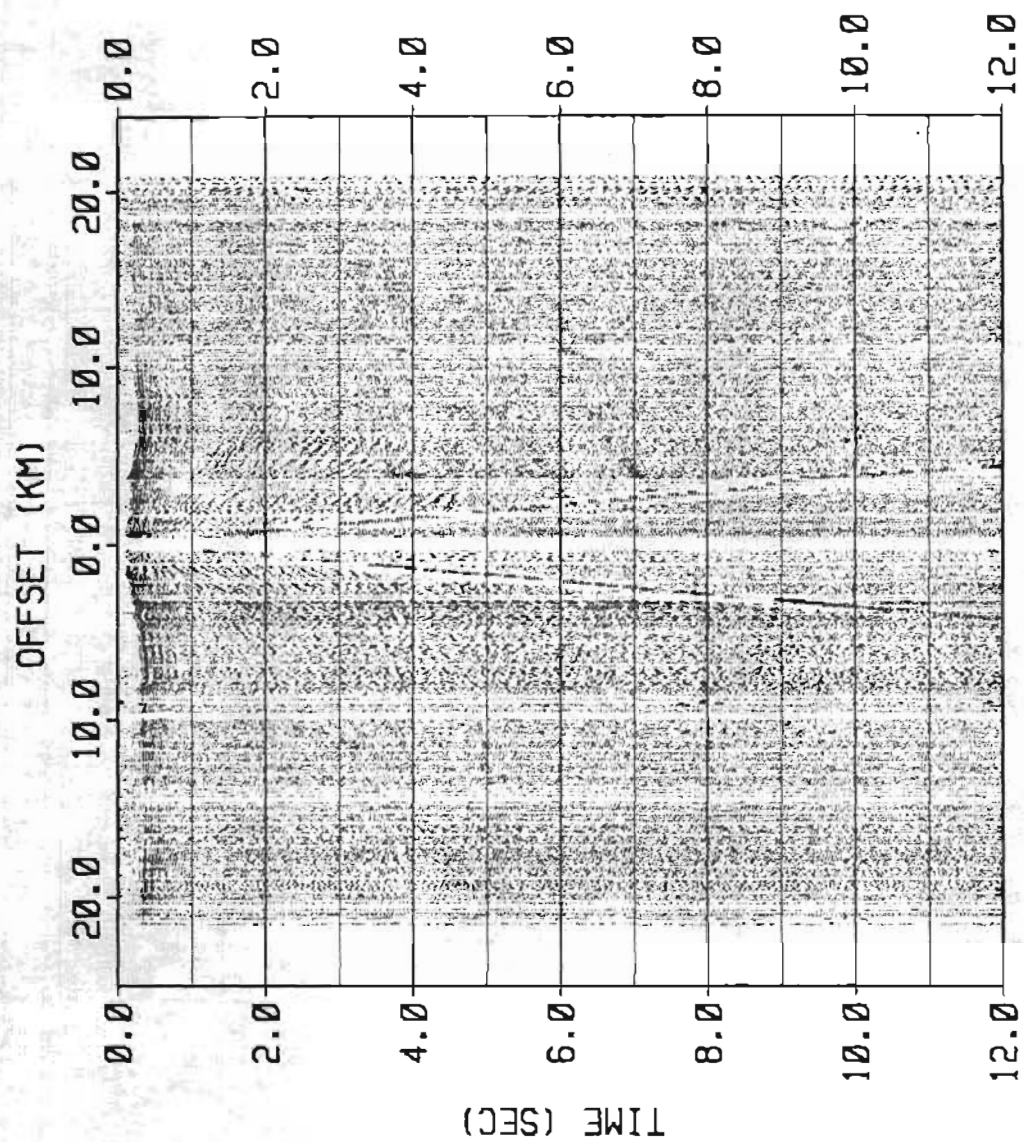


Figure 89      Profile 5  
Shot 56      Shot Point 132      AGC = 2 sec

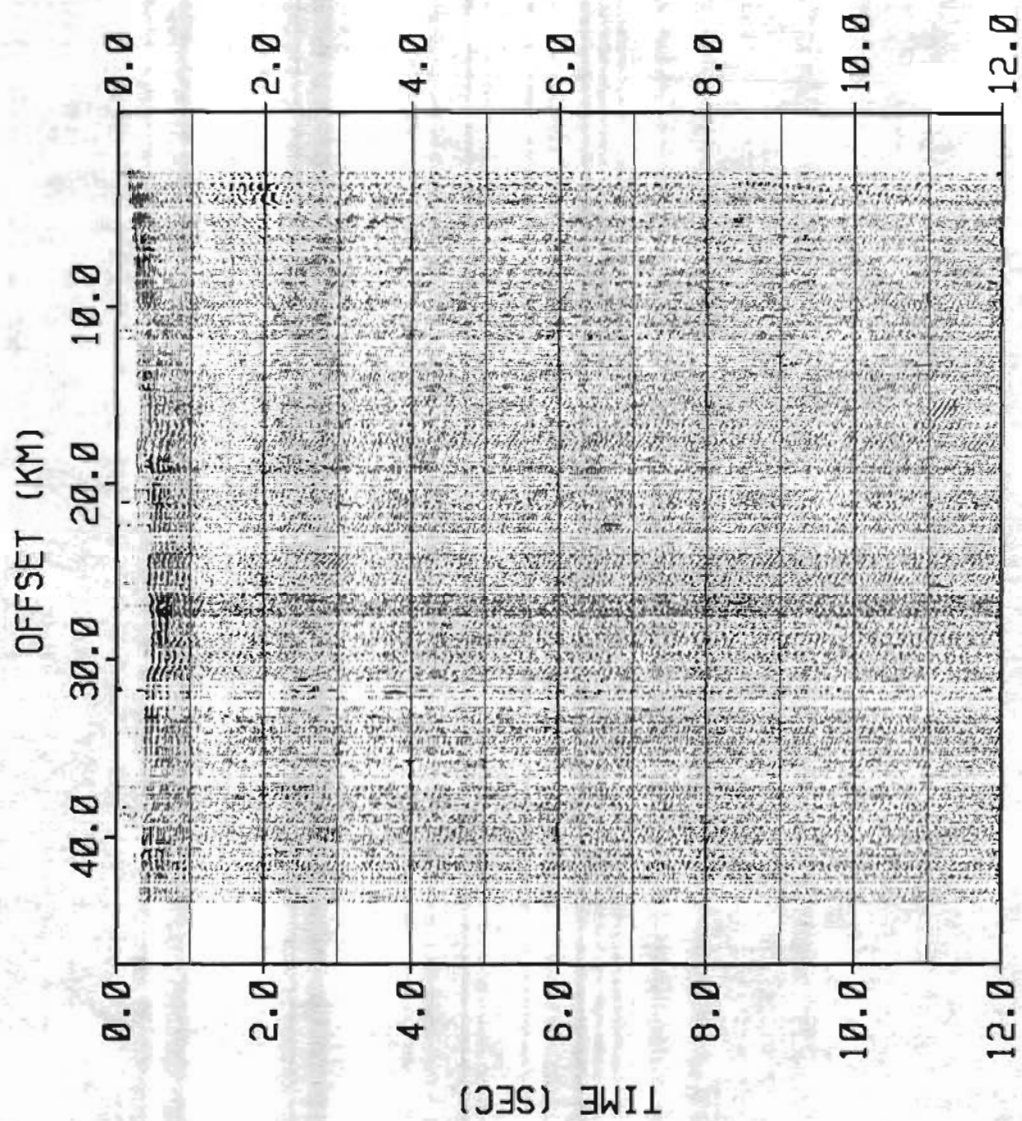


Figure 90 Profile 5  
Shot 57 Shot Point 135 AGC = 2 sec

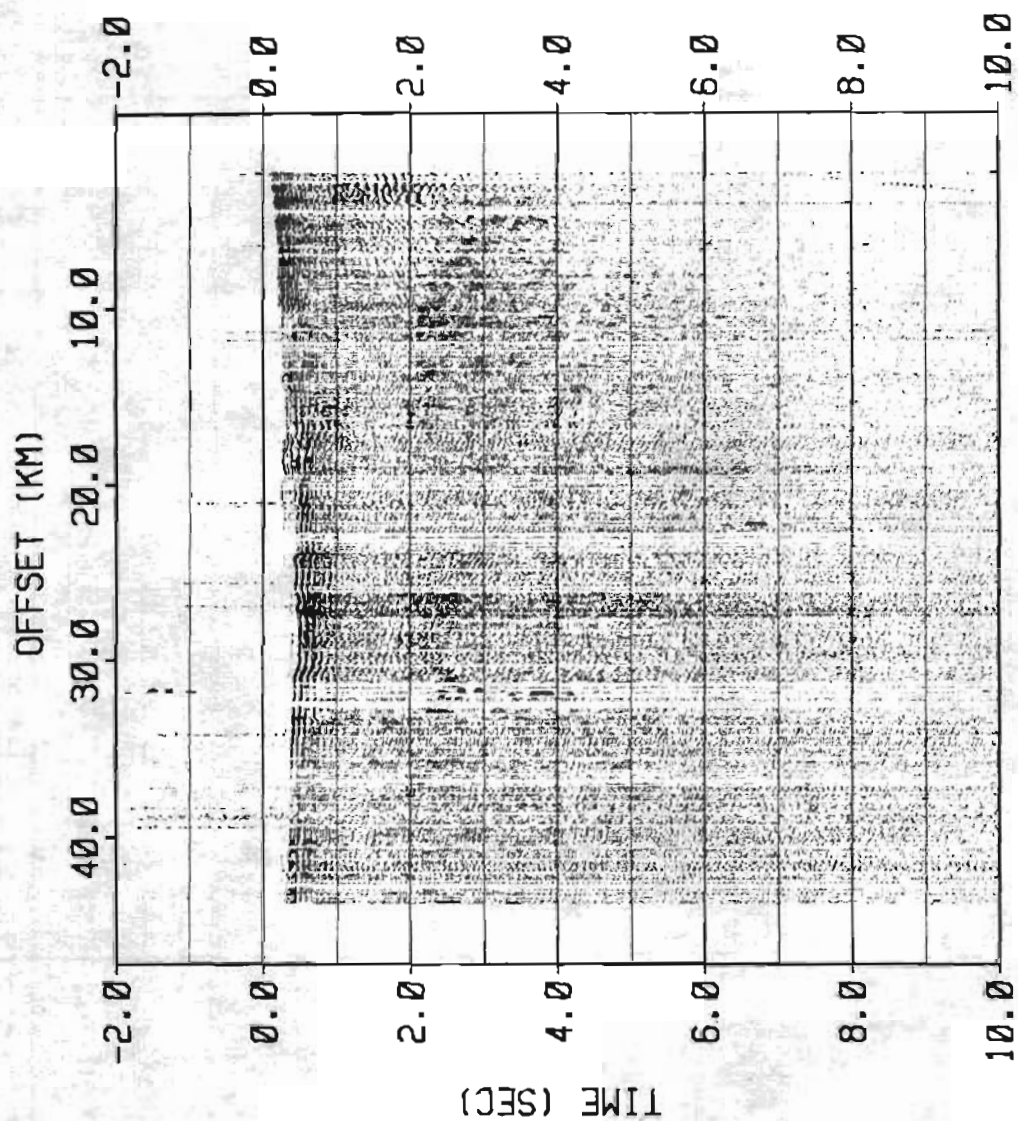


Figure 91 Profile 5  
Shot 57 Shot Point 135 AGC = 12 sec

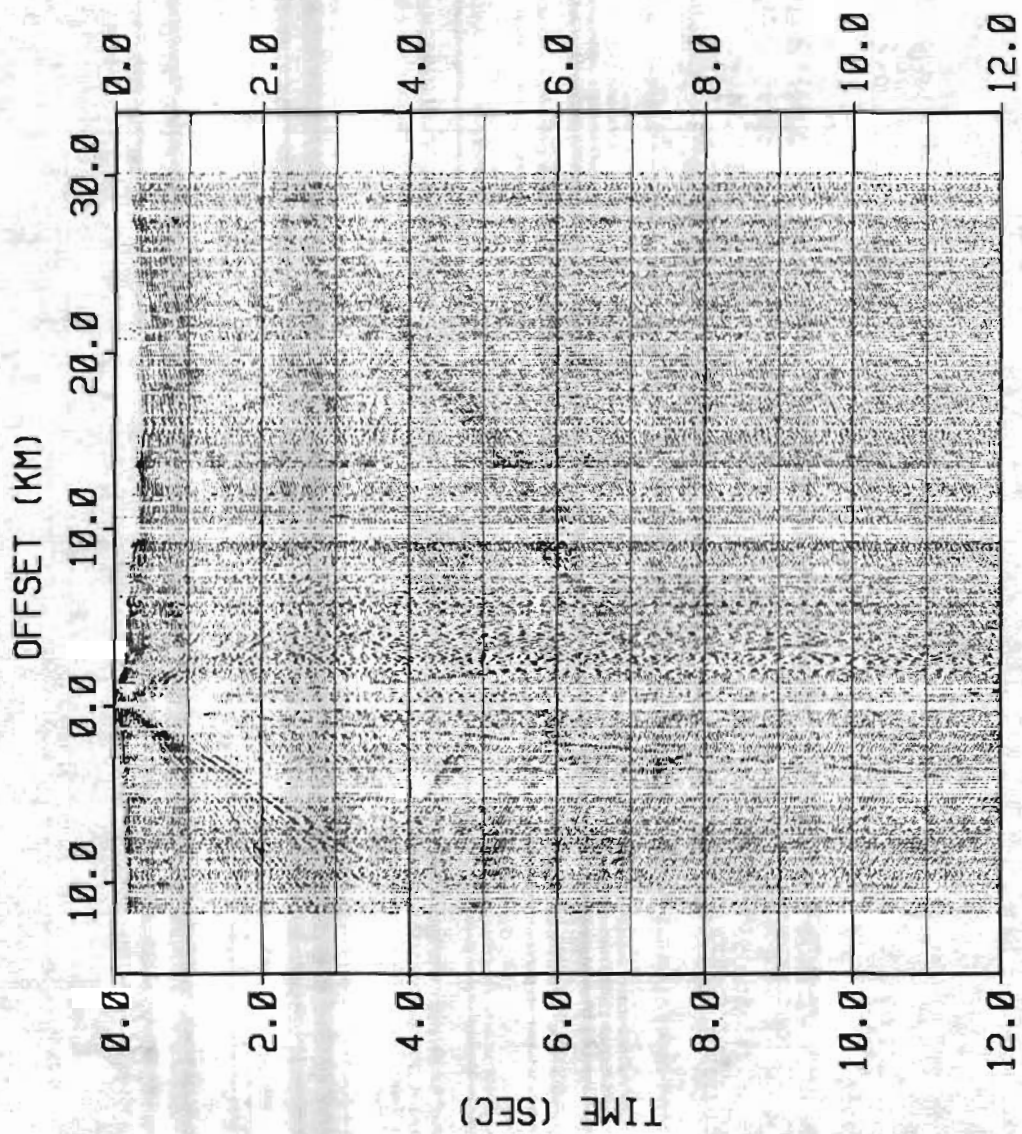


Figure 92 Profile 5

Shot 58 Shot Point 174 AGC = 2 sec



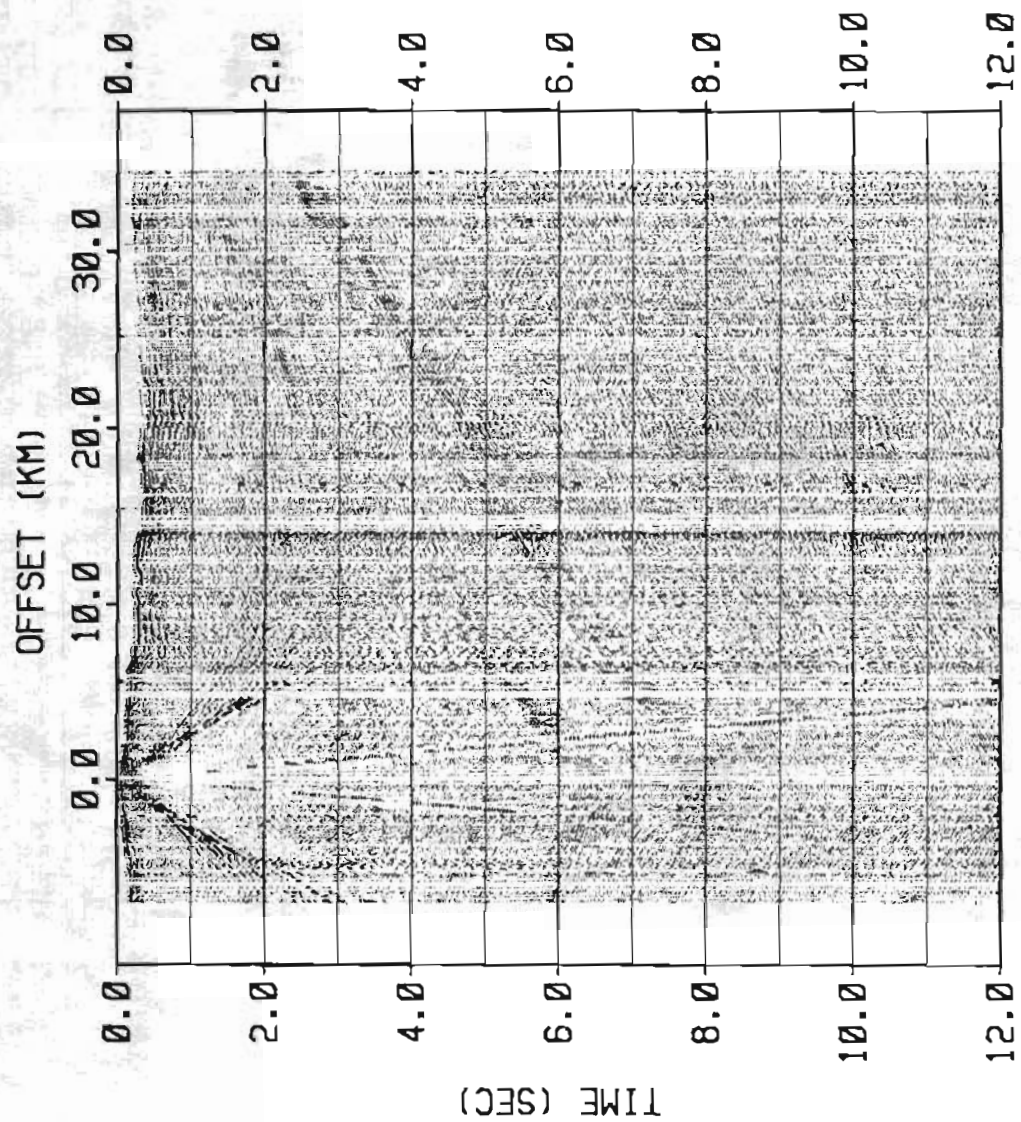


Figure 93      Profile 5  
 Shot 59    Shot Point 173    AGC = 2 sec



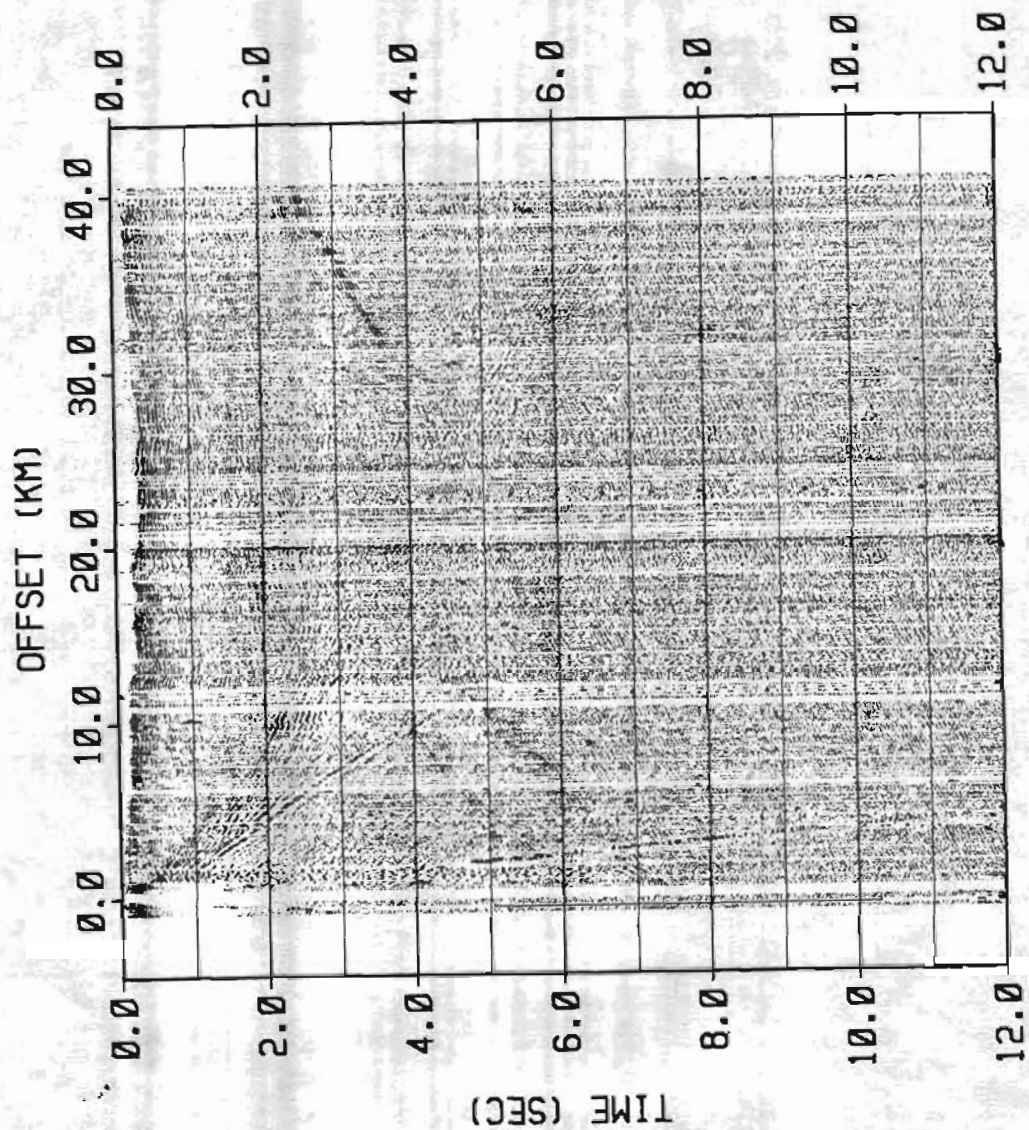


Figure 94      Profile 5  
 Shot 60      Shot Point 131      AGC = 2 sec

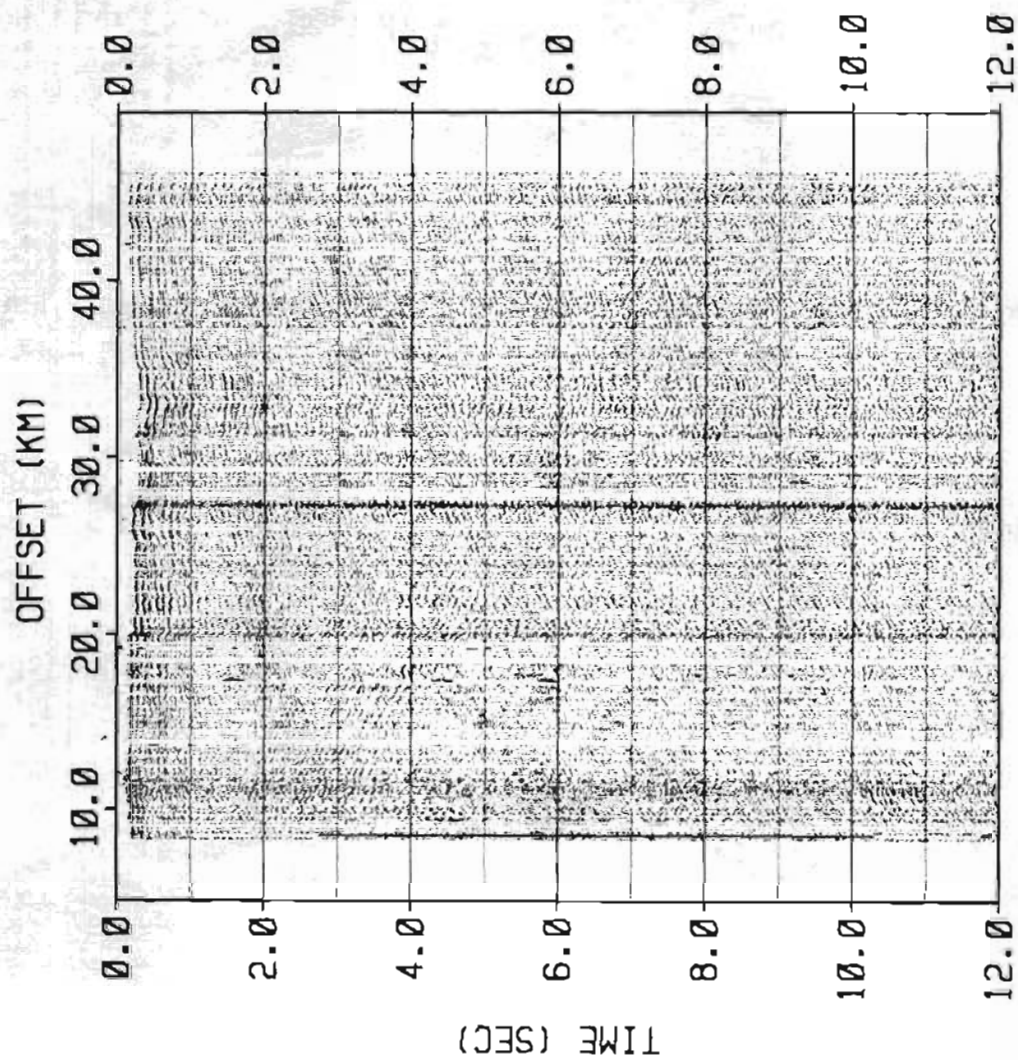


Figure 95 Profile 5

Shot 61 Shot Point 172 AGC = 2 sec

## APPENDIX B

**TABLE B1**

Typical maximum data length for different instrument types,  
in-lineshots, and off-end shots.

<u>Instrument/Boxtype</u>	<u>In-line shot data length (sec)</u>	<u>Off-end shot data length (sec)</u>
SCR / 1	30	38
SGR / 2	30 - X/8	63 - X/8
PRS1 / 3	45 - X/8	55
Ref Tek / 4	58 - X/8	60

where X is the absolute value of offset distance. Maximum trace lengths vary slightly for different deployments, but may be significantly shorter for alternate shot windows.