
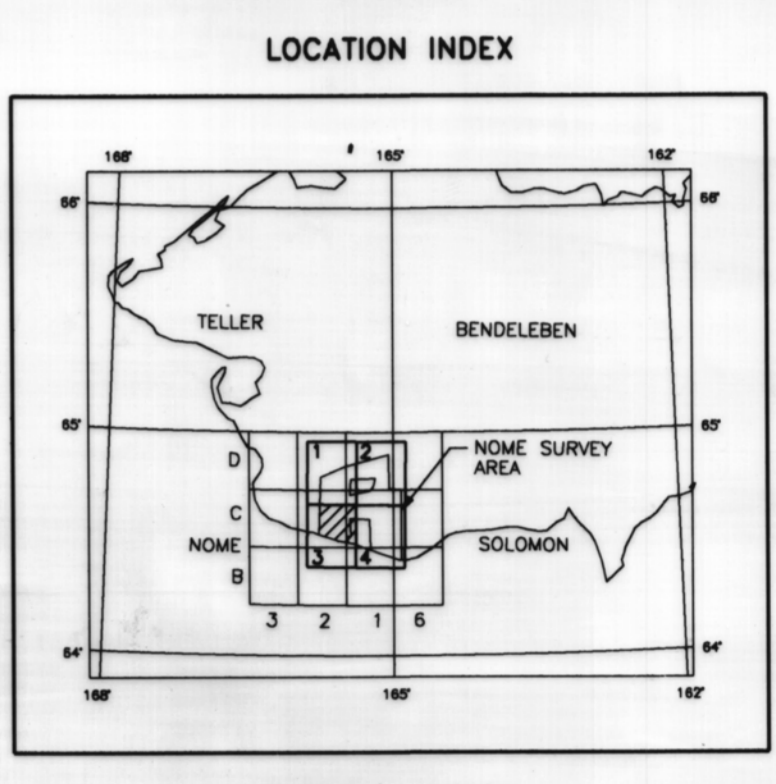
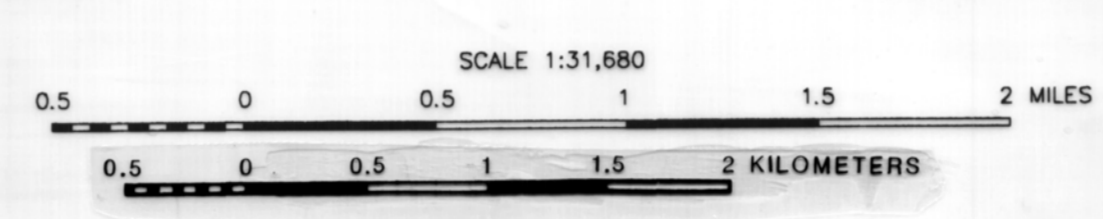


Section outlines from U.S. Geological Survey topographic maps. Name: B-1, C-12, D-12, E-12, G-12, H-12, I-12, J-12, K-12, L-12, M-12, N-12, O-12, P-12, Q-12, R-12, S-12, T-12, U-12, V-12, W-12, X-12, Y-12, Z-12.

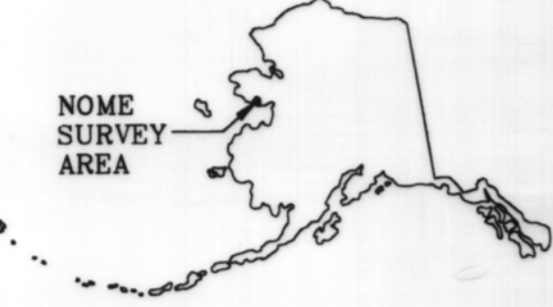

TOTAL FIELD MAGNETICS AND ELECTROMAGNETIC ANOMALIES OF THE NOME MINING DISTRICT

1994

DESCRIPTIVE NOTES
The geophysical data were acquired with a DIGHEM[®] Electromagnetic (EM) system, a Scaintrex cesium CS2 magnetometer, and a Herz VLF system installed in an AS350B-1 Squirrel helicopter. In addition, the survey recorded data from a rotor altimeter, GPS navigation system, 50/80 Hz monitors and video camera. Flights were performed at a mean terrain clearance of 200 feet along survey flight lines with a spacing of a quarter of a mile. Tie lines were flown perpendicular to the flight lines at intervals of approximately three miles.

A Serceal Real-Time Differential Global Positioning System (RT-DGPS) was used for both navigation and flight path recovery. The helicopter position was derived every 0.5 seconds using both real-time and post-processing differential positioning to a relative accuracy of better than 10 m. Flight path positions were projected onto the Clarke 1866 (UTM) spheroid, 1927 North American datum using a Central Meridian (CM) of 166°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

TOTAL FIELD MAGNETICS
The magnetic total field contours were produced using digitally recorded data from a Scaintrex cesium CS2 magnetometer, with a sampling interval of 0.1 seconds. The magnetic data were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) leveled to the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF, 1985, updated to August, 1993) was removed from the leveled magnetic data.

Akima, H., 1970. A new method of interpolation and smooth curve fitting based on local procedures. *Journal of the Association of Computing Machinery*, v. 17, no. 4, p. 589-602.

MAGNETIC CONTOUR INTERVAL

.....	250 nT
.....	50 nT
.....	10 nT
.....	5 nT
.....	magnetic law

ELECTROMAGNETICS
To determine the location of EM anomalies or their boundaries, the DIGHEM[®] EM system measured inphase and quadrature components at five frequencies. Two vertical coaxial coil-pairs operated at 900 and 5000 Hz while three horizontal coplanar coil-pairs operated at 900, 7200 and 55,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The type of conductor is indicated on the aeromagnetic map by the interpretive symbol attached to each EM anomaly. Determination of the type of conductor is based on EM anomaly shapes of the coaxial and coplanar coil responses, together with conductor and magnetic patterns and topography. The power line monitor and the flight track video were examined to locate cultural sources.

ELECTROMAGNETIC ANOMALIES

Grade	Anomaly	Conductance
7	●	>100 siemens
6	●	50-100 siemens
5	●	20-50 siemens
4	●	10-20 siemens
3	●	5-10 siemens
2	●	1-5 siemens
1	●	< 1 siemens
-	○	Questionable anomaly
-	*	Weak conductivity associated with an EM magnetic response
-	△	Interpretive symbol
-	B	Bedrock conductor
-	D	Narrow bedrock conductor ("thin dia")
-	S	Conductive cover ("horizontal thin sheet")
-	H	Broad conductive rock unit, deep conductive weathering, thick conductive cover ("thick sheet")
-	E	Edge of broad conductor (edge of half space)
-	L	Culture, e.g. power line, metal building or fence

EM Anomaly Identifier

Depth is greater than:
 15 m
 30 m
 45 m
 60 m

Interpretive symbol

Inphase and Quadrature of coaxial coil is greater than:
 5 ppm
 10 ppm
 15 ppm
 20 ppm

SURVEY HISTORY
This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys, and WGM, Mining and Geological Consultants Inc. Airborne geophysical data for area 3 were acquired by Dighem Surveys & Processing, Inc. in 1993. The data for areas 1 and 2 were provided by Bering Straits Native Corporation. Other products from this survey are available from the Alaska Division of Geological & Geophysical Surveys, 794 University Ave., Suite 200, Fairbanks, Alaska, 99709.