




Base from U.S. Geological Survey Maps B-1, C-12, D-12, Solomon B-6, C-6, D-6, Quadrangles, Alaska, 1965

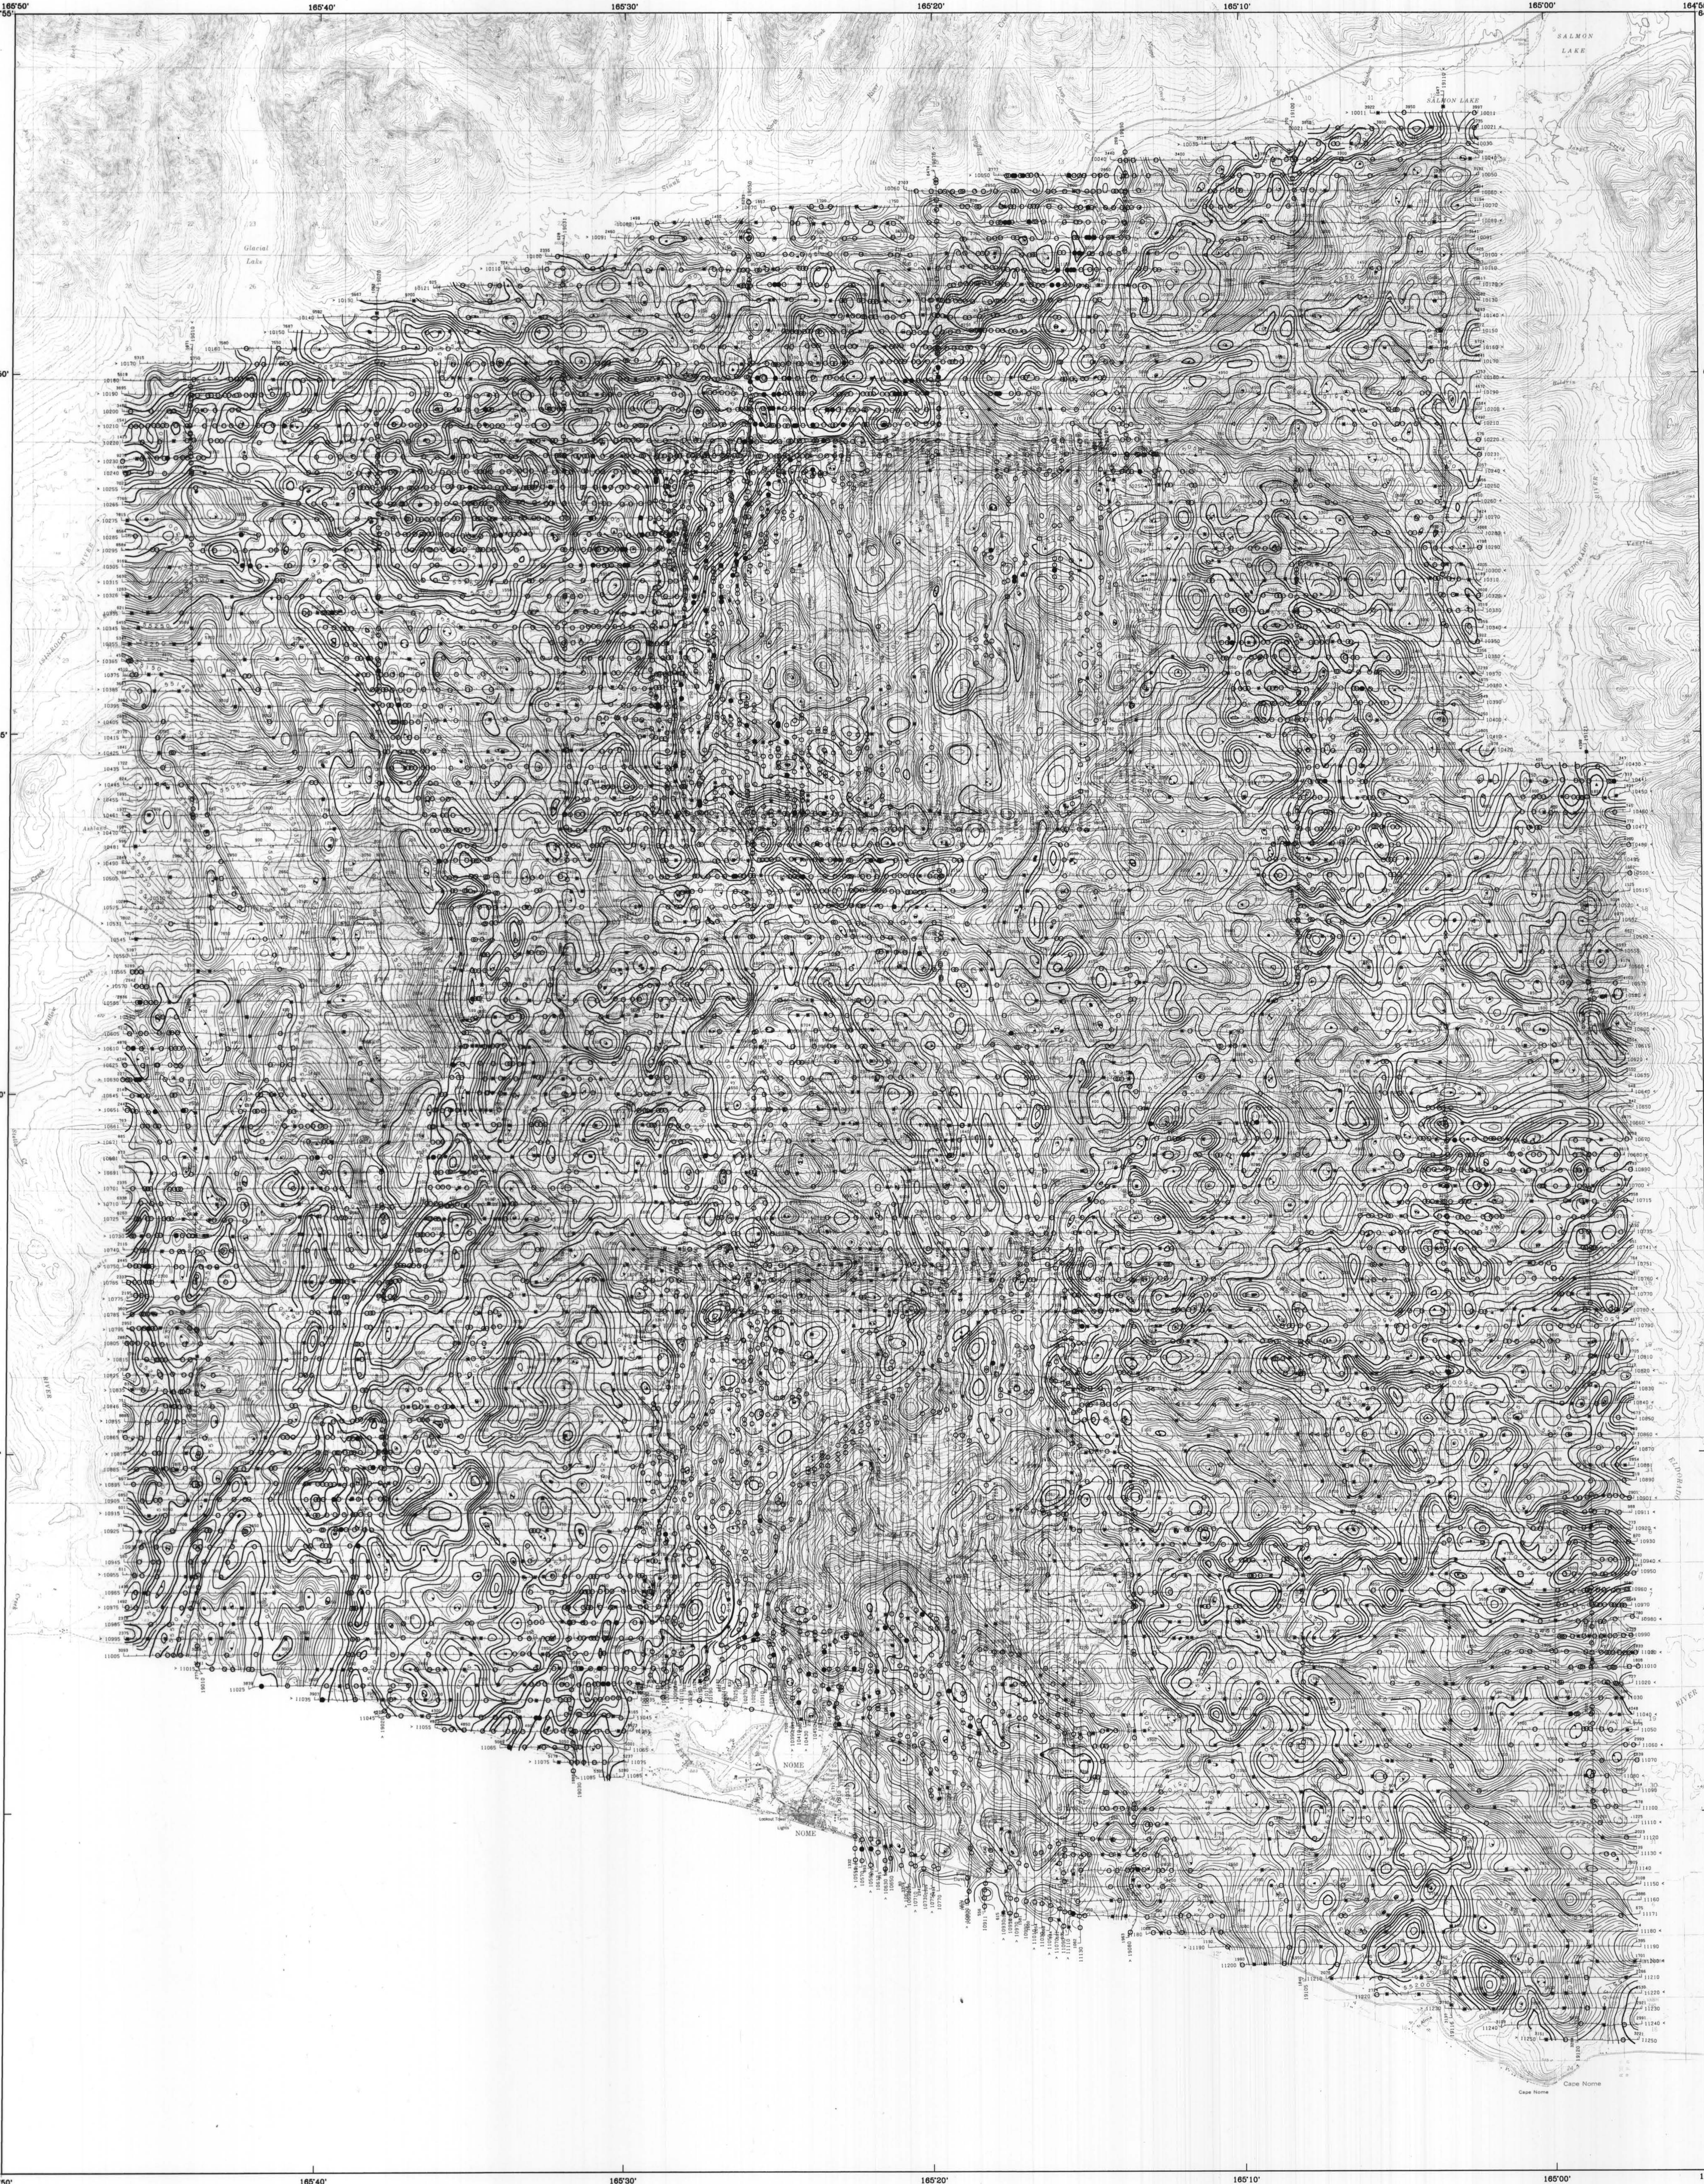

DESCRIPTIVE NOTES



The geophysical data were acquired with a DIGHEM[®] Electromagnetic (EM) system, a Scintrex cesium CS2 magnetometer, and a Hiex VLF system installed in an AS-50B-1 Squirrel helicopter. In addition, the survey recorded data from a radar altimeter, GPS navigation system, 50/60 Hz monitors and video camera. Flights were performed at a mean terrain clearance of 200 feet along survey flight lines with a spacing of a quarter of a mile. Tie lines were flown perpendicular to the flight lines at intervals of approximately three miles.

A Seracel Real-Time Differential Global Positioning System (RT-DGPS) was used for both navigation and flight path recovery. The helicopter position was derived every 0.5 seconds using both real-time and post-processing differential positioning to a relative accuracy of better than 10 m. Flight path positions were projected onto the Clarke 1866 (UTM) spheroid, 1927 North American datum using a Central Meridian (CM) of 166°, a north constant of 0 and an east constant of 500,000. Positional accuracy of the presented data is better than 10 m with respect to the UTM grid.

ELECTROMAGNETIC ANOMALIES

To determine the location of EM anomalies or their boundaries, the DIGHEM[®] EM system measured inphase and quadrature components at five frequencies. Two vertical coplanar coil-pairs operated at 900 and 5000 Hz while three horizontal coplanar coil-pairs operated at 900, 7200 and 56,000 Hz. EM data were sampled at 0.1 second intervals. The EM system responds to bedrock conductors, conductive overburden, and cultural sources. The EM anomalies that are indicated are classified by conductance.

- Anomaly
- Conductance >50 siemens
 - Conductance <50 siemens
 - ⊛ Questionable anomaly
 - Δ Weak conductivity associated with an EM magnetic response

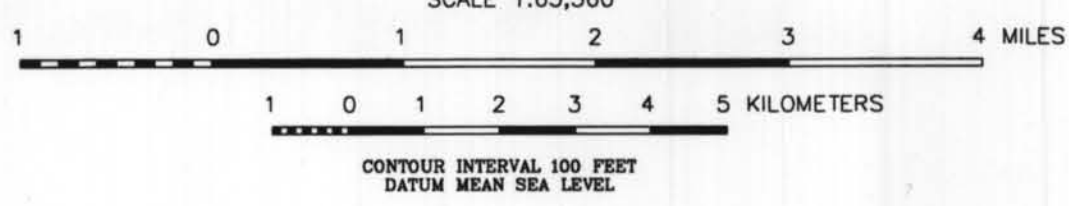

TOTAL FIELD MAGNETICS AND ELECTROMAGNETIC ANOMALIES OF THE NOME MINING DISTRICT

1994

TOTAL FIELD MAGNETICS


The magnetic total field contours were produced using digitally recorded data from a Scintrex cesium CS2 magnetometer, with a sampling interval of 0.1 seconds. The magnetic data were (1) corrected for diurnal variations by subtraction of the digitally recorded base station magnetic data, (2) levelled to the tie line data, and (3) interpolated onto a regular 100 m grid using a modified Akima (1970) technique. The regional variation (or IGRF, 1985, updated to August, 1993) was removed from the levelled magnetic data.

Akima, H., 1970, A new method of interpolation and smooth curve fitting based on local procedures, *Journal of the Association of Computing Machinery*, v. 17, no. 4, p.589-602.

MAGNETIC CONTOUR INTERVAL

- 250 nT
- 50 nT
- 10 nT
- 5 nT
- magnetic low

LOCATION INDEX

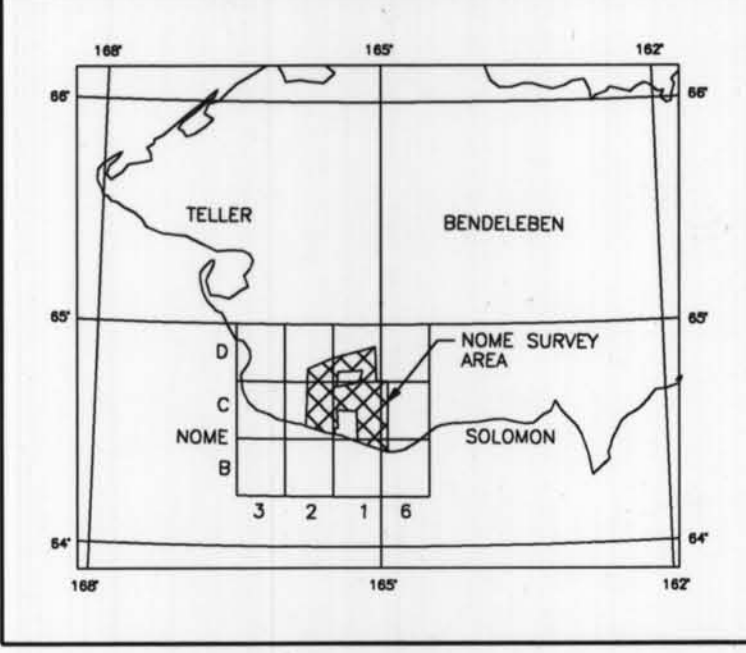

SURVEY HISTORY

This map has been compiled and drawn under contract between the State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys, and WGM, Mining and Geological Consultants Inc. Airborne geophysical data for area 3 were acquired by Digheem Surveys & Processing, Inc. in 1993. The data for areas 1 and 2 were provided by Bering Straits Native Corporation. Other products from this survey are available from the Alaska Division of Geological & Geophysical Surveys, 704 University Ave., Suite 200, Fairbanks, Alaska, 99709.

